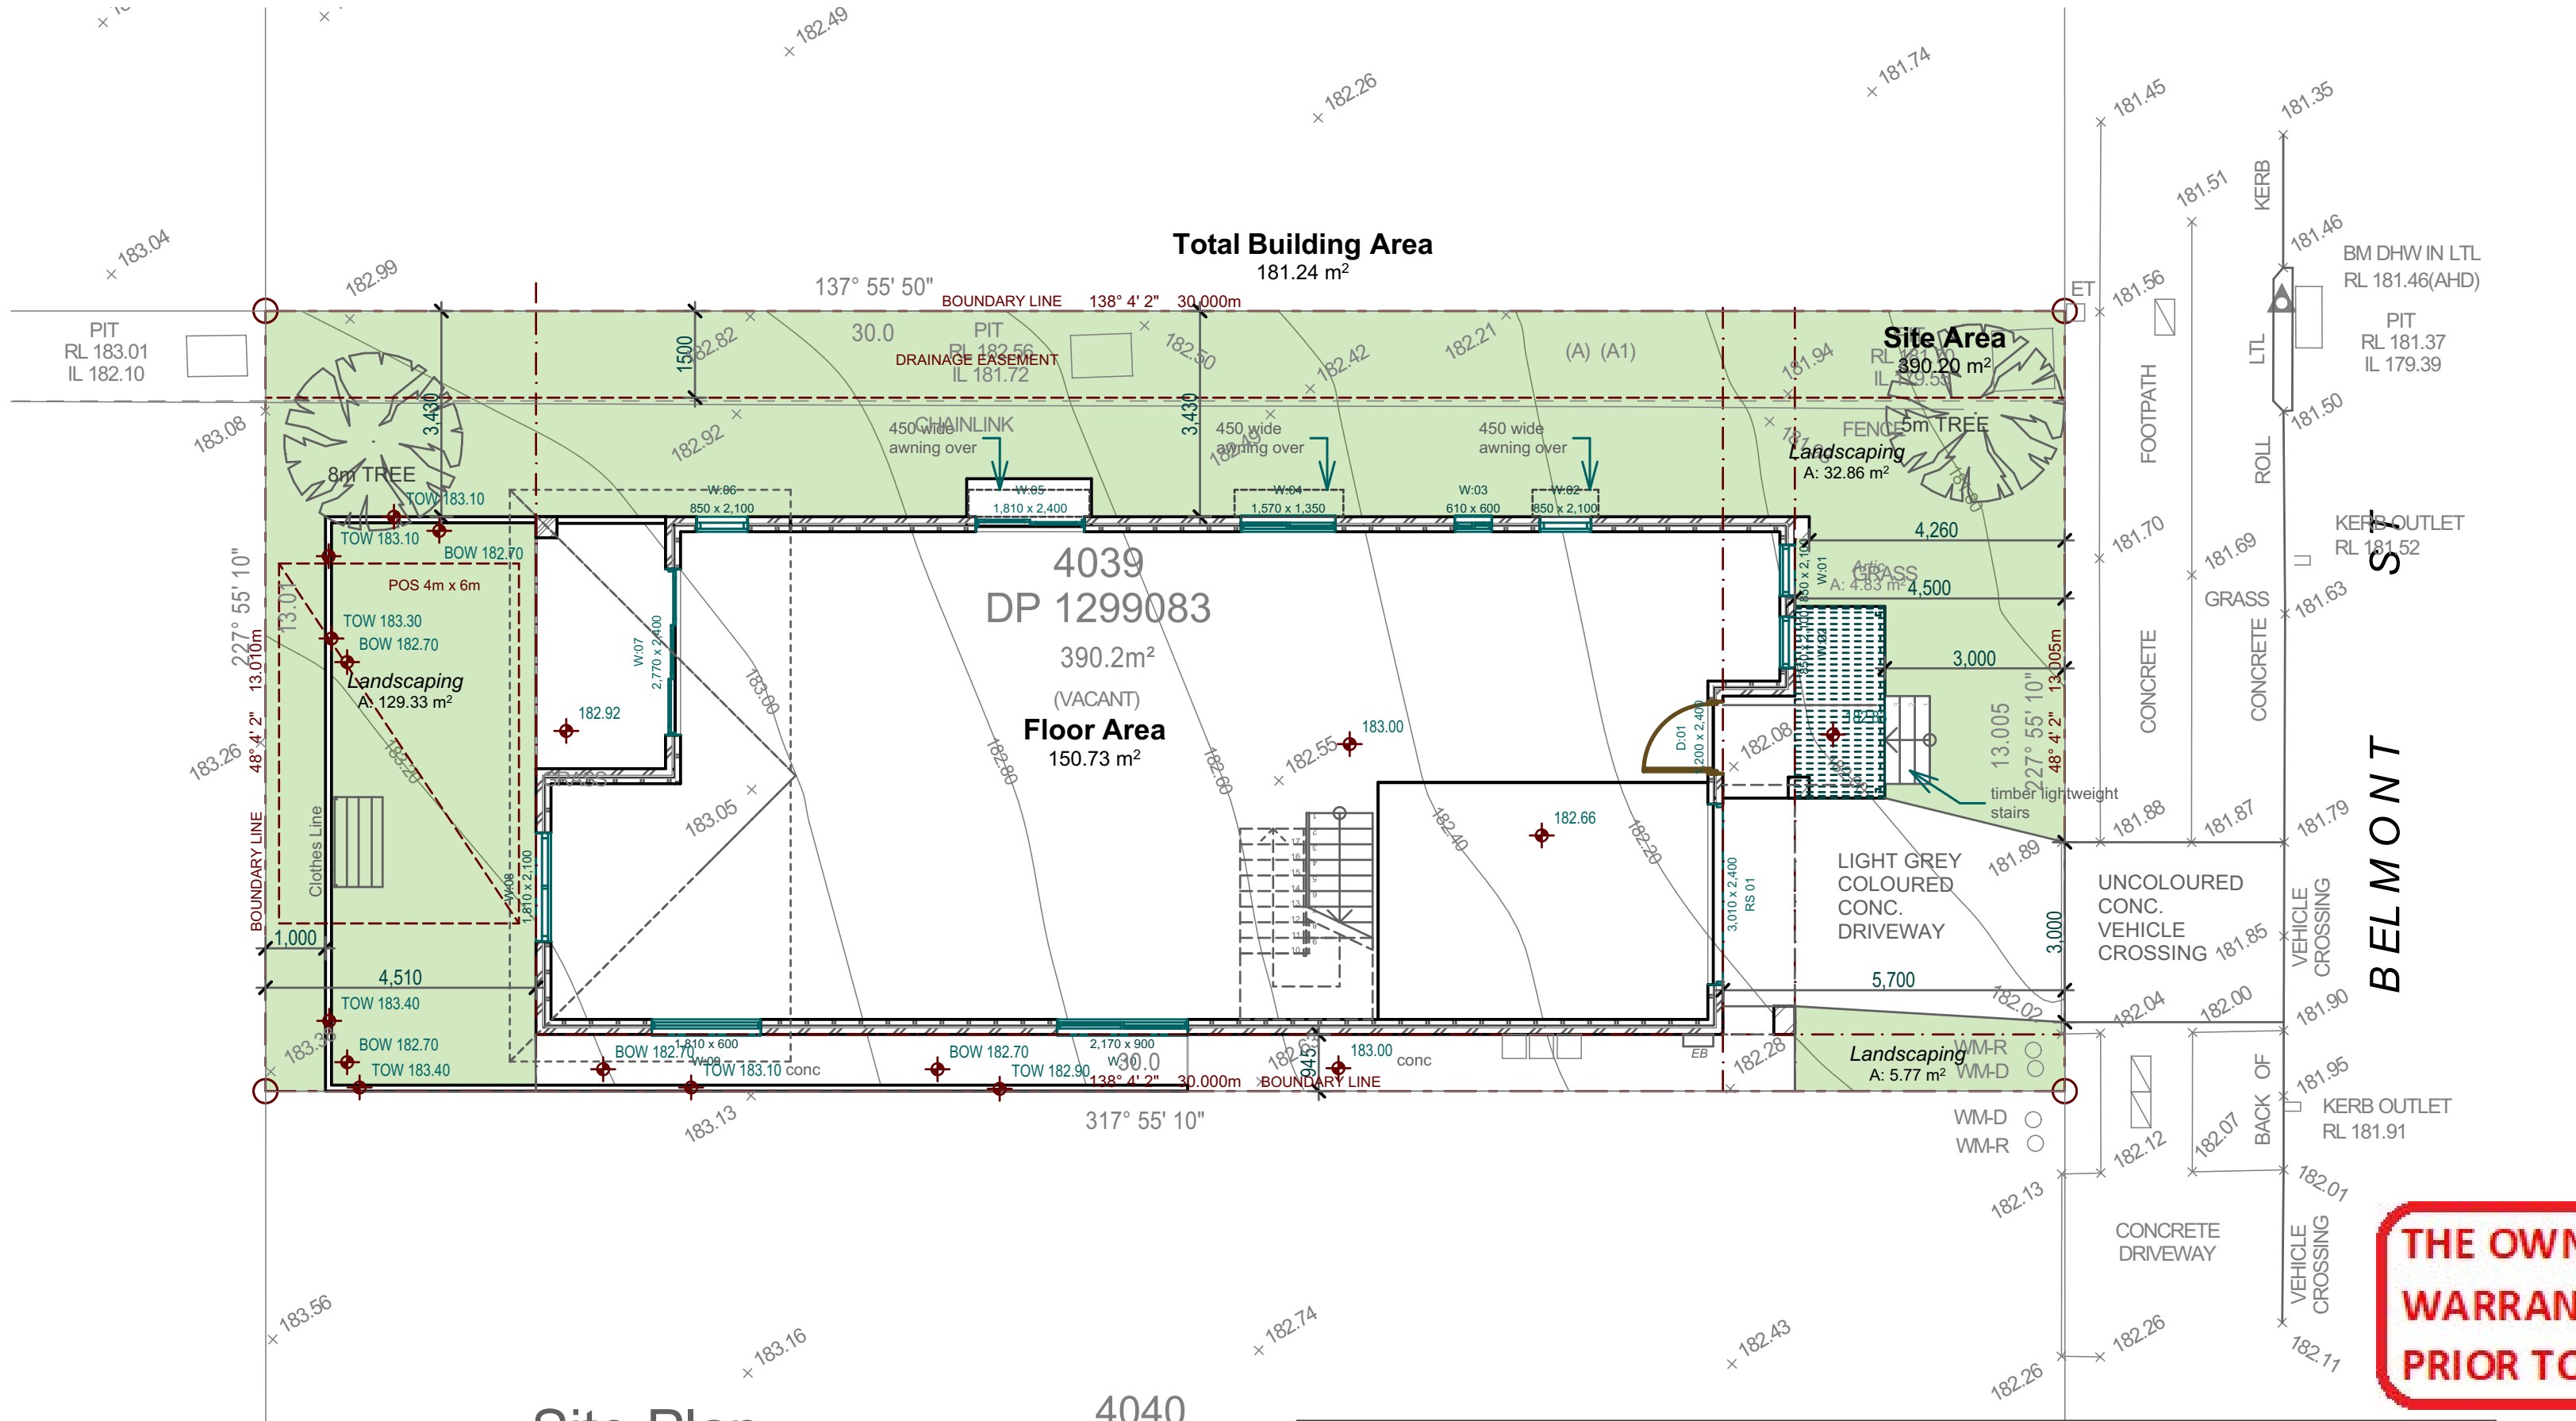

Site Plan
1:200

NOTE:
RETAINING WALLS TO BE BUILT WHOLLY WITHIN BOUNDARY AND OUTSIDE EASEMENT.

NOTE:
NO CHANGE TO VEHICLE CROSSING PERMITTED. ANY CHANGE WILL REQUIRE COUNCIL APPROVAL.

Artists Impression

THE OWNER MUST APPOINT A PCA AND PROVIDE A HBCF WARRANTY CERTIFICATE OR OWNER BUILDER PERMIT PRIOR TO THE COMMENCEMENT OF ANY WORKS.

NOTE:
I. WATERPROOFING TO COMPLY WITH PART 10.2 OF THE 2022 BCA "WET AREA WATERPROOFING"
II. ALL OFF-STREET CAR PARKING SPACES AND VEHICLE ACCESS MUST COMPLY WITH AS/NZS 2890.1:2004, PARKING FACILITIES, PART 1: OFF-STREET CAR PARKING.

NOTE:
WHERE A FLOOR WASTE IS INSTALLED THE
MINIMUM CONTINUOUS FALL OF A FLOOR PLANE TO THE WASTE MUST BE 1:80; AND
THE MAXIMUM CONTINUOUS FALL OF A FLOOR PLANE TO THE WASTE MUST BE 1:50.

NOTE:
CLIMATE ZONE 6 ROOF SPACE AS PER 10.8.3(1)(A)&(B) TO BE PROVIDED AND VENTILATION TO
ROOF SPACE REQUIRED AS PER 10.8.3(1)(C).

NOTE:
ROOF SOLAR ABSORBANCE TO BE 0.7 OR LESS

SITE CALCULATIONS: CERTIFIER

SITE AREA : 390.2 m²

PROPOSED DWELLING : 247.5m² excluding carspace (MAX 247.55m² + carspace)

LANDSCAPING : 168.47m² (MIN 25% 97.55m²)

MIN SETBACKS: FRONT 4.5m
GARAGE 5.5m
SIDE 900mm
REAR : 3m GROUND 8m FIRST

MAX HEIGHT : 8.5M

ARTICULATION AREA: 4.87m2 max 4.87m2

POS 24m2

TOTAL BUILDING AREA : 325.97m2

ThermPerform

BASIX/NatHERS Project Commitments
Assessment by Thermperform - Certified and Accredited

Project Details

Proposed:	**Proposed Double Storey Dwelling**
Address:	**6 Belmont Street, Wilton NSW**
Lot / DP:	**4039/DP1299083**

Water

Shower Head Rating:	3 star (> 7.5 but <= 9 L/min)
Toilet Rating:	3 star
Kitchen Taps Rating:	3 star
Bathroom Taps Rating:	3 star
Reticulated Recycled Water:	Connect supply to Garden/Lawn and throughout toilets

Thermal Comfort

External Walls (Lightweight Cladded):	Glass fibre batt: R2.7 to external walls	
External Walls (Brick Veneer):	Glass fibre batt: R2.7 to external walls (excluding Garage)	
Internal Walls (Cavity Stud Walls, Plasterboard):	Glass fibre batt: R2.5	to Garage, Laundry, Guest Ensuite and Bathroom
Floors - Slab On Ground:	Uninsulated	
Suspended Floors - Timber Bearers/Joists:	Glass fibre batt: R3.5 between bearers/joists	
Ceilings (Timber Framed):	Glass fibre batt: R6.0 to ceilings with roof over (excluding Garage)(reduce to R3.0 within 450mm of roof/wall pitching points)	
Roof (Tiled):	Sarking under roof tiles	
Ceiling Fans:	≥ 900mm diameter ceiling fan	to Sitting and Master Bed
Ceiling Fans:	≥ 1400mm diameter ceiling fan	to either Family OR Dining
Downlights:	Sealed downlight covers to be used to all downlights where insulation is installed	
Windows:	Refer to NatHERS Certificate for locations, confirmation of all units and substitution tolerances	

Energy

Hot Water:	Heat Pump (26 to 30 STCs)
Ventilation Bathroom:	Individual fan, ducted to façade or roof (interlocked to light with timer off)
Ventilation Kitchen:	Individual fan, ducted to façade or roof (manual switch on/off)
Ventilation Laundry:	Individual fan, ducted to façade or roof (manual switch on/off)
Cooling (Living Areas):	3 Phase AC (EER 2.5 - 3.0)
Cooling (Bedrooms):	3 Phase AC (EER 2.5 - 3.0)
Heating (Living Areas):	3 Phase AC (EER 2.5 - 3.0)
Heating (Bedrooms):	3 Phase AC (EER 2.5 - 3.0)
Cooktop/Oven:	Induction cooktop & electric oven
Outdoor Clothes Drying:	Yes
Indoor Clothes Drying:	No
PV System:	Capacity to produce a minimum of 4.8kW's of electricity

Disclaimer: References to any product, brand, or supplier by ThermPerform are not to be taken as endorsements or mandatory specifications.
Builders must confirm all selections and installations comply with current Australian Standards and Building Codes.
Consult the relevant certifications for complete details and verification of all items

Lot 4039 DP 1299083

6 Belmont St, Wilton

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

IT IS ADVISED THAT
PRIOR TO THE COMMENCEMENT OF WORKS
YOU CONTACT DIAL BEFORE YOU DIG
ON 1100 OR MAKE AN APPLICATION AT
WWW.1100.COM.AU

NOTE::

- DRIVEWAY TO COMPLY WITH AS 2890.1

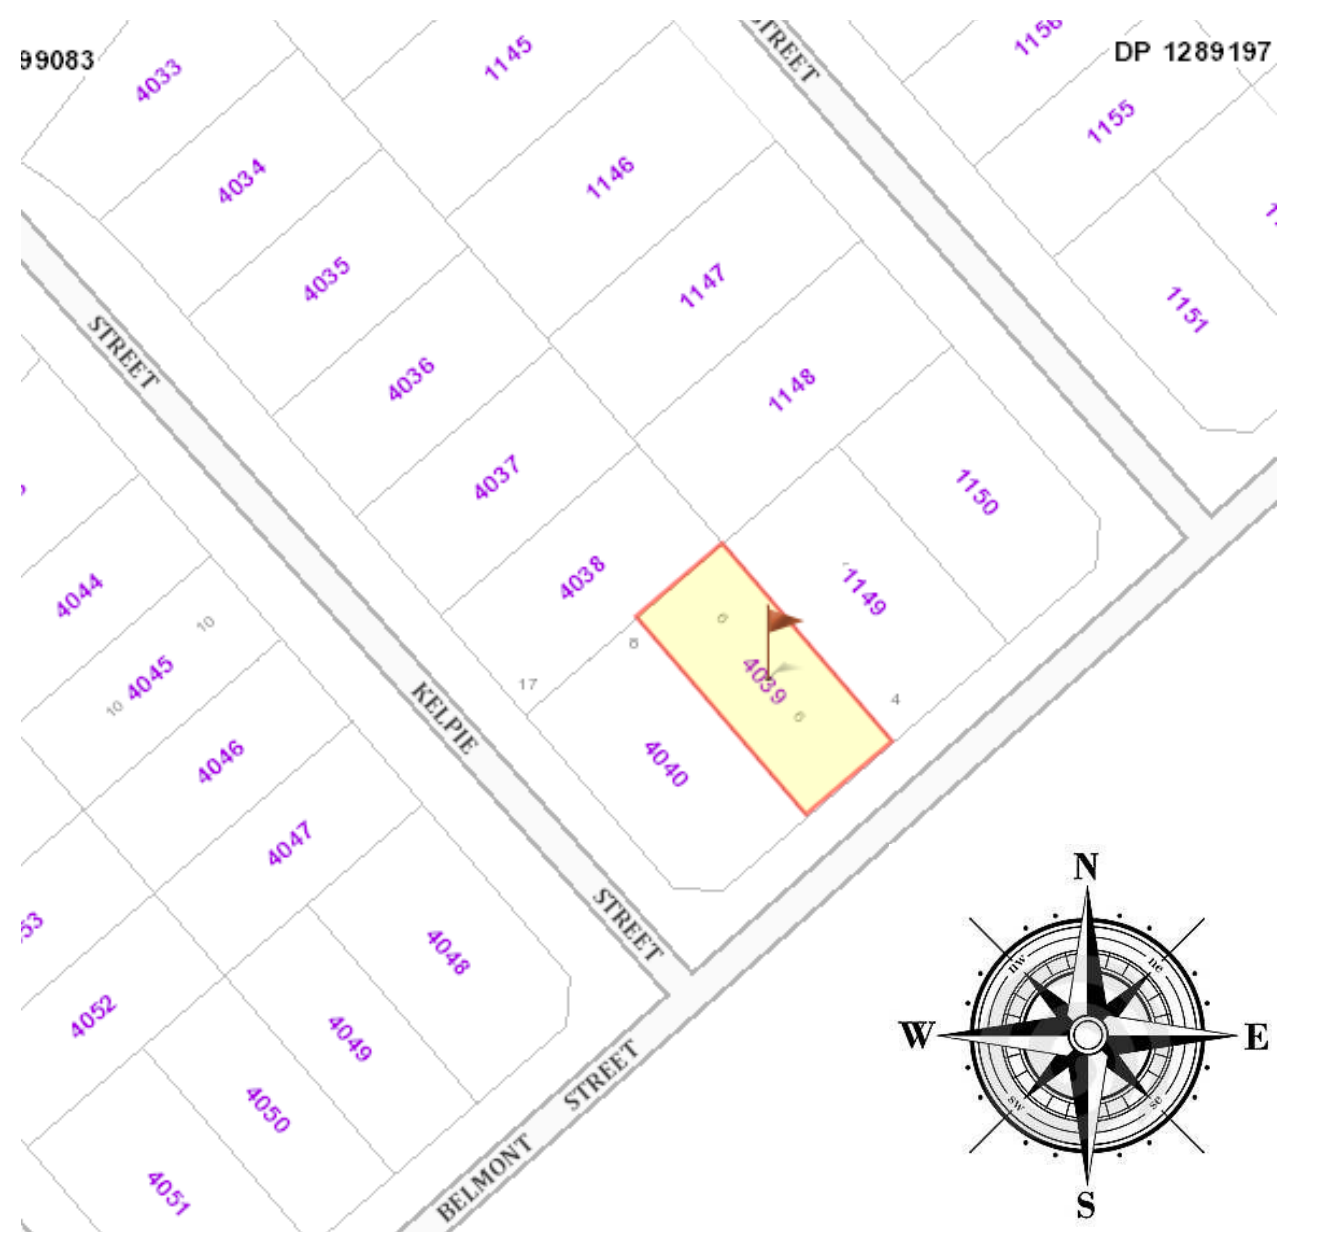

Location Plan

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Site Plan & Location Plan Dwg No. CD01A

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729

Ground Floor Plan
1:100

NOTE:
RETAINING WALLS TO BE BUILT WHOLLY WITHIN BOUNDARY AND OUTSIDE EASEMENT.

11. Terms of easement, profit à prendre, restriction, or positive covenant numbered 11 in the plan.

The lots burdened will require acoustic treatments as indicated in the tables below;

Required Glazing

Category	Room	Window/Door Orientation	Glazed Element Area (Windows/Doors)	Required Glazing
Category 1	Bedrooms	Facing Roadway	<2m2 2m2 to 3m2 3m2 to 9m2	6mm glass (Rw 29) 6.38mm laminated glass (Rw 31) 10.38mm laminated glass (Rw 35)
		Perpendicular to Roadway	<5m2 5m2 to 8m2 >8m2	6mm glass (Rw 29) 6mm glass (Rw 29) 6.38mm laminated glass (Rw 29)
	Living Rooms	Facing Roadway	<5m2 5m2 to 8m2 >8m2	6.38mm laminated glass (Rw 29) 6.38mm laminated glass (Rw 29) 10.38mm laminated glass (Rw 35)
		Perpendicular to Roadway	<5m2 5m2 to 8m2 >8m2	6mm glass (Rw 29) 6.38mm laminated glass (Rw 29) 6.38mm laminated glass (Rw 29)

Required Construction Standards

	External Walls	Roof	External Doors
Category 1 Dwellings	Double brick or Brick veneer or Light weight external wall with external wall system is to include 2x13mm thick plasterboard sheeting for internal wall lining and external wall lining of 6mm fc sheet (or material of equivalent surface density)	Roof ceiling cavity to have minimum 75mm thick 14kg/m³ insulation to cavity (includes sheet metal or tile). For bedrooms which are facing the Hume Highway or Sub-arterial roadway in Category 1 dwellings, ceiling sheeting to consist of 2x10mm thick plasterboard	External non-glazed doors for are to be solid core timber or glazed, fitted with acoustic seals around the perimeter (Raven RP 10 to top and sides, Raven RP 36 drop seal to base).

Complying Development Issue

BAL - 19 CONSTRUCTION

REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977 BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025 Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Ground Floor Plan Dwg No. CD02A

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

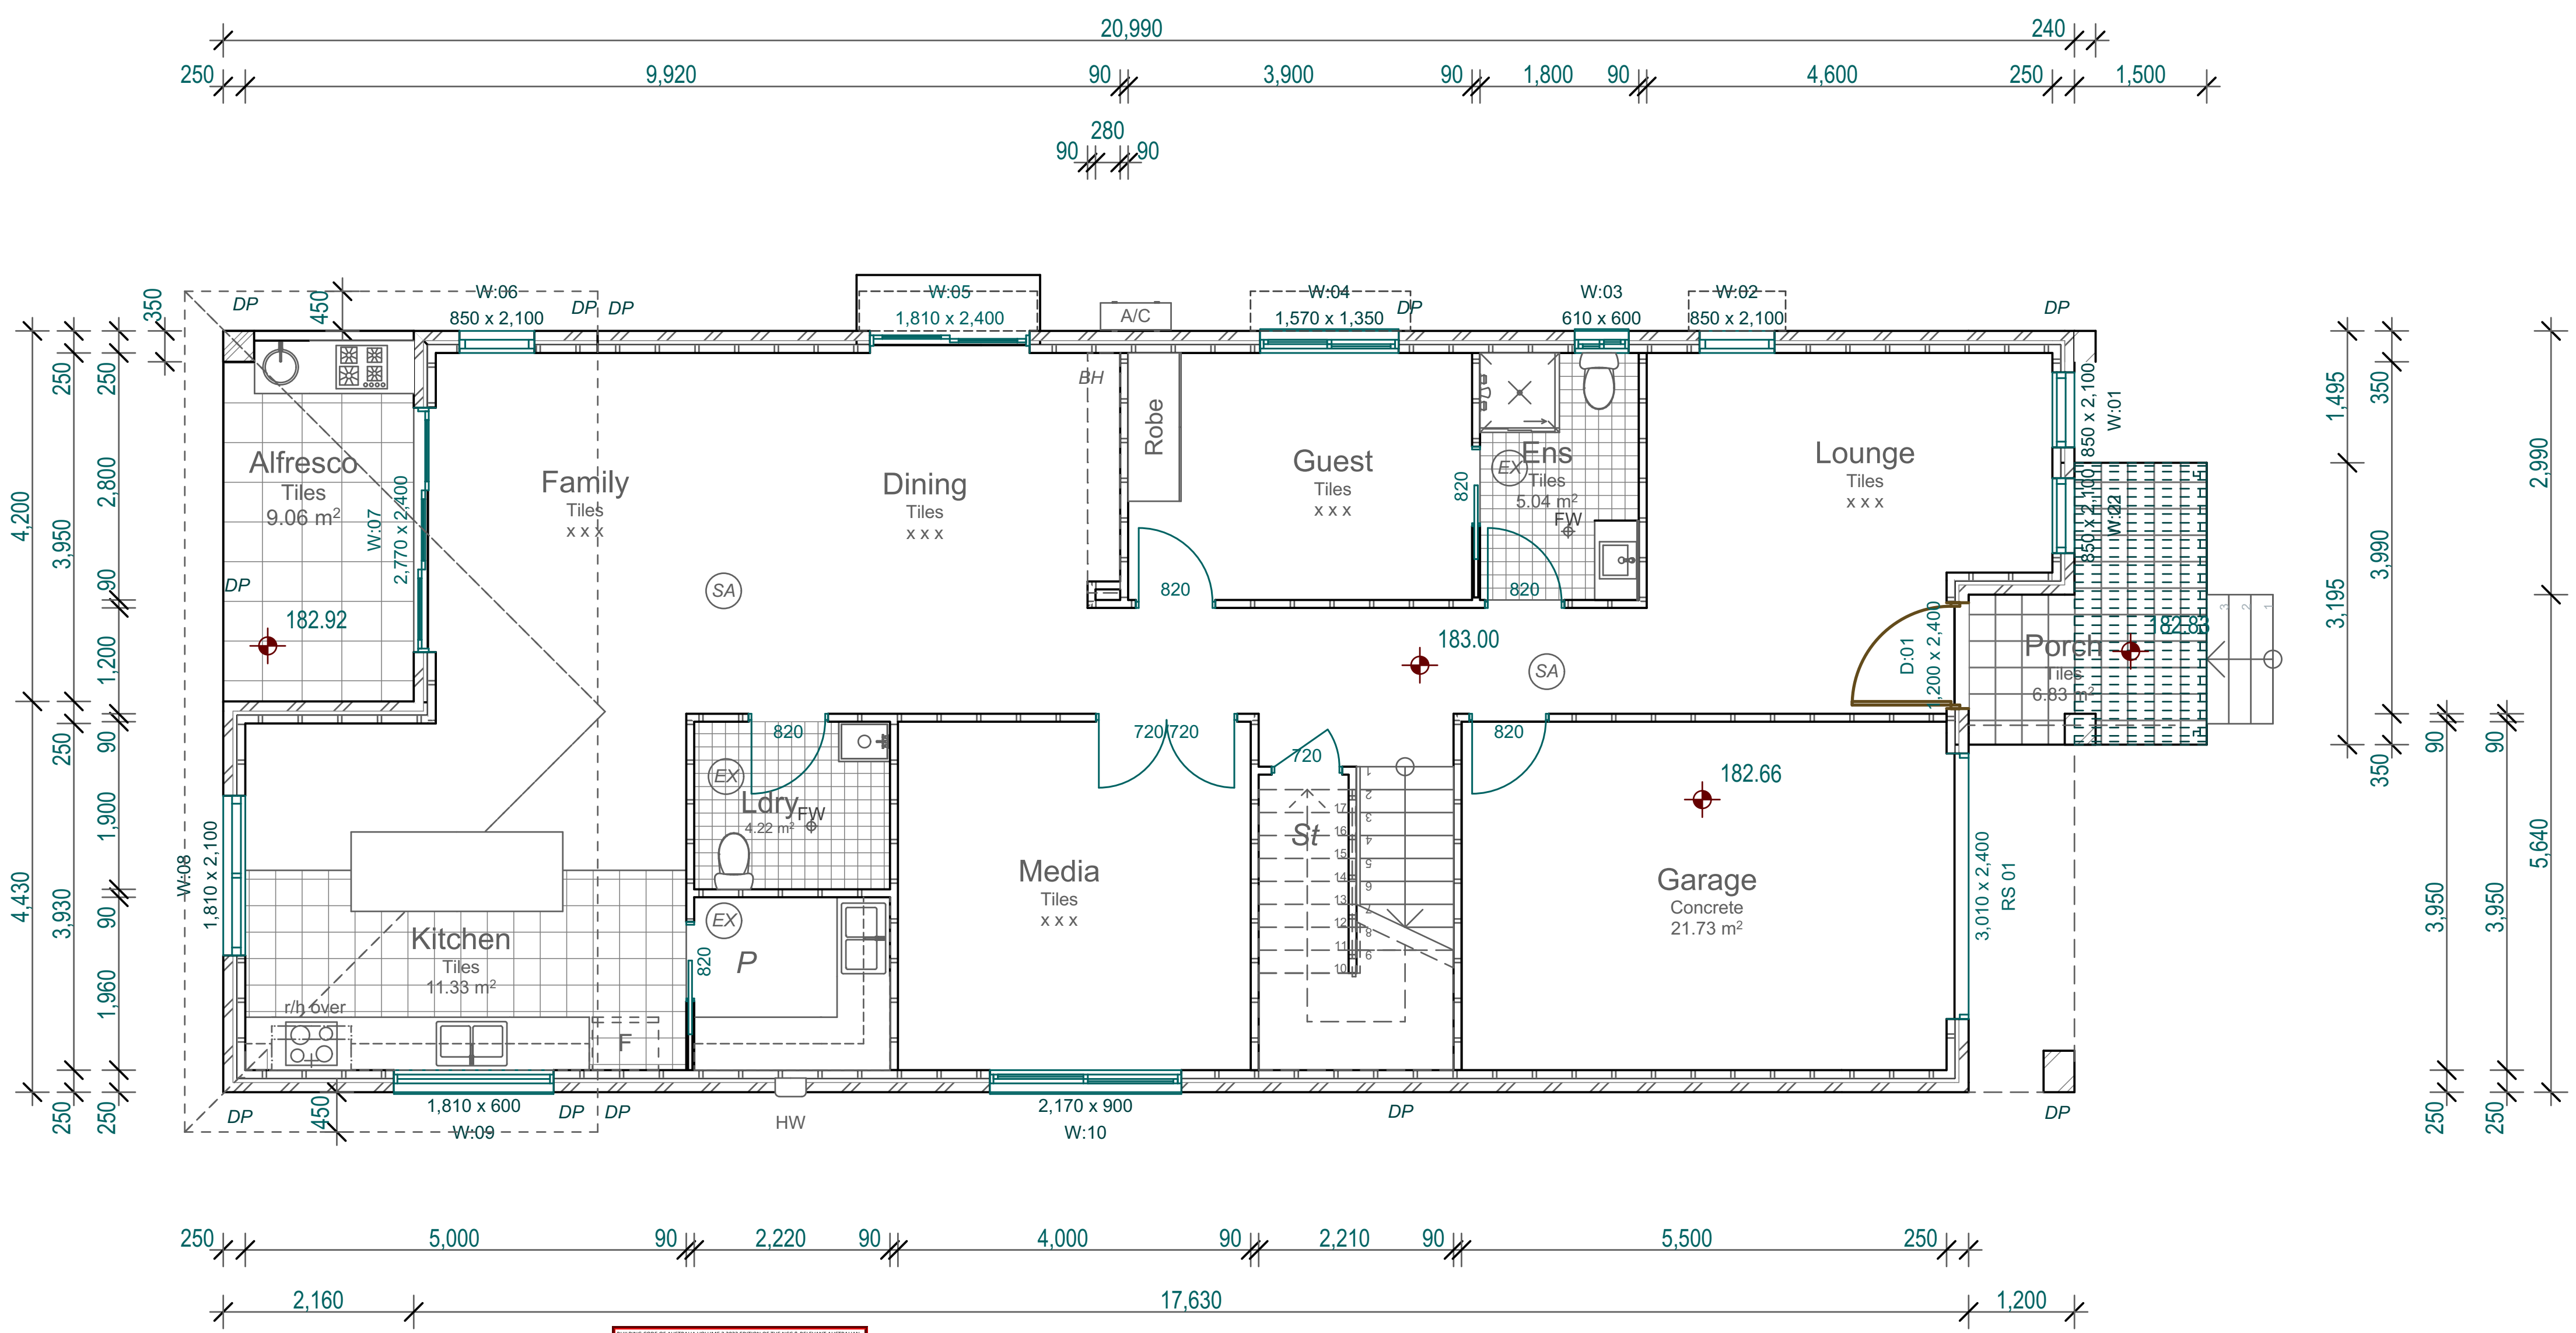

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

Ground Floor Dimensions
1:100

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Ground Floor Dimensions
									Dwg No. CD03A

Total Building Area
144.54 m^2

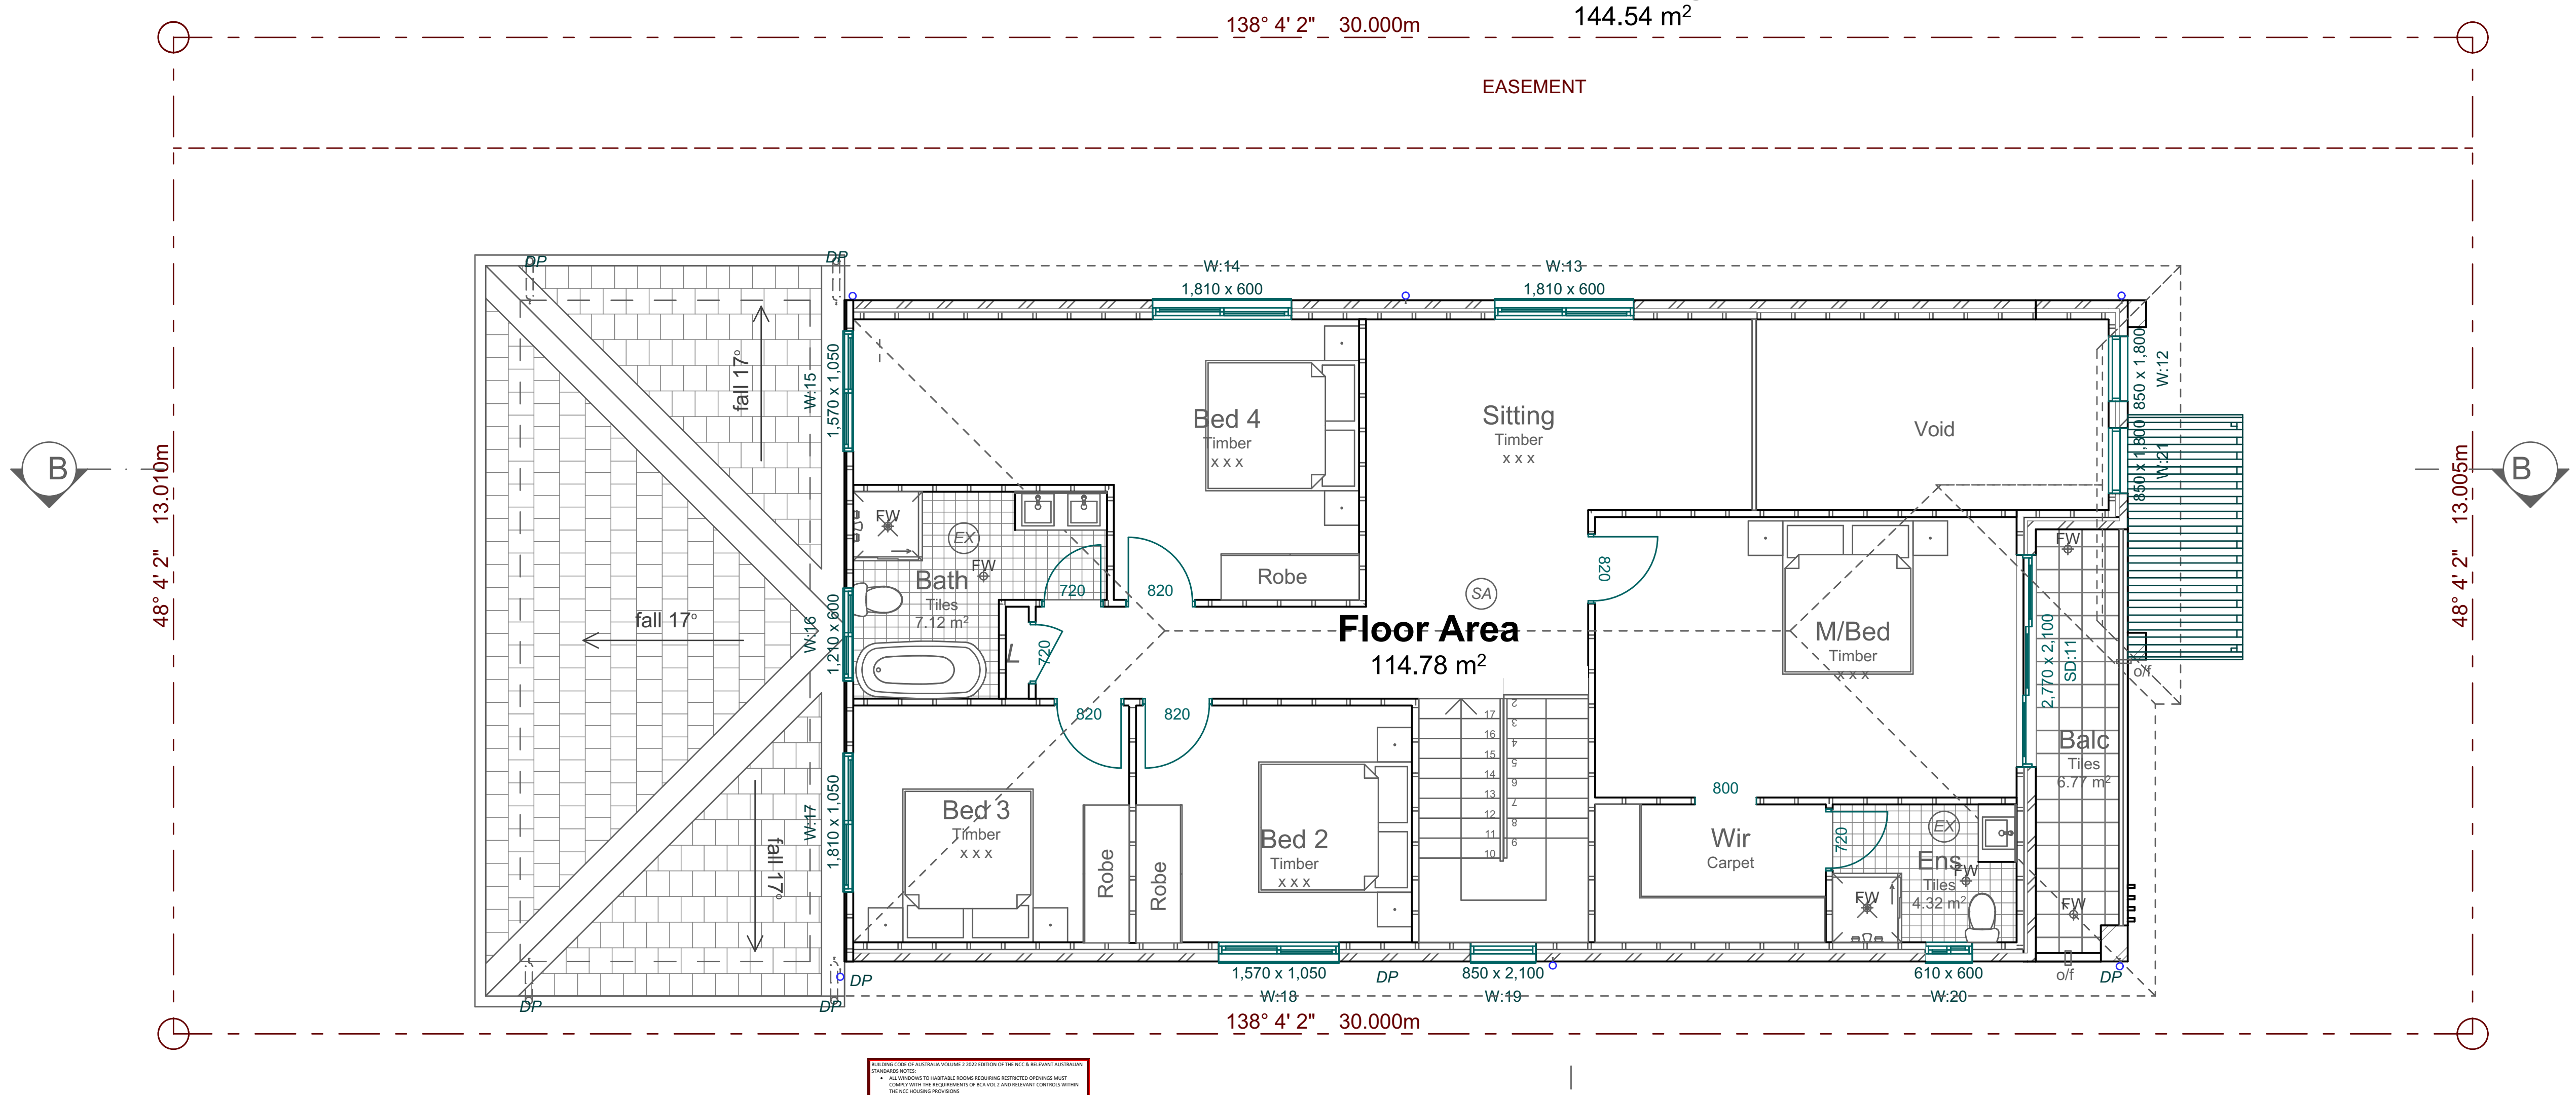

First Floor Plan
1:100

11. Terms of easement, profit à prendre, restriction, or positive covenant numbered 11 in the plan.

The lots burdened will require acoustic treatments as indicated in the tables below;

Required Glazing

Category	Room	Window/Door Orientation	Glazed Element Area (Windows/Doors)	Required Glazing
Category 1	Bedrooms	Facing Roadway	<2m2 2m2 to 3m2 3m2 to 9m2	6mm glass (Rw 29) 6.38mm laminated glass (Rw 31) 10.38mm laminated glass (Rw 35)
		Perpendicular to Roadway	<5m2 5m2 to 8m2 >8m2	6mm glass (Rw 29) 6mm glass (Rw 29) 6.38mm laminated glass (Rw 29)
	Living Rooms	Facing Roadway	<5m2 5m2 to 8m2 >8m2	6.38mm laminated glass (Rw 29) 6.38mm laminated glass (Rw 29) 10.38mm laminated glass (Rw 35)
		Perpendicular to Roadway	<5m2 5m2 to 8m2 >8m2	6mm glass (Rw 29) 6.38mm laminated glass (Rw 29) 6.38mm laminated glass (Rw 29)

Required Construction Standards

	External Walls	Roof	External Doors
Category 1 Dwellings	Double brick or Brick veneer or Light weight external wall with external wall system is to include 2x13mm thick plasterboard sheeting for internal wall lining and external wall lining of 6mm fc sheet (or material of equivalent surface density)	Roof ceiling cavity to have minimum 75mm thick 14kg/m^3 insulation to cavity (includes sheet metal or tile). For bedrooms which are facing the Hume Highway or Sub-arterial roadway in Category 1 dwellings, ceiling sheeting to consist of 2x10mm thick plasterboard	External non-glazed doors for are to be solid core timber or glazed, fitted with acoustic seals around the perimeter (Raven RP 10 to top and sides, Raven RP 36 drop seal to base).

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

North

Revision
A. COMPLYING DEVELOPMENT ISSUE 12/06/26

Client
Aamir Shahzad - Naeelam Shahzad

Project
Proposed Two Storey dwelling at 6 Belmont St, Wilton

Designer
CACTUS DESIGN & DRAFTING
16 Glenella Way, Minto, NSW 2566
M. 0412411977

BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA

Job No.	25037	Cadd File	6 Belmont st CDC - rwall.pln
Designed	C.D.G	Check	CDG
Date	15/12/2025	Scales	AS SHOWN

Title
First Floor Plan

Dwg No.
CD04A

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729

Liability limited by a scheme approved under Professional Standards Legislation.

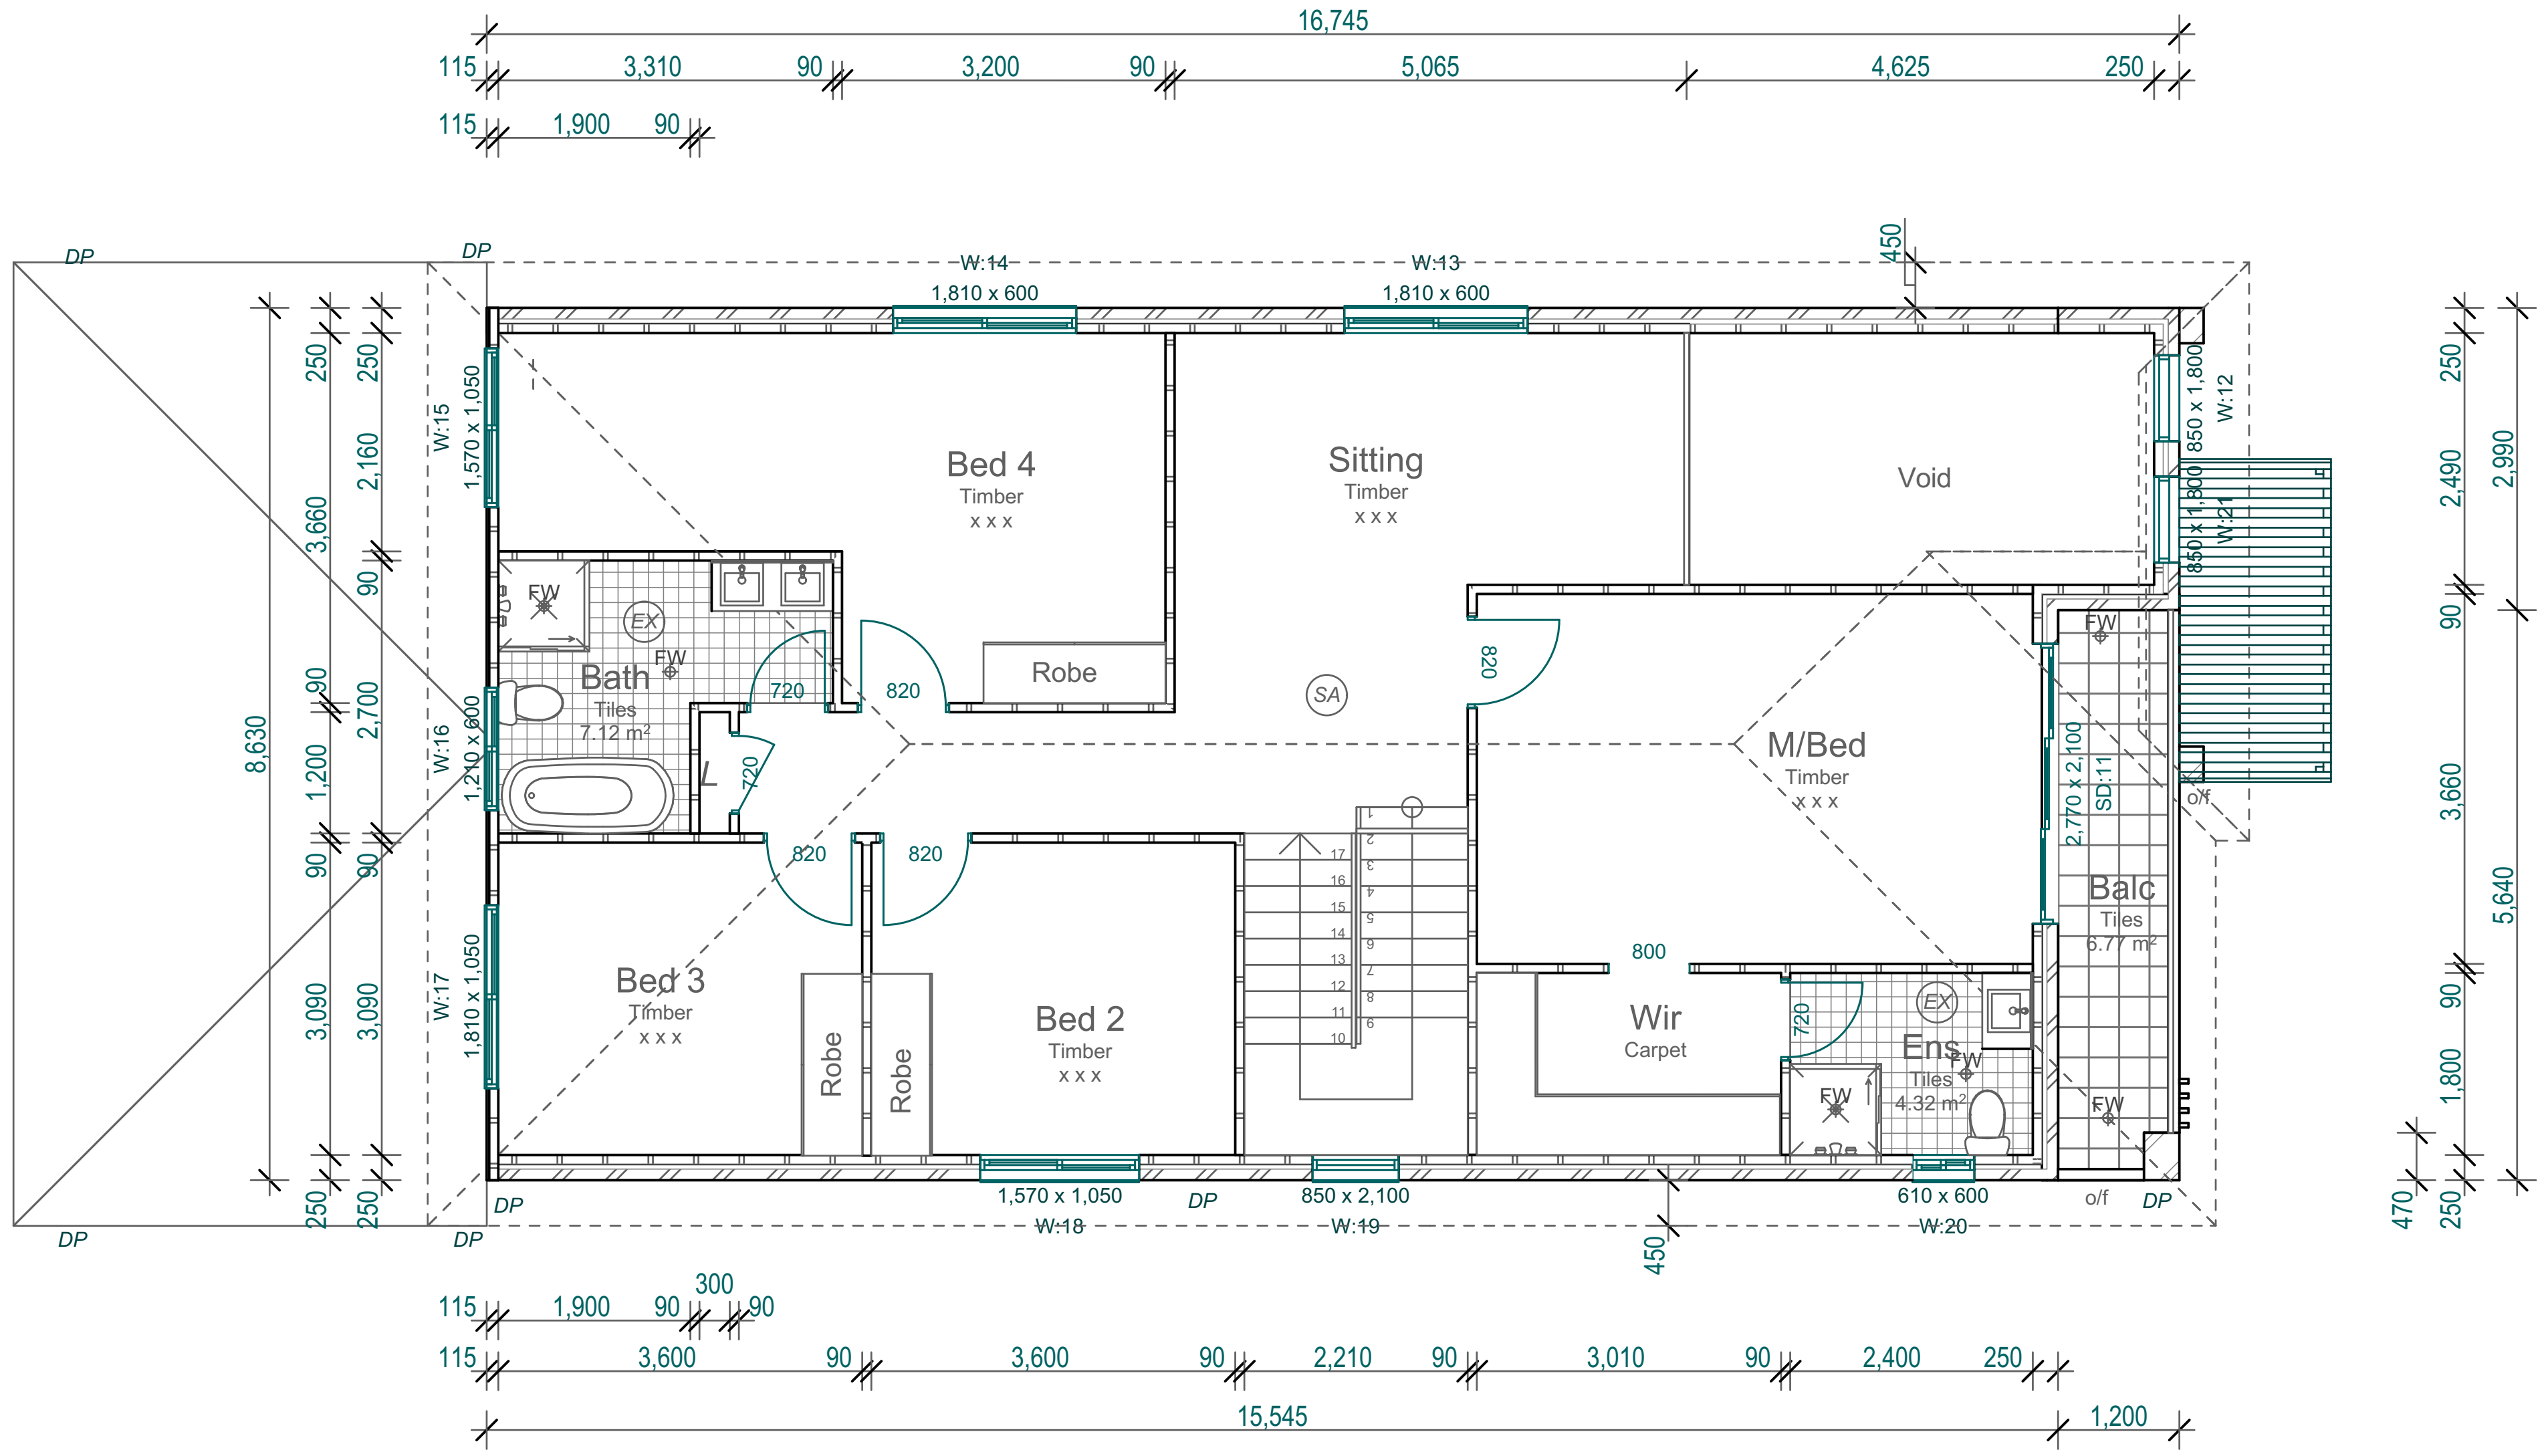

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

First Floor Dimensions

1:100

Complying Development Issue

BAL - 19 CONSTRUCTION

REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title First Floor Dimensions	Dwg No. CD05A

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

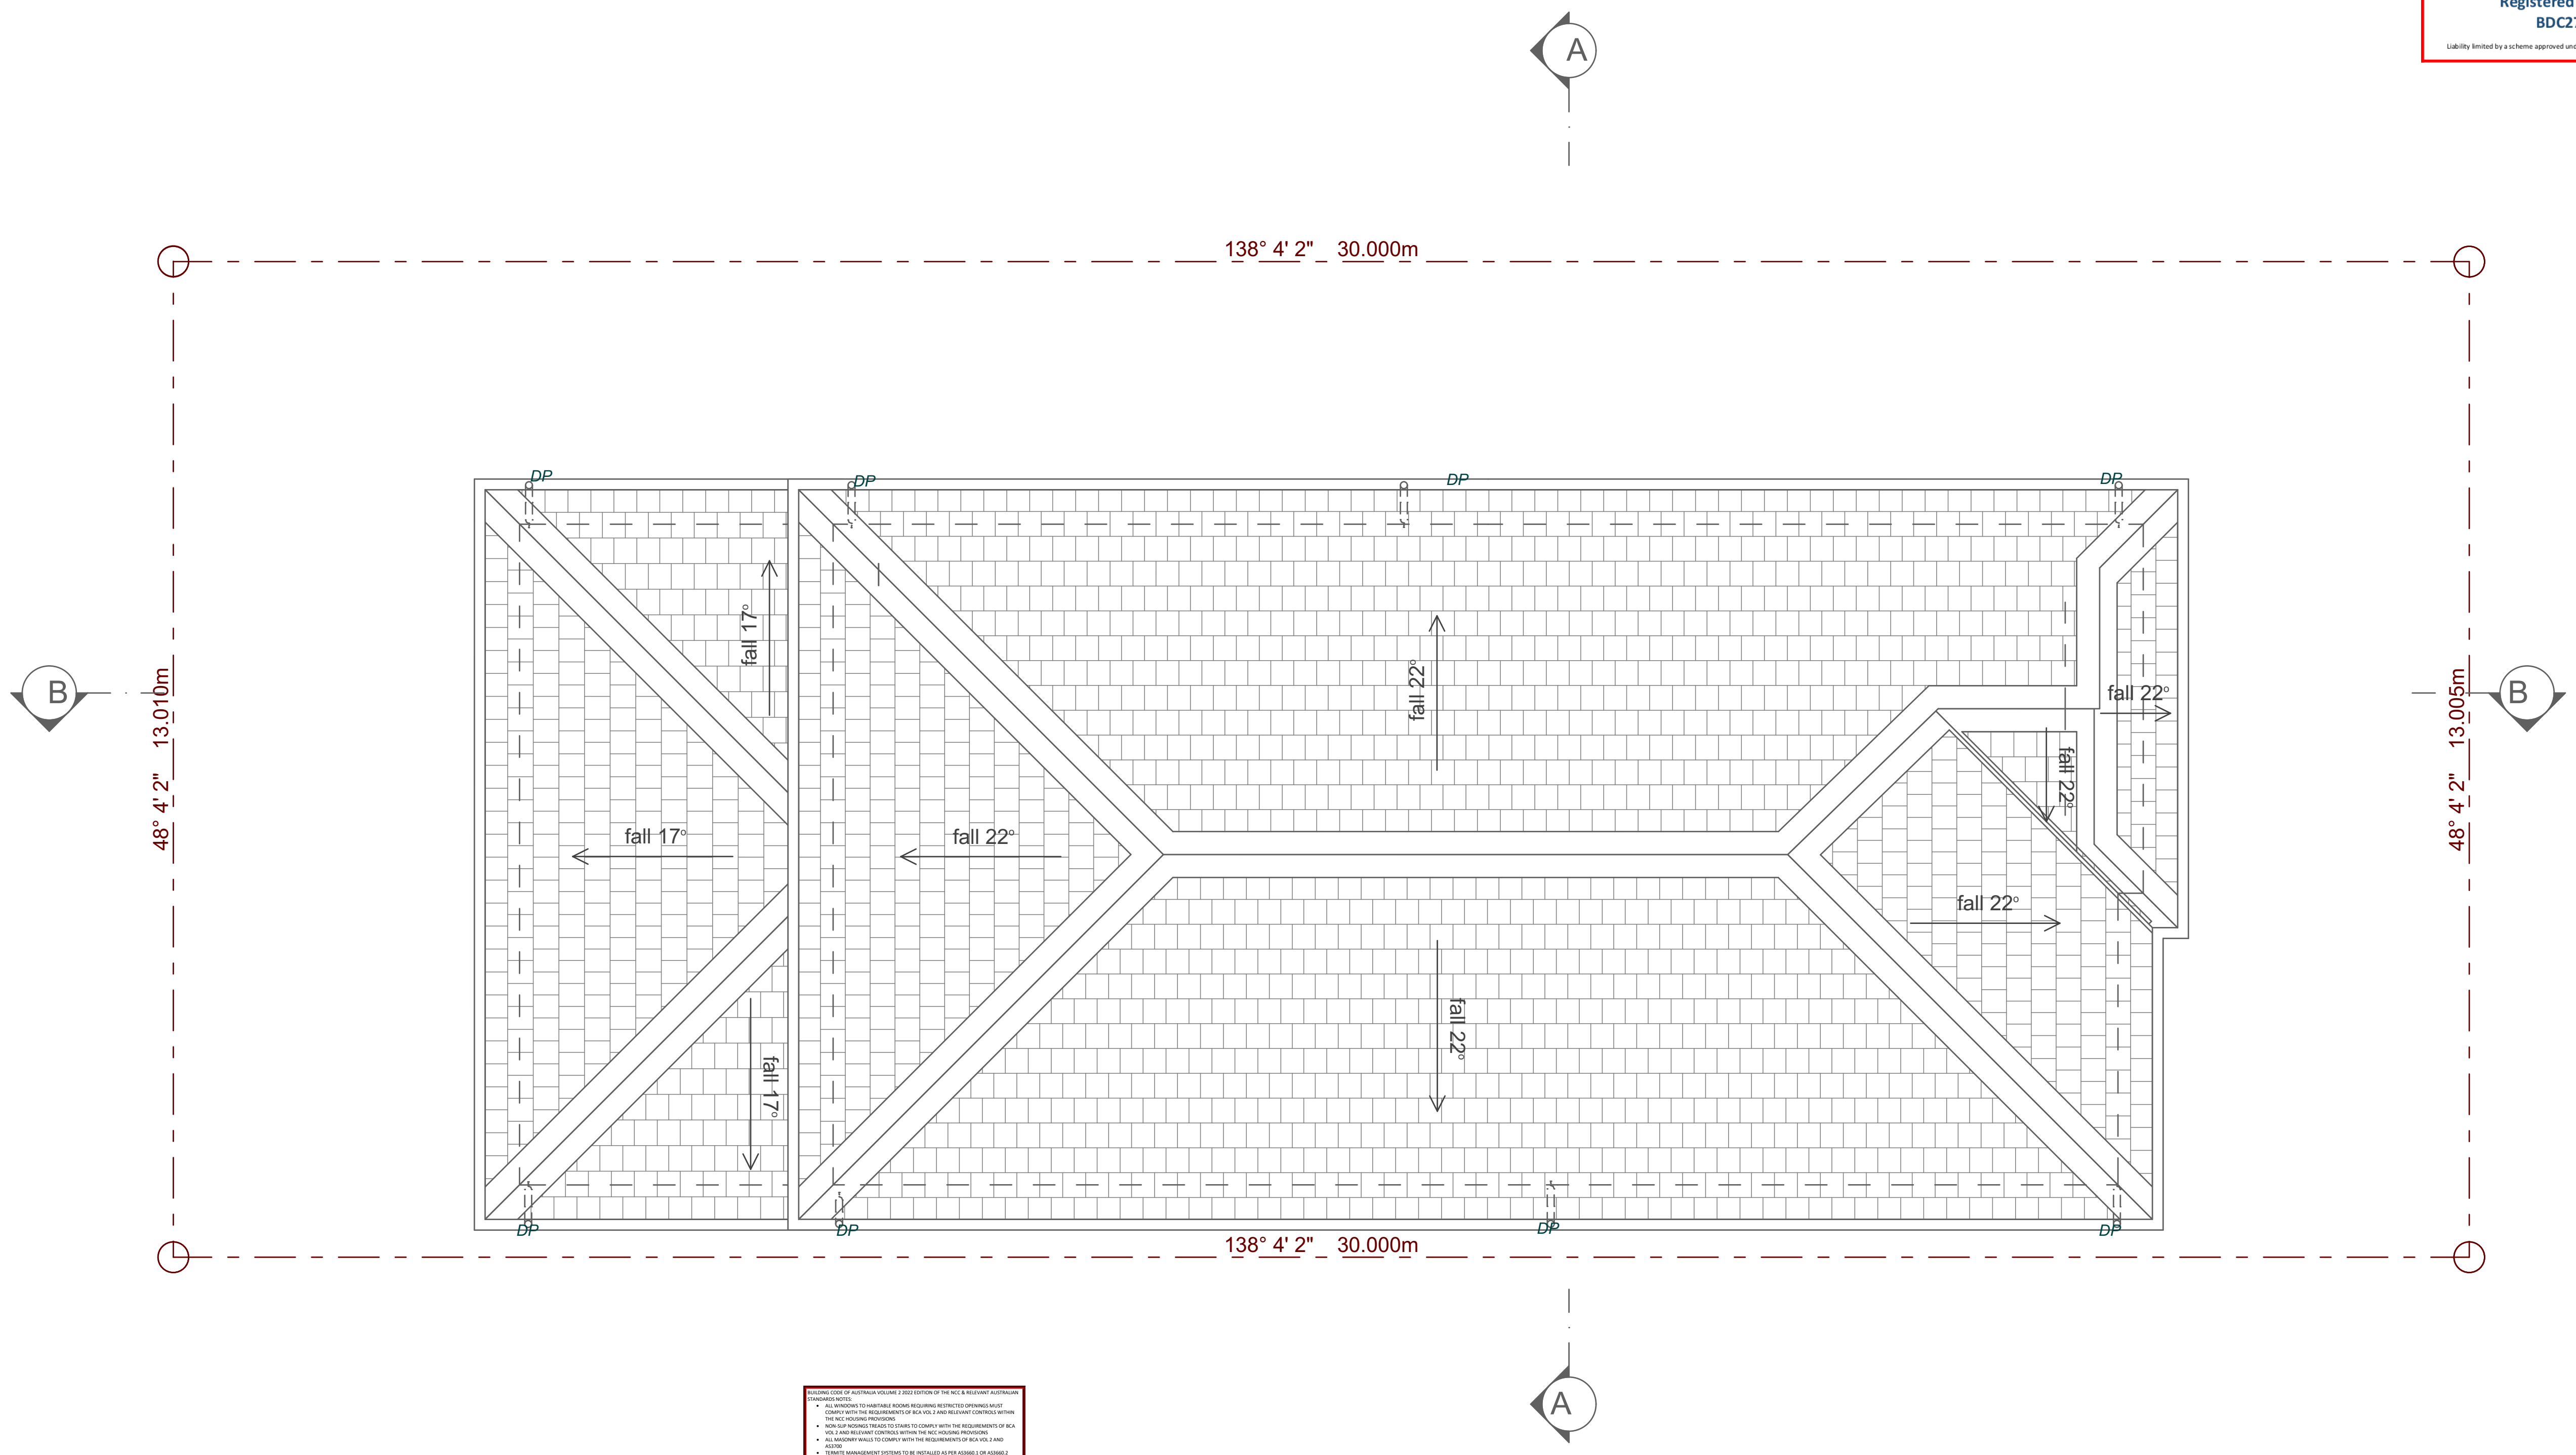

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

Roof Plan
1:100

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	bdaa BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Roof Plan	Dwg No. CD06A

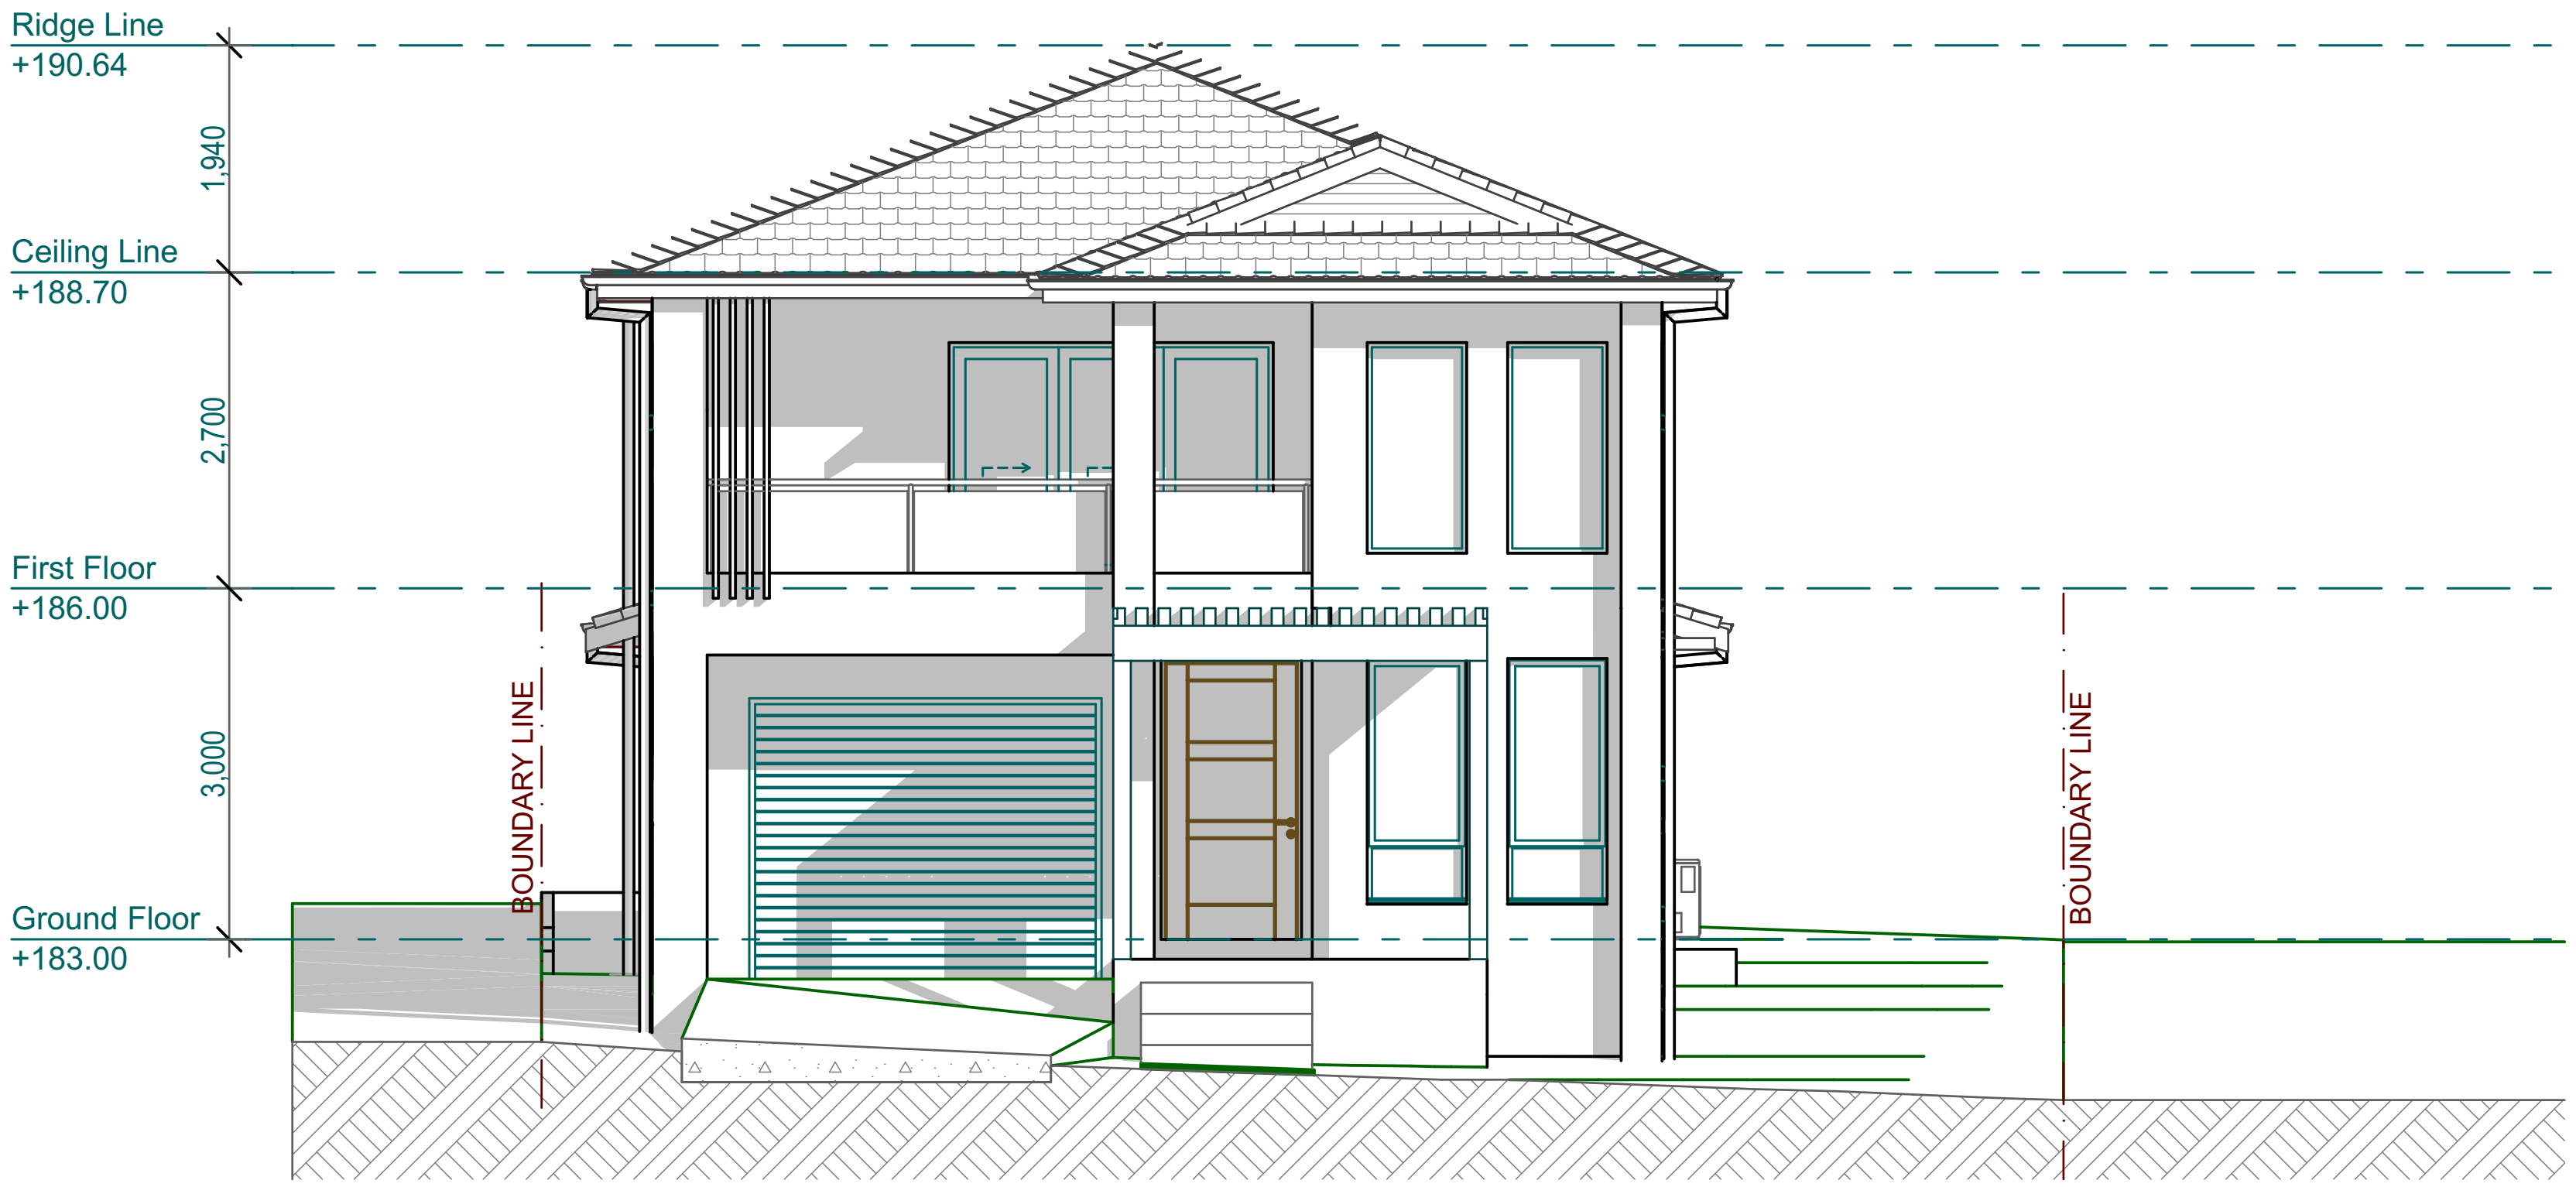

South East Elevation
1:100

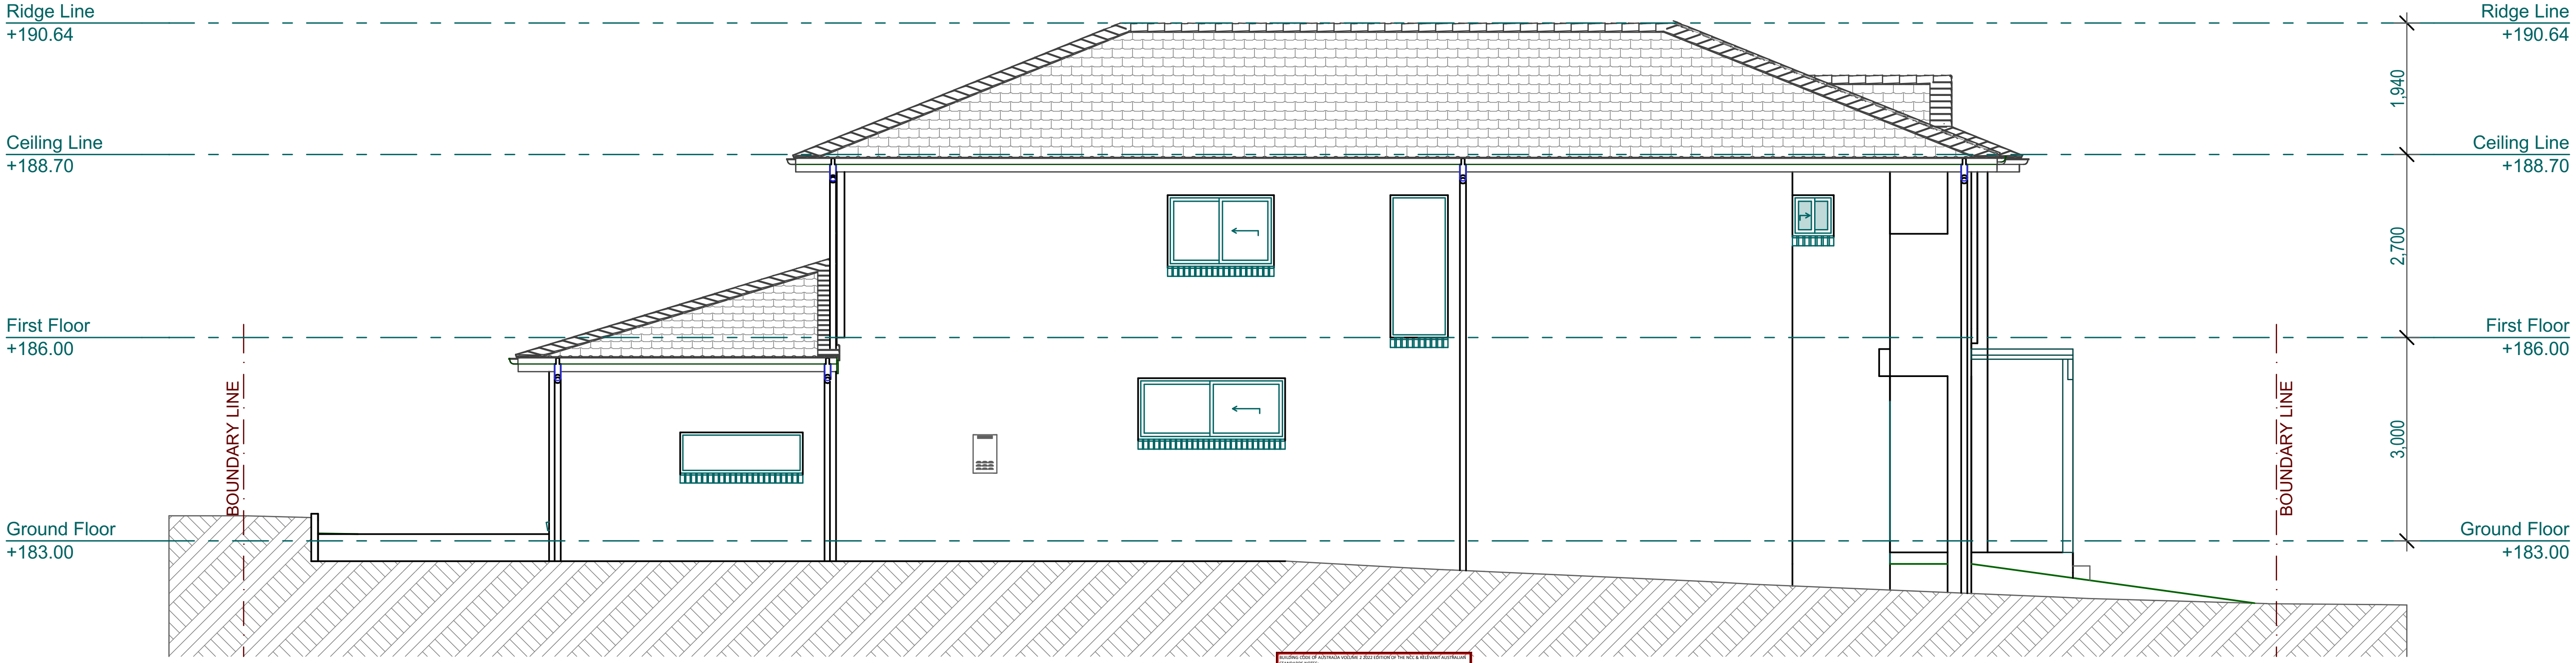

South West Elevation
1:100

Complying Development Issue

BAL - 19 CONSTRUCTION

REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN

Title	Dwg No.
South-East & South West Elevations	CD07A

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729

Liability limited by a scheme approved under Professional Standards Legislation.

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

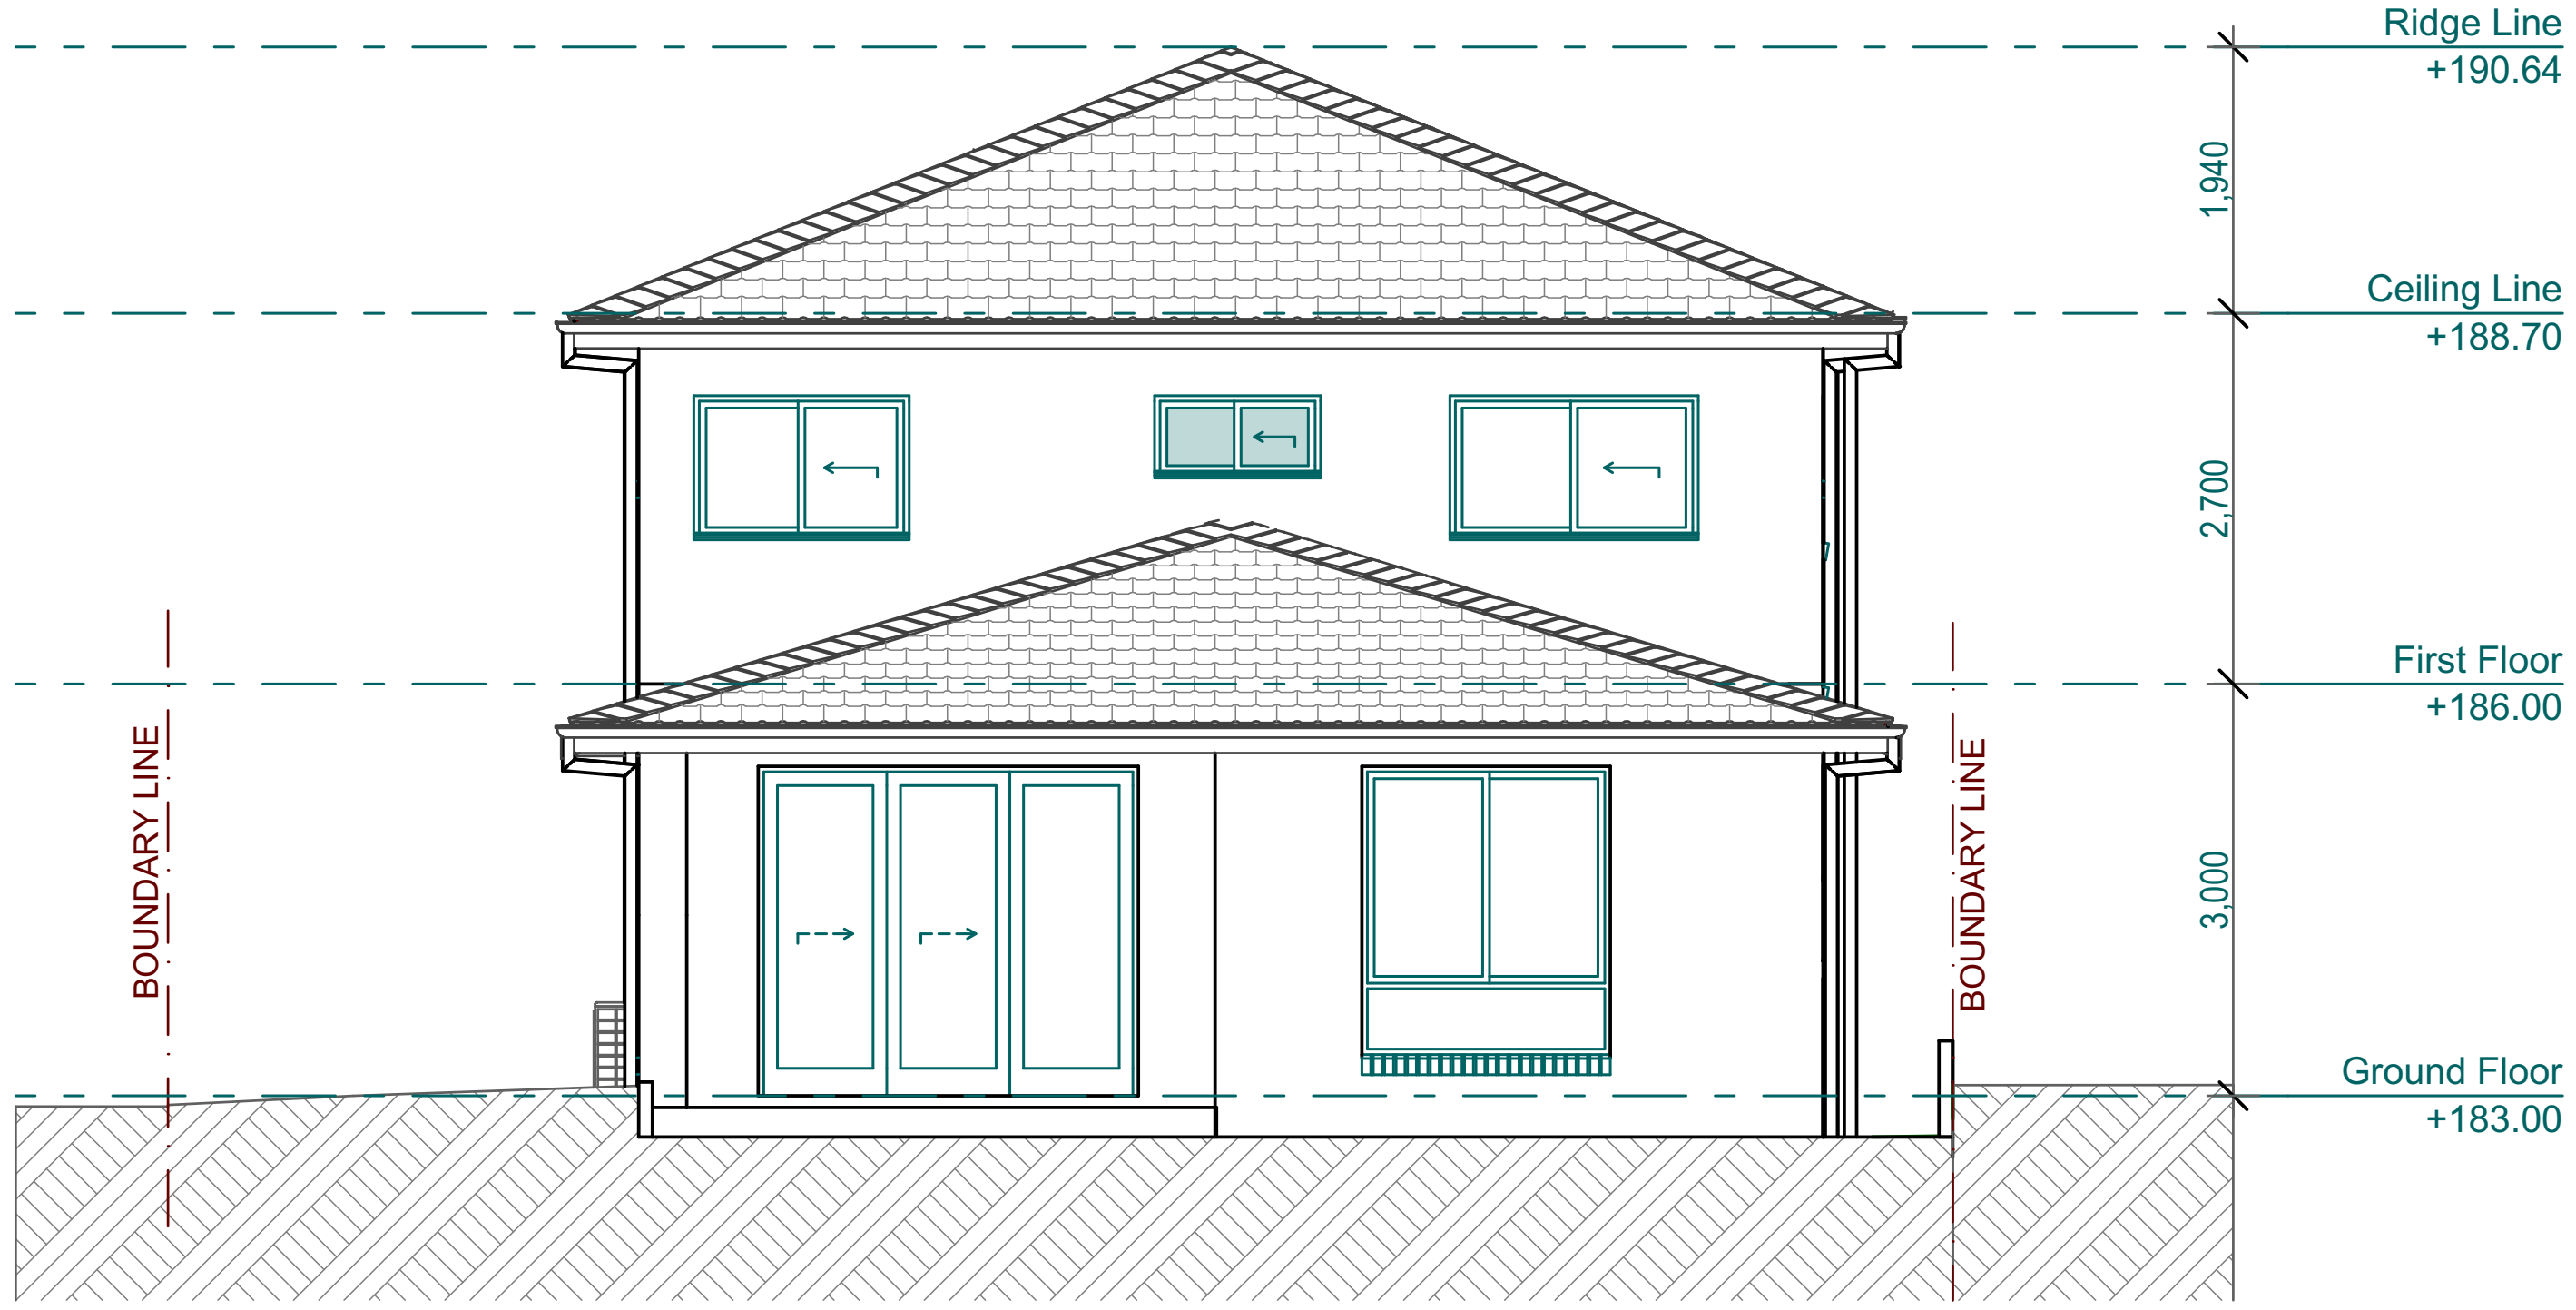

North West Elevation
1:100

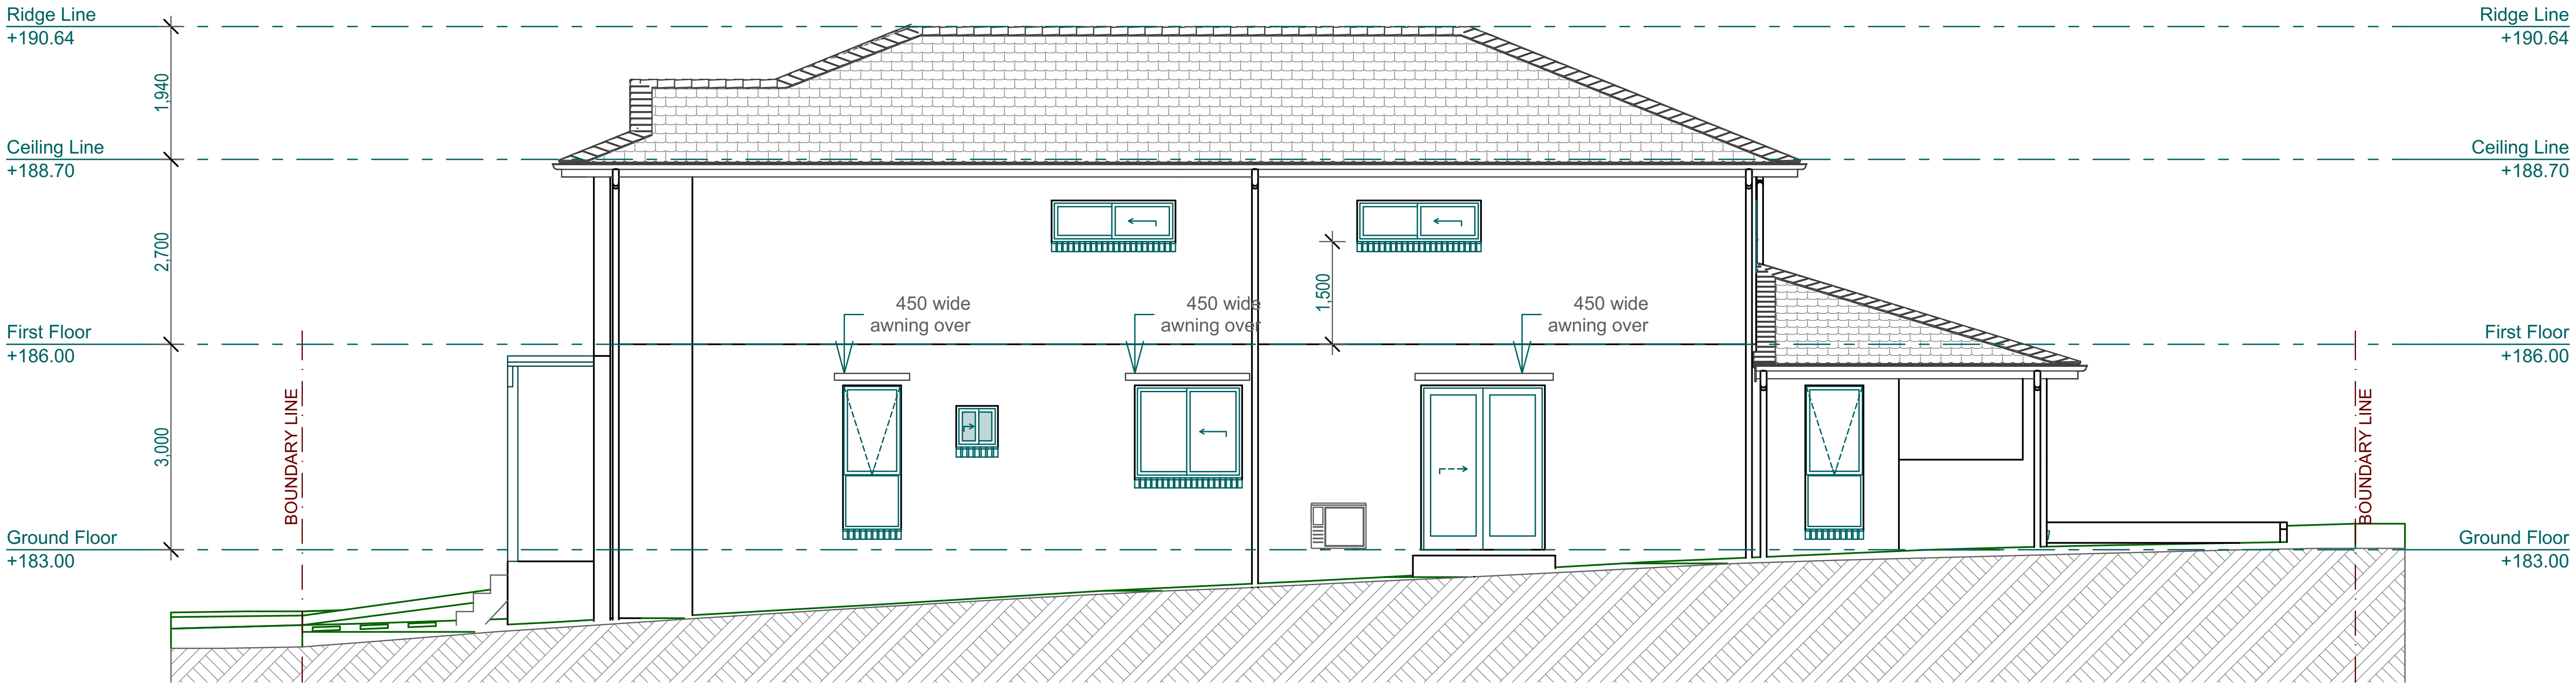

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

North East Elevation
1:100

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title **North-West & North-East Elevations**	Dwg No. **CD08A**

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

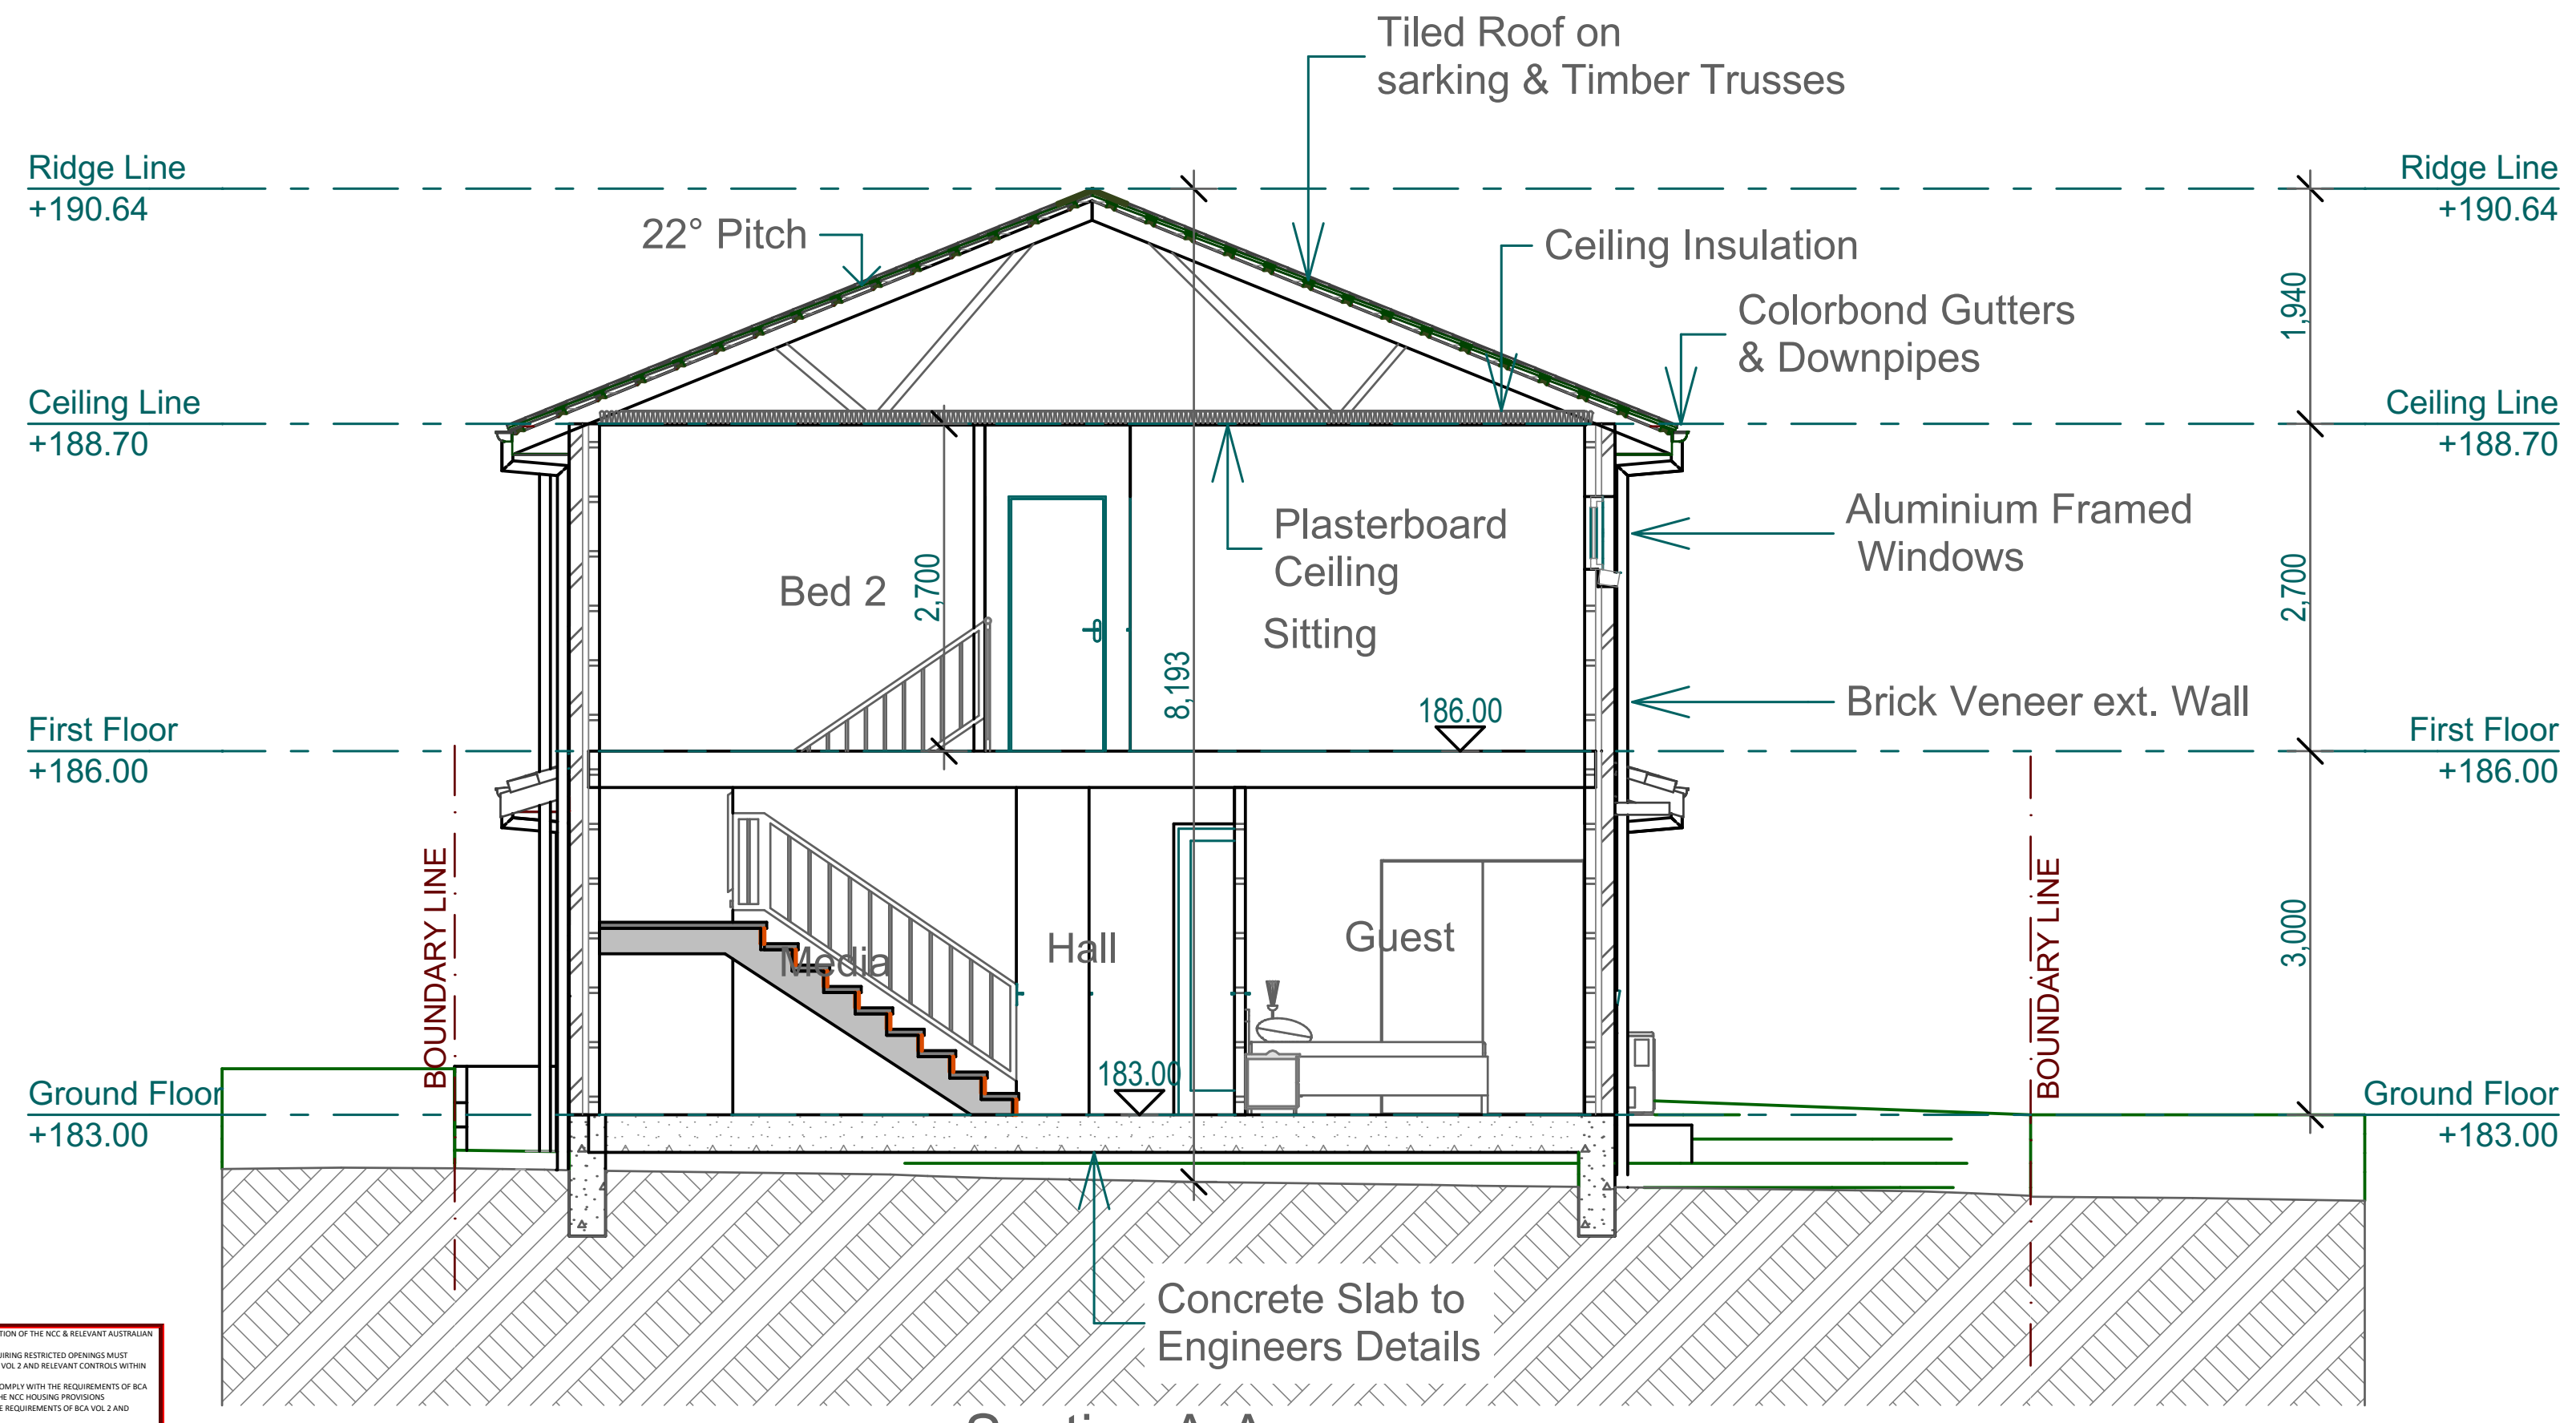

Section A-A
1:100

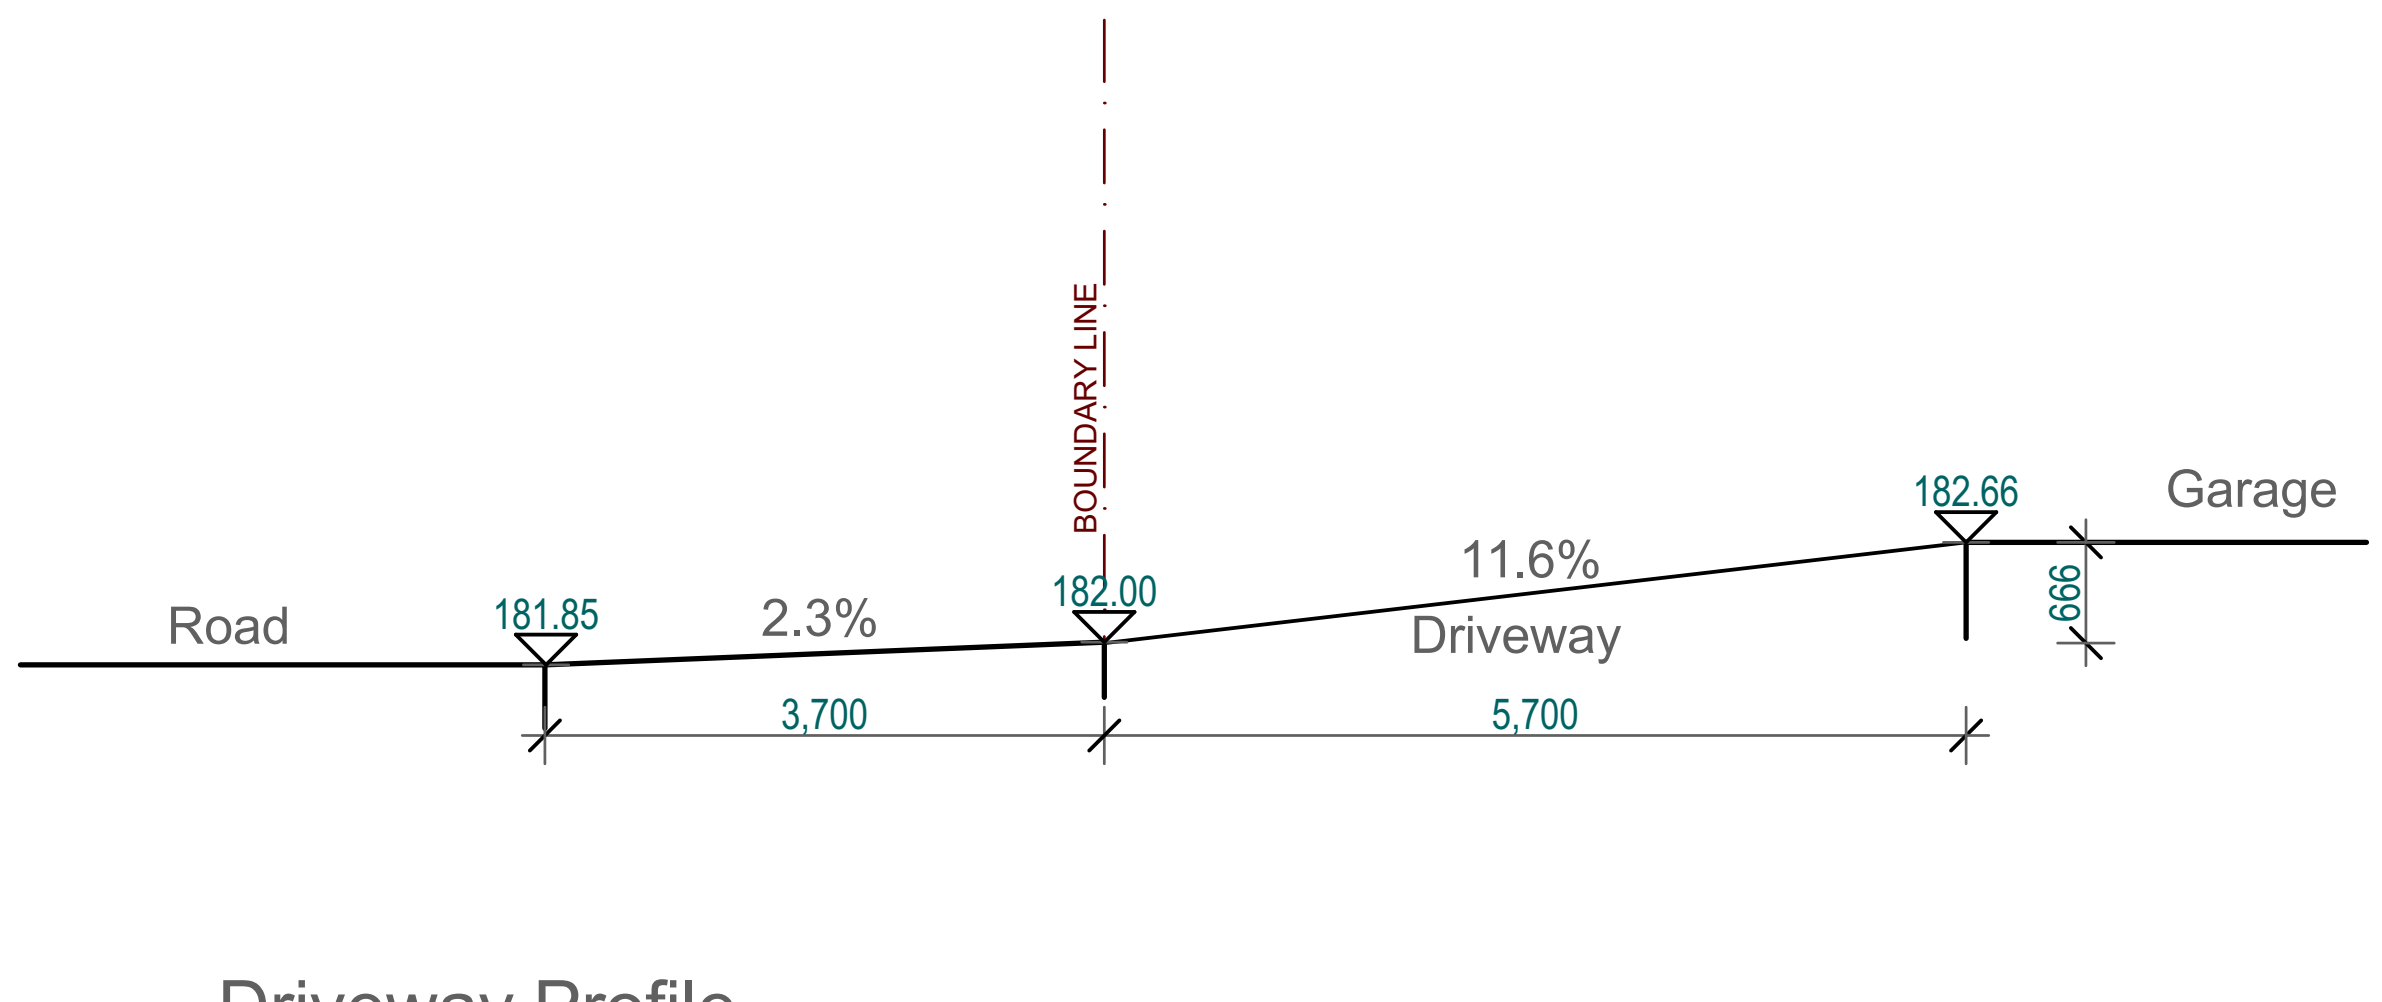

Driveway Profile
1:100

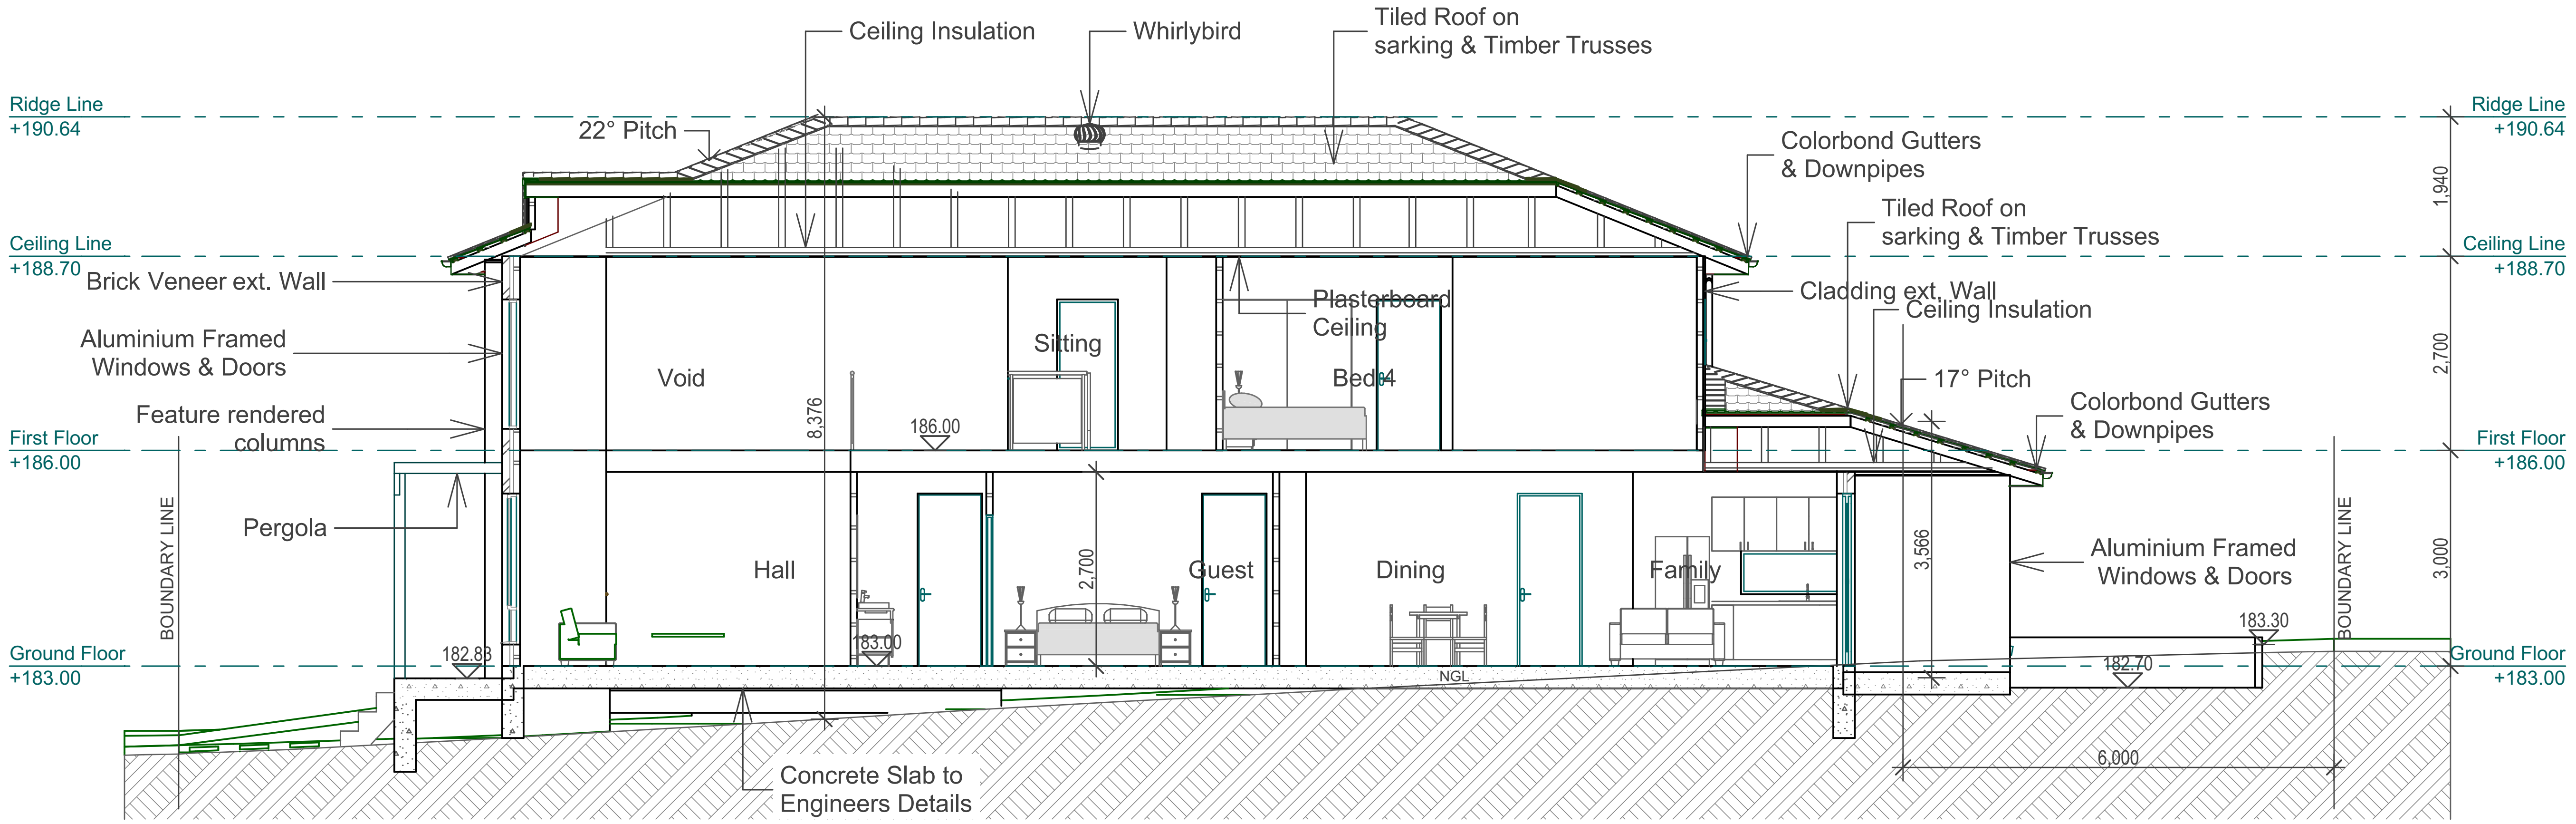

Section B-B
1:100

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	bdaa BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Sections AA & BB

Dwg No.
CD09A

3D View 1

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

3D View 2

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title **3D views**	Dwg No. **CD10A**

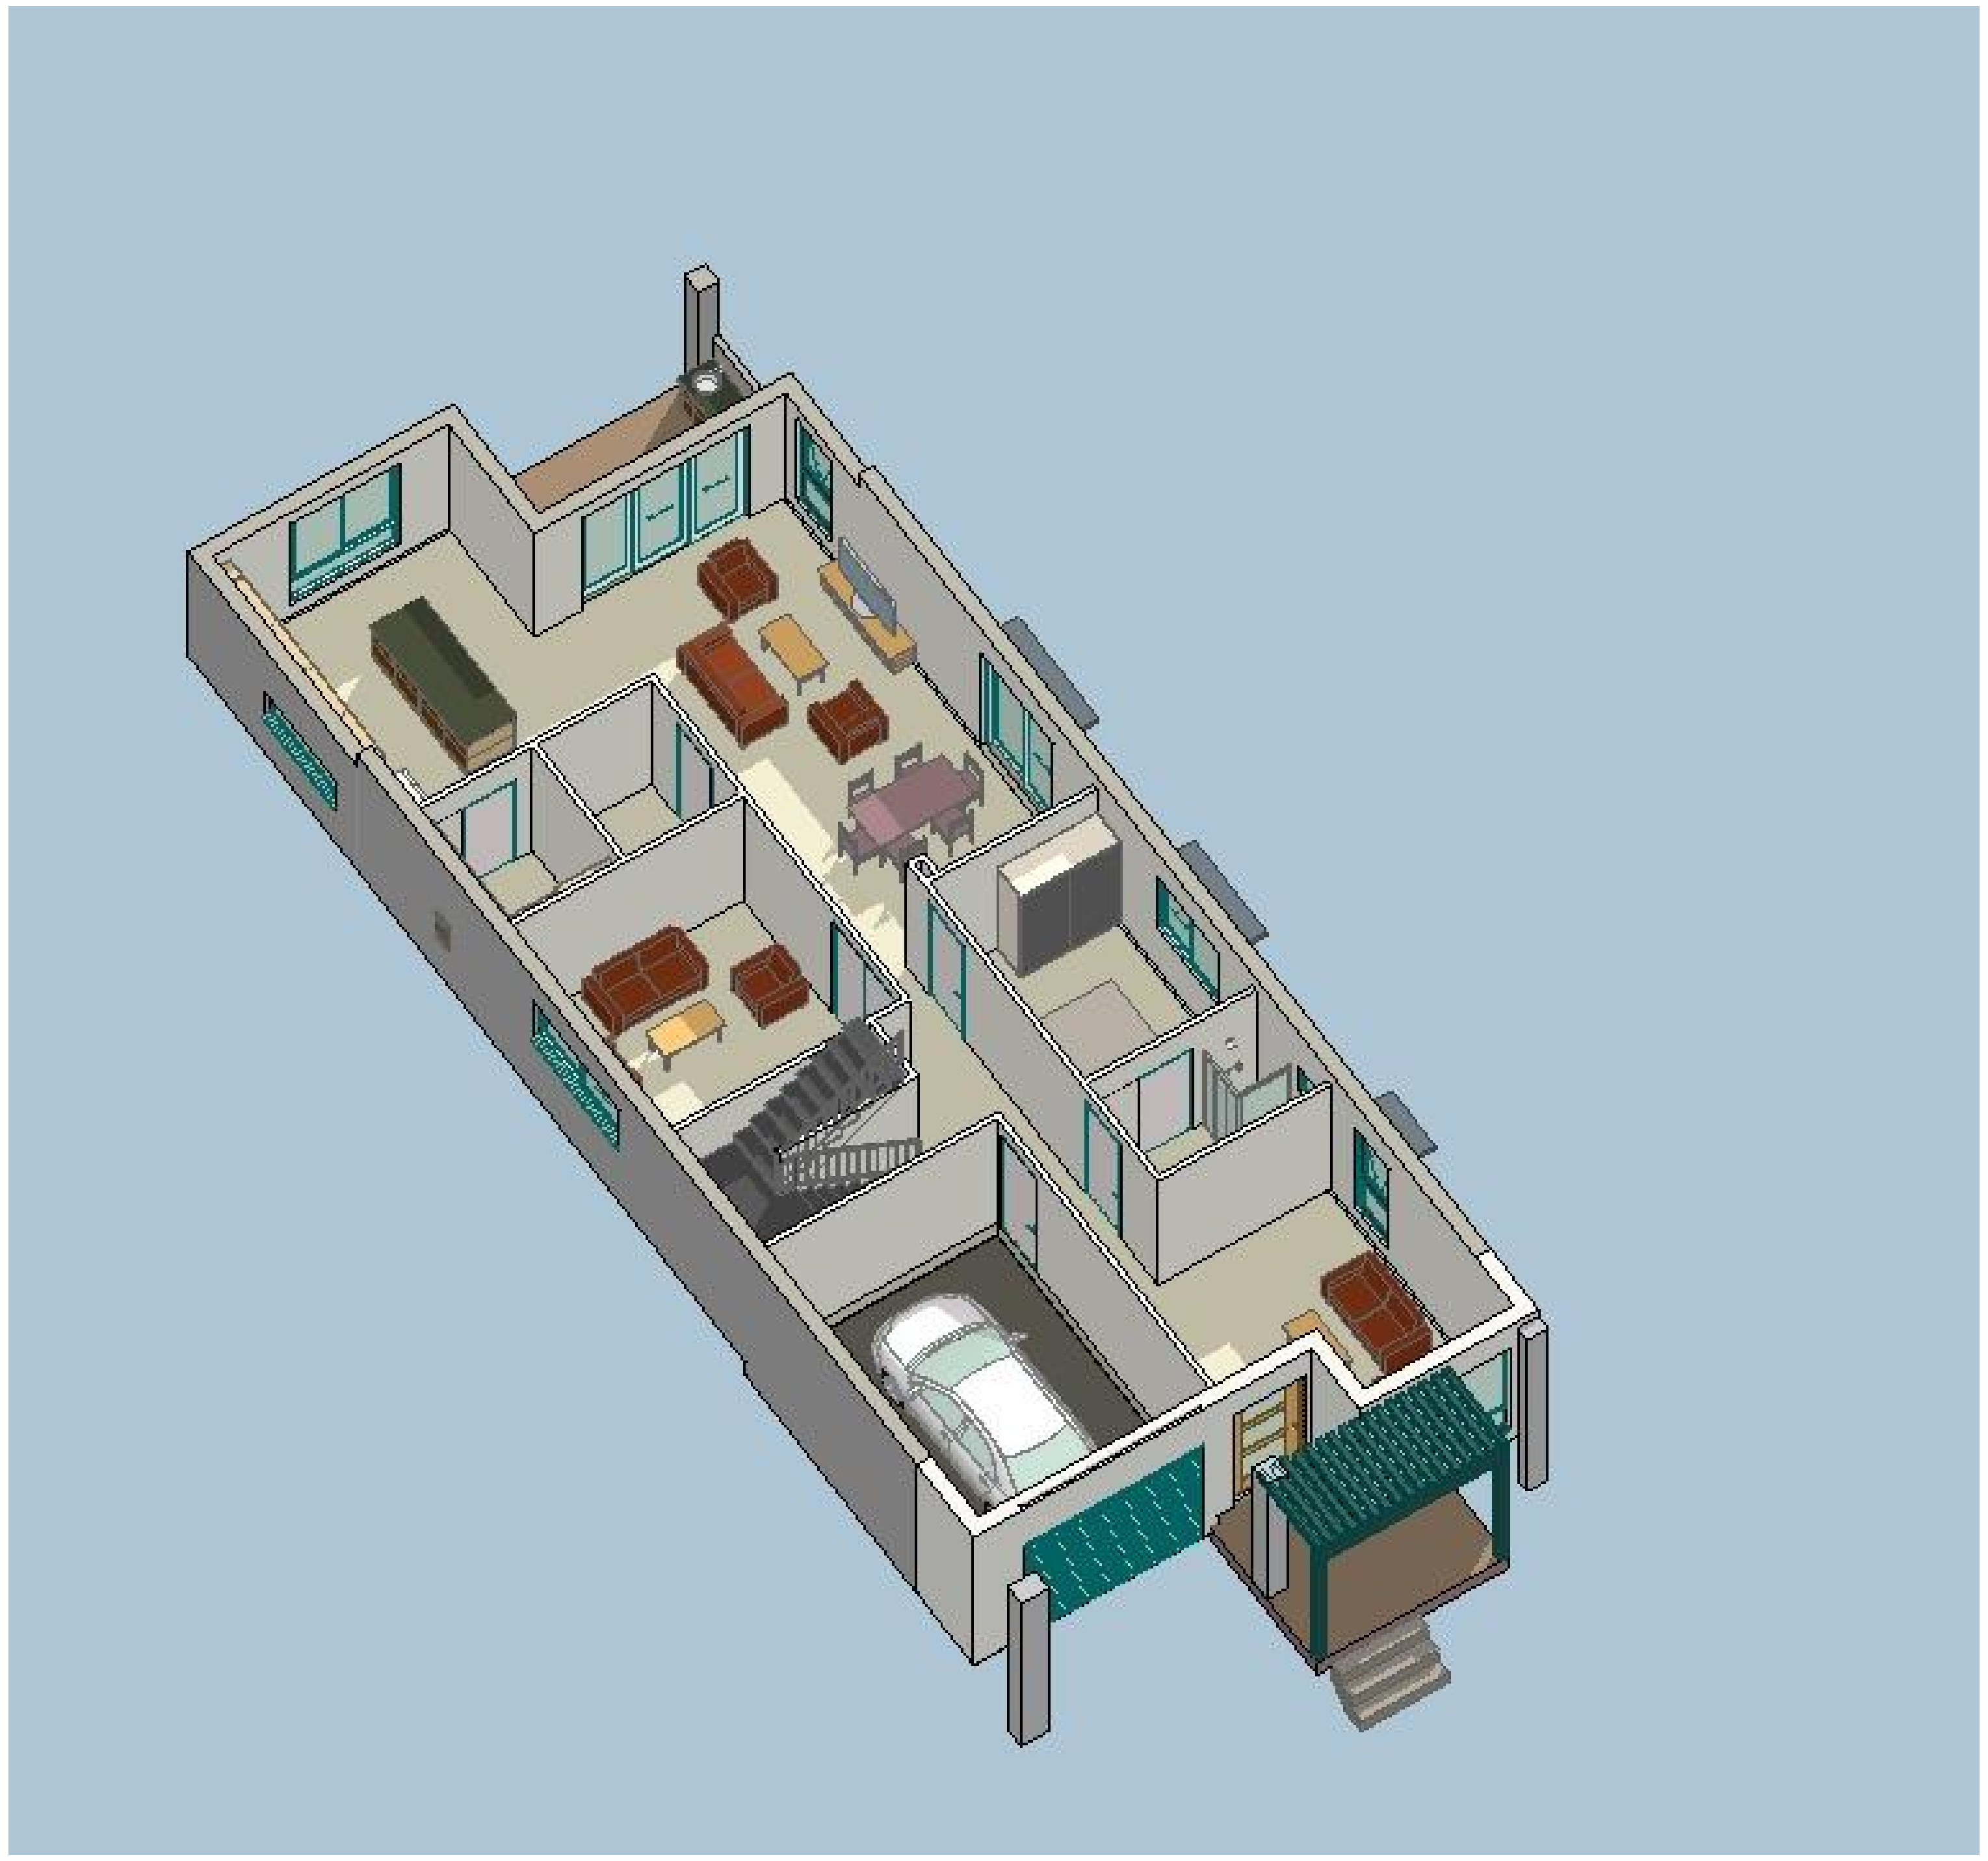

3D Internal Ground Floor

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729

Liability limited by a scheme approved under Professional Standards Legislation.

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

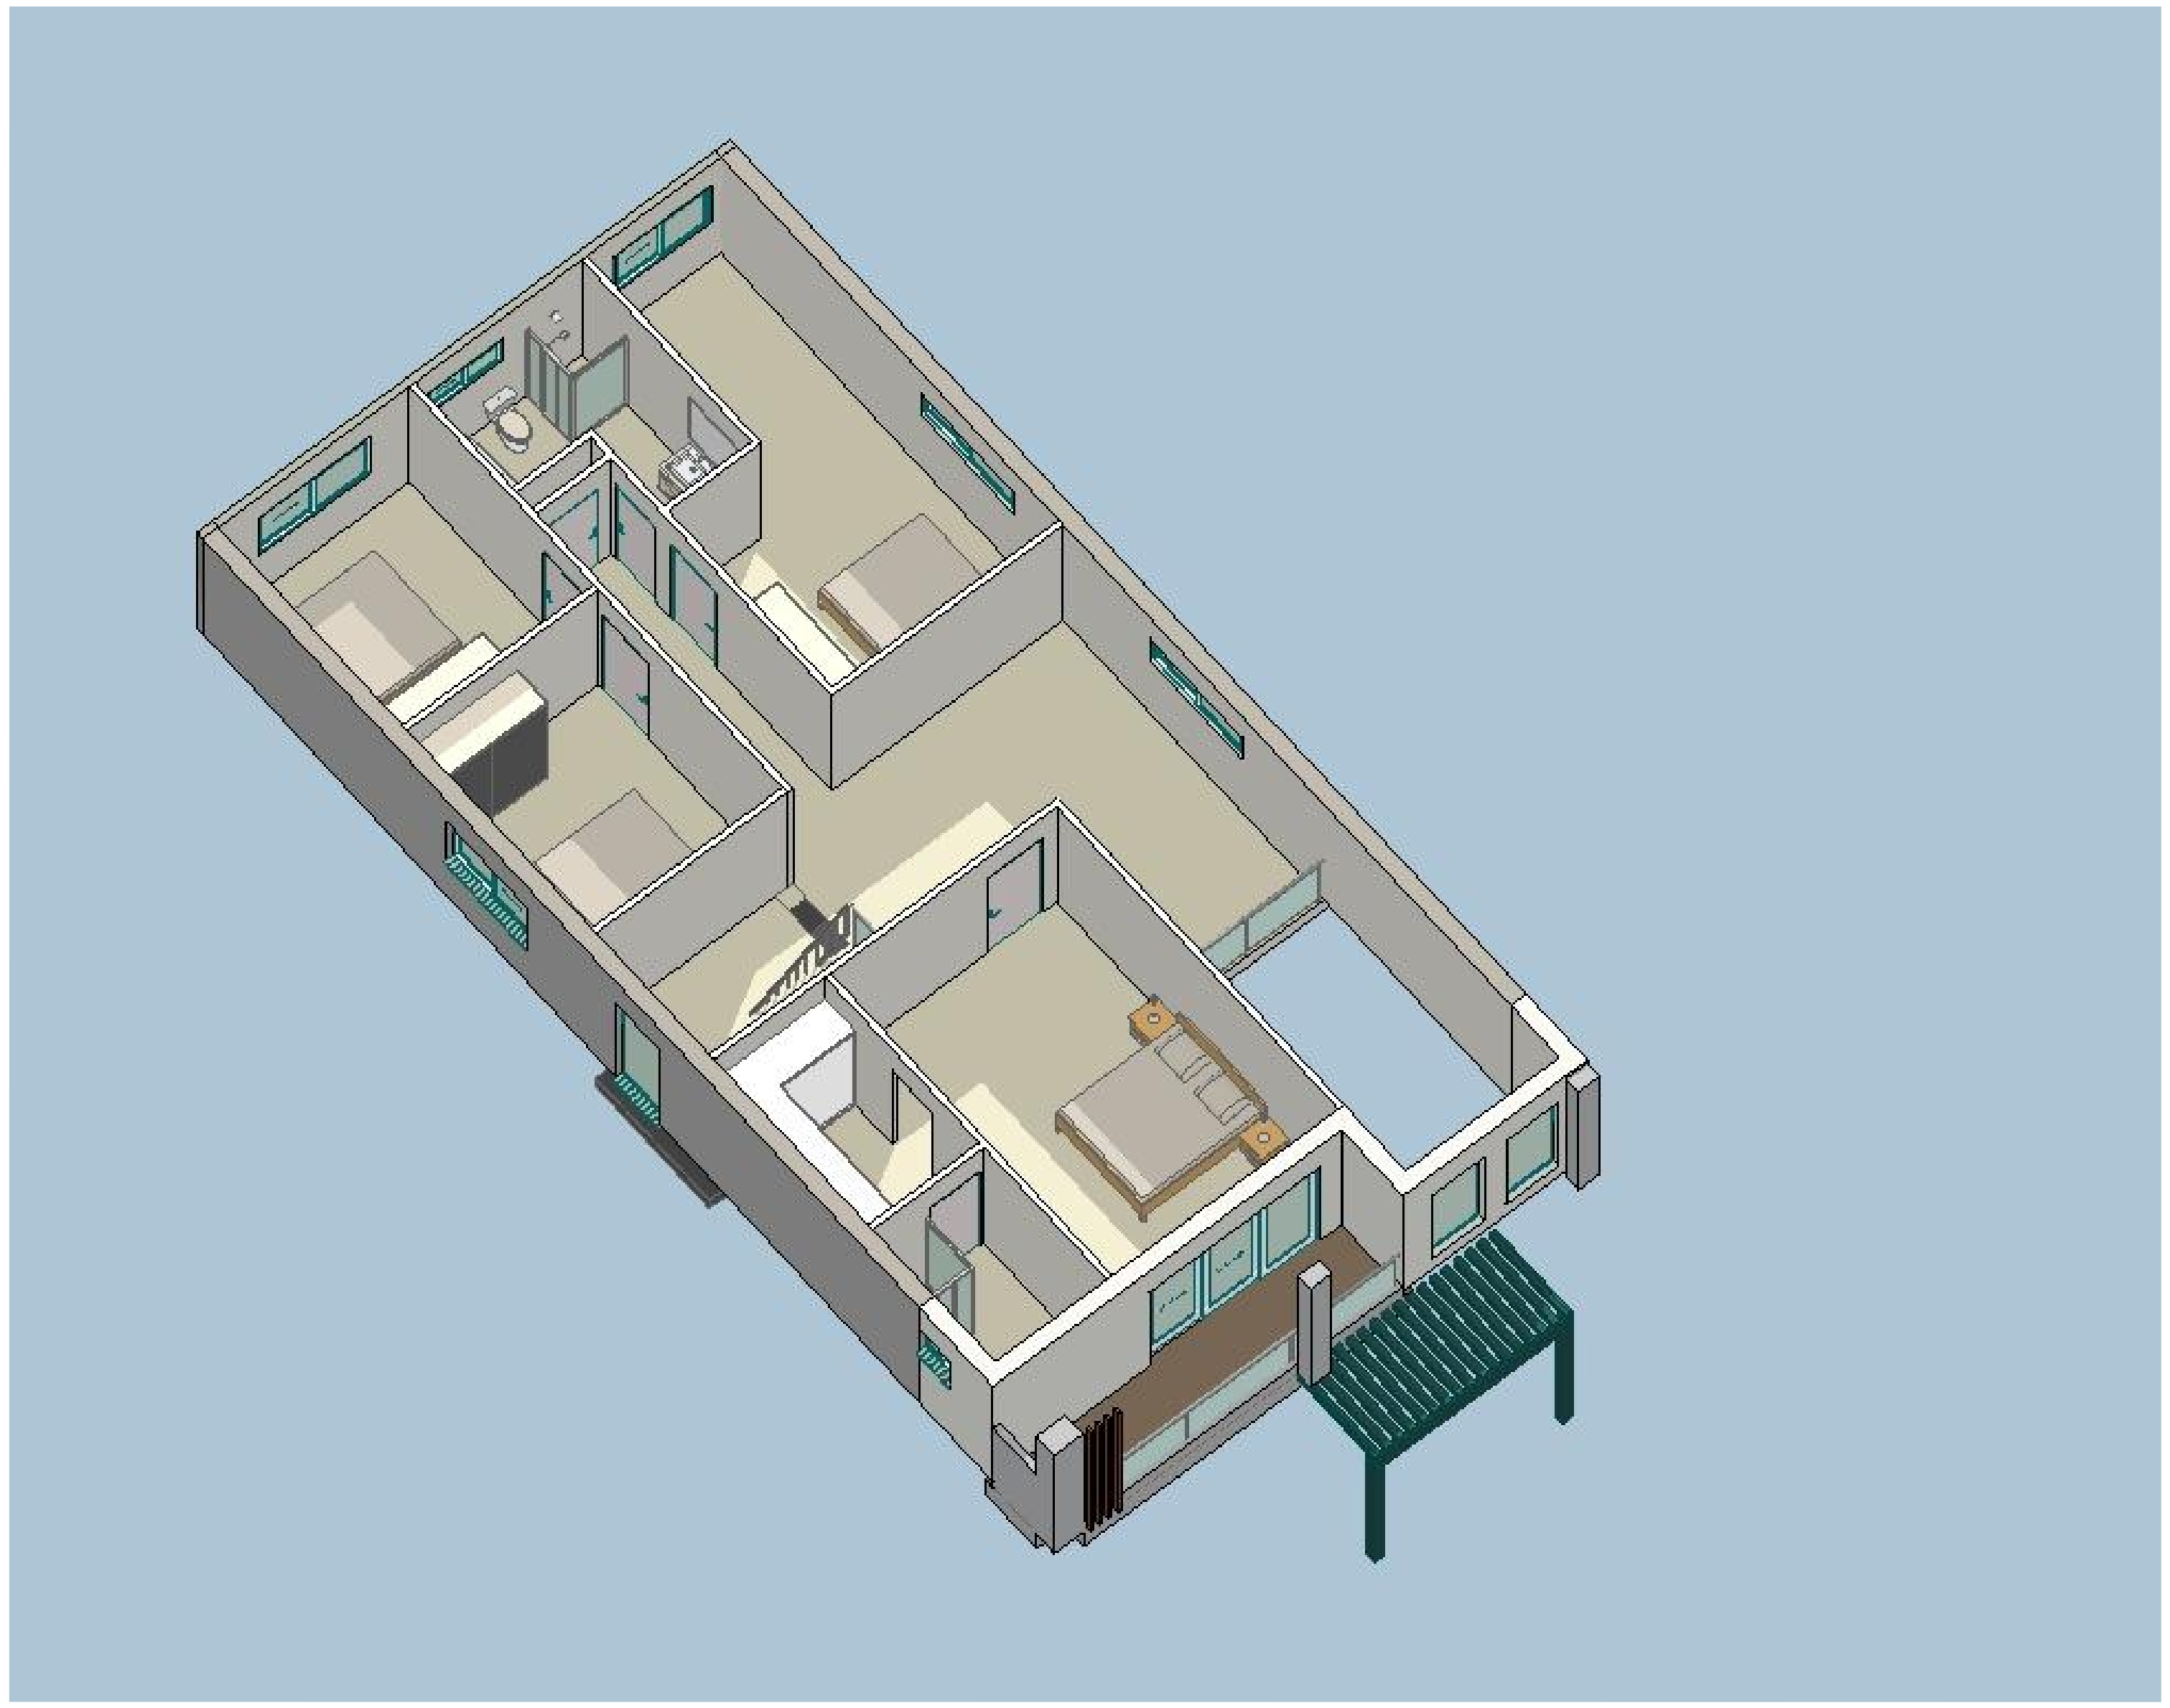

3D Internal First Floor

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977	BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025	Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title **3D Internal view**	Dwg No. **CD11A**

1. FALLS, SLIPS, TRIPS

a) WORKING AT HEIGHTS

DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of workers falling more than two metres. However, construction of this building will require workers to be working at heights where a fall in excess of two metres is possible and injury is likely to result from such a fall. The builder should provide a suitable barrier wherever a person is required to work in a situation where falling more than two metres is a possibilty.

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings where scaffolding is appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation.

For buildings where scaffold, ladders, trestles are not appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, fall barriers or Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislation.

b) SLIPPERY OR UNEVEN SURFACES

FLOOR FINISHES specified:

If finishes have been specified by designer, these have been selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to the specified finish should be made in consultation with the designer or, if this is not practicalm surfaces with an equivalent or better slip resistance should be chosen.

FLOOR FINISHES by owner:

If designer has not been involved in the selection of surface finishes, the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with AS HB 197:1999 and AS/NZ 4586:2004.

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for this building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace.

Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways.

Contractors should be required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be stored in designated areas away from access ways and work areas.

2. FALLING OBJECTS

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the work is being carried out onto persons below.

1. Prevent or restricted access to areas below where the work is being carried out.
2. Provide toeboards to scaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area have Personal Protective Equipment (PPE).

BUILDING COMPONENTS

During construction, renovation or demolition of this building, parts of the structure including fabricated steelwork, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times when collapse which may injure persons in area is a possibilty.

Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

3. TRAFFIC MANAGEMENT

For building on a major road, narrow road or steeply sloping road:

Parking of vehichles or loading/unloading of vehichles on this roadway may cause a traffic hazard. During construction, maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the supervision of these areas.

For building where on-site loading/unloading is restricted:

Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading areas.

For all buildings:

Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

4. SERVICES

GENERAL

Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are indentified on the plans but the exact location and extent of services may vary from that indicated. Services should be located using an appropriate service (such as Dial Before You Dig), appropriate excavation practice should be used and, where necessary, specialist contractors should be used.

Locations with underground power:

Underground power lines MAY be located in or around this site. All underground power lines must be disconnected or carefully located and adequate warning signs used prior to any construction, maintenance or demolition commencing.

Locations with overhead powerlines:

Overhead powerlines MAY be near or on this site. These pose a risk or electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5. MANUAL TASKS

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by mechanical lifting devices. Where this is not practical, suppliers or fabricators should be required to limit the component mass.

All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methos in all areas where lifting may occur.

Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturer's specifications and not used where faulty or (in the case of electrical equipment) not carrying a current electrical safety tag.

All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in accordance with manufacturer's specification.

6. HAZARDOUS SUBSTANCES

ASBESTOS

For alterations to a building constructed prior to 1990:

If this existing building was constructed prior to:

1990 - it therefore may contain asbestos

1986 - it therefore is likely to contain asbestos

either in cladding material or in fire retardant insulation material. either case, the builder should check and, if necessary, take appropriate action before demolishing, cutting, sanding, drilling otherwise disturbing the existing structure.

POWDERED MATERIALS

Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

TREATED TIMBER

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this material can be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection again inhalation of harmful material when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS

Many types of glue, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Fibreglass, rockwool, ceramic and other material used for thermal or sound insulation may contain synthetic mineral fibre which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts of the body. Personal Protective Equipment including protection again inhalation of harmful material should be used when installing, removing or working near bulk insulation material.

TIMBER FLOORS

This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Person Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

7. CONFINED SPACES

EXCAVATION

Construction of this building and some maintenance on the excavations. Where practical, installation should be carried out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated area should be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations should be provided.

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

ENCLOSED SPACES

For buildings with enclosed spaces where maintenances or other access may be required:

Enclosed spaces within this building may present a risk to persons entering for construction, maintenance or any other purpose. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal Protective Equipment should be provided.

SMALL SPACES

For buildings with small spaces where maintenance or other access may be required:

Some small spaces within this building will require access by construction or maintenance workers. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces.

8. PUBLIC ACCESS

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secured when not fully supervised.

9. OPERATIONAL USE OF BUILDING

RESIDENTIAL BUILDINGS

This building has been designed as a residential building. If it, at a later date, it is used or intended to be used as a workplace, the provisions of the Work Health Safety Act 2011 or subsequent replacement Act should be applied to the new use.

NON-RESIDENTIAL BUILDINGS

For non-residential buildings where the end-use has not been indentified:

This building has been designed to requirements of the classification identified on the drawings. The specific use of the building is not known at the time of the design and a further assessment of the workplace health and safety issues should be undertaken at the time of fit-out for the end-user.

For non-residential buildings where the end-use is known:

This building has been designed for the specific use as identified on the drawings. Where a change of use occurs at a later date a further assessment of the workplace health and safety issues should be undertaken.

10. OTHER HIGH RISK ACTIVITY

All electrical work should be carried out in accordance with Code of Practice: Managing Electrical Risks at the Workplace, AS/NZ 3012 and all licensing requirements.

All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace.

All work should be carried out in accordance with Code of Practice: Managing Noise and Preventing Hearing Loss at Work.

Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement. All the above applies.

Complying Development Issue

BAL - 19 CONSTRUCTION

REFER BUSHFIRE REPORT 10/06/2026

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN THE PROJECT.
THIS INCLUDES (but is not excluded to): OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTENORS, DEMOLISHERS.

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

All levels and dimensions to be confirmed on site before commencing fabrication. This drawing is a copyright and must not be copied or used without authority from the designers.	North	Revision A. COMPLYING DEVELOPMENT ISSUE 12/06/26	Client Aamir Shahzad - Naeelam Shahzad	Project Proposed Two Storey dwelling at 6 Belmont St, Wilton	Designer CACTUS DESIGN & DRAFTING 16 Glenella Way, Minto, NSW 2566 M. 0412411977 BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA	Job No. 25037 Designed C.D.G Date 15/12/2025 Cadd File 6 Belmont st CDC - rwall.pln Check CDG Scales AS SHOWN	Title Safety Design Sheet Dwg No. CD12A

External Door & Window Schedule

Window/Door Number	D:01	RS 01	SD:11	W:01	W:02	W:03	W:04	W:05	W:06	W:07	W:08	W:09	W:10	W:12	W:13
Height	2,400	2,400	2,100	2,100	2,100	600	1,350	2,400	2,100	2,400	2,100	600	900	1,800	600
Width	1,200	3,010	2,770	850	850	610	1,570	1,810	850	2,770	1,810	1,810	2,170	850	1,810
Sill Height	0	0	2,100	300	300	1,500	1,050	0	300	0	300	1,000	1,500	300	1,500
Notes															
3D Front Axonometry															

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

External Door & Window Schedule

Window/Door Number	W:14	W:15	W:16	W:17	W:18	W:19	W:20	W:21	W:22
Height	600	1,050	600	1,050	1,050	2,100	600	1,800	2,100
Width	1,810	1,570	1,210	1,810	1,570	850	610	850	850
Sill Height	1,500	1,050	1,500	1,050	1,050	0	1,500	300	300
Notes									
3D Front Axonometry									

BUILDING CODE OF AUSTRALIA VOLUME 2 2022 EDITION OF THE NCC & RELEVANT AUSTRALIAN STANDARDS NOTES:

- ALL WINDOWS TO HABITABLE ROOMS REQUIRING RESTRICTED OPENINGS MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- NON-SLIP NOSINGS TREADS TO STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL MASONRY WALLS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND AS3700
- TERMITE MANAGEMENT SYSTEMS TO BE INSTALLED AS PER AS3660.1 OR AS3660.2
- HIGH IMPACT VAPOR BARRIER TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- GUTTERS AND DOWNPIPES TO COMPLY WITH THE REQUIREMENTS AS3500.3 AND/OR AS3500.5
- WET AREA MEMBRANE TO BE INSTALLED AS PER AS3740 AND THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ALL ENCLOSED WATER CLOSET DOORS MUST SWING OUT **OR** BE PROVIDED WITH REMOVABLE HINGES **OR** CAVITY SLIDING DOOR AS PER THE REQUIREMENTS OF BCA VOL 2
- SMOKE ALARMS TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- STAIRS TO BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- FINISH OF STAIRS MUST MEET THE REQUIREMENTS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- LANDINGS TO BE PROVIDED MUST COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- BARRIERS AND BALUSTRADING TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- HANDRAILS SERVICING STAIRS TO COMPLY WITH THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- ROOM HEIGHTS IN HABITALE ROOMS MUST BE A MINIMUM OF 2.4M MEASURED FROM THE FINISHED FLOOR TO THE CEILING LINING AS PER THE REQUIREMENTS OF BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS
- CONDENSATION MANAGEMENT TO BE INSTALLED AND MANAGED IN ACCORDANCE WITH THE REQUIREMNETS OF THE BCA VOL 2 AND RELEVANT CONTROLS WITHIN THE NCC HOUSING PROVISIONS

Complying Development Issue

BAL - 19 CONSTRUCTION
REFER BUSHFIRE REPORT 10/06/2026

Note: Downpipe locations are indicative only.Refer to Stormwater Engineers plans for location of dp's and drainage pies.

North

Revision
A. COMPLYING DEVELOPMENT ISSUE 12/06/26

Client
Aamir Shahzad - Naeelam Shahzad

Project
Proposed Two Storey dwelling at 6 Belmont St, Wilton

Designer
CACTUS DESIGN & DRAFTING
16 Glenella Way, Minto, NSW 2566
M. 0412411977

BUILDING DESIGNERS ASSOCIATION OF AUSTRALIA

Job No. 25037
Designed C.D.G
Date 15/12/2025
Cadd File 6 Belmont st CDC - rwall.pln
Check CDG
Scales AS SHOWN

Title
Window schedule

Dwg No.
CD13A