PROPOSED SECONDARY DWELLING WITH ATTACHED GARAGE NO.8 IONA STREET, BLACKTOWN, NSW 2148

1.0 GENERAL

1.01 TECHNICAL SPECIFICATIONS OR SPECIFIC INSTRUCTIONS ON DRAWINGS TAKE PRECEDENCE OVER THESE NOTE.

1.02 THE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTION AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ANY DISCREPANCY SHALL BE PREFERRED TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK. CONSTRUCTION FROM THESE DRAWINGS, AND THEIR ASSOCIATED CONSULTANTS' DRAWINGS, IS NOT TO COMMENCE UNTIL APPROVED BY THE LOCAL AUTHORITIES.

1.03 ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE RELEVANT AND CURRENT STANDARD AUSTRALIA CODES AND WITH BY BY-LAWS AND ORDINANCES OF THE RELEVANT BUILDING AUTHORITIES EXCEPT WHERE VARIED BY THE PROJECT SPECIFICATION.

1.04 ALL DIMENSIONS SHOWN SHALL BE VERIFIED BY THE BUILDER ON SITE. ENGINEER'S DRAWINGS SHALL NOT BE SCALED FOR DIMENSIONS.

1.05 DURING CONSTRUCTION THE STRUCTURE, AND ANY ASSOCIATED EXCAVATIONS, SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED. TEMPORARY BRACING SHALL BE PROVIDED BY THE BUILDER TO KEEP THE WORKS AND EVACUATIONS STABLE AT ALL TIME.

1.06 UNLESS NOTED OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETRES (mm) AND ALL LEVELS ARE IN METRE (m) TO AUSTRALIAN HEIGHT DATUM (AHD).

1.07 ALL ABBREVIATIONS ARE IN ACCORDANCE WITH AS 1100. ADDITIONAL ABBREVIATIONS USED AS FOLLOW:

CTRS	CENTRES	UNO	UNLESS NOTED OTHERWISE
BTM	BOTTOM	U/S	UNDERSIDE
NF	NEAR FACE	GL	GROUND LEVEL
FF	FAR FACE	RL	REDUCED LEVEL
EF	EACH FACE	FFL	FINISHED FLOOR LEVEL
EW	EACH WAY	SSL	STRUCTURAL SLAB LEVEL
STAG	STAGGERED BARS	RC	REINFORCED CONCRETE
ALT	ALTERNATING BARS	MC	MASS CONCRETE
LV	LENGTH VARIES	C/S	BRICKWORK COURSES
NSOP	NOT SHOWN ON PLANT		

2.0 FOUNDATIONS

2.01 FOUNDATIONS HAVE BEEN DESIGNED FOR A TYPICAL BEARING PRESSURE OF 250kPa UNLESS OTHERWISE NOTED

2.02 THE FOUNDATION MATERIAL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER FOR THE BEARING CAPACITY BEFORE PLACING ANY MEMBRANE, REINFORCEMENT OR CONCRETE. WHERE NECESSARY, THE FOOTING DESIGN MAY BE ALTERED.

2.03 REFER TO GEOTECHNICAL INVESTIGATION REPORT BY GEO ENGINEERING PTY LTD DATED 06/07/2026 REF. GE26-241-DN001.

2.04 THE BUILDER SHALL BE RESPONSIBLE FOR MAINTAINING ANY EXCAVATIONS IN A STABLE CONDITION WITHOUT ADVERSELY AFFECTING SURROUNDING PROPERTIES INCLUDING SERVICES. THIS INCLUDES OBTAINING ALL NECESSARY APPROVALS FOR SHORING AND ANCHORING SYSTEMS.

2.05 FOOTINGS SHALL BE LOCATED CENTRALLY UNDER WALLS AND COLUMNS UNLESS NOTED OTHERWISE.

2.06 FOOTINGS NEAR BOUNDARIES MUST NOT BE LOCATED HIGHER OR LOWER THAN THE FOOTINGS OF ADJACENT PROPERTIES UNLESS APPROVED.

2.07 OBTAIN THE APPROVAL OF THE ENGINEER FOR ALL EXCAVATIONS PRIOR TO CONCRETING.

2.08 WHERE FOOTINGS ARE OVER-EXCAVATED, FILL OVER-EXCAVATED AREAS WITH BLINDING CONCRETE GRADE SAME AS FOOTING TO A MINIMUM THICKNESS OF 50mm.

2.09 KEEP FOOTING CLEAN AND FREE OF LOOSE MATERIAL BEFORE INSPECTION, IMMEDIATELY PRIOR TO POURING OF CONCRETE, AND DURING POURING.

2.10 DO NOT EXCEED RISE OF 1000mm IN A RUN OF 3000MM FOR THE LINE OF SLOPE BETWEEN ADJACENT FOOTINGS OR EXCAVATIONS.

2.11 DO NOT BACKFILL RETAINING WALLS (OTHER THAN CANTILEVER WALLS) UNTIL FLOOR CONSTRUCTION AT TOP AND BOTTOM IS COMPLETED. ENSURE FREE DRAINING BACKFILL AND DRAINAGE IS IN PLACE.

2.12 FOOTINGS ARE TO BE CONSTRUCTED AND BACKFILLED AS SOON AS POSSIBLE FOLLOWING EXCAVATION TO AVOID SOFTENING OR DRYING OUT BY EXPOSURE.

2.13 SOON TEST ALL PAD FOOTINGS FOR BEARING PRESSURE GREATER THAN 3500kPa FOR EACH FOOTING, PROVIDE A 50mm DIAMETER PROVING HOLE TO THE DEPTH OF 1.5 TIMES THE MINIMUM WIDTH OR 2.5m, WHICHEVER IS LESS, BELOW THE BASE OF THE FOOTING.

3.0 SLAB ON GROUND

3.01 REMOVE ALL TOP SOIL INCLUDING ROOTS AND ANY OTHER ORGANIC MATTER, STORE TOP SOIL AS REQUIRED.

3.02 WHERE SHOWN ON DRAWINGS, BASE AND SAND BUILDING ARE TO BE PLACED AND COMPACTED AS SPECIFIED.

3.03 EXCAVATE TO THE REQUIRED FORMATION LEVEL AND PROOF ROLL FORMATION WITH 6 PASSES OF A 10 TONNE SMOOTH WHEELED ROLLER. SOFT AREAS ARE TO BE REMOVED AND REPLACED WITH SUITABLE FILL COMPACTED TO THE DENSITY NOMINATED IN THE SPECIFICATION.

3.04 FILL MATERIAL SHALL MEET THE REQUIREMENTS OF THE SPECIFICATION. PLACE IN MAXIMUM 150mm THICK LAYERS MAXIMUM DEPTH OF FILL IS TO BE 750mm UNLESS NOTED OTHERWISE BY THE ENGINEER.

3.05 CLAY SUBGRADE FORMATIONS TO BE MAINTAINED AT OPTIMUM MOISTURE CONTENT -0,+3% PRIOR TO COVERING.

4.0 REINFORCEMENT

4.01 REINFORCEMENT SYMBOLS:

S	DENOTES GRADE 250S HOT ROLLED DEFORMED BARS TO AS 4671
N	DENOTED GRADE D500 N BARS TO AS 4671 GRADE N
SL & RL	DENOTES GRADE 250S HOT ROLLED PLAIN BARS TO AS 4671 SQUARE AND RECTANGULAR MESH RESPECTIVELY.
R	DENOTES GRADE 250 HOT ROLLED PLAIN BARS TO AS 4671
W	DENOTES HARD-DRAWN PLAIN WIRE TO AS 4671
DW	DENOTES COLD ROLLED RIBBED WIRE TO AS 4671

NUMBER OF BARS IN GROUP
BAR GRADE & TYPE
17N20-250
NOMINAL BAR SIZE IN mm
BAR SPACING IN mm

THE FIGURE FOLLOWING THE FABRIC SYMBOL IS REFERENCE NUMBER FOR FABRIC TO AS 4671

4.02 ALL REINFORCEMENT SHALL BE FIRMLY SUPPORTED ON MILD STEEL PLASTIC TIPPED CHAIRS, PLASTIC CHAIR OR CONCRETE CHAIRS AT NOT GREATER THAN 1 METRE CENTRES BOTH WAYS. BARS SHALL BE TIED AT ALTERNATIVE INTERSECTIONS. IN EXPOSURE CONDITIONS GREATER THAN B1 USE ONLY PLASTIC CHAIR.

4.03 REINFORCEMENT IS REPRESENTED DIAGRAMMATICALLY AND NOT NECESSARILY IN TRUE PROJECTION.

4.04 SLAB REINFORCEMENT SHALL EXTEND AT LEAST 75mm ONTO MASONRY SUPPORT WALLS AND 50 PERCENT OF BOTTOM REINFORCEMENT SHALL BE COGGED TO ACHIEVE ANCHORAGE AT SIMPLY SUPPORTED ENDS.

4.05 SPLICES IN REINFORCEMENT SHALL BE MADE ONLY IN POSITIONS SHOWN OR OTHERWISE APPROVED IN WRITING BY THE ENGINEER. LAPS SHALL BE IN ACCORDANCE THE FOLLOWING:

SLABS / BAND BEAMS / WALLS / STAIRS

TENSION LAP LENGTH (mm)				
BAR	CONCRETE GRADE ≥ 32MPa			
	LESS THAN 300mm CONCRETE CAST BELOW OR VERTICAL BAR		MORE THAN 300mm CONCRETE CAST BELOW BAR	
	SPACING < 150	SPACING ≥ 150	SPACING < 150	SPACING ≥ 150
N12	450	300	600	400
N16	800	550	950	700
N20	1100	800	1400	950
N24	1500	1100	1900	1350
N28	1950	1400	2450	1750
N32	2400	1700	2950	2100
N36	NOT TO BE USED - REFER TO AS 3600 13.2.1 (e)			

4.06 SITE BENDING OF DEFORMED REINFORCING BARS SHALL BE DONE WITHOUT HEATING USING MECHANICAL BENDING TOOLS.

4.07 WELDING OF REINFORCEMENT SHALL NOT BE PERMITTED UNLESS SHOWN ON THE STRUCTURAL DRAWINGS OR APPROVED BY THE ENGINEER.

4.08 JOGGLES TO BARS SHALL BE 1 BAR DIAMETER OVER A LENGTH OF 12 BARS DIAMETERS.

4.09 WHERE TRANSVERSE THE BARS ARE NOT SHOWN PROVIDE N12-300 SLICED WHERE NECESSARY AND LAP WITH MAIN BARS 450mm U.N.O.

NOTES: THESE LAP LENGTHS ARE BASED ON THE FOLLOWING MINIMUM COVER TO THE BARS:
SLABS & WALLS : 20mm
BEAMS: 40mm

5.0 MASONRY NOTES

5.01 ALL MASONRY SHALL COMPLY WITH AS3700 AND THE PROJECT SPECIFICATION

5.02 CONCRETE MASONRY UNITS TO HAVE A MINIMUM CHARACTERISTIC UNCONFINED STRENGTH OF 20MPa IN ACCORDANCE WITH AS2733.

5.03 MASONRY TO BE BEDDED IN FRESHLY PREPARED MORTAR.

(a) CONCRETE BLOCKS:

MORTAR MIX TO BE UNIFORMLY MIXED IN A RATIO OF ONE PART CEMENT ONE PART LIME AND SIX PARTS SAND CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.

(b) CLAY BRICKS:

MORTAR MIX TO BE UNIFORMLY MIXED IN THE RATIO OF ONE PART CEMENT, THREE PARTS SAND AND ONE FOURTH PART LIME CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.

5.04 GROUT SHALL HAVE A COMPRESSIVE STRENGTH (f'c) OF 20 MPa AT 28 DAYS, A SLUMP OF 125mm IN A 150mm CONE, A MAXIMUM AGGREGATE SIZE OF 10mm AND BE IN ACCORDANCE WITH AS3700

5.05 BEDDING OF MASONRY SHALL BE FULL FACE WITH CROSS JOINTS COMPLETELY FILLED, JOINT THICKNESS SHALL NOT EXCEED 12mm

5.06 PROVIDE WALL TIES AT 600mm MAXIMUM CENTRES VERTICALLY AND HORIZONTALLY. REFER TO MASONRY DETAILS FOR WALL TIE SETOUT AT OPENINGS

5.07 THE CAVITY SHALL NOT EXCEED 100mm AND SHALL NOT BE SMALLER THAN 40mm UNLESS NOTED OTHERWISE. KEEP CAVITY CLEAN AND CLEAR OF OBSTRUCTIONS

5.08 ALL WALLS TO BE KEPT STABLE AT ALL STAGES OF CONSTRUCTION AND NOT BE OVER STRESSED AT ANY TIME.

5.09 UNLESS NOTED OR SHOWN OTHERWISE ON DRAWINGS THERE ARE TO BE NO CHASES OR RECESSES PERMITTED IN MASONRY WALL WITHOUT THE PRIOR APPROVAL OF HCT ENGINEERING PTY LTD

TIMBER NOTES

T1 AS 1684 IS RELEVANT TO DOMESTIC CONSTRUCTION IN SHELTERED LOCATIONS

T2 SOFTWOOD MINIMUM GRADE F7 U.N.O.
HARDWOOD MINIMUM GRADE F11 U.N.O.

T3 EXTERNAL TIMBER TO BE EITHER HARDWOOD
DURABILITY CLASS I OR II OR IMPREGNATED GRADE F7. PRESSURE TREATED TO AS 1684 AND RE-DRILLED PRIOR TO USE. SUPPLEMENTARY TREATMENT SHALL BE APPLIED TO ALL CUT SURFACES, PROVIDE DOCUMENTATION.

T4 ALL BOLTS IN TIMBER CONSTRUCTION TO BE MIN. M16 U.N.O. BOLT HOLES TO BE DRILLED EXACT SIZE. WASHERS UNDER HEADS AND NUTS TO BE AT LEAST 2.5 TIMES BOLT DIAMETER

T5 FINISHED TIMBER SIZES
SEASONED SOFTWOOD +5,-0mm
UNSEASONED SOFTWOOD F7 +3, -3mm; F7+2, -4mm
SEASONED HARDWOOD +2,-0mm
UNSEASONED HARDWOOD -3,-3mm
(SEE ALSO CLAUSE 1.6.2 IN AS 2082)

T6 ALL TIMBER JOINTS AND NOTCHES TO BE 100mm MINIMUM FROM LOOSE KNOTS. SEVERE SLOPING GRAIN, GUM VEINS OR OTHER MINOR DEFECTS.

T7 BLOCKING IS NOT REQUIRED FOR JOISTS SPANNING LESS THAN 3m

- FOR JOISTS SPANNING GREATER THAN 3m AND LESS THAN 4.2m PROVIDE ONE ROW OF BLOCKING MID-SPAN
- FOR JOISTS SPANNING GREATER THAN 3.2m AND UP TO 6.0m PROVIDE TWO ROWS OF BLOCKING AT 1/3 SPAN
- FOR DEEP JOISTED FLOORS WHERE A CONTINUOUS TRIMMING JOIST IS NOT PROVIDED AT END OF JOISTS. BLOCKING IS REQUIRED AT 1800 MAXIMUM CENTERS. (REFER TO AS 1684)

WALL FRAMING SUMMARY

TYPE	HEIGHT	DETAIL
LOAD BEARING WALL	2700 TO 3000	EXTERNAL / INTERNAL LOAD BEARING WALL
		90x45 'MGP10' STUDS @450 MAX CTRS.
		2 ROWS NOGGINGS @1350 MAX CTRS.
		STUDS MUST BE CONTINUOUS TO UPPER ROOF LEVEL
NON-LOAD BEARING WALL	2700 TO 3000	INTERNAL NON-LOAD BEARING WALL
		90x45 'MGP10' STUDS @600 MAX CTRS.
		SINGLE 45 THICK ' MGP10' PLATE TOP AND BOTTOM
TOP @ BOTTOM PLATES		ALL EXTERNAL / INTERNAL LOAD BEARING STUD ALLS SHALL HAVE TWO (2) 35 THICK 'MGP10' TOP PLATE AND ONE (1) 45 THICK 'MGP10' BOTTOM PLATE. NOGGINS AT 1350 MAX CTRS WITH MIN 2 ROWS.
		ALL INTERNAL NON-LOAD BEARING STUDS WALLS SHALL HAVE ONE (1) 45 THICK 'MGP10' PLATE TOP AND BOTTOM.
ROOF BATTENS		45x70 'MGP10' @600 CTRS OR TOP HAT 40mm.

WALL FRAMING CONNECTION

SINGLE/ UPPER STOREY	STUDS TO BOTTOM/ TOP PLATES	G.I.S. 2/2. 80 NAILS EACH END OF FRAMING ANCHORS x 1 WITH 4/2.80 NAILS EACH LEG
	BOTTOM PLATES TO SLAB	M10 CAST IN BOLT 1.2M MAX CTRS. (180 MIN. EMBEDMENT)
	BOTTOM PLATES TO FLOOR FRAME	2/NO. 14 TYPE 17 SCREWS 900 MAX. CTRS. (40MIN. EMBEDMENT INTO JOIST)

STRUCTURAL STEEL WORK NOTES

S1 ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538 AND THE SPECIFICATION

S2 UNLESS SHOWN OTHERWISE, ALL STEEL SHALL BE IN ACCORDANCE WITH AS1204 GRADE 300. ALL STELL HOLLOW SECTIONS SHALL BE GRADE 350 U.N.O. AND SHALL BE IN ACCORDANCE WITH AS1163. ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 STEEL IN ACCORDANCE WITH AS 1538

S3 UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
ALL WELDS SHALL BE 6mm CONTINUOUS FILLET WELDS ALL ROUND, "SP" GRADE WITH E48 ELECTRODE
ALL BOLTS SHALL BE M20-8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION
PURLIN BOLTS TO BE M12-4.6/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END
ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK (U.N.O)
ALL CAP PLATES SHALL BE 10mm THICK (U.N.O)
ALL BASE PLATES SHALL BE 10mm THICK (U.N.O)

S4 BOLT DESIGNATION:
4.6/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.6 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION
8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION
8.8/TB REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS A BEARING JOINT
8.8/TF REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A FRICTION JOINT

S5 HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE "PART TURN" METHOD OF TIGHTENING.

S6 ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.

S7 SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER

S8 ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE ENCASED IN 75mm MIN. CONCRETE ALL ROUND

S9 ALL STEELWORK, EXCEPT THAT WHICH IS TO BE CONCRETE ENCASED, FIRE SPRAYED OR CONTACT SURFACES OF FRICTION TYPE JOINTS, SHALL BE SURFACE CLEANED AND PAINTED IN ACCORDANCE WITH THE SPECIFICATION.

S10 STEELWORK THAT IS CONCRETE ENCASED, FIRE SPAYED OR FACING SURFACES OF FRICTION TYPE JOINTS SHALL BE LEFT UNPAINTED AND FREE FROM SCALE

S11 THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND DRILL AL HOLES NECESSARY FOR FIXING STEEL, TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS

S12 THE FABRICATION AND ERECTION OF THE STRUCTURAL STEELWORK SHALL BE SUPERVISED BY QUALIFIED PERSONNEL EXPERIENCED IN SUCH SUPERVISION TO ENSURE THAT ALL REQUIREMENTS OF THE DESIGN ARE MET. DETAILS OF ERECTION SEQUENCE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ERECTION

S13 COLUMNS AND MULLIONS SHALL HAVE THEIR BASE PLATES FULLY GROUTED IN ACCORDANCE WITH THE SPECIFICATIONS AFTER PLUMBING AND LEVELING ON STEEL PACKERS

S14 THREE SETS OF STEELWORK SHOP DETAIL DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ANY FABRICATION. THE CHECK SHALL NOT COVER LAYOUT AND MEMBER DIMENSIONS.

S15 CONCRETE ENCASED STRUCTURAL STEELWORK TO BE ENCLOSED BY F41 MESH PLACED CLEAR OF STEELWORK, ENCASING TO PROVIDE 50mm MIN. COVER TO STEELWORK U.N.O. ON THE DRAWINGS. COVER TO MESH TO BE 20mm MIN. MAXIMUM AGGREGATE SIZE = 10mm, CONCRETE f'c=20MPa.

S16 UNLESS SPECIFIED OTHERWISE, STEELWORK SHALL BE PREPARED TO CLASS 2.5 FINISH IN ACCORDANCE WITH AS1627.4 AND GIVE TWO COATS OF ZINC PHOSPHATE TO A TOTAL DRY FILM THICKNESS OF 70 MICRONS.

SUMMARY DESIGN

SITE CLASSIFICATION	CLASS 'H1'
SOIL CLASSIFICATION	'CLAY'
WIND CLASSIFICATION	AS4055 N1
ROOF CONSTRUCTION	SHEET ROOF
ROOF FRAME	ROOF TRUSSES BY OTHERS
ROOF LOAD	40KG/M2 FOR SHEET ROOF
GROUND FLOOR WALL	CLADDED FRAMED WALL
GROUND FLOOR WALL LOAD	EX.WALL = 1.69 kN/m
	INT.WALL = 0.83 kN/m
GROUND FLOOR SLAB/FOOTING SYSTEM	WAFFLE SLAB

DRAWING LIST

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:
PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:
GENERAL NOTES

SHEET A3 | DRG No. HCT - 2898 - ST000 | APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

DESIGN SUMMARY

SITE CLASSIFICATION	CLASS 'H1'
SOIL CLASSIFICATION	'CLAY'
DURABILITY CLASS	NORMAL
SALINITY SITE - REFER TO GEOTECH REPORT	"NO"
WAFFLE POD HEIGHT	225
WAFFLE POD SIZE	1100x1100
SLAB THICKNESS	100mm
TYPICAL BEAM DEPTH	VARIES
SLAB MESH	SL82
PIER SPACING	AS SHOWN ON PLAN (MAX. 3000mm)

LEGEND

ITEM	DESCRIPTION
	Ø400mm PIERS, MINIMUM DEPTH 1.0m BELOW NGL, FOUNDED ON NATURAL CLAY MIN. BEARING CAPACITY 150kPA.

CONCRETE QUALITY

ELEMENT	SLUMP	AGGREGATE (MAX.SIZE)	CEMENT TYPE	f'c
SLAB ON GROUND	80mm	20mm	A	32MPa
FOOTING	80mm	20mm	A	32MPa
COLUMN	80mm	20mm	A	32MPa
SUSPENDED SLAB	80mm	20mm	A	32MPa
PIER	80mm	20mm	A	32MPa

REINFORCEMENT COVER SCHEDULE

MEMBER	COVER (mm)			EXPOSURE CLASSIFICATION
	TOP	BTM	SIDES	
INTERNAL SLABS	20mm	25mm	20mm	A1
EXTERNAL SLABS	45mm	45mm	45mm	B1

*WPM : WATER PROOFING MEMBRANE

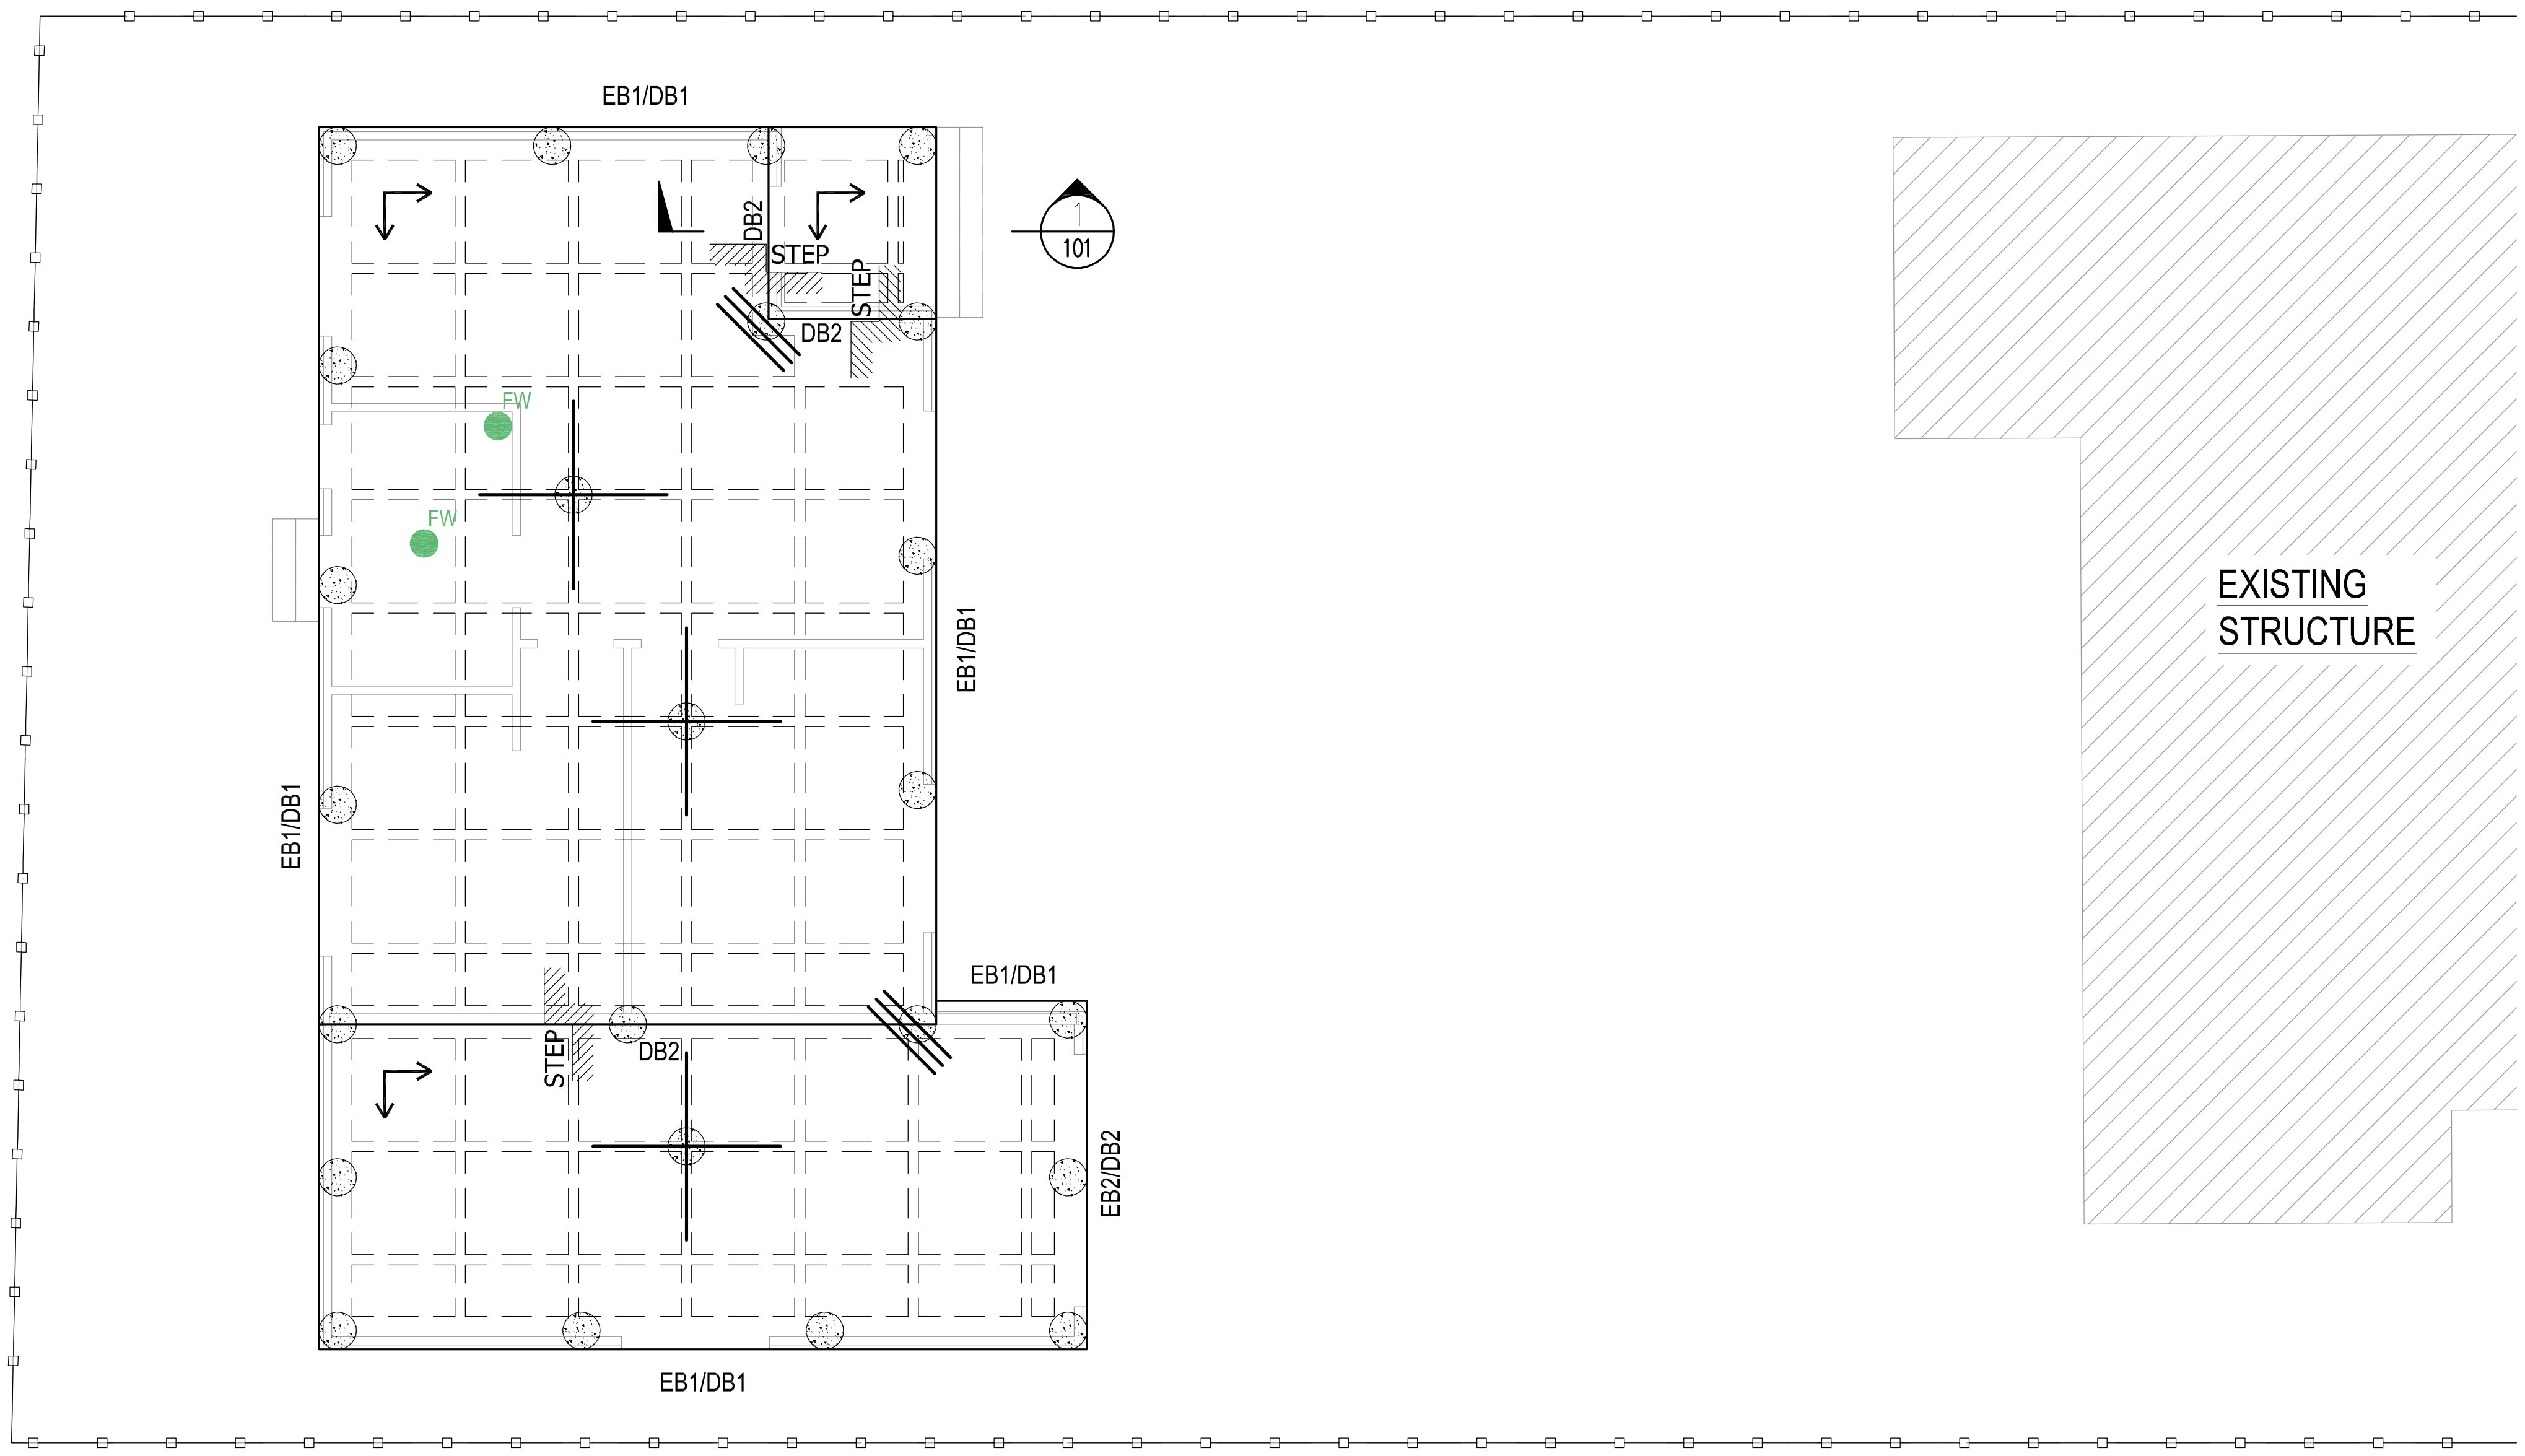

GROUND FLOOR SLAB PLAN

1:100

1. SLAB @100mm DEPTH FOUNDED ON COMPACTED FILL GROUND U.N.O
2. TYPICAL SL82 MESH TOP THROUGHOUT U.N.O
3. REFER TO ARCHITECTURAL DRAWINGS FOR LEVELS, RL's, STEPS AND FOLDS
4. FOR STRUCTURAL NOTES REFER TO DRAWING ST-000

REINFORCEMENT NOTES:

1. TYPICAL TRIMMER AT PENETRATION DETAIL:



2. TYPICAL TRIMMER AT RE-ENTRANT CORNER:

L12TM - 1600LG, TIED UNDER TOP MESH TYPICAL ALL RE-ENTRANT CORNERS



3. TYPICAL TRIMMER AT SLAB CORNER:

1N12 L-BARS TOP IN CORNER OF SLAB 600 LEG



4. PROVIDE ADEQUATE OVERLAP AT MESH JOINTS AS FOLLOWS:
400 MIN. LAP FOR SL82 MESH
500 MIN. LAP FOR SL92 MESH
600 MIN. LAP FOR SL102 MESH

5. BAR DIA. LAP LENGTH
- N12 : 400
- N16 : 600
- N20 : 800
- N24 : 1050
- N28 : 1300
- N32 : 1600



CONCRETE BORED PIER

REINFORCEMENT FOR PIERS DEEPER THAN 2.5m

FOUNDATIONS	MIN. PIER Ø (mm)	SOCKET DEPTH (mm)	REINFORCEMENT
STIFF CLAY	450	500	4N16, R10-300 TIES
SHALE	400	200	4N12, R10-300 TIES
ROCK	300	100	4N12, R10-300 TIES

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT: PROPOSED SECONDARY DWELLING WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE: FOOTING & SLAB PLAN

SHEET A3 | DRG No. HCT - 2898 - ST100 | APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

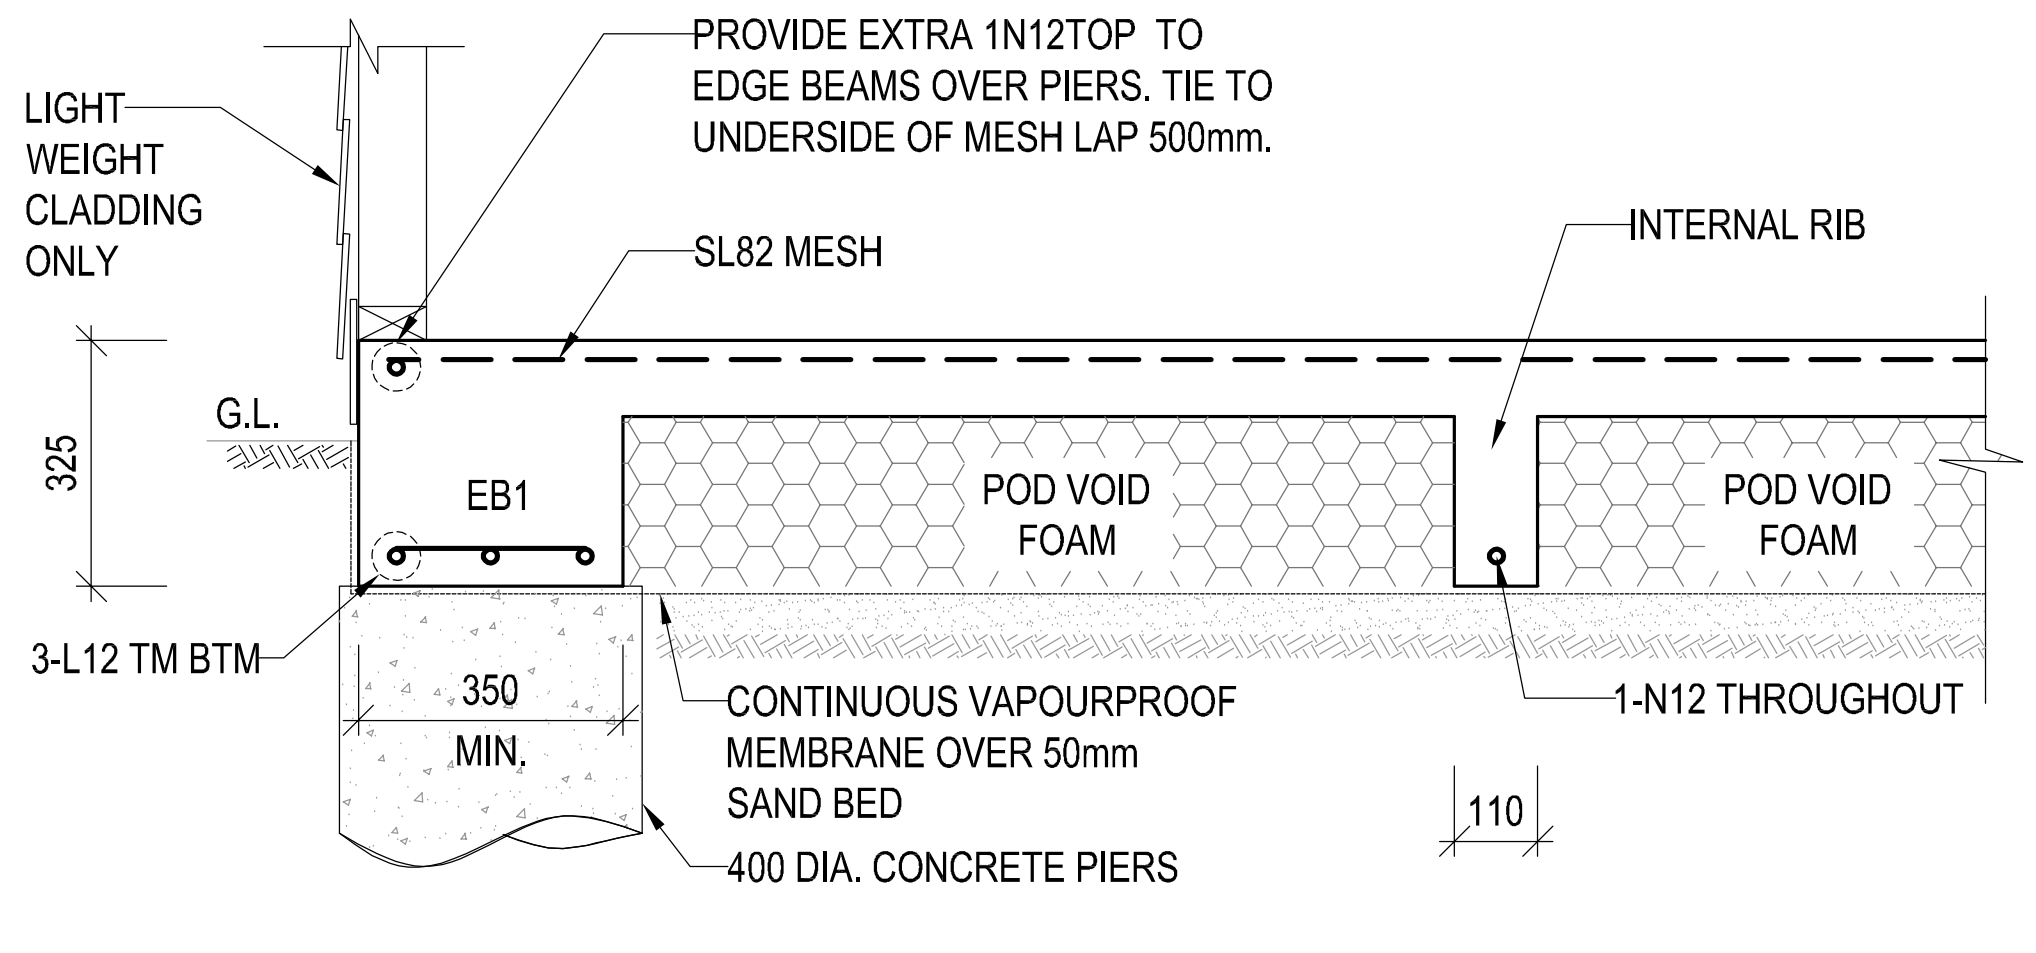

TYPICAL EDGE BEAM DETAIL (EB1)

1:20

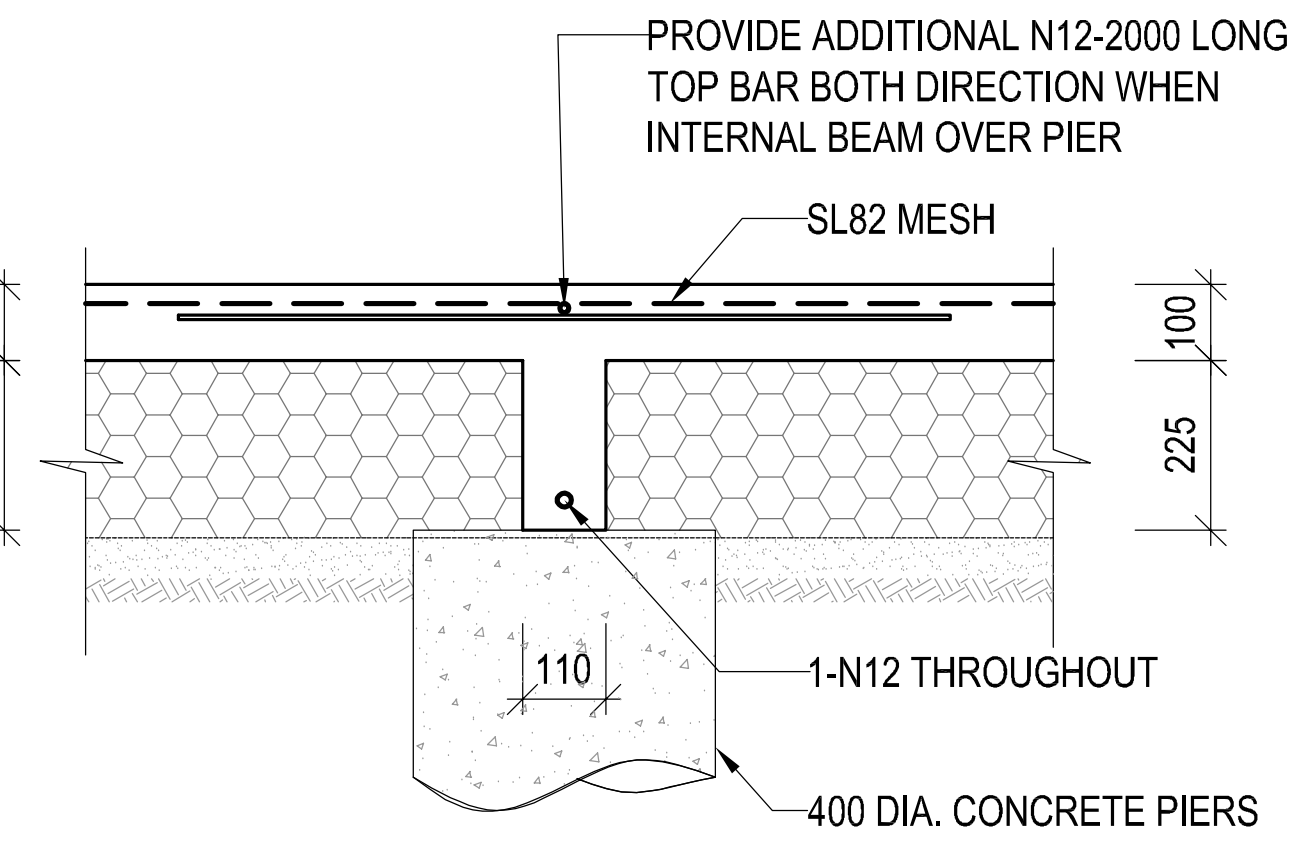

TYPICAL INTERNAL RIB OVER PIER

1:20

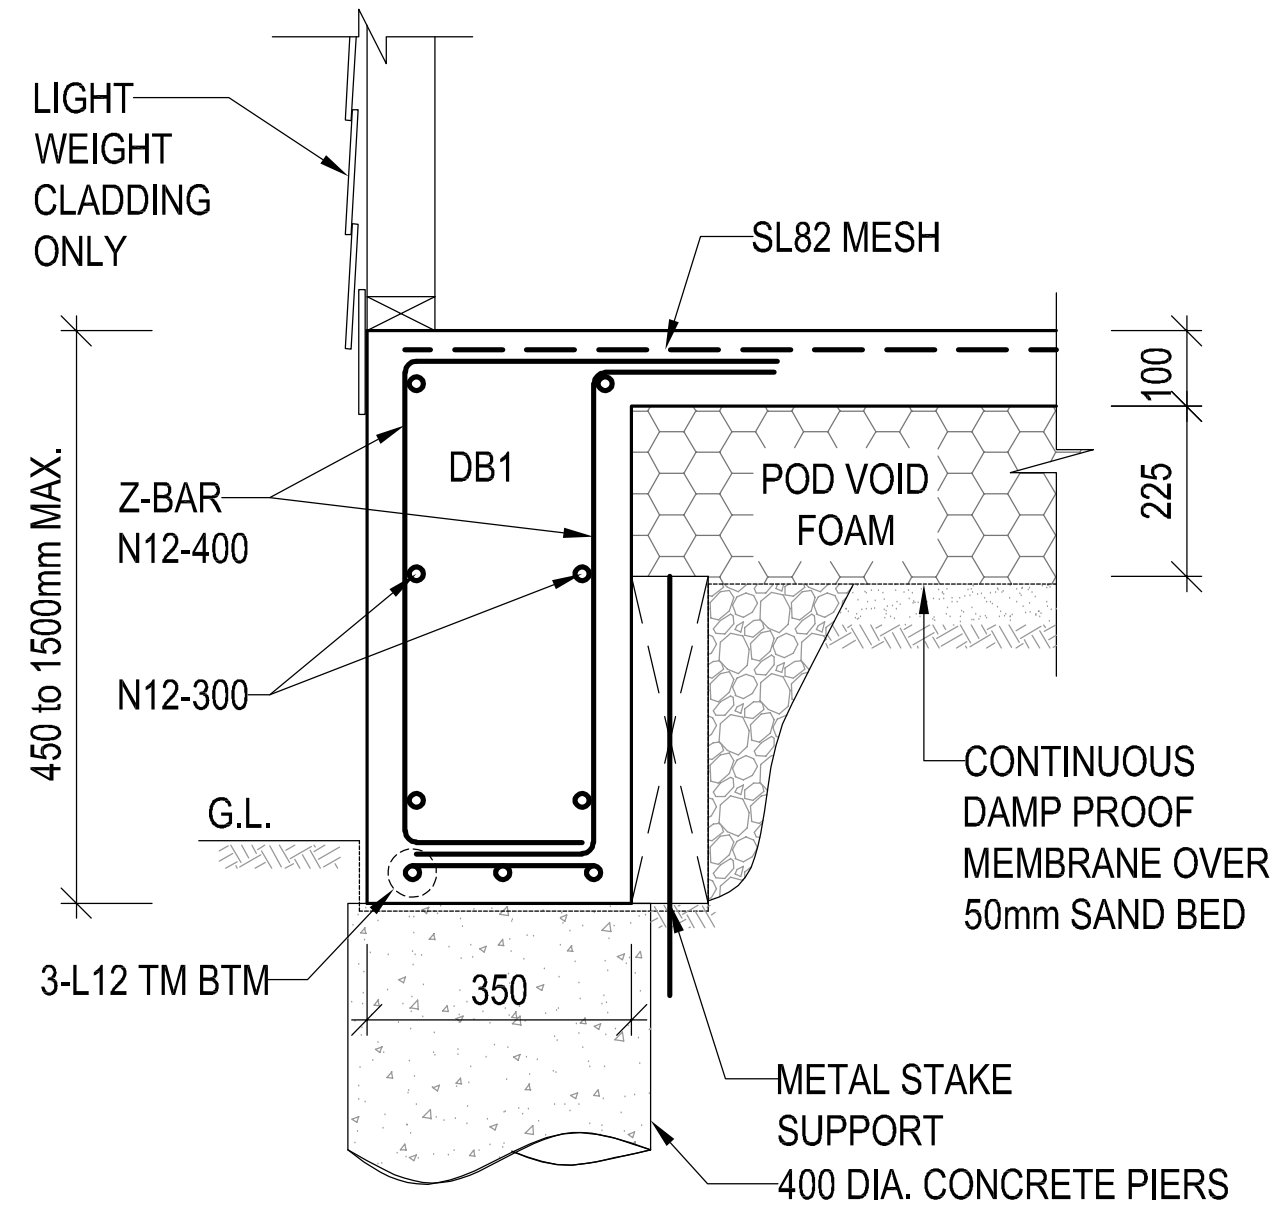

TYPICAL EDGE BEAM DETAIL (DB1)

1:20

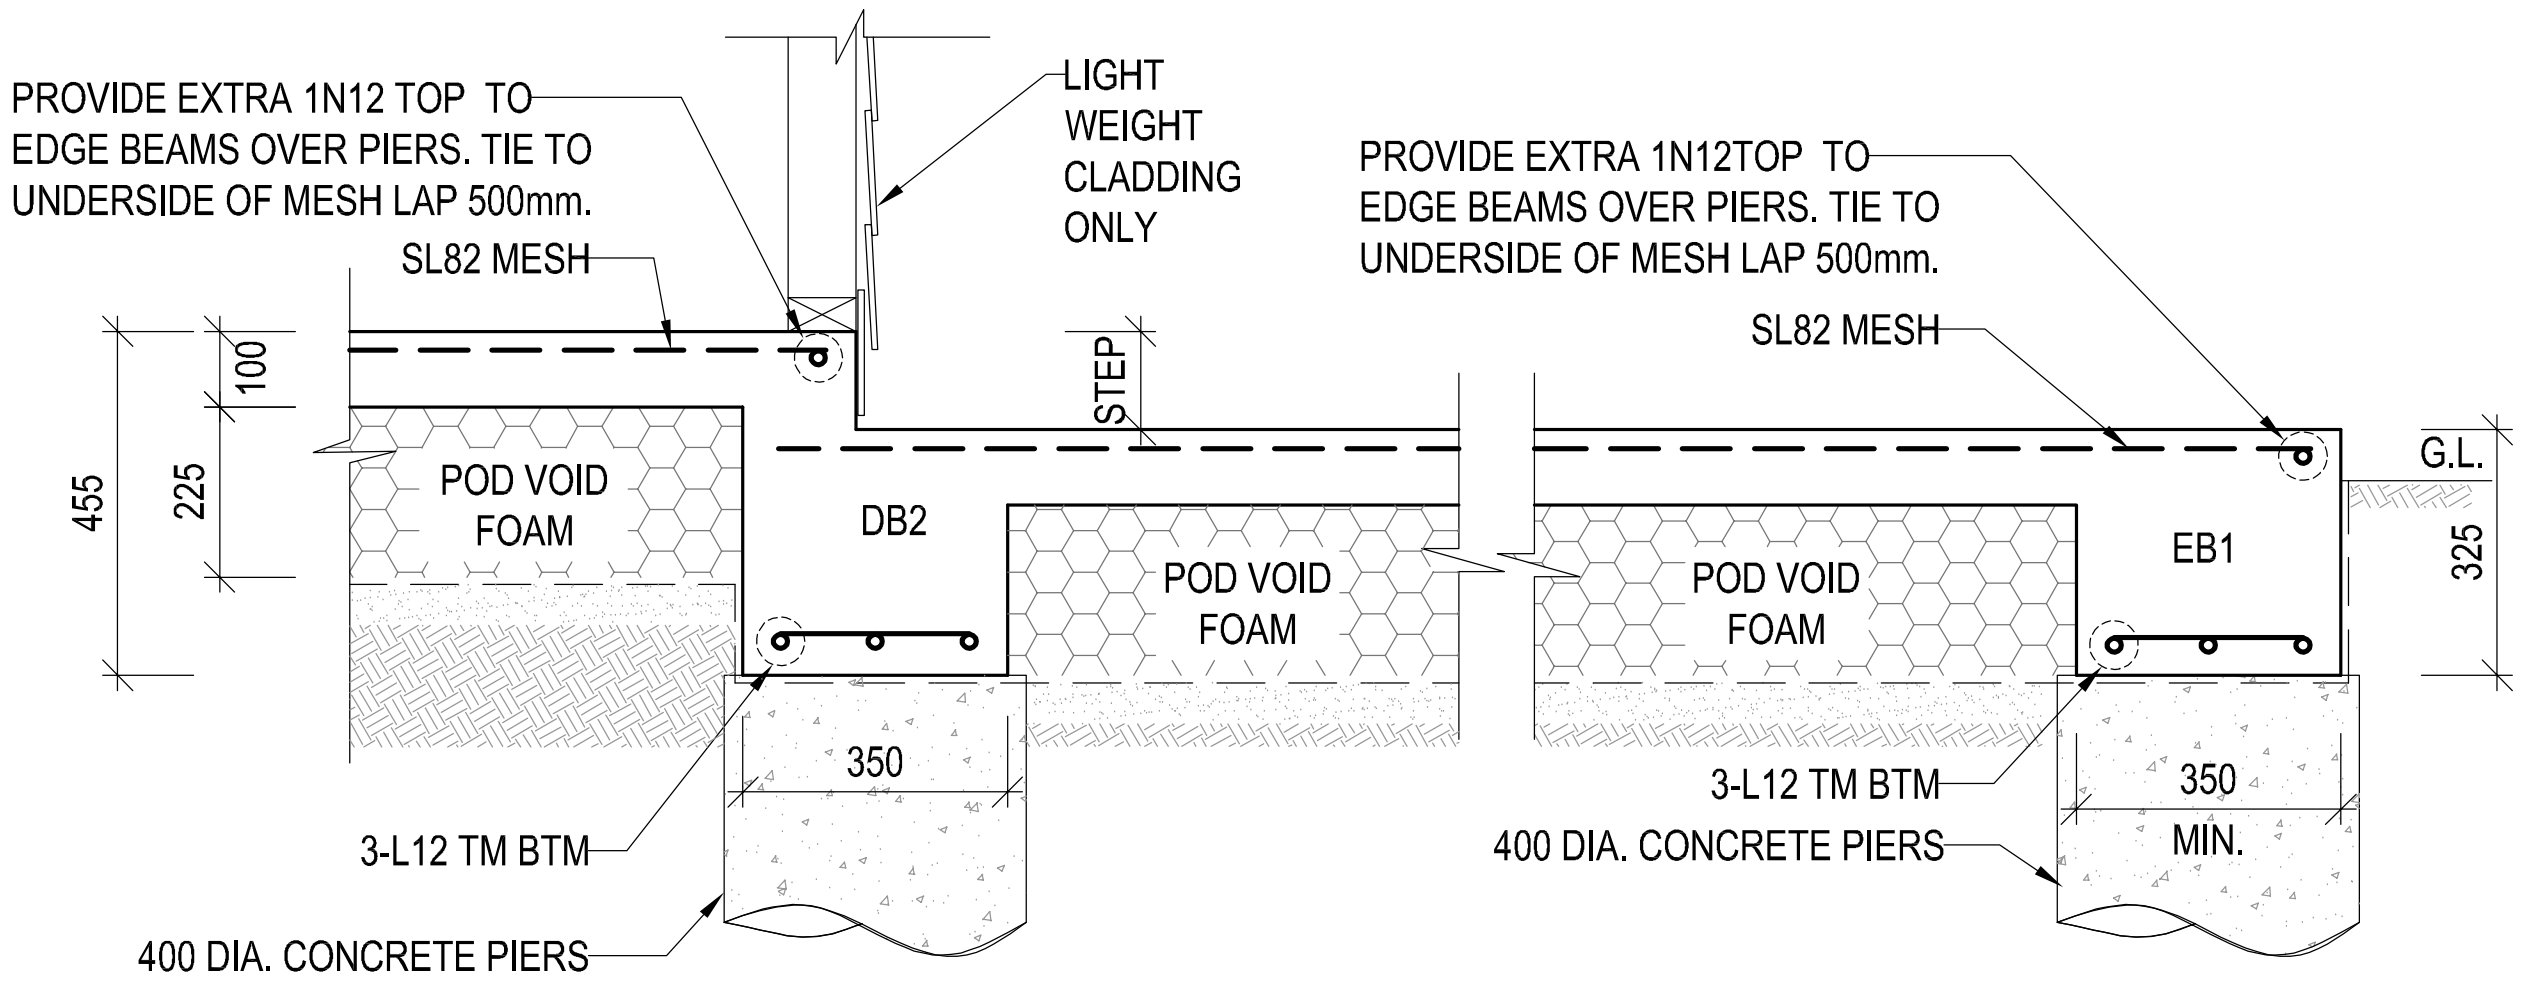

1 / 100 SECTION 1:20

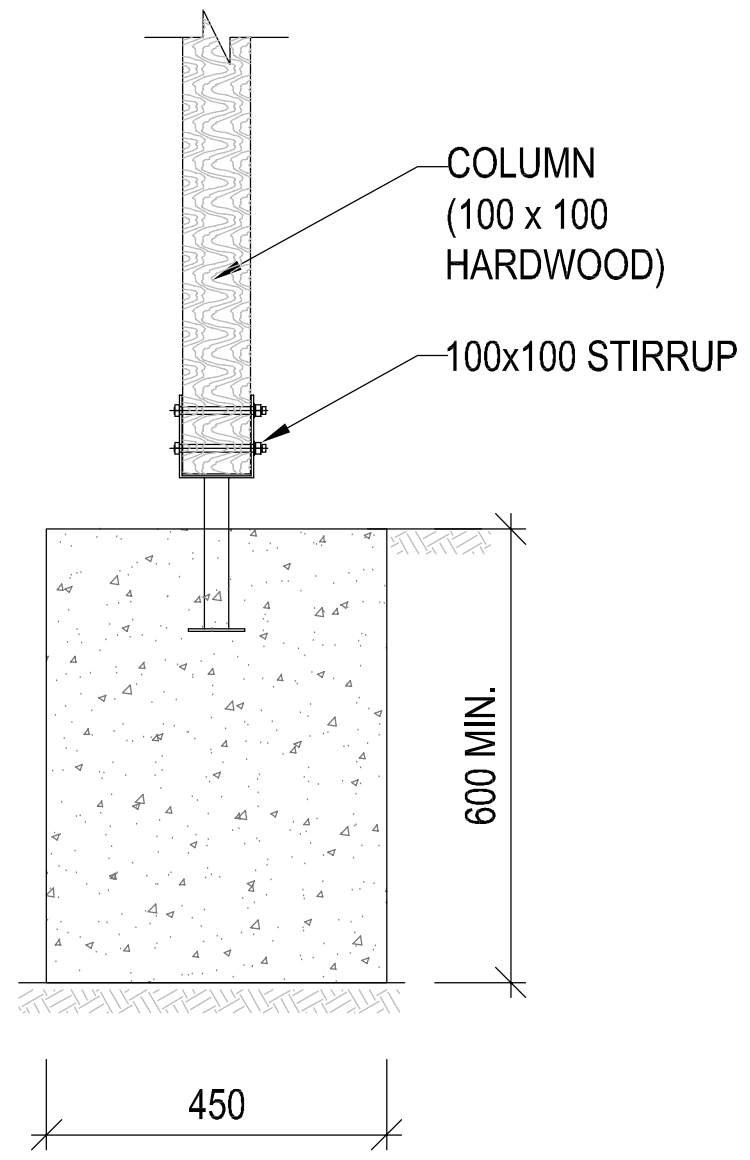

TIMBER POST CONNECT WITH CONCRETE SLAB/ FOOTING

1:20

HCT ENGINEERING

HCT ENGINEERING Pty Ltd

STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:
PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:
FOOTING TYPICAL DETAIL SH.1

SHEET A3 | DRG No. | HCT - 2898 - ST101 | APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

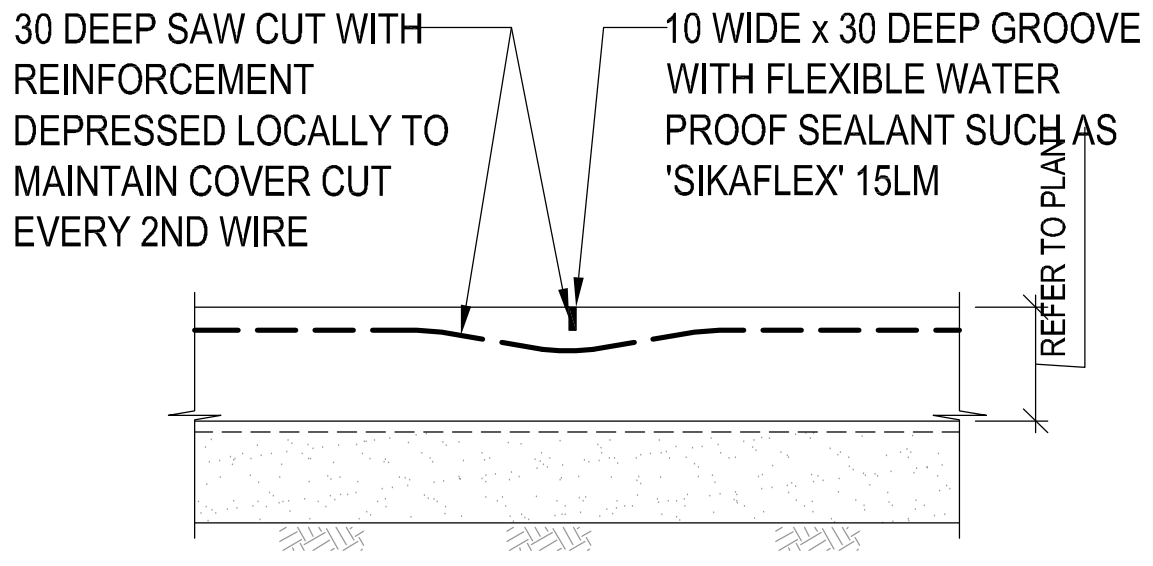

SAWN/TOOLED JOINT DETAIL - (SJ)

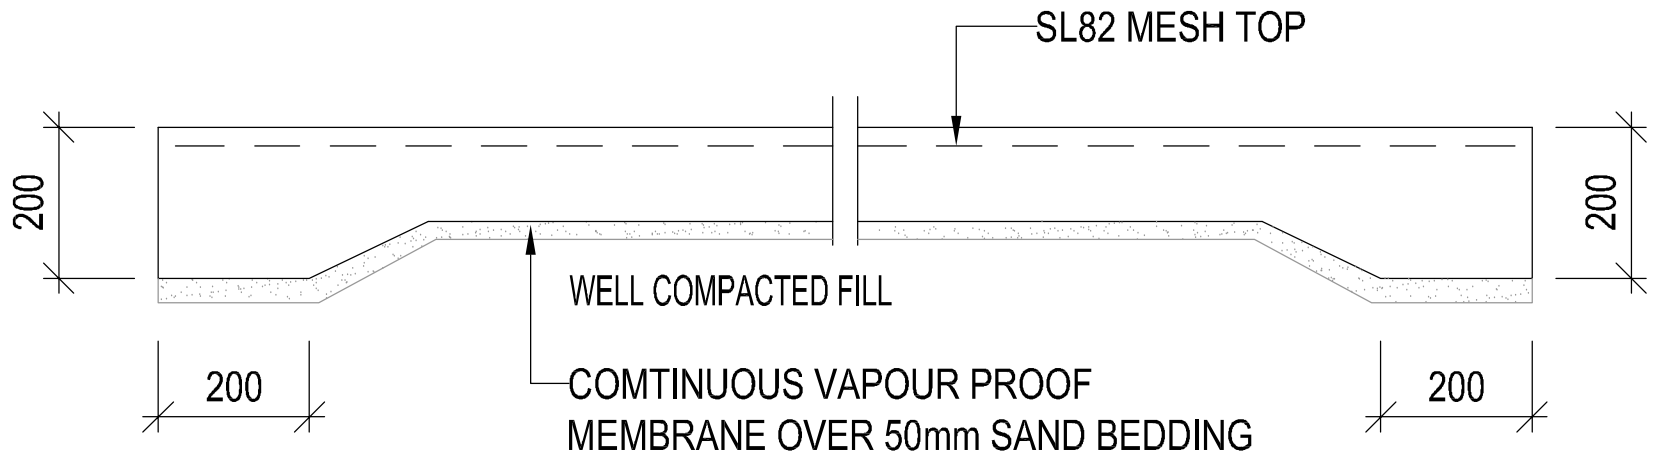

TYPICAL DRIVEWAY SECTION

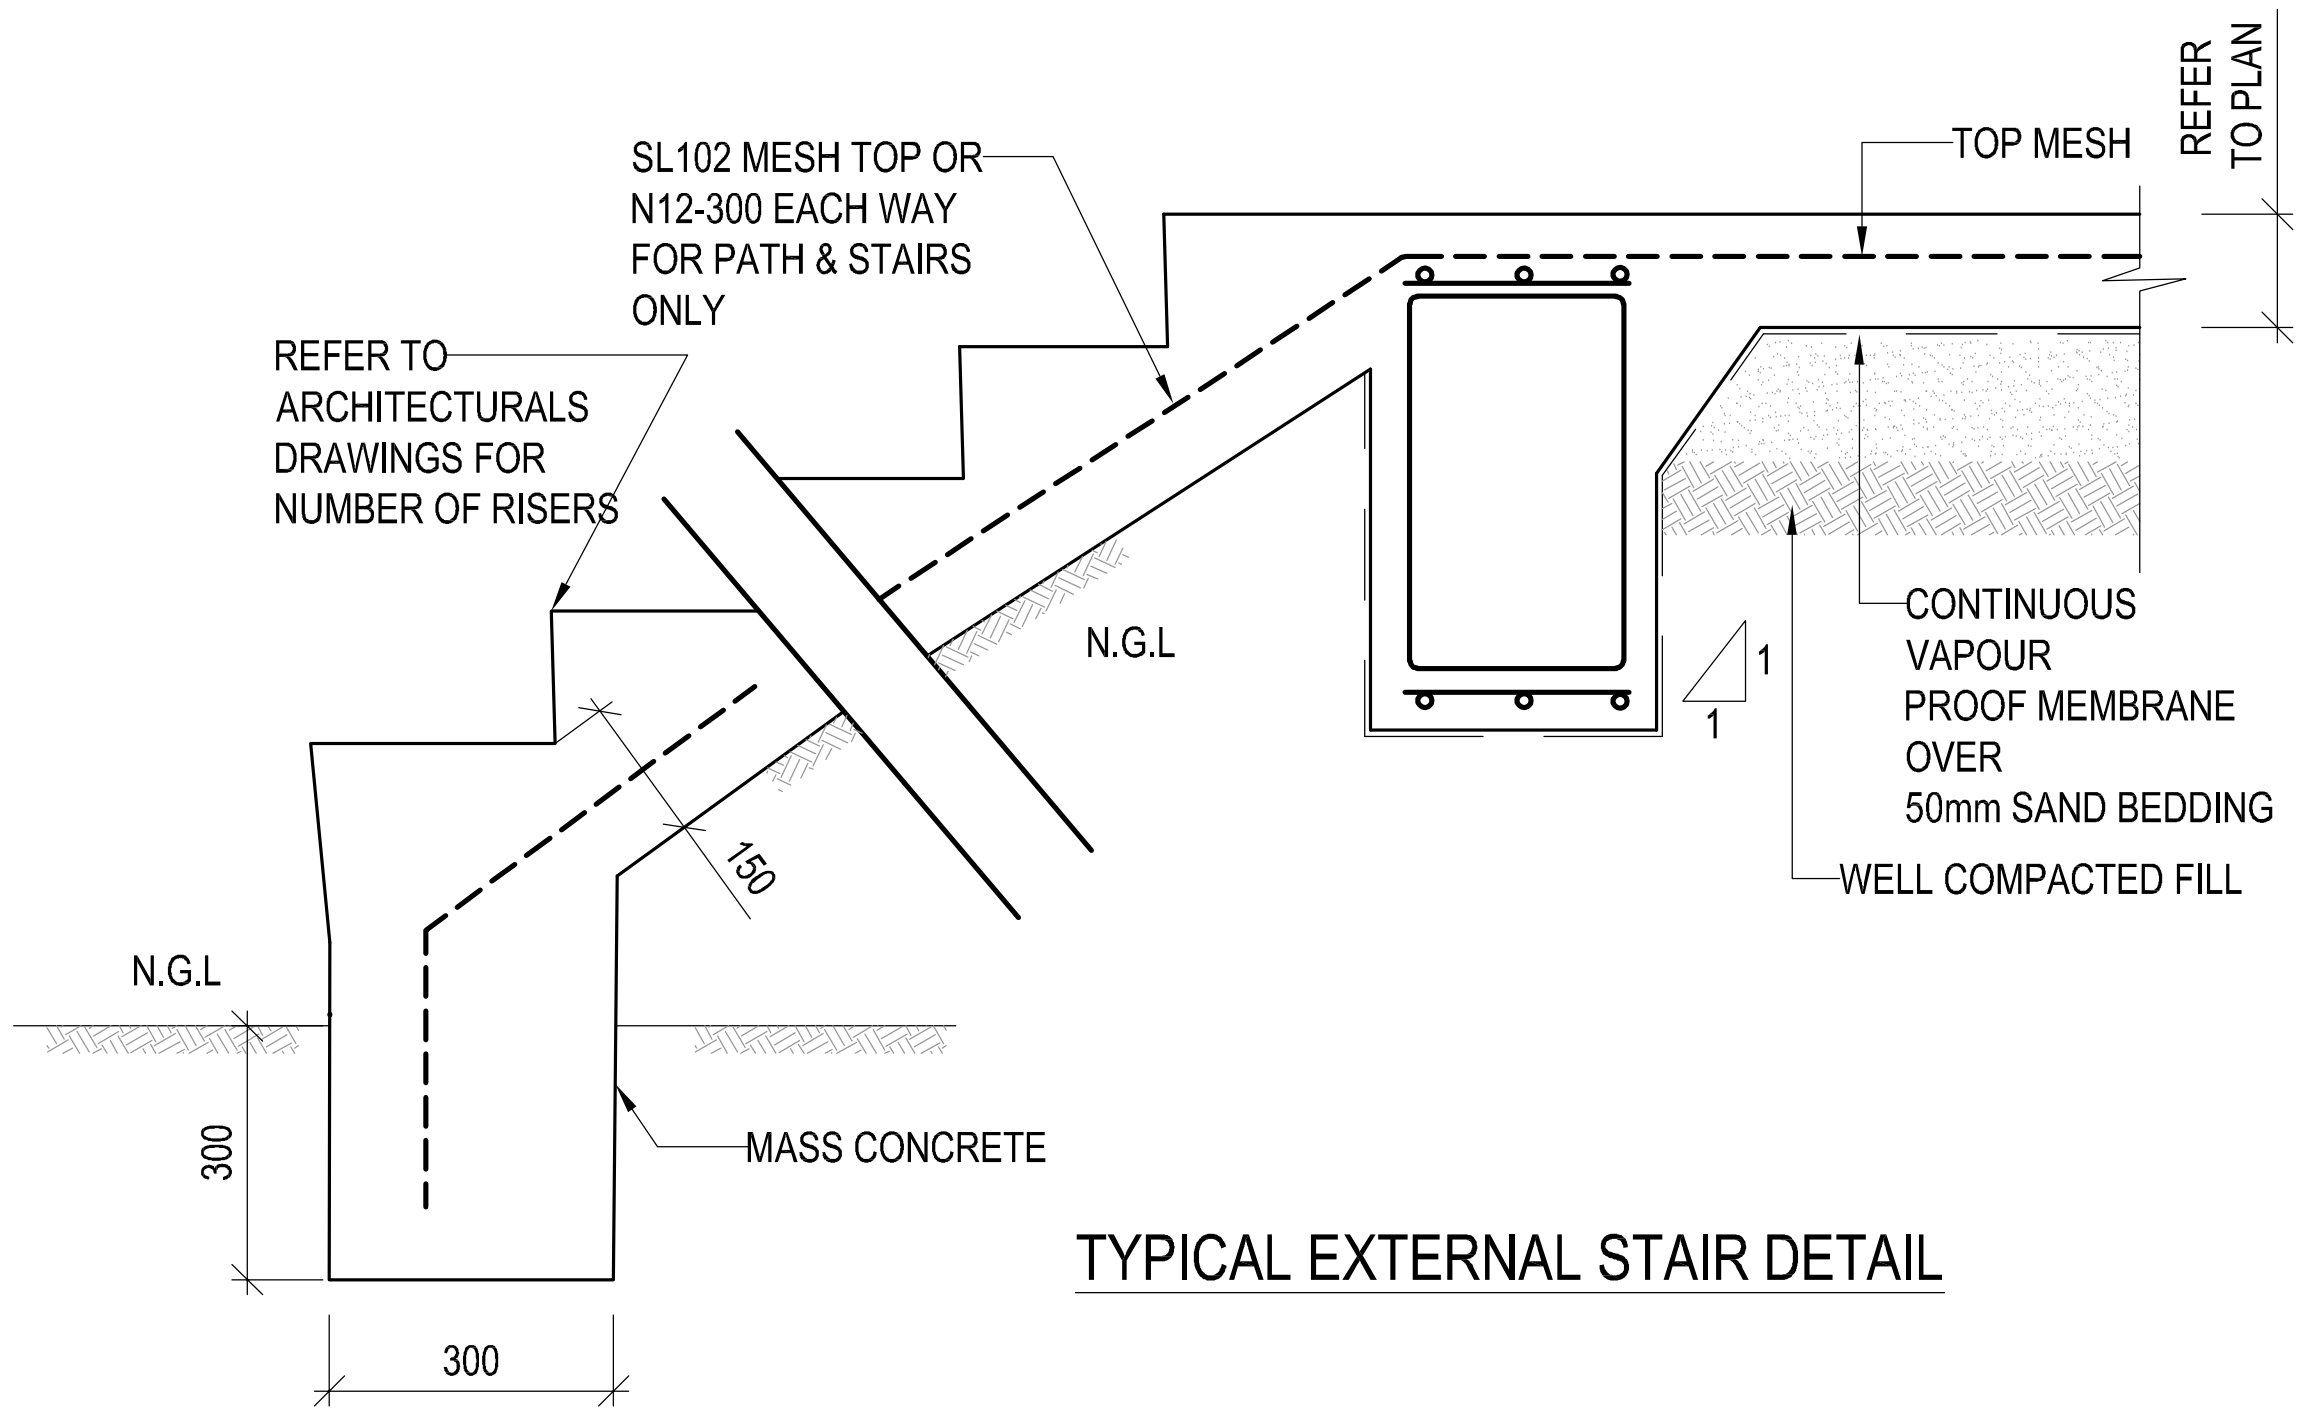

TYPICAL EXTERNAL STAIR DETAIL

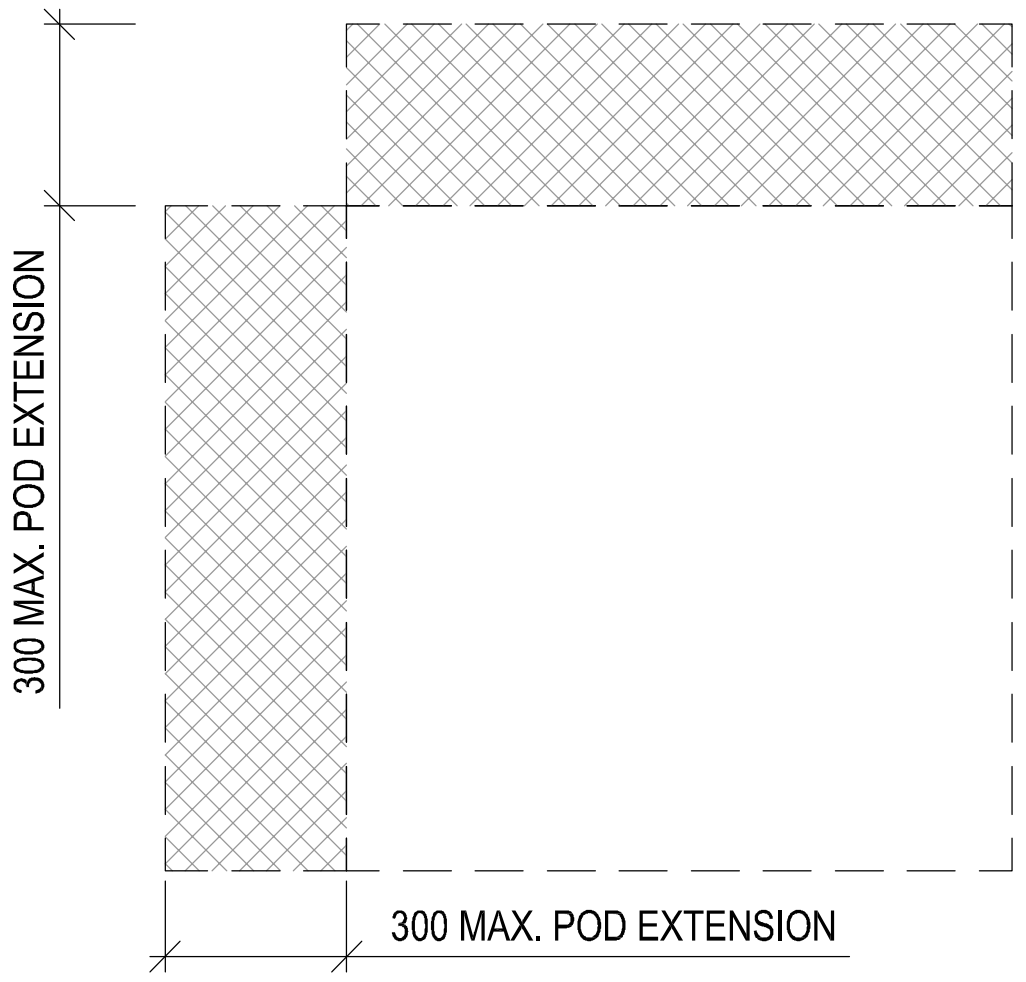

TYPICAL POD EXTENSION PLAN

1:20

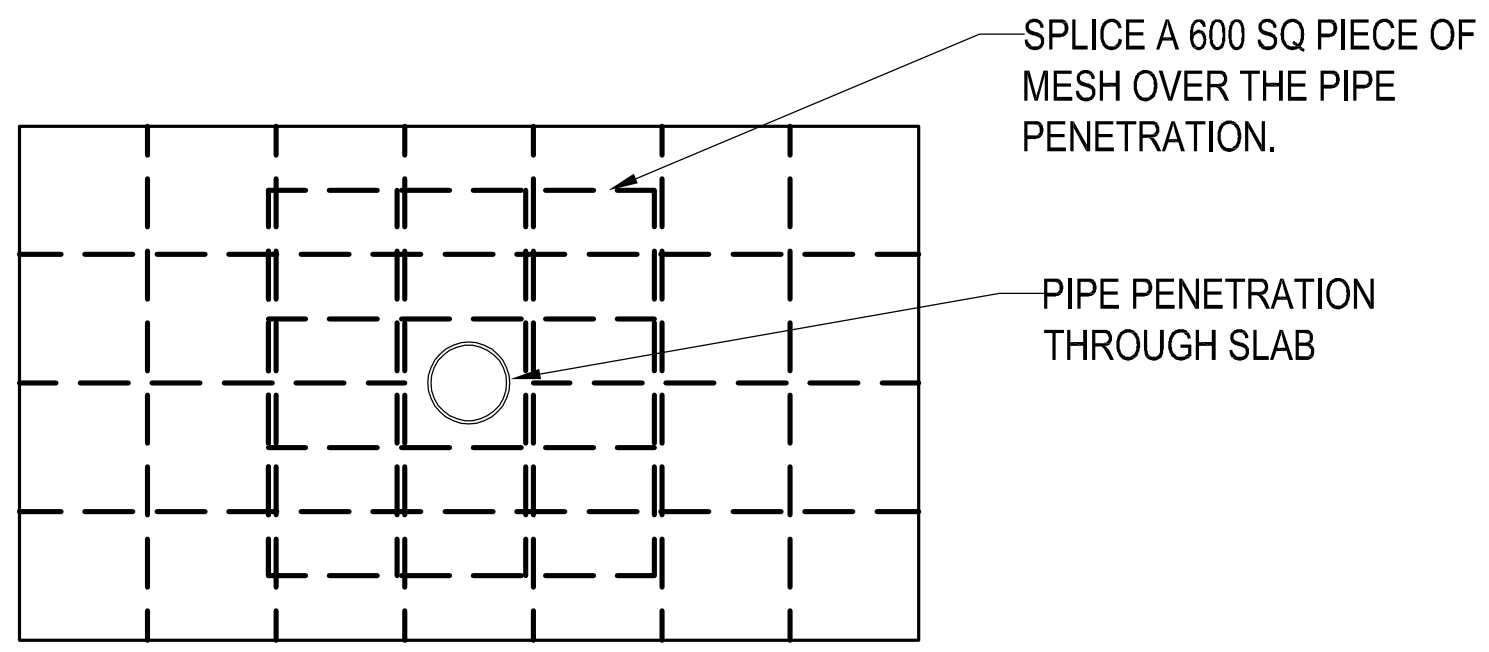

VERTICAL PIPE PENETRATION THROUGH SLAB

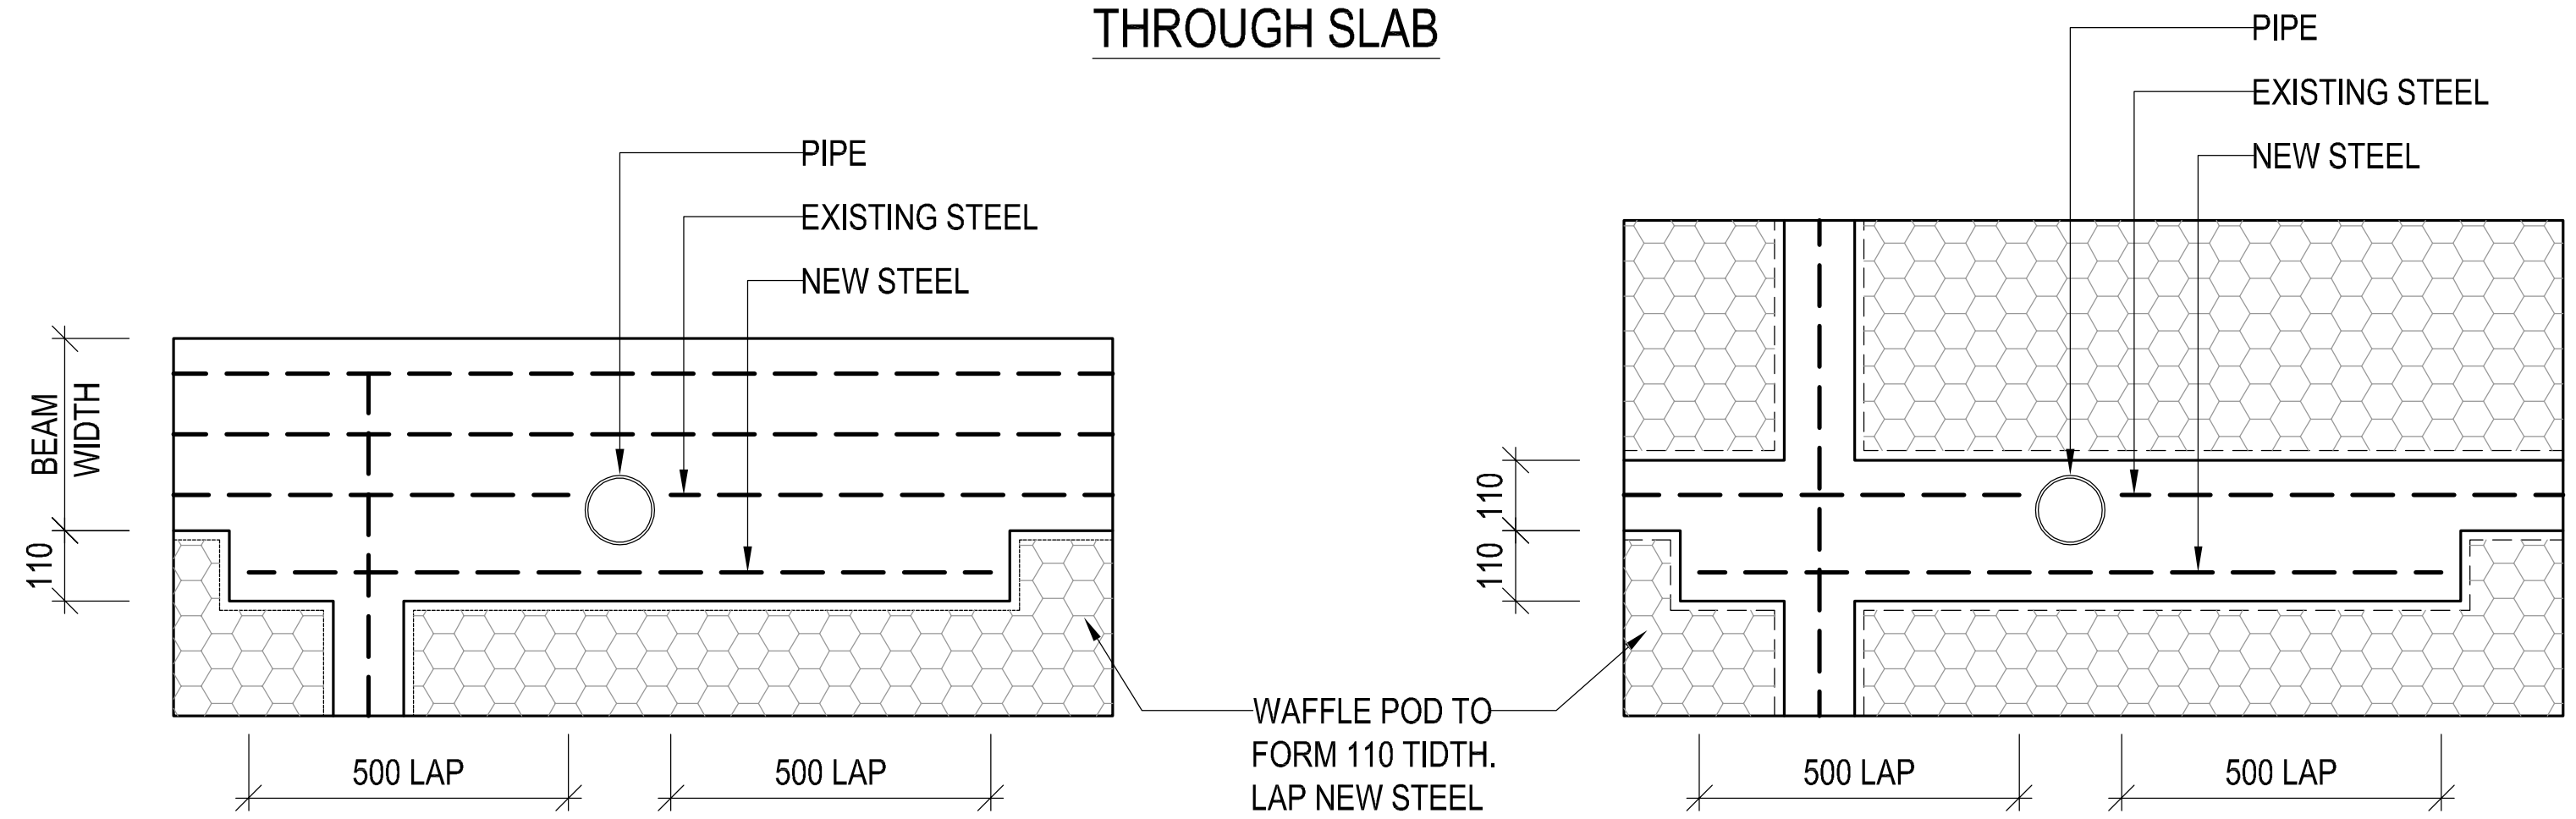

THROUGH BEAM

THROUGH RIBS

PLAN ON PIPE PENETRATIONS

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:
PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:
FOOTING TYPICAL DETAIL SH.2

SHEET A3 | DRG No. HCT - 2898 - ST102 | APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

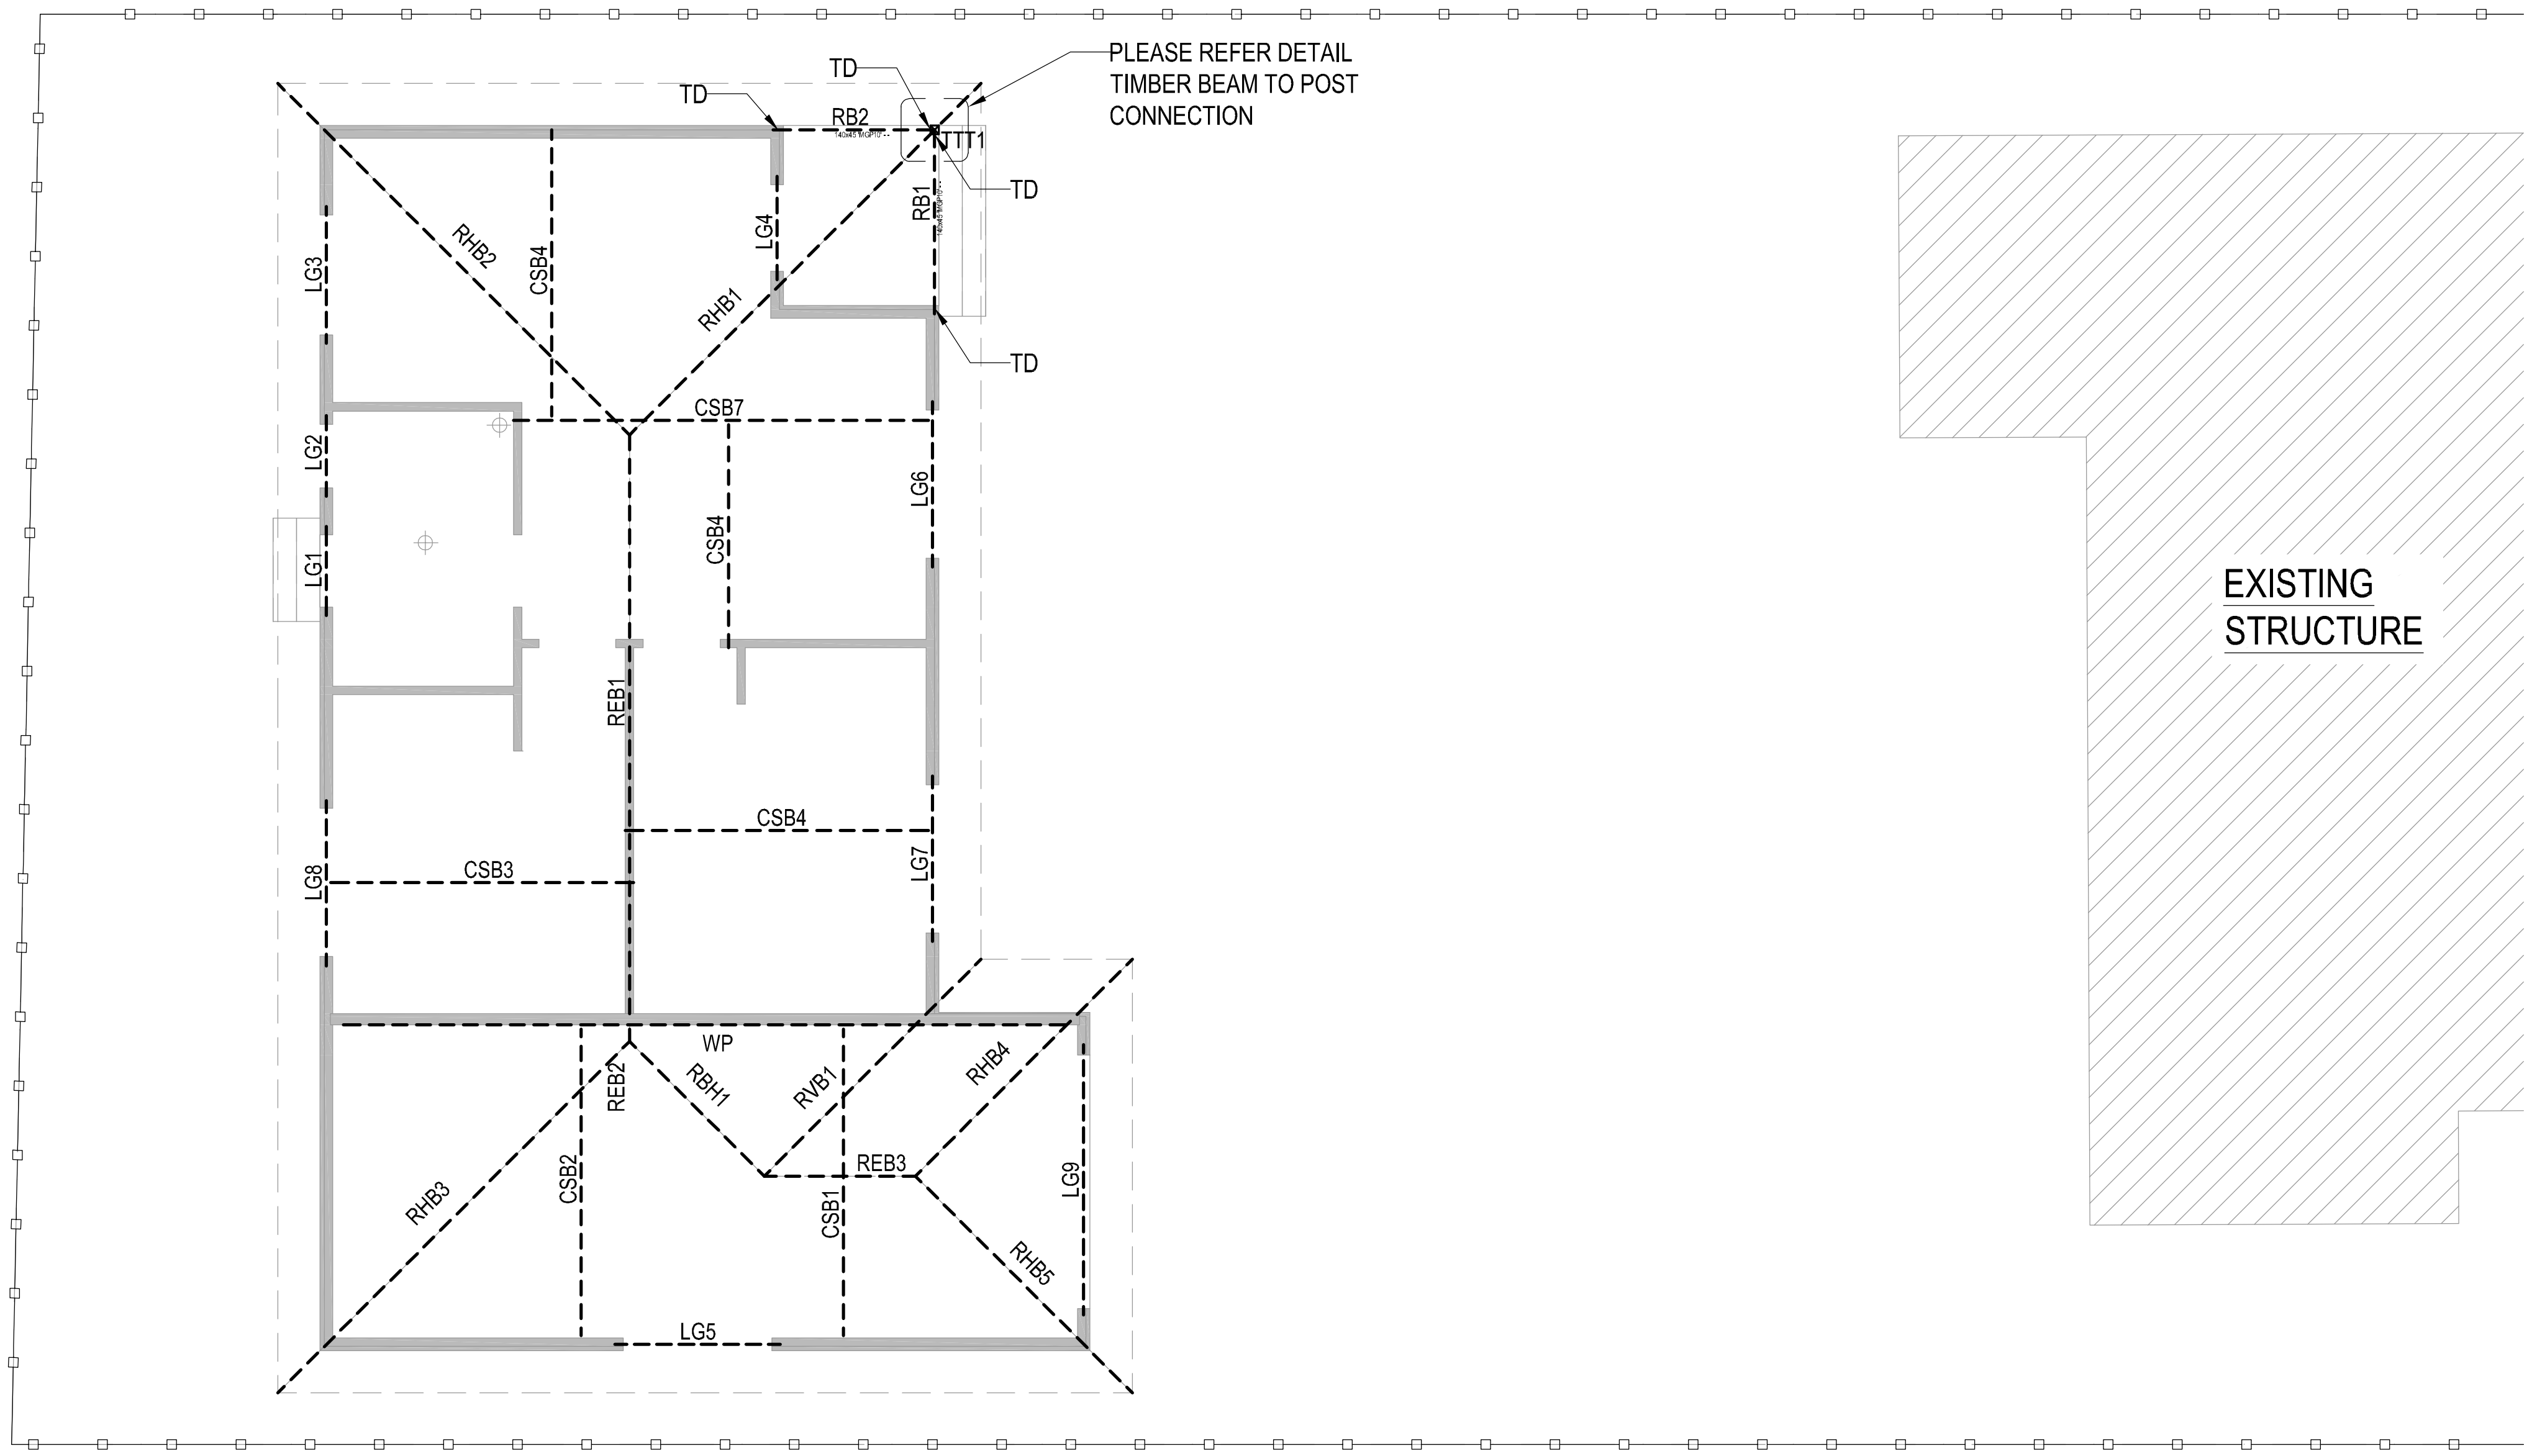

LINTEL PLAN AND ROOF PLAN

1:100

POST / BEAM / JOIST SCHEDULE					
MARK	DESCRIPTION	INTERNAL SKIN	EXTERNAL SKIN	EST.	QTY.
LG1	LINTEL G	2/140x45 'MGP10'		1.1m	1
LG2	LINTEL G	2/140x45 'MGP10'		1.0m	1
LG3	LINTEL G	2/140x45 'MGP10'		1.6m	1
LG4	LINTEL G	2/140x45 'MGP10'		1.3m	1
LG5	LINTEL G	2/190x45 'MGP10'		1.9m	1
LG6-LG8	LINTEL G	2/200x45 'Smart LVL 13'		1.9m	3
LG9	LINTEL GARAGE	2/240x45 'Smart LVL 13'		3.0m	1
TTT1	TIMBER POST	100x100 HARDWOOD		-	1

LEGEND

ITEM	DESCRIPTION
	DENOTES LOAD BEARING WALL BELOW

POST / BEAM / JOIST SCHEDULE (ROOF)			
MARK	DESCRIPTION	SIZE	QTY.
TYP. RAFTERS		90x45 'MGP10' @600mm CTRS MAX	-
REB1 - REB3	RIDGE BOARD	140x45 'MGP10'	3
RHB1 - RHB5	HIP RAFTER	140x45 'MGP10'	5
RVB1	VALLEY RAFTER	140x45 'MGP10'	1
RBH1	BROKEN HIP	140x45 'MGP10'	1
RB1 - RB2	RAFTER BEAM	200x45 'Smart LVL 13'	2
CSB1 - CSB6	COUNTER/ STRUTTING BEAM	200x45 'Smart LVL 13'	6
CSB7		240x45 'Smart LVL 13'	1
WP	WHALING PLATE	300x45 'Smart LVL 13'	1

THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

THE ABOVE MEMBER SIZES ARE SUGGESTIONS ONLY BASED ON THE ASSUMPTION THAT THESE MEMBER SPANS NO MORE THAN 2.0M CONTINUOUSLY AND STRUTTING FRAMES ARE PROVIDED UNDERNEATH TO BREAK THE LARGE SPAN INTO SHORTER SPANS. THE CARPENTER/CONTRACTOR NEEDS TO TAKE DUE DILIGENCE TO DOUBLE CHECK FRAMING CONSTRUCTION WITH AS 1684.4 BEFORE ORDERING MATERIAL.

NOTES:

- TD : TIE DOWN BEAM TO TIMBER POST/ STUD WALL BELOW

HCT ENGINEERING Pty Ltd

STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT: PROPOSED SECONDARY DWELLING WITH ATTACHED GARAGE NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE: LINTEL PLAN & ROOF PLAN

SHEET A3 | *DRG No.* HCT - 2898 - ST200 | *APP:* FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

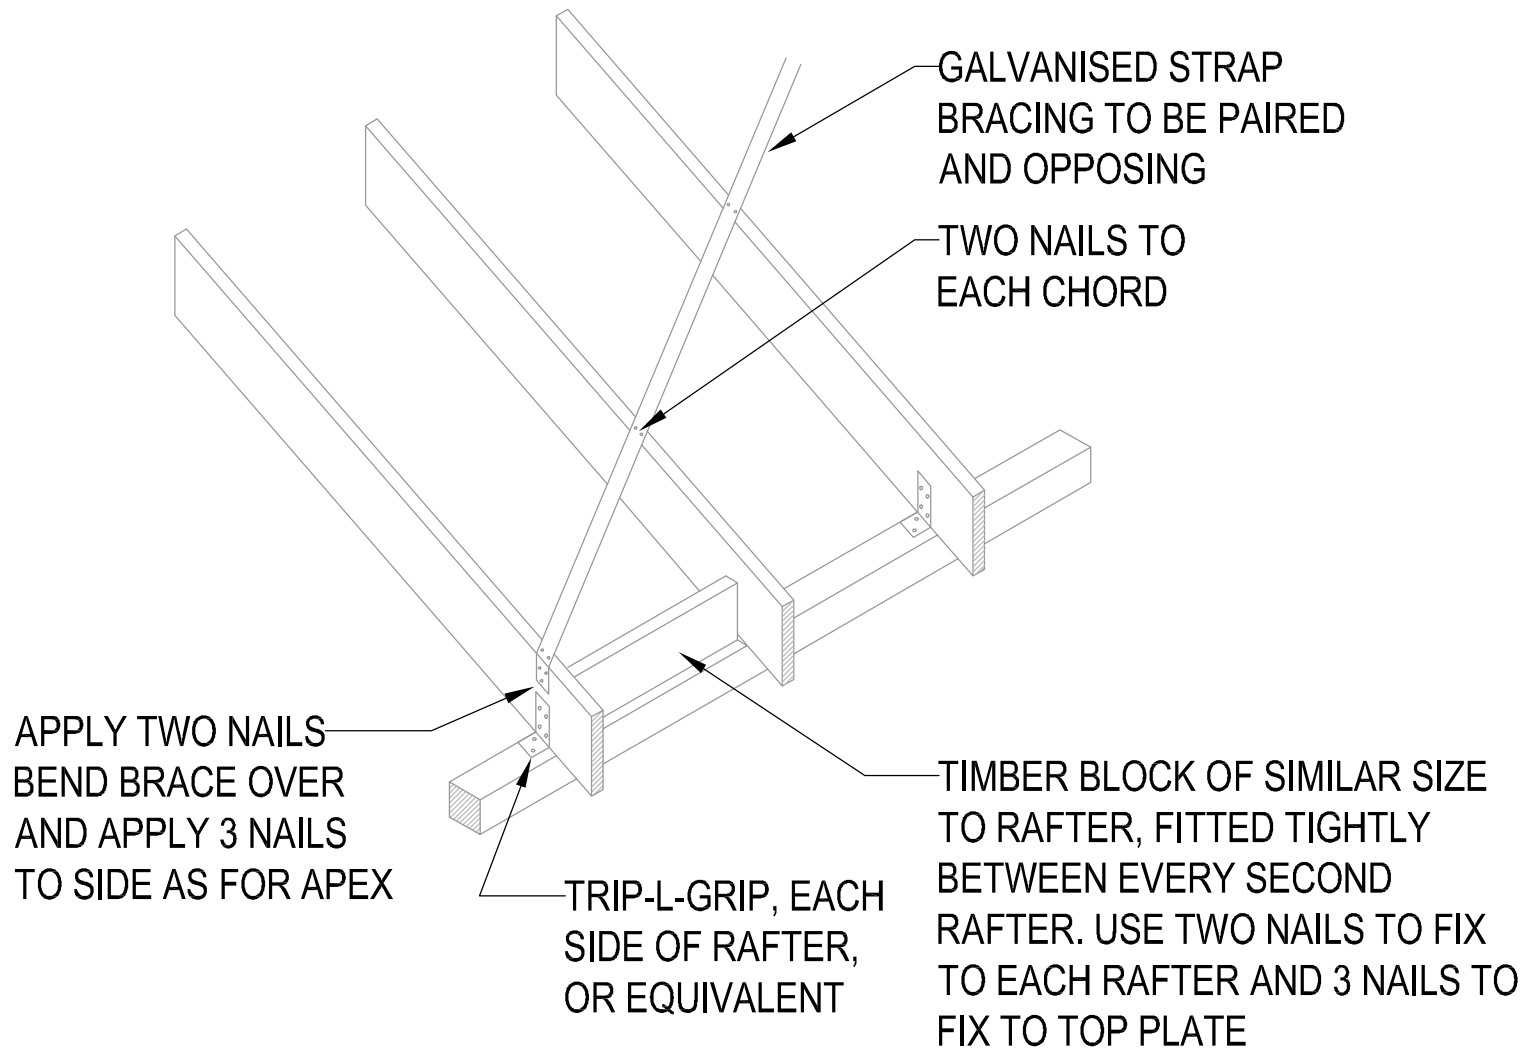

TYPICAL ROOF BRACING DETAIL

NTS

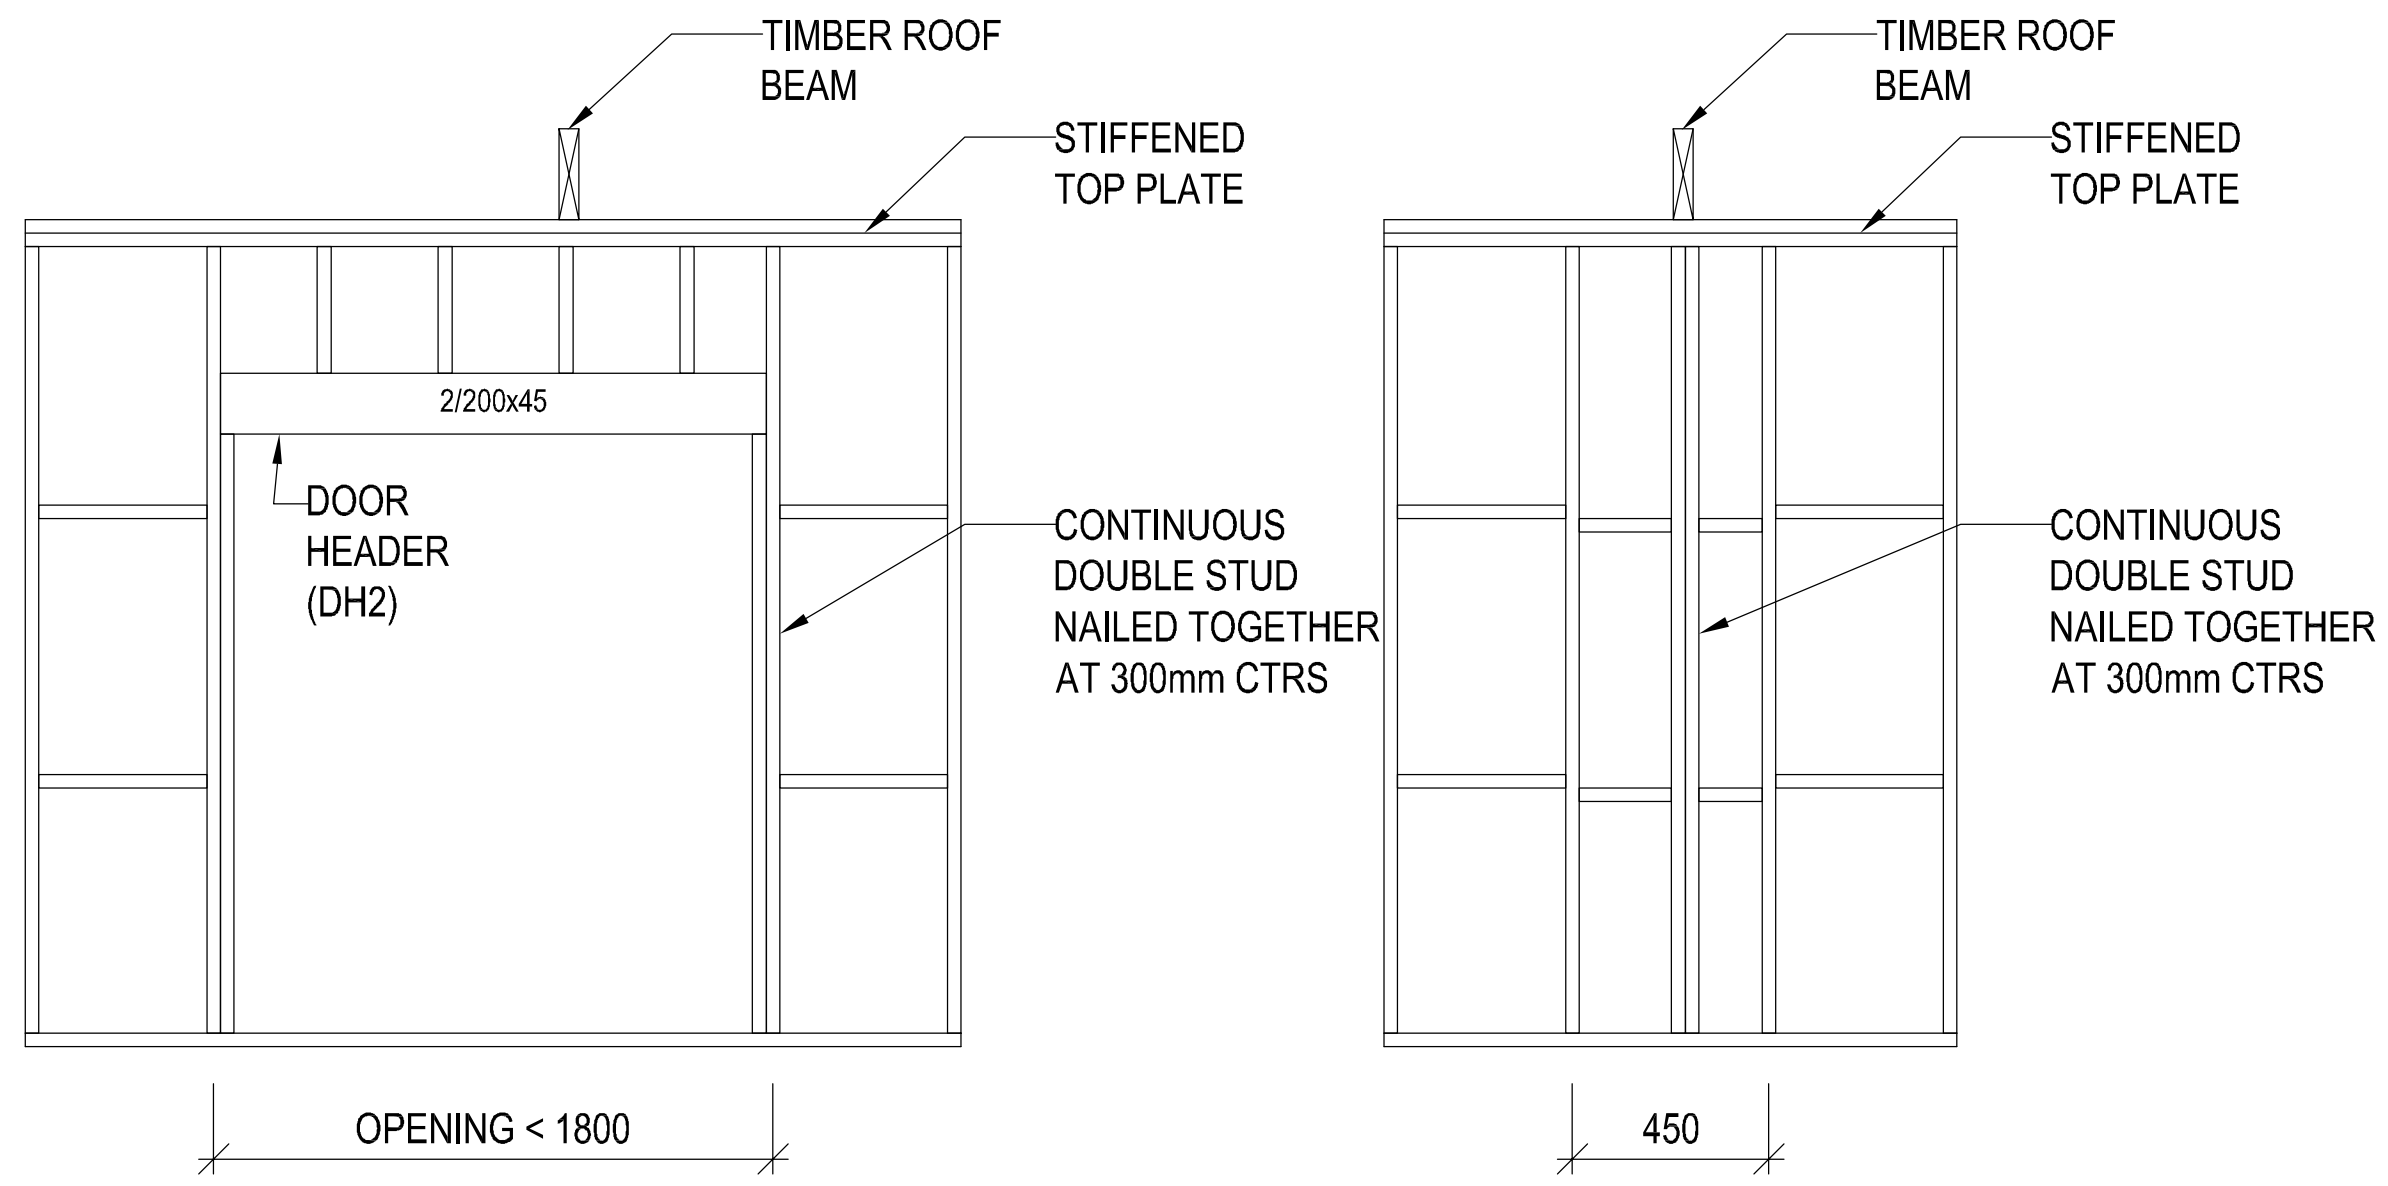

TYPICAL LOAD-BEARING WALL SET-OUT

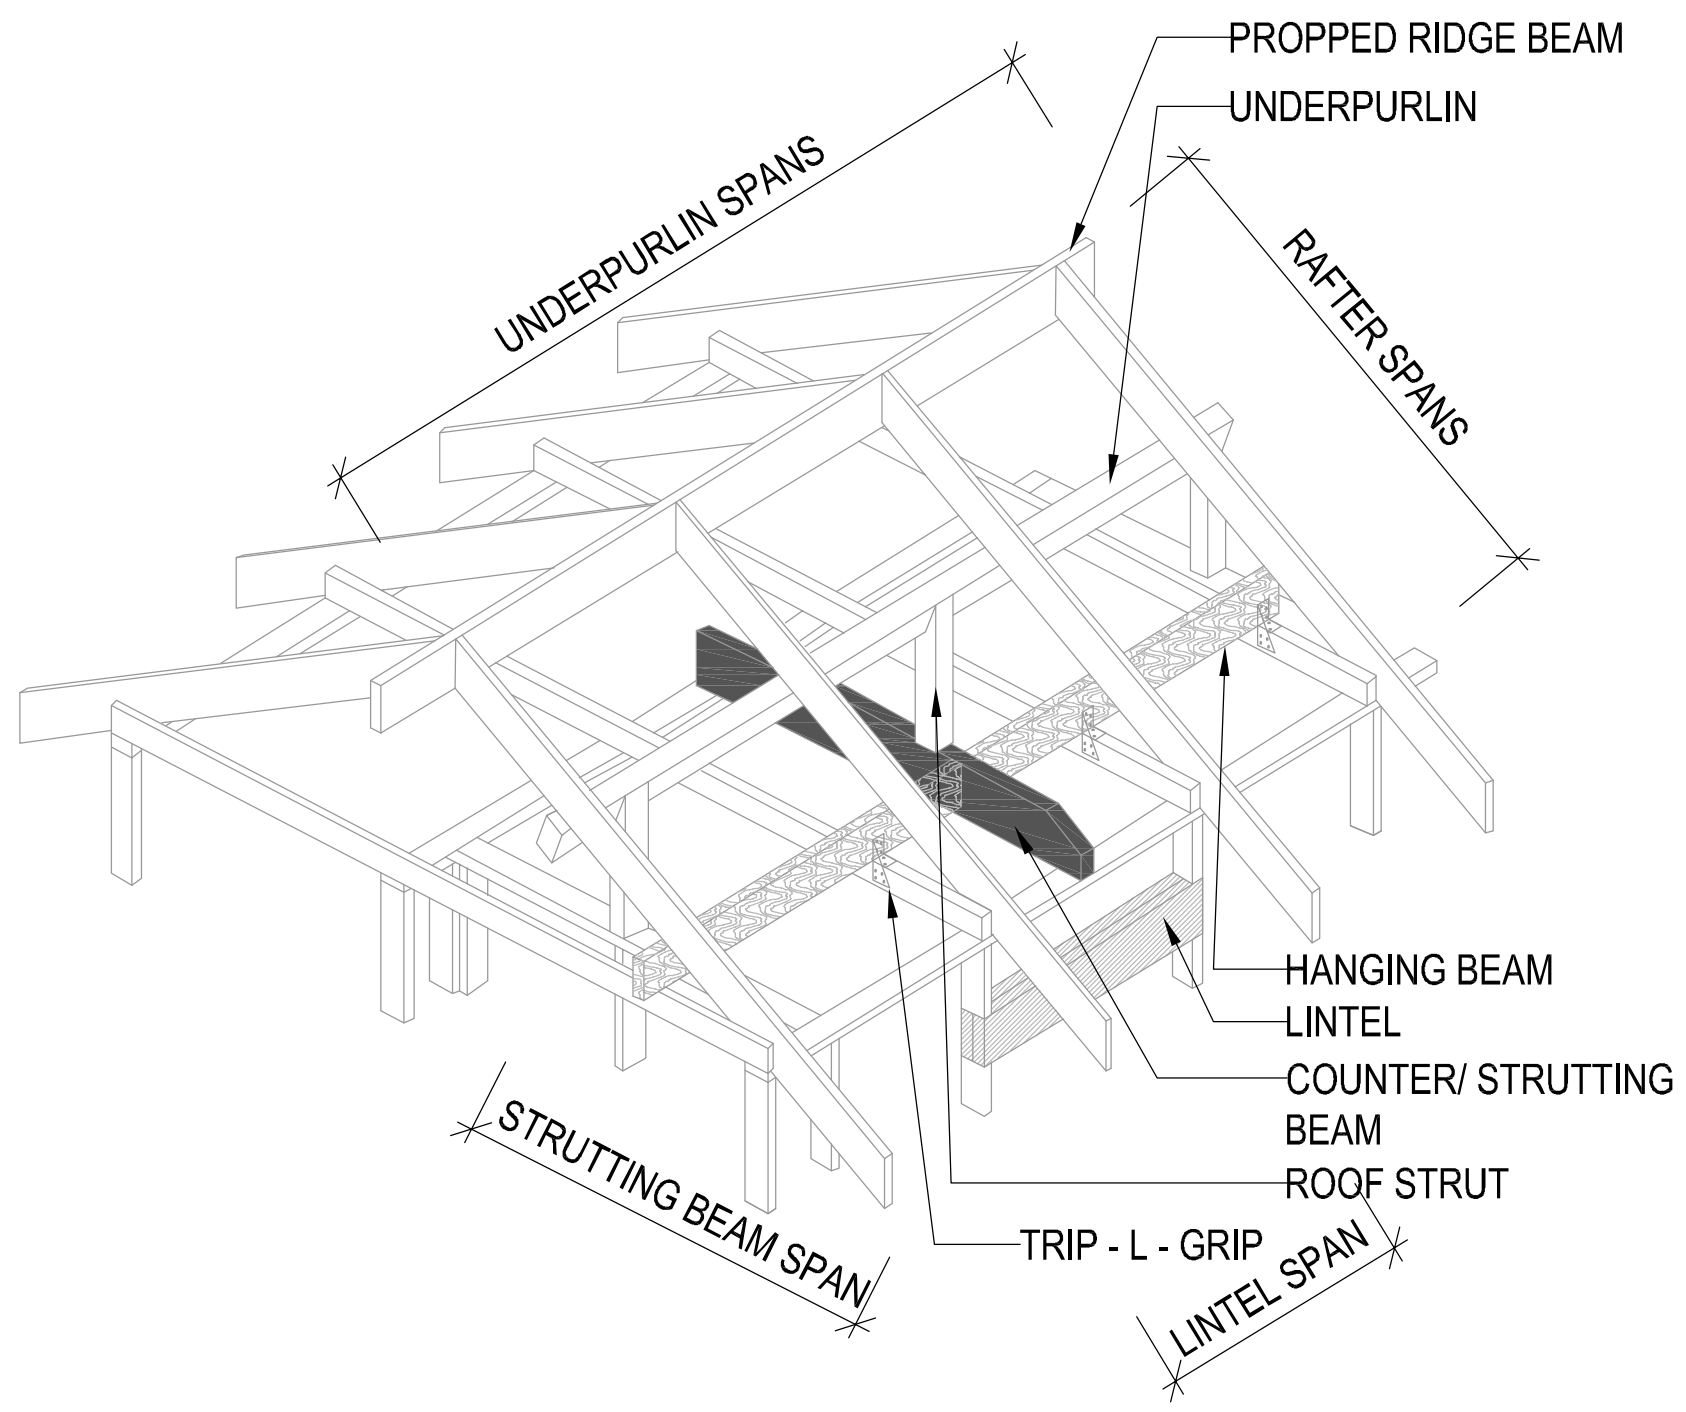

TYPICAL ROOF FRAMING CONSTRUCTION DETAIL

(FOR TERMINOLOGY REFERENCE ONLY)

PLEASE NOTE: THIS DIAGRAM IS INTENDED TO ILLUSTRATE STANDARD ROOF FRAMING TERMINOLOGY AND MAY NOT PRECISELY REFLECT THE SPECIFIC ROOF CONFIGURATION OF THE SUBJECT PROJECT. HOWEVER, THE NAMES AND STRUCTURAL ROLES OF THE ROOF MEMBERS DEPICTED ARE CONSISTENT WITH THOSE COMMONLY USED IN ROOF CONSTRUCTION.

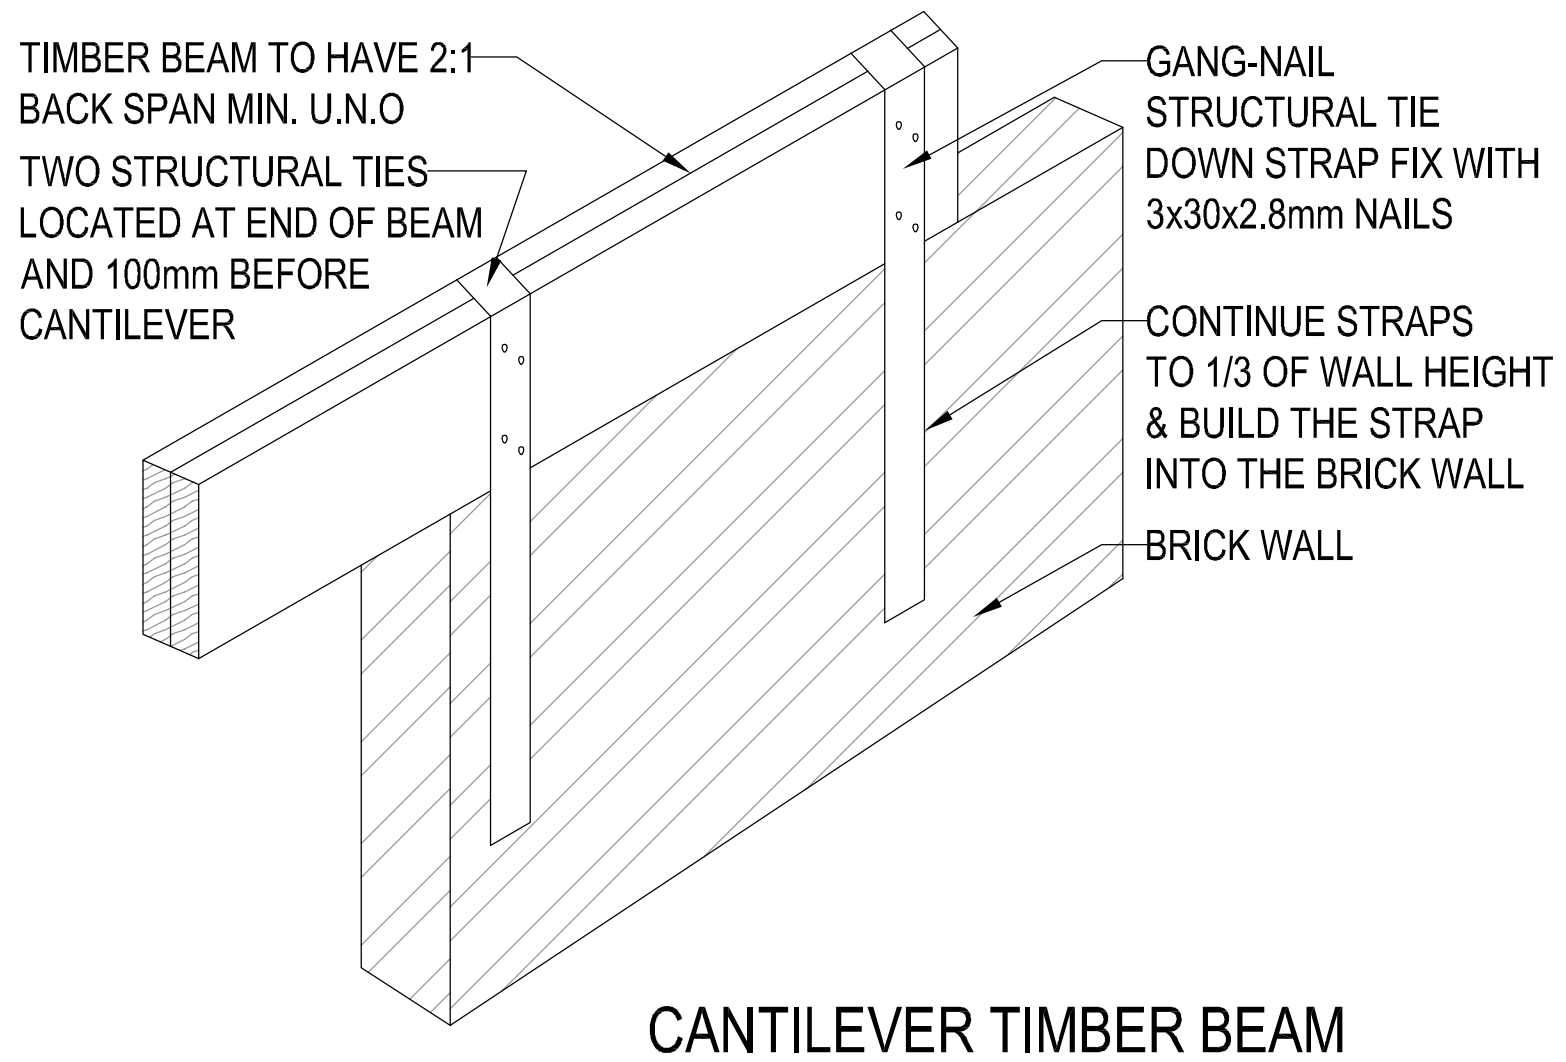

CANTILEVER TIMBER BEAM TO BRICK WALL CONNECTION

NTS

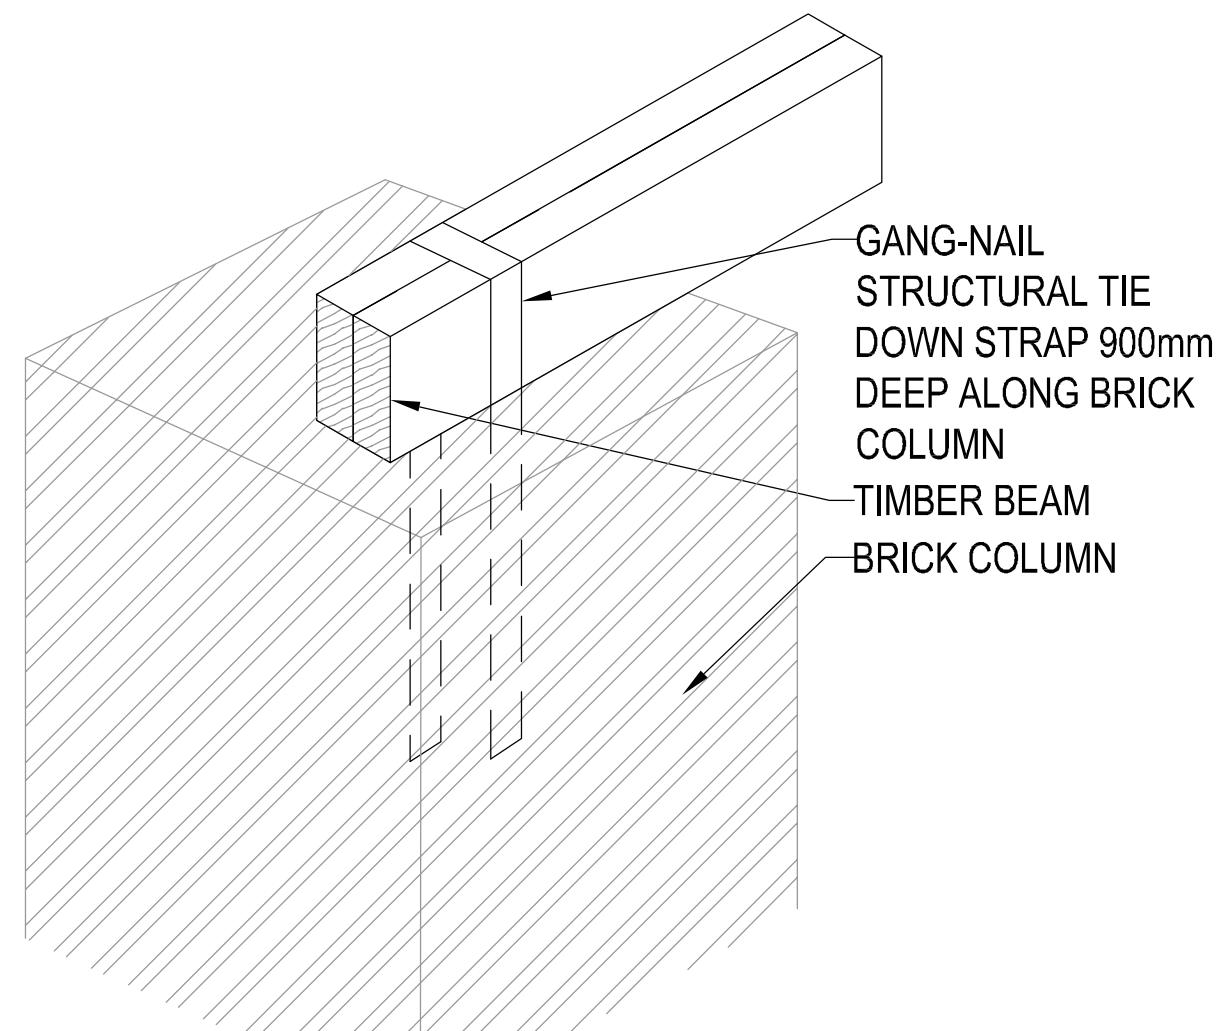

TIMBER BEAM TO BRICK COLUMN CONNECTION

NTS

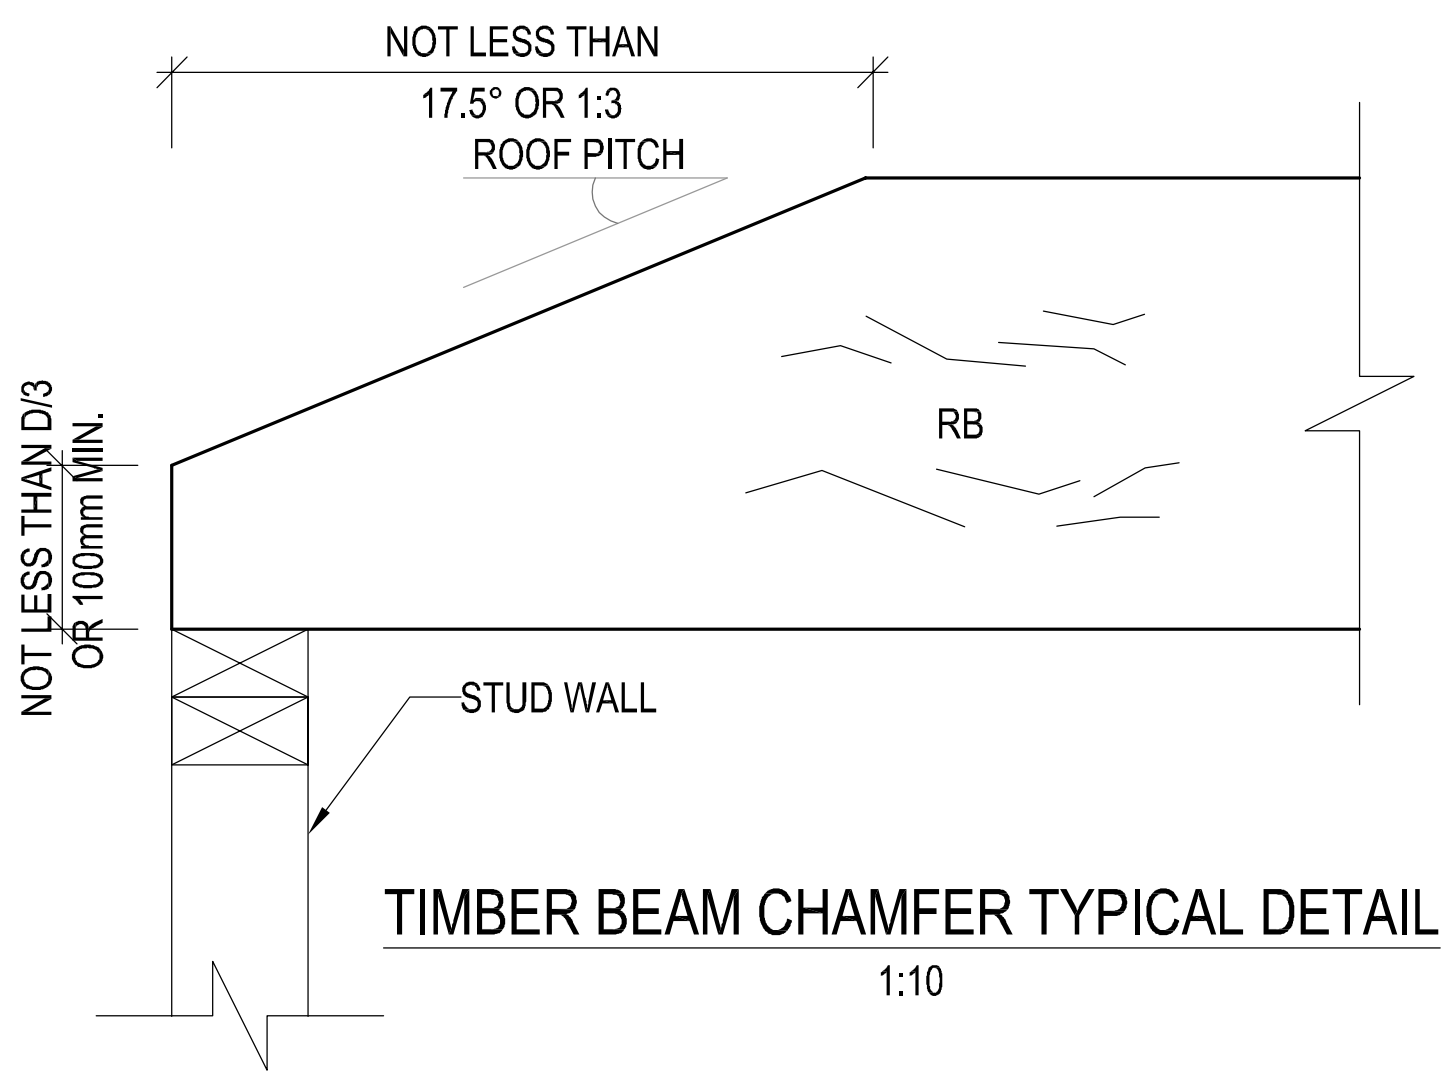

TIMBER BEAM CHAMFER TYPICAL DETAIL

1:10

HCT ENGINEERING

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT: PROPOSED SECONDARY DWELLING WITH ATTACHED GARAGE NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE: BEAM & POST TYPICAL DETAIL SH.1

SHEET A3	DRG No.	HCT - 2898 - ST201	APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

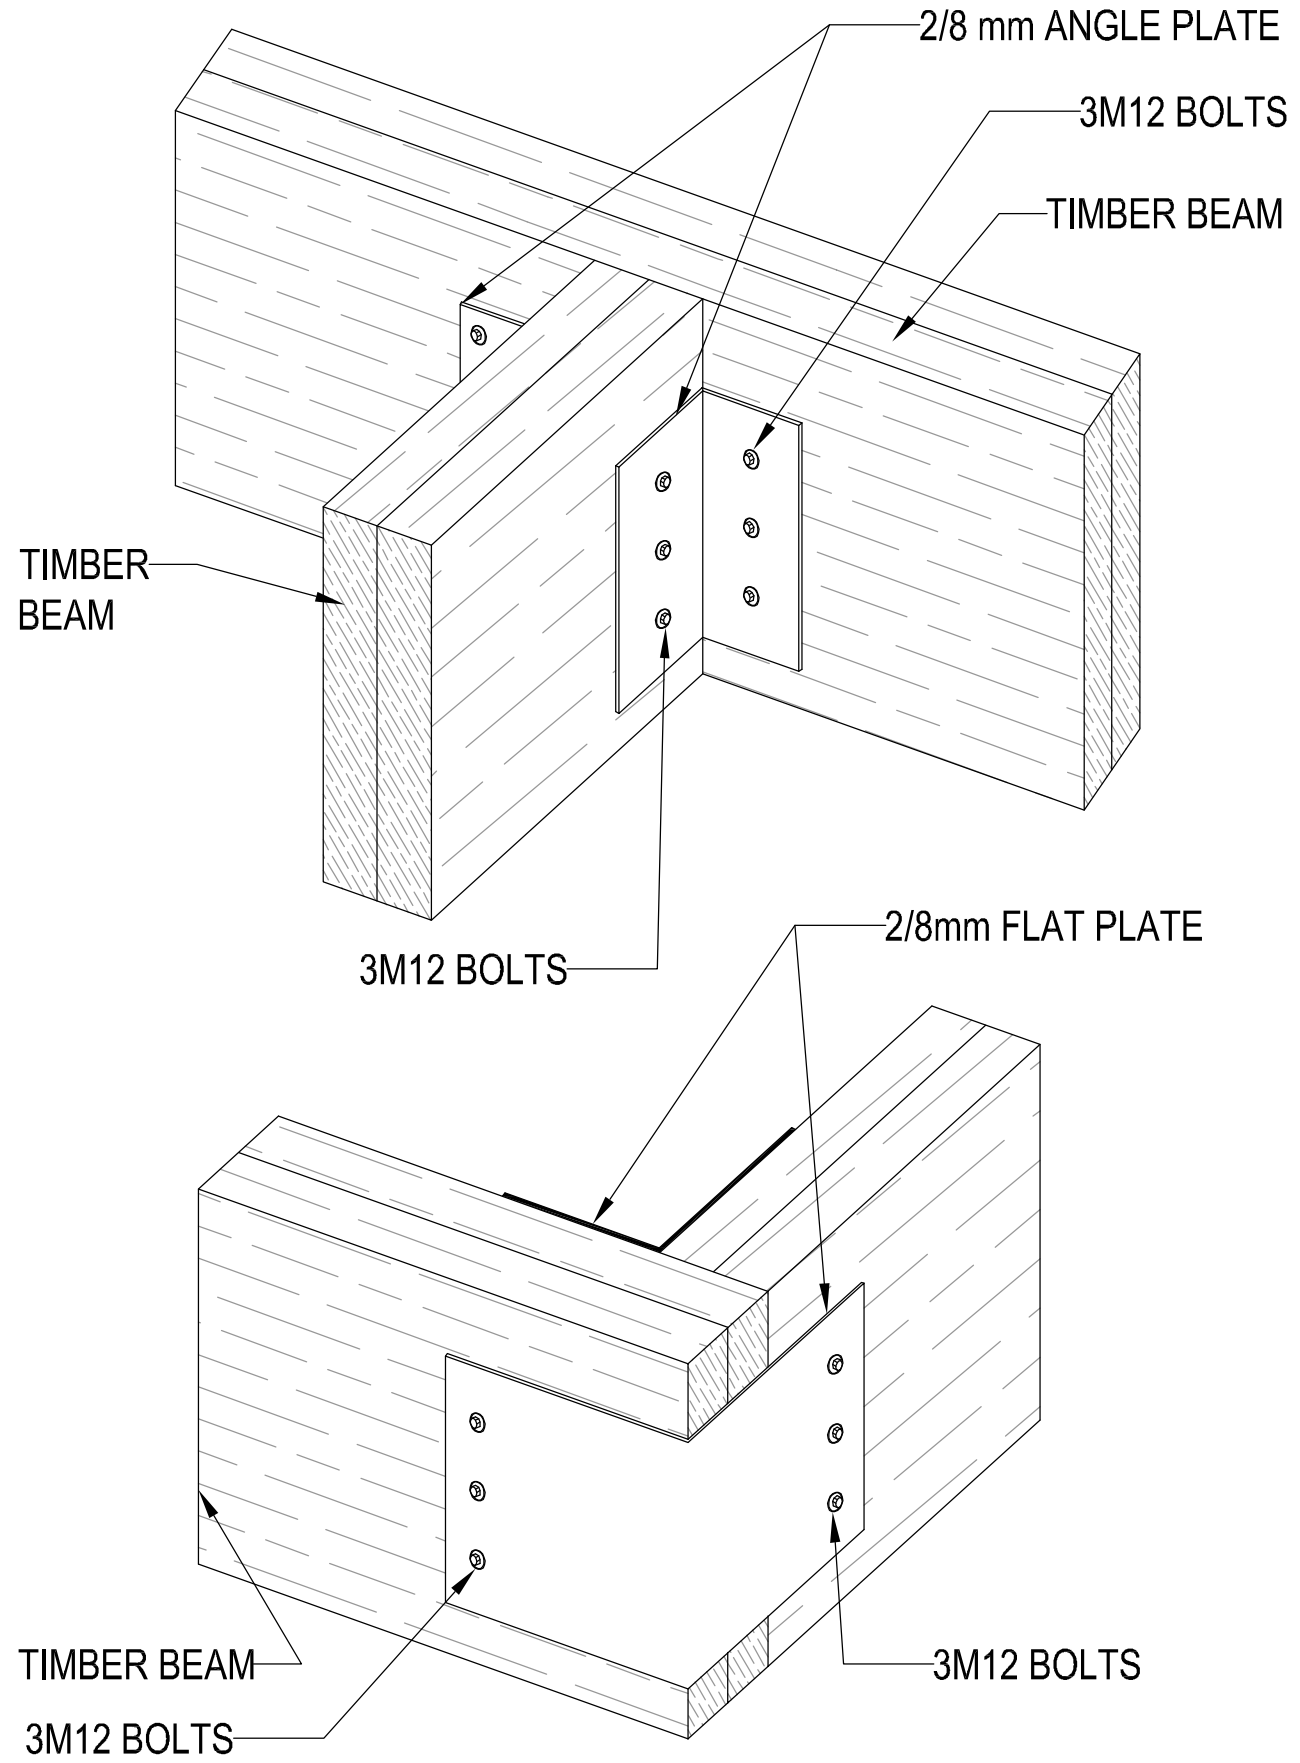

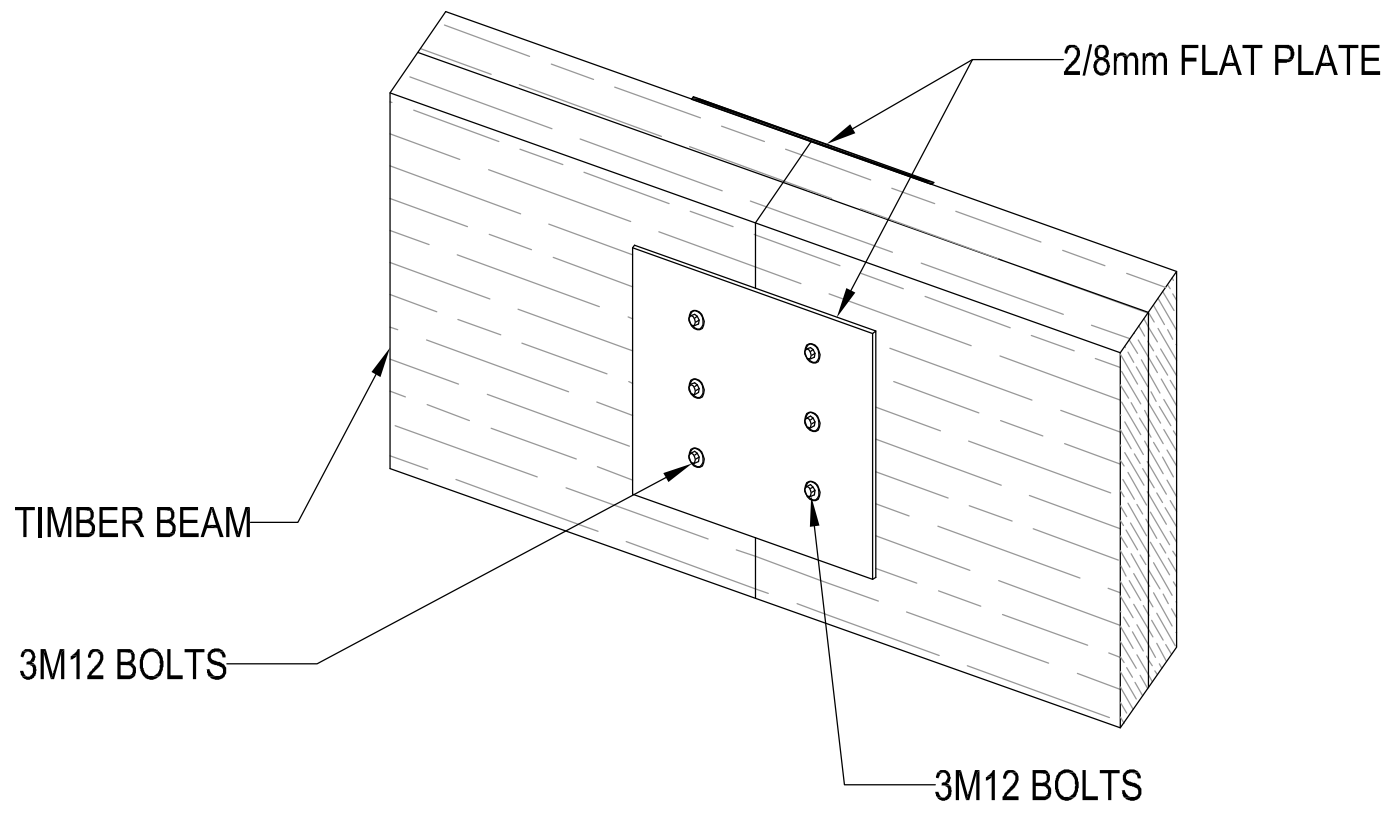

TIMBER BEAM CONNECTION DETAILS
1:20

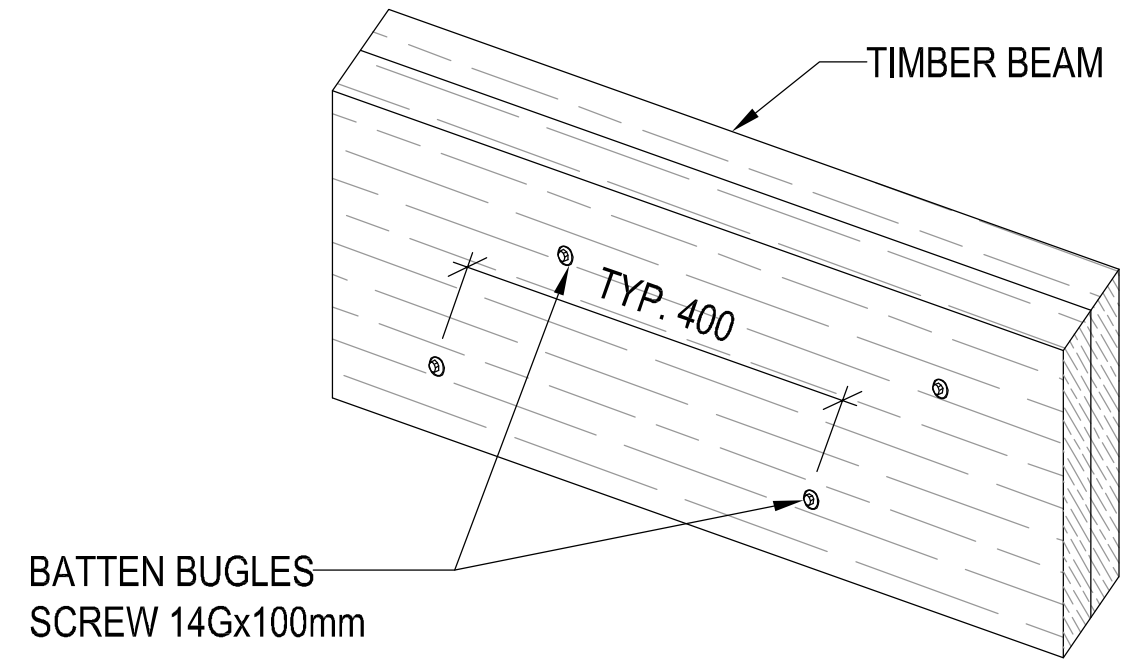

DOUBLE TIMBER BEAM DETAILS
1:20

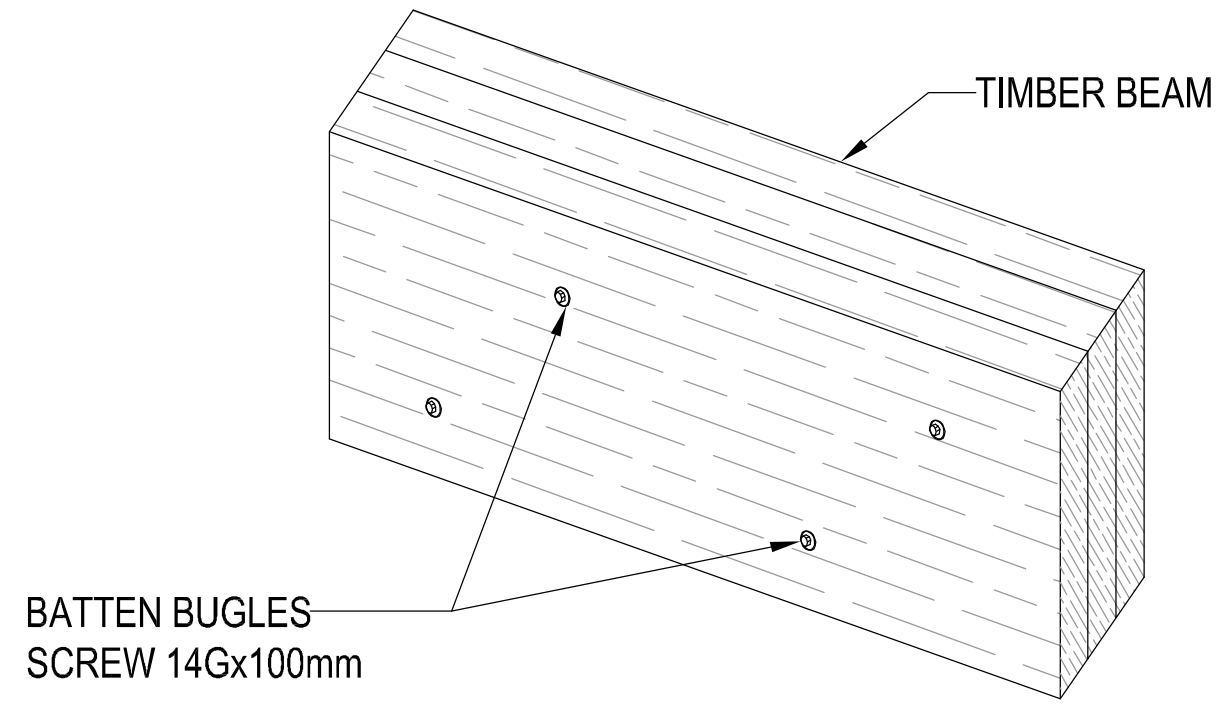

TRIPLE TIMBER BEAM DETAILS
1:20

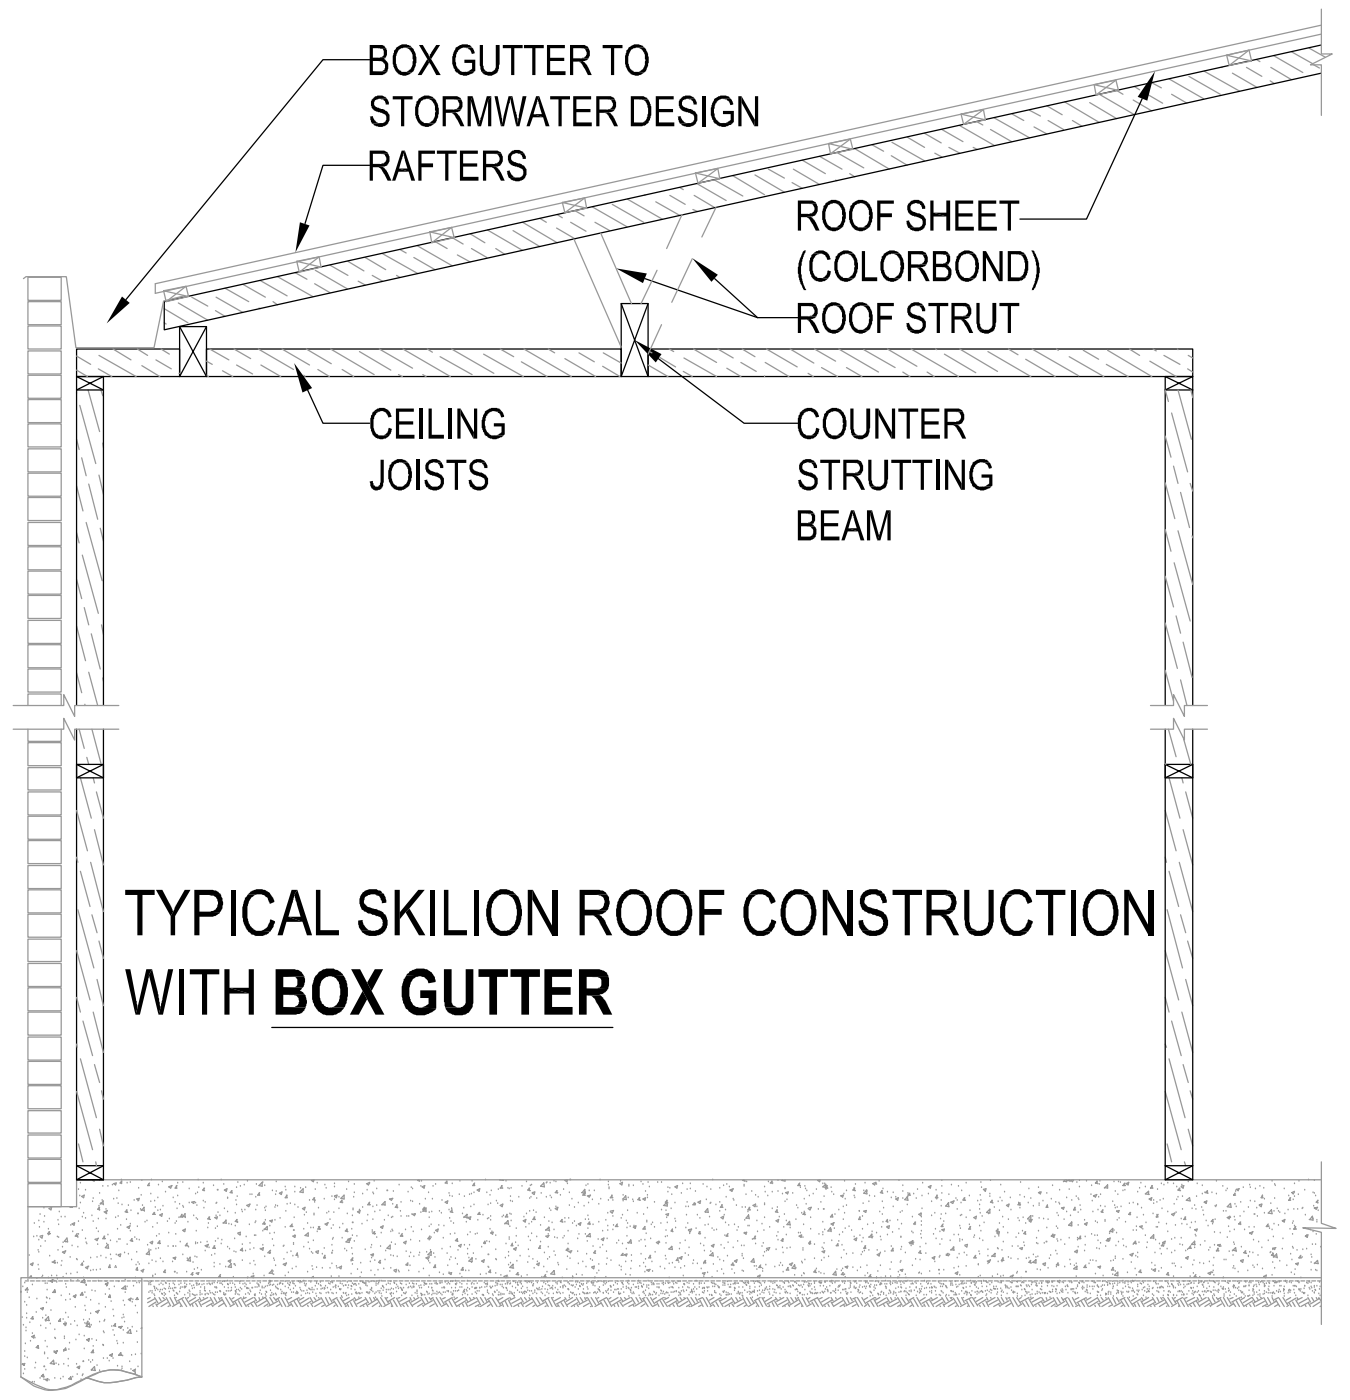

TYPICAL SKILION ROOF CONSTRUCTION WITH **BOX GUTTER**

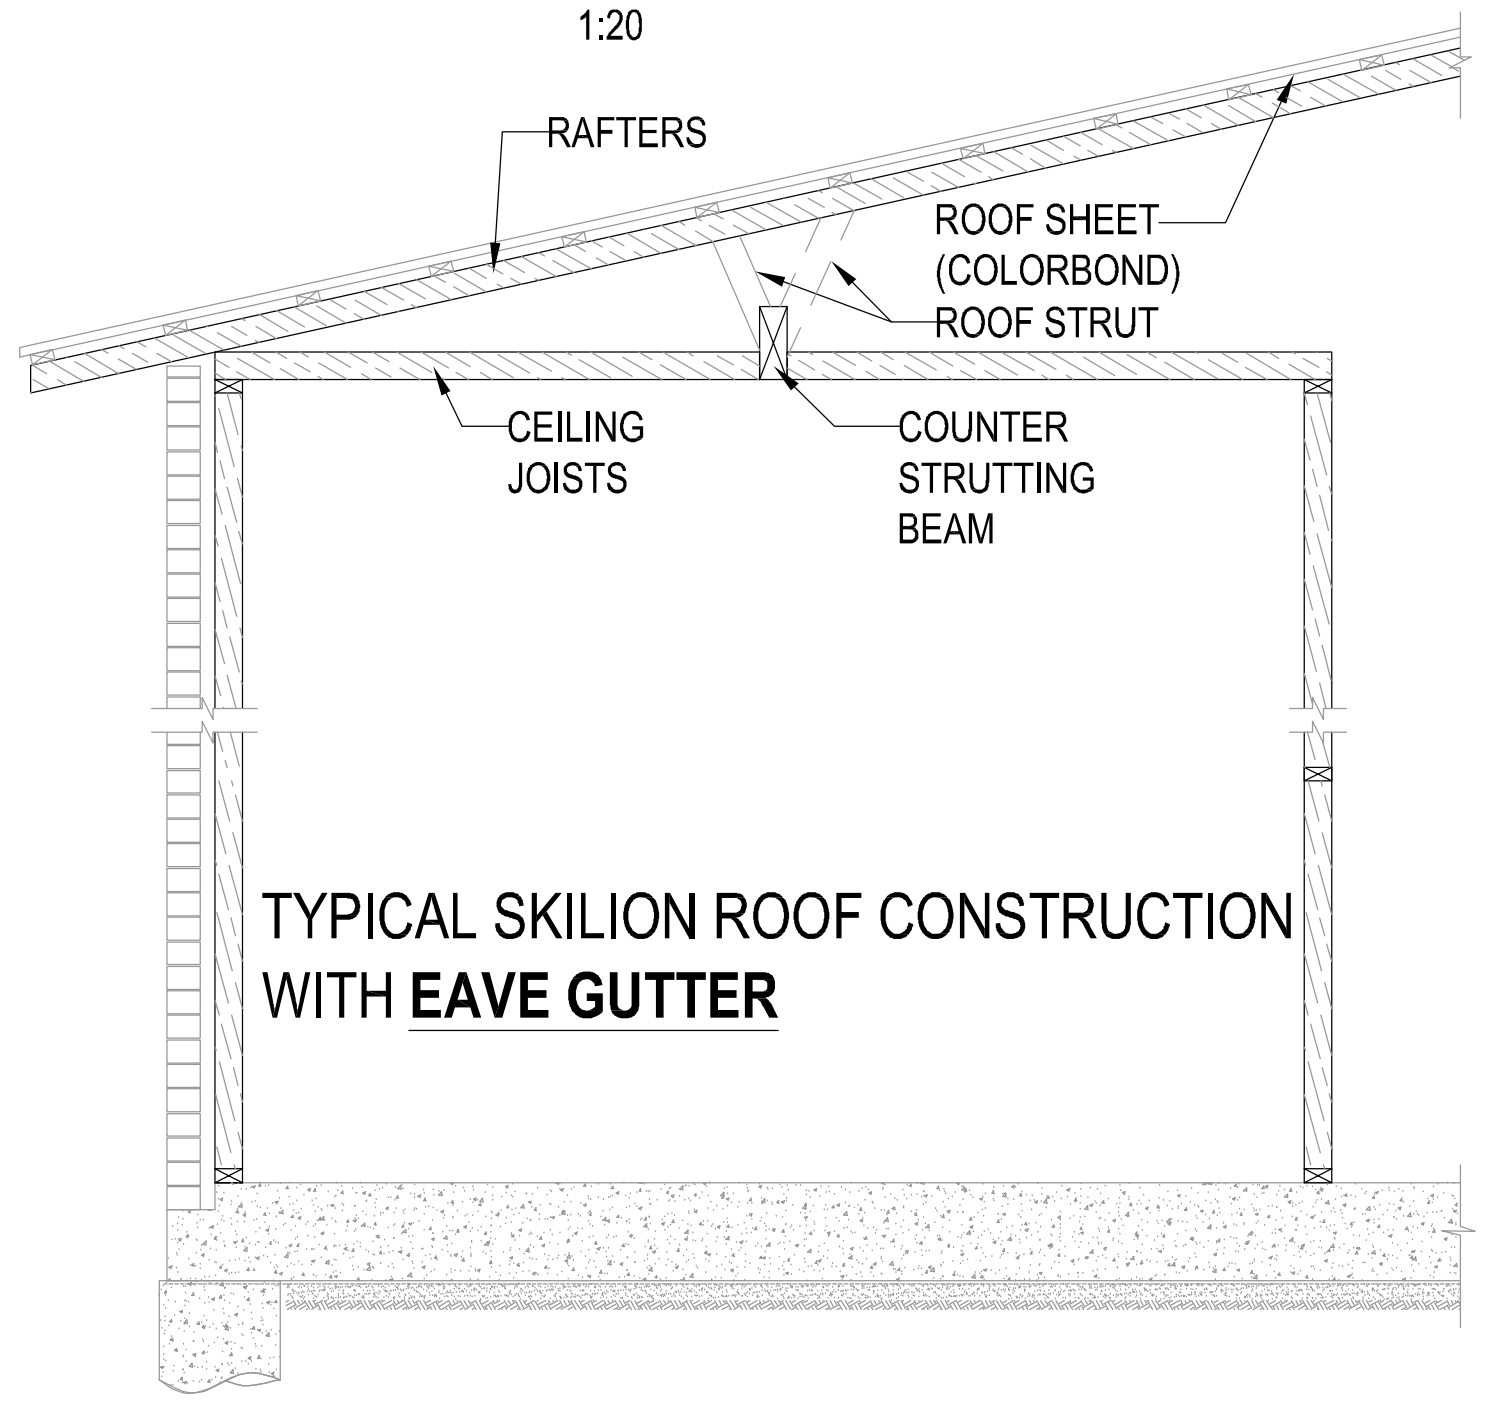

TYPICAL SKILION ROOF CONSTRUCTION WITH **EAVE GUTTER**

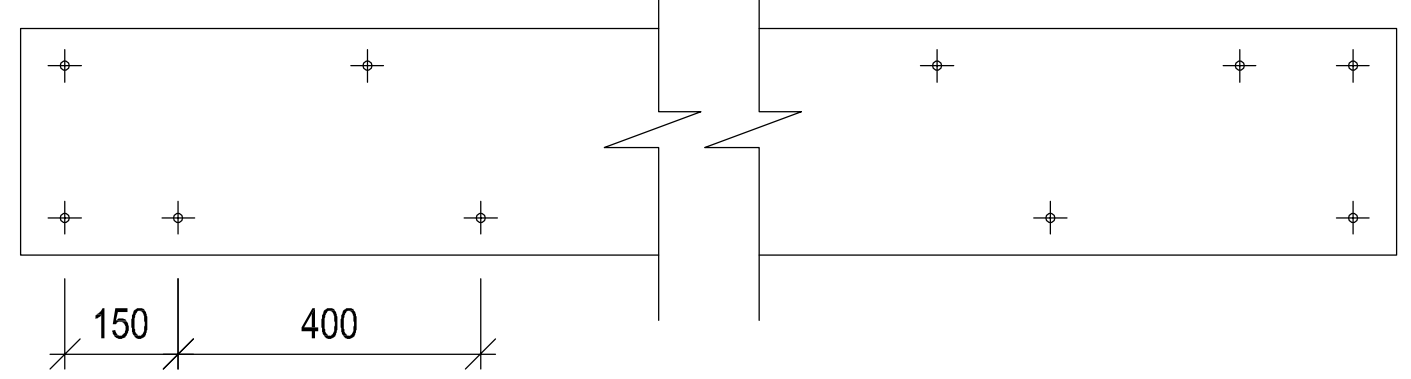

BEAM LAMINATING DETAIL BOLT HOLES PATTERN
1:20

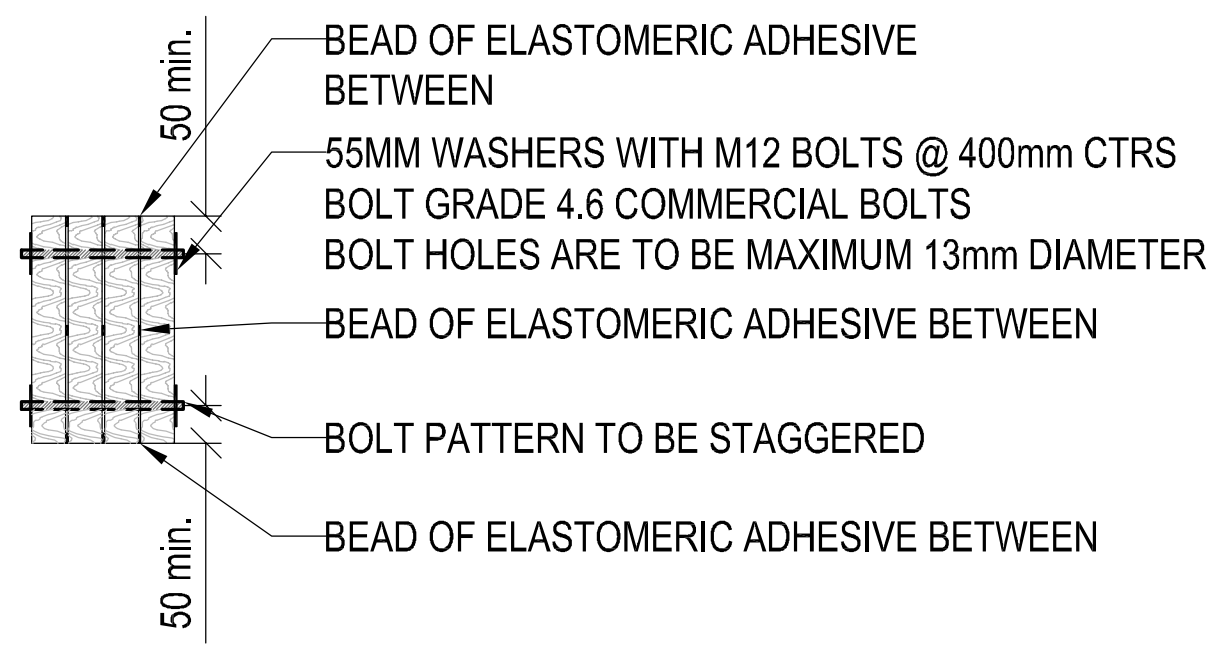

BEAM LAMINATING DETAIL SECTION VIEW
1:20

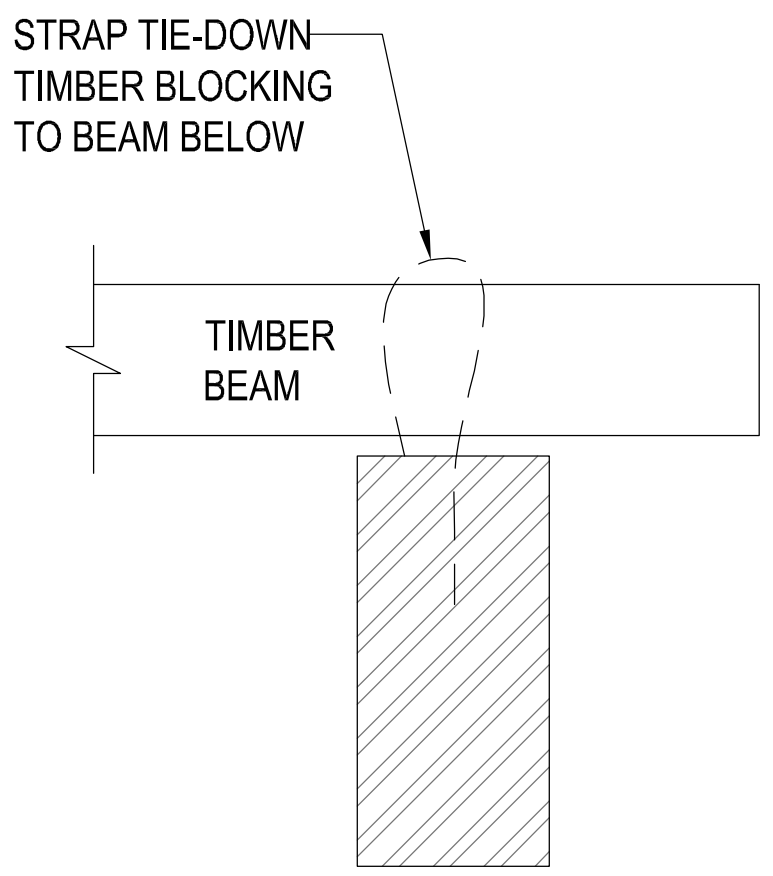

TIE DOWN STRAP
1:20

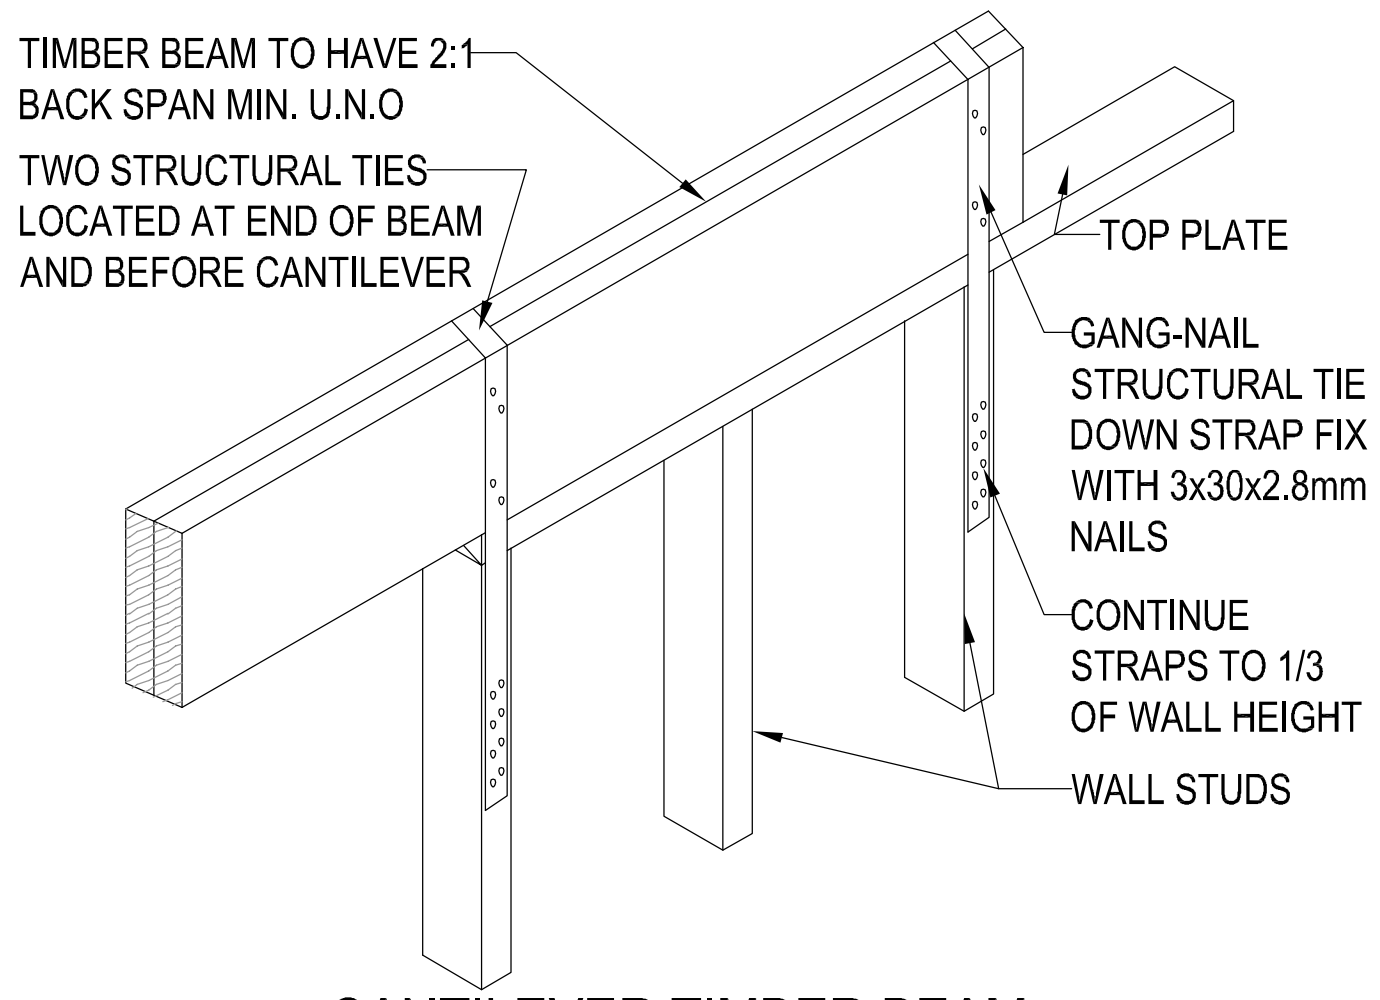

CANTILEVER TIMBER BEAM TO STUD WALL CONNECTION
NTS

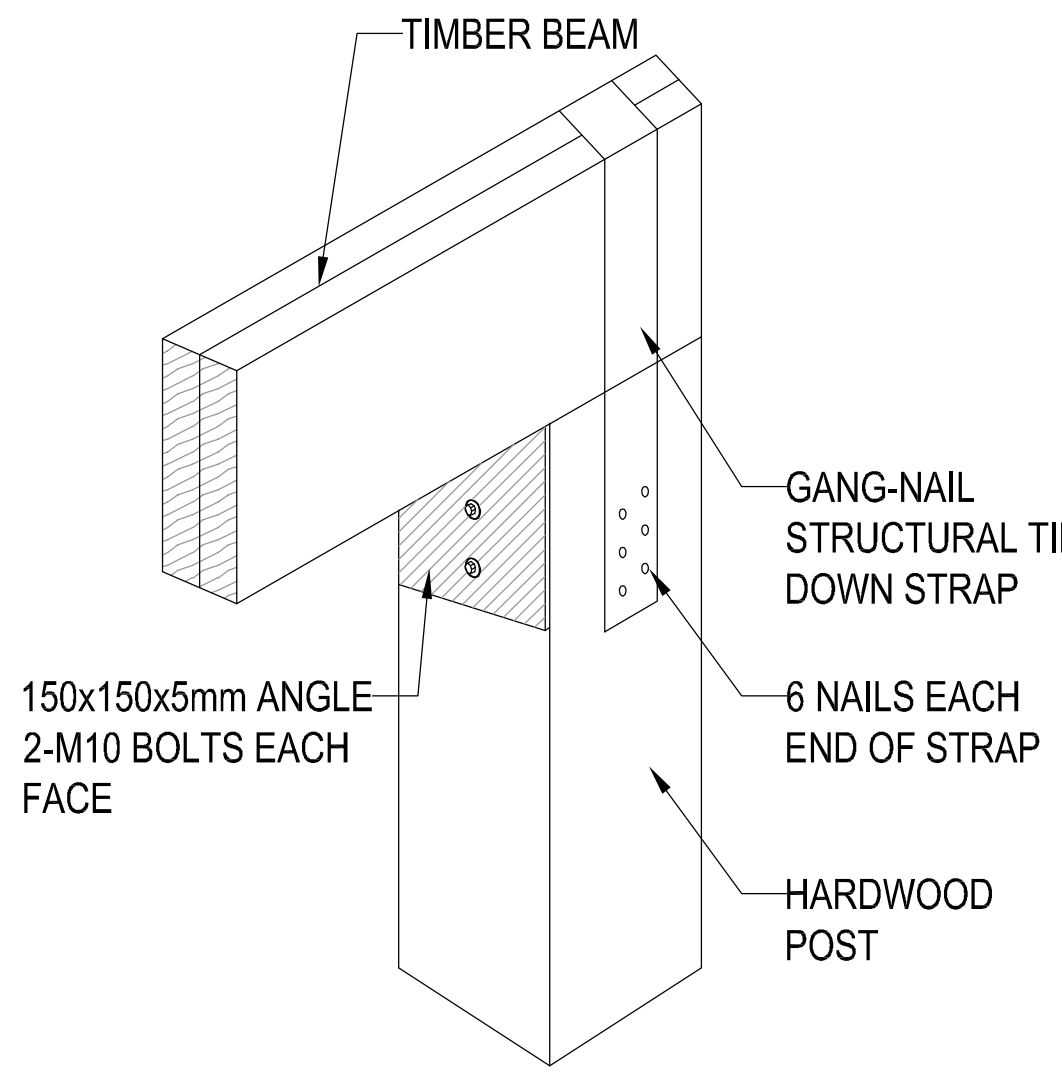

TIMBER BEAM TO POST CONNECTION DETAIL
NTS

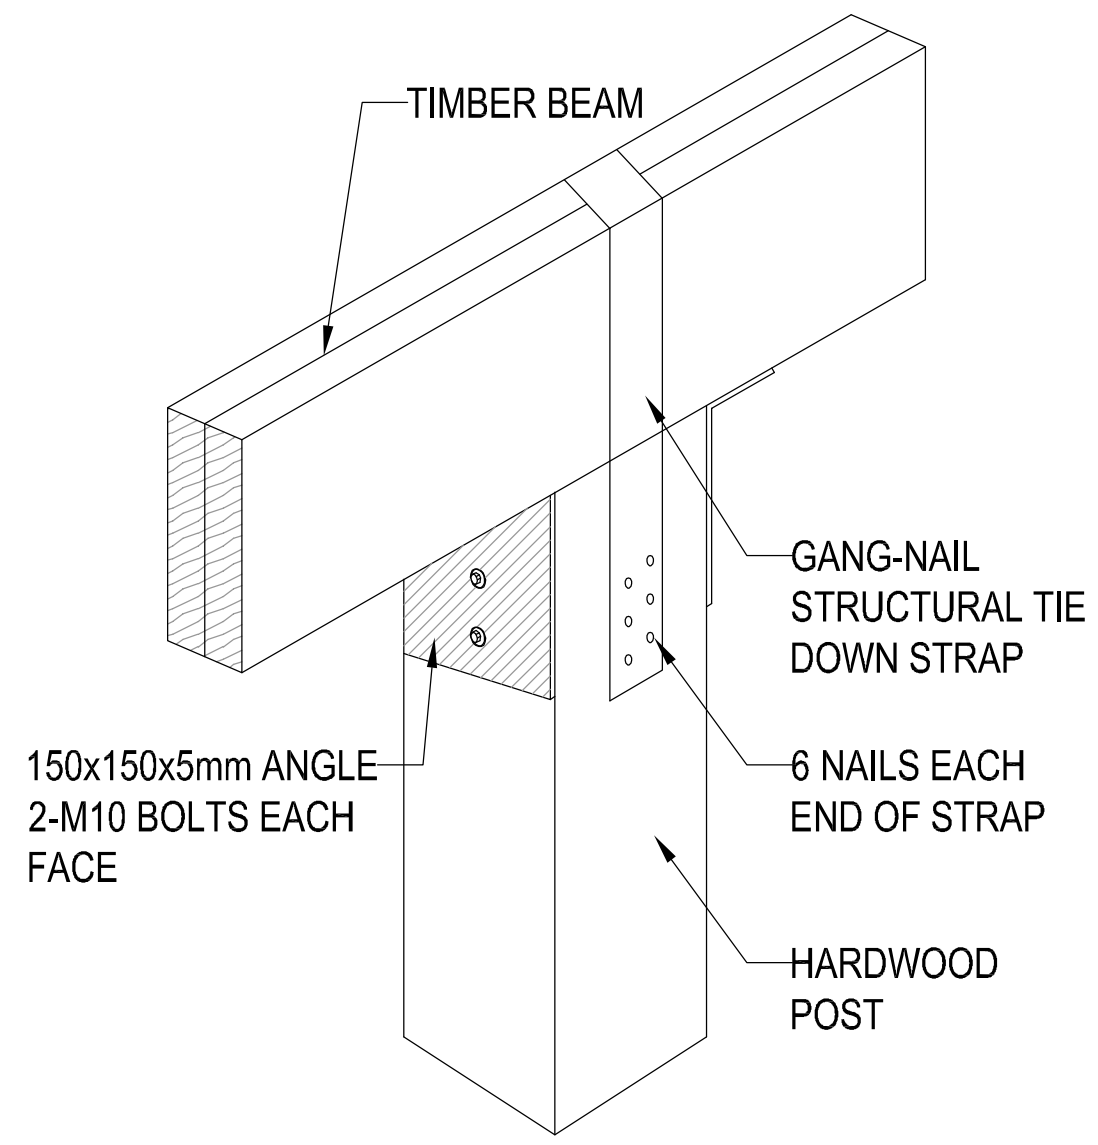

TIMBER BEAM TO POST CONNECTION DETAIL
NTS

HCT ENGINEERING

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:
PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:
BEAM & POST TYPICAL DETAIL SH.2

SHEET A3	DRG No.	HCT - 2898 - ST202	APP: FN

ISSUE	AMENDEMENT	BY	DATE
....	....	....	....
....	....	....	....
....	....	....	....
....	....	....	....
....	....	....	....
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

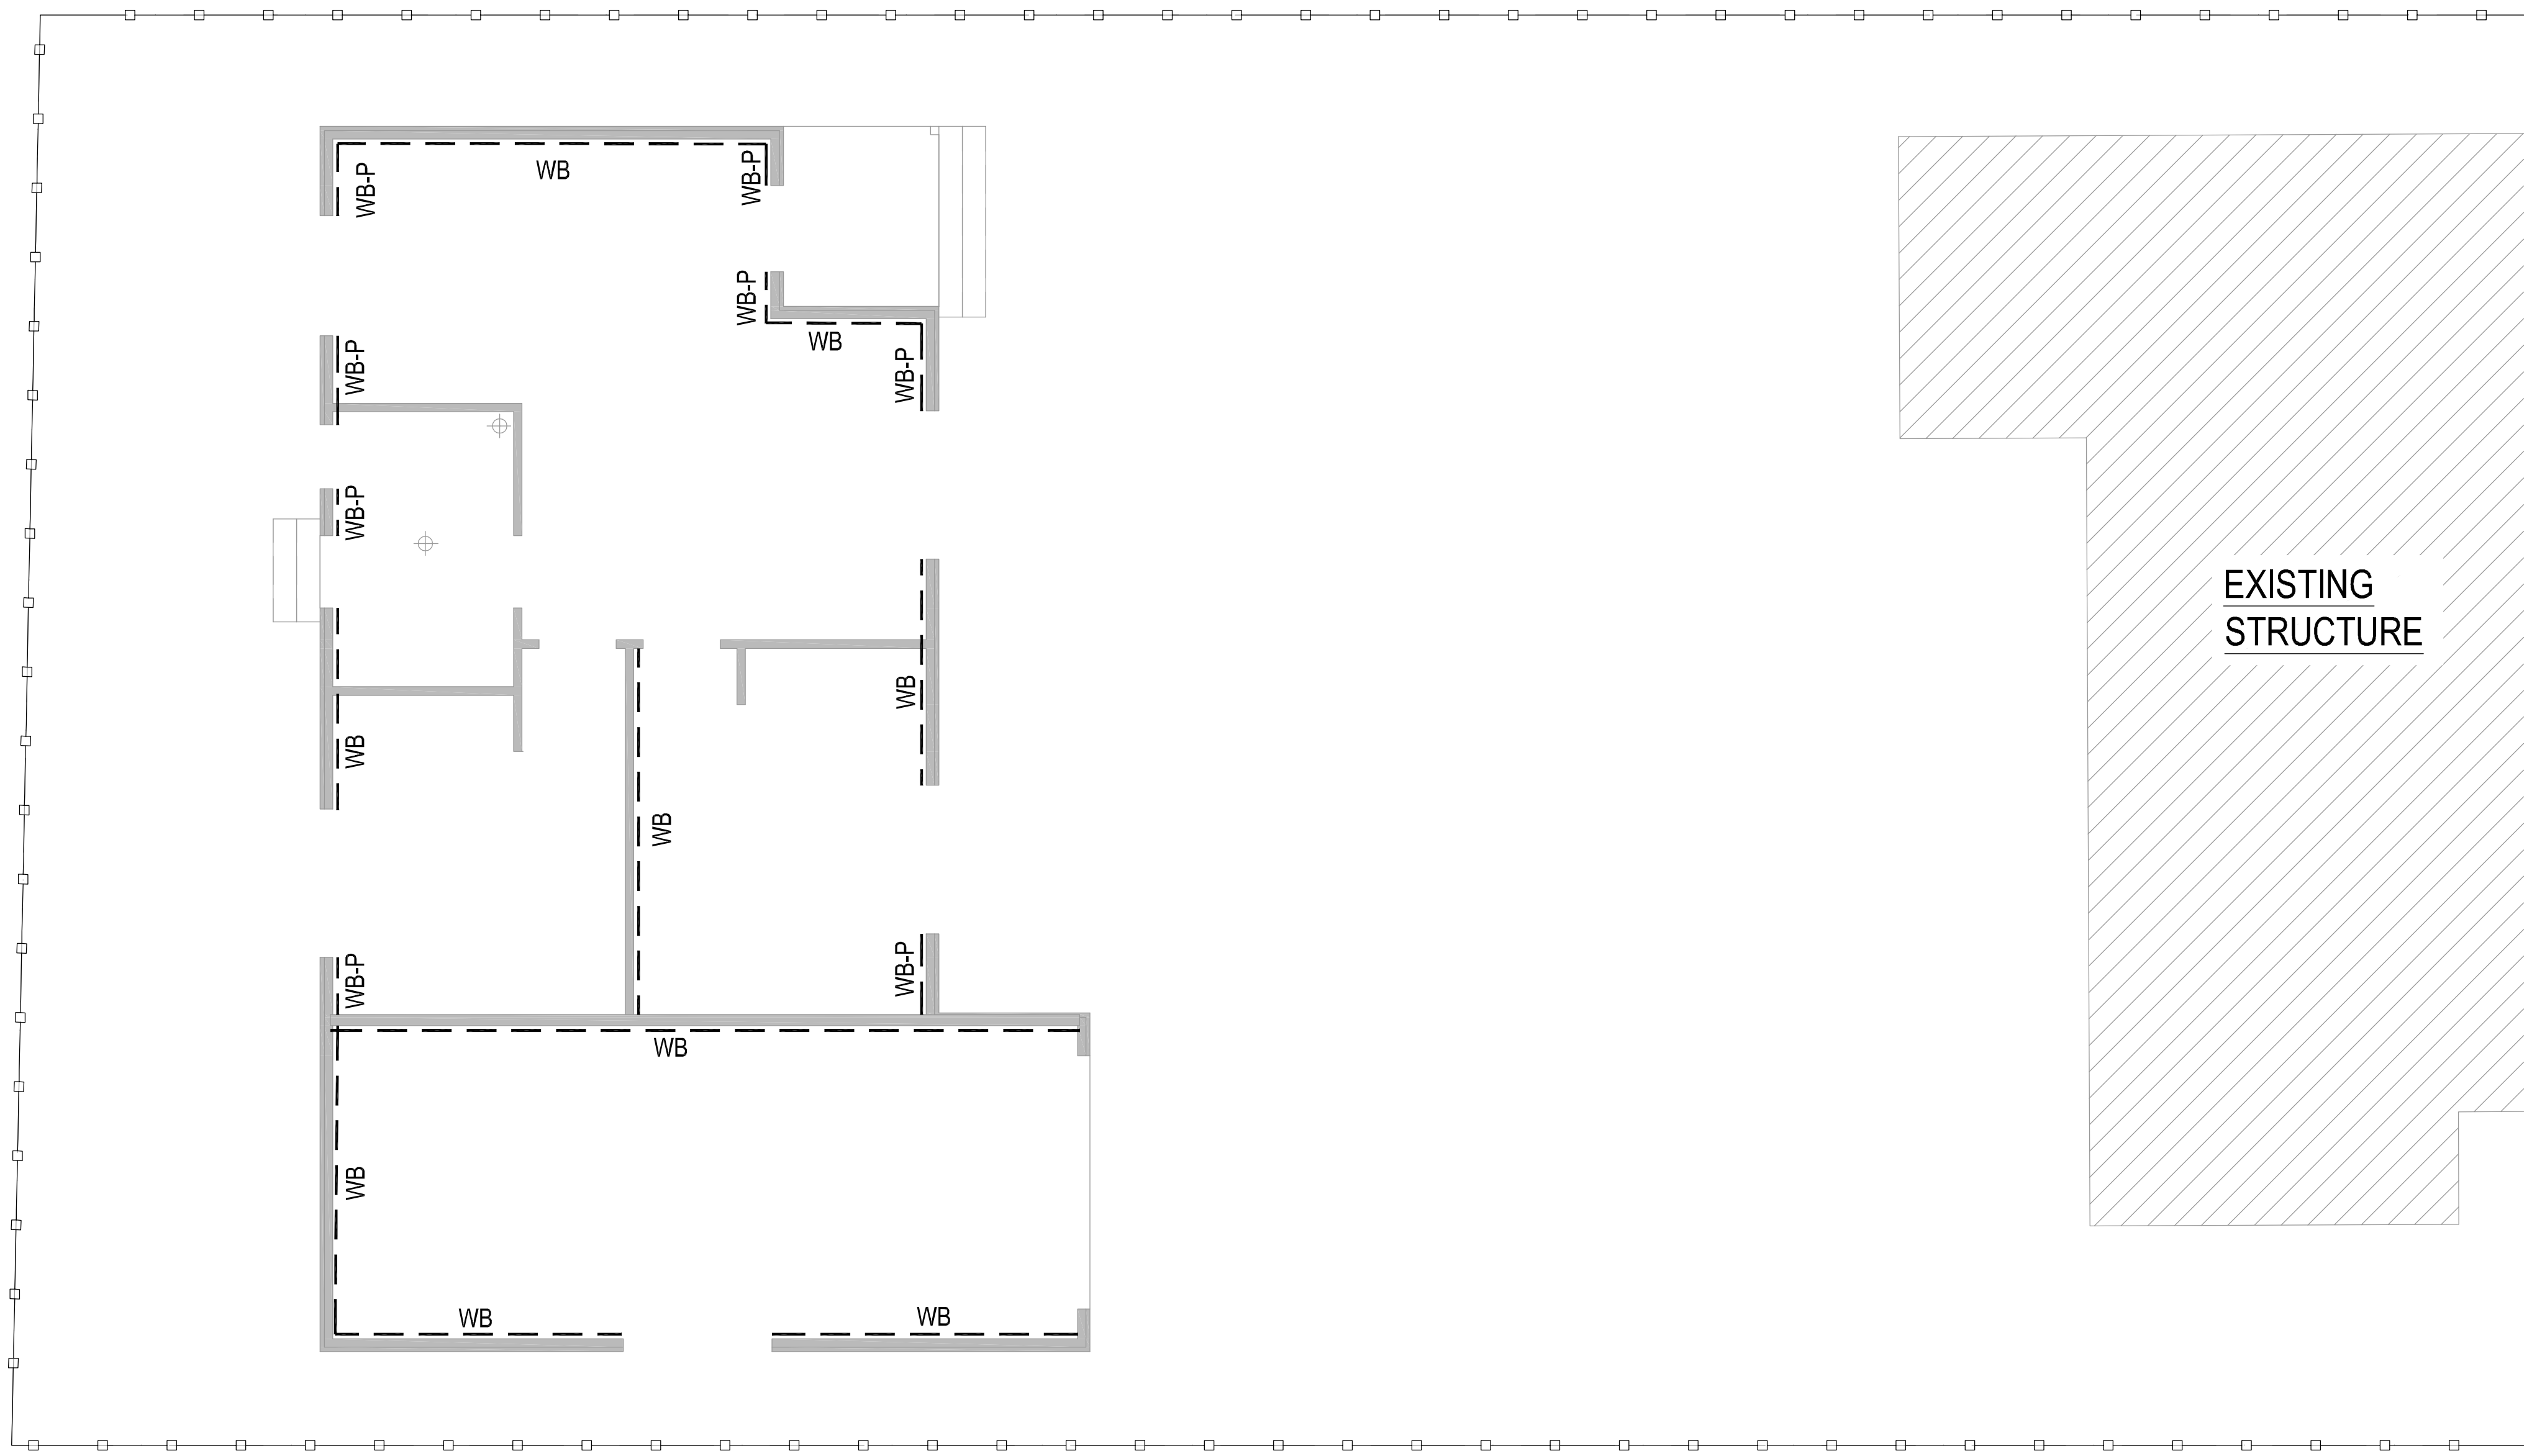

GROUND FLOOR WALL BRACING

1:100

HCT ENGINEERING Pty Ltd

STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:

PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:

GROUND FLOOR BRACING PLAN

SHEET A3	DRG No.	HCT - 2898 - ST300	APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026

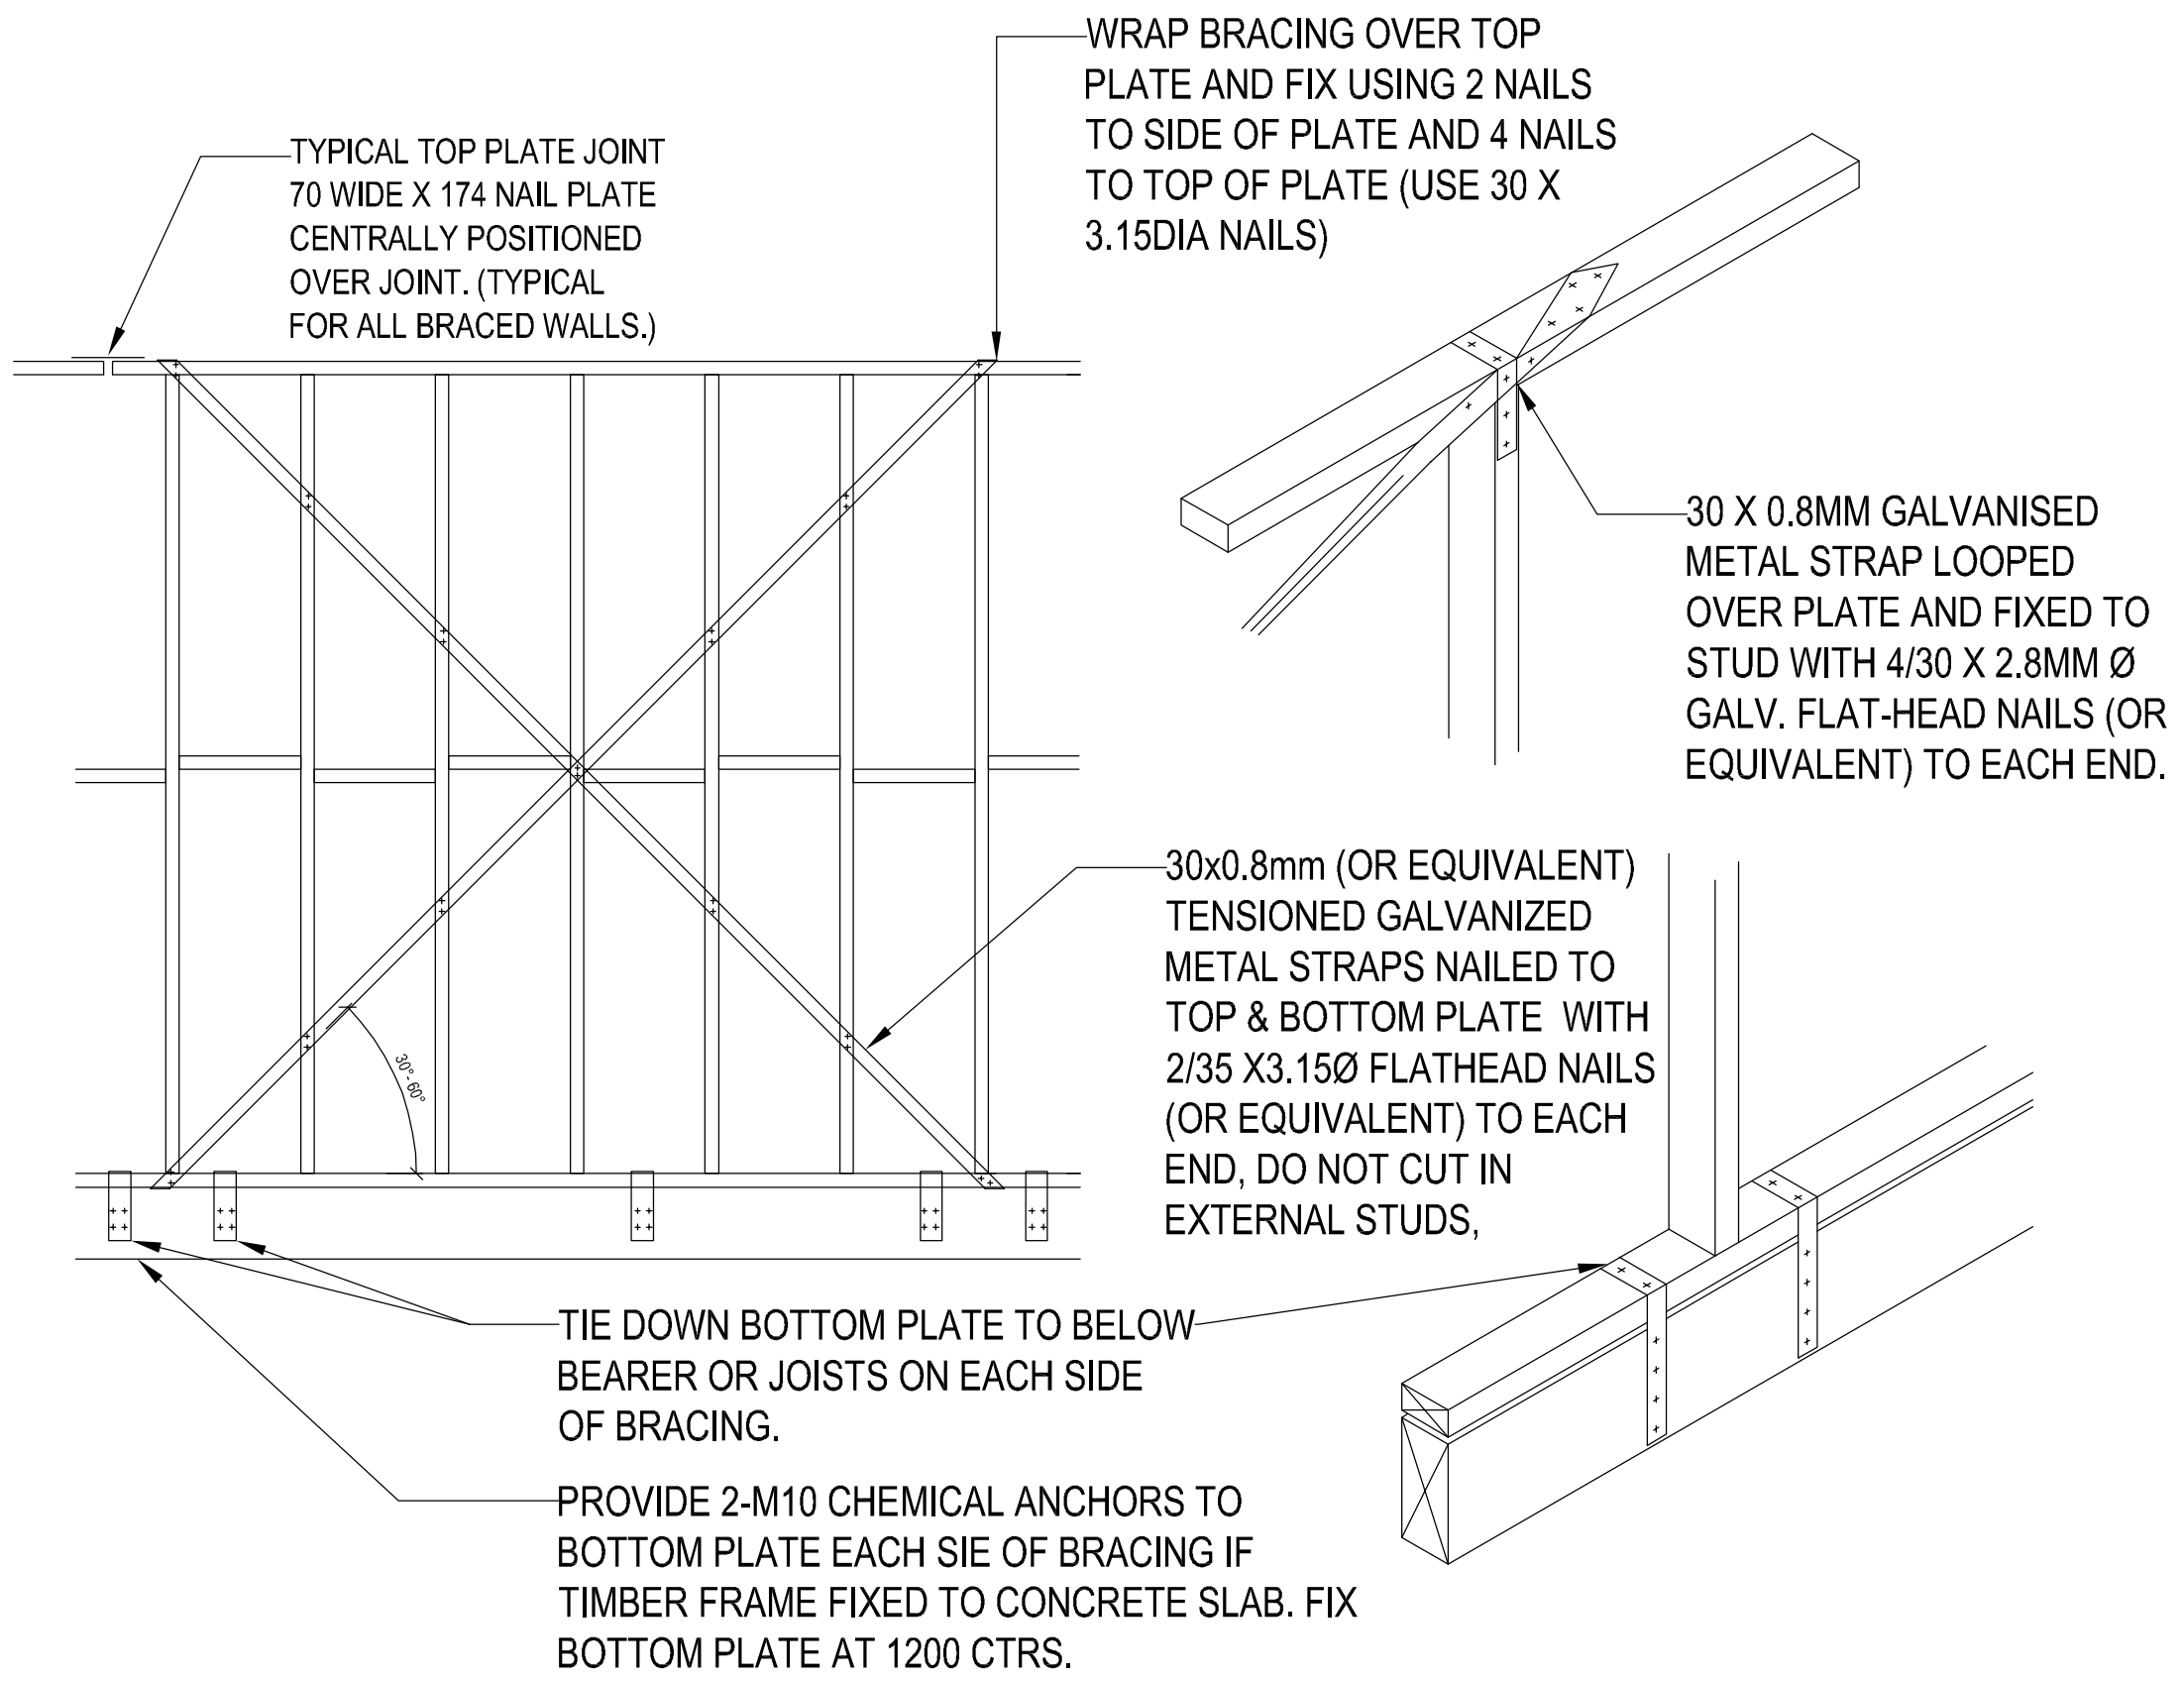

TYPICAL WALL BRACING DETAIL - 'WB'

1:50

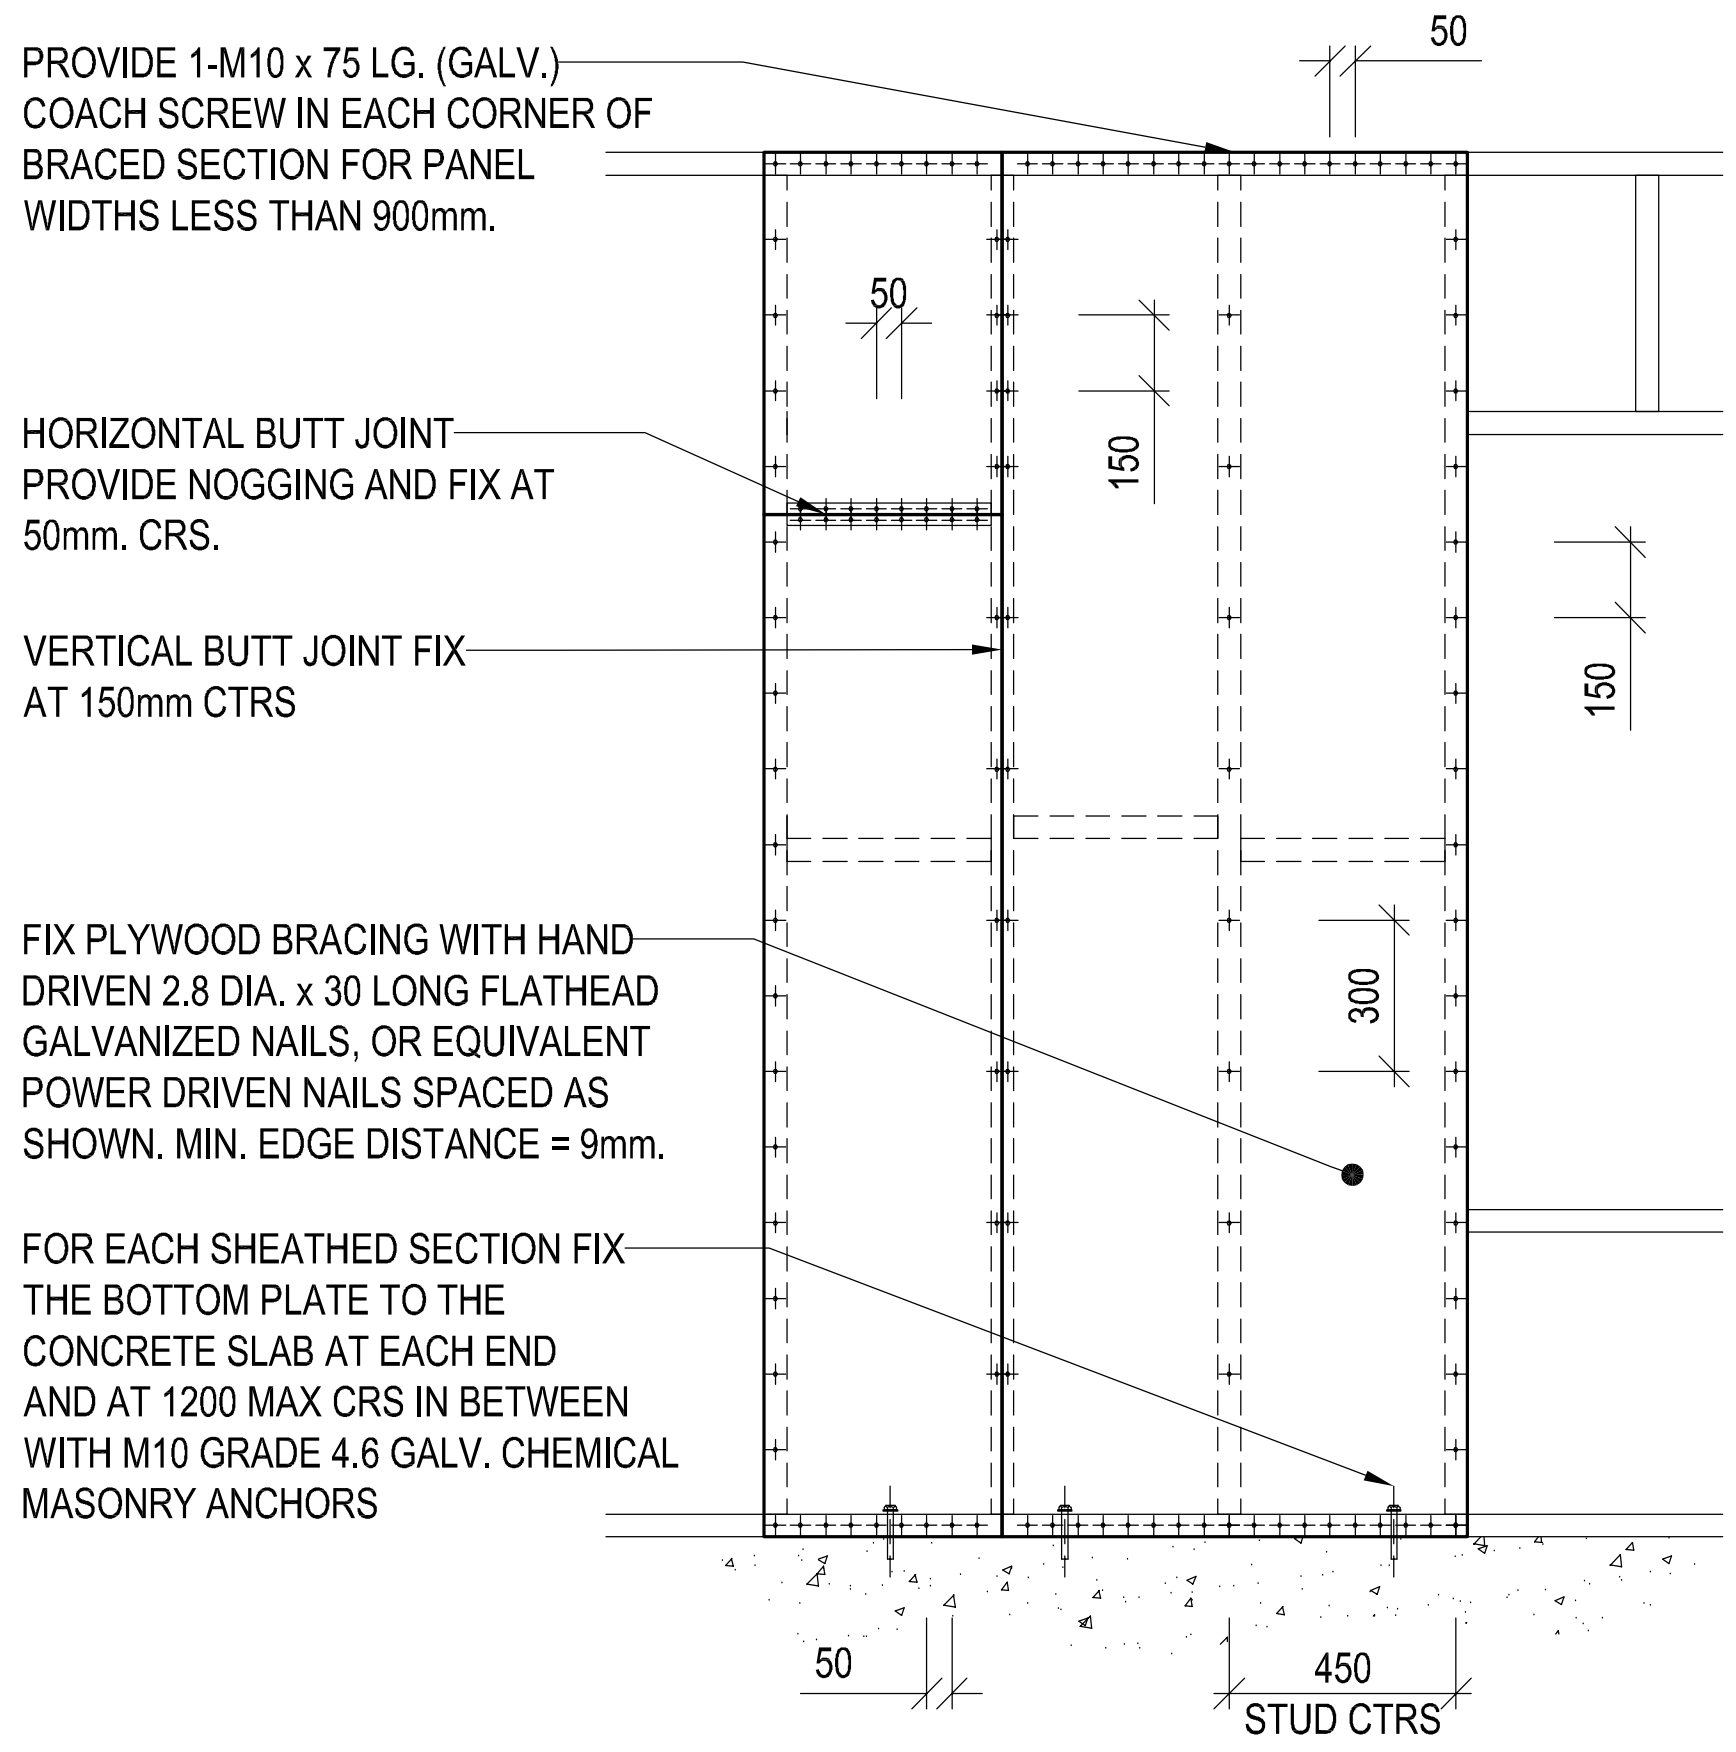

TYPICAL PLYWOOD WALL BRACING TO CONCRETE SLAB DETAIL - 'WB-P'

1:30

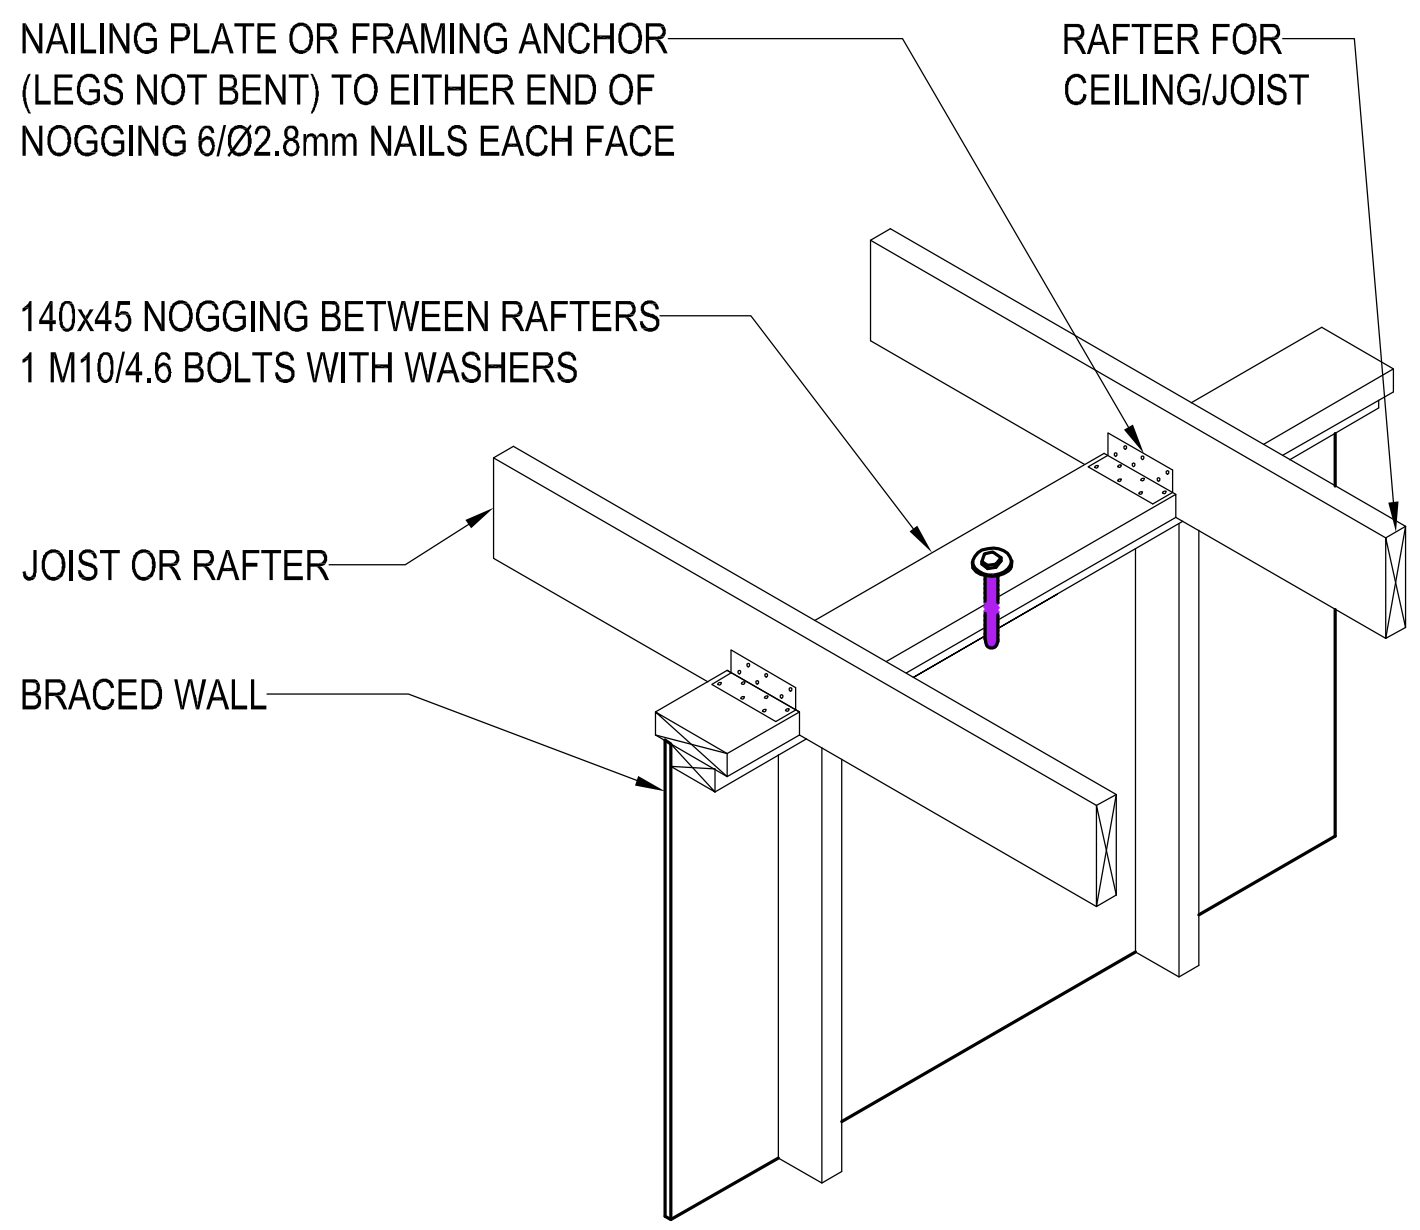

TYPICAL JOIST OR RAFTER PARALLEL TO BRACING WALL CONNECTION

NTS

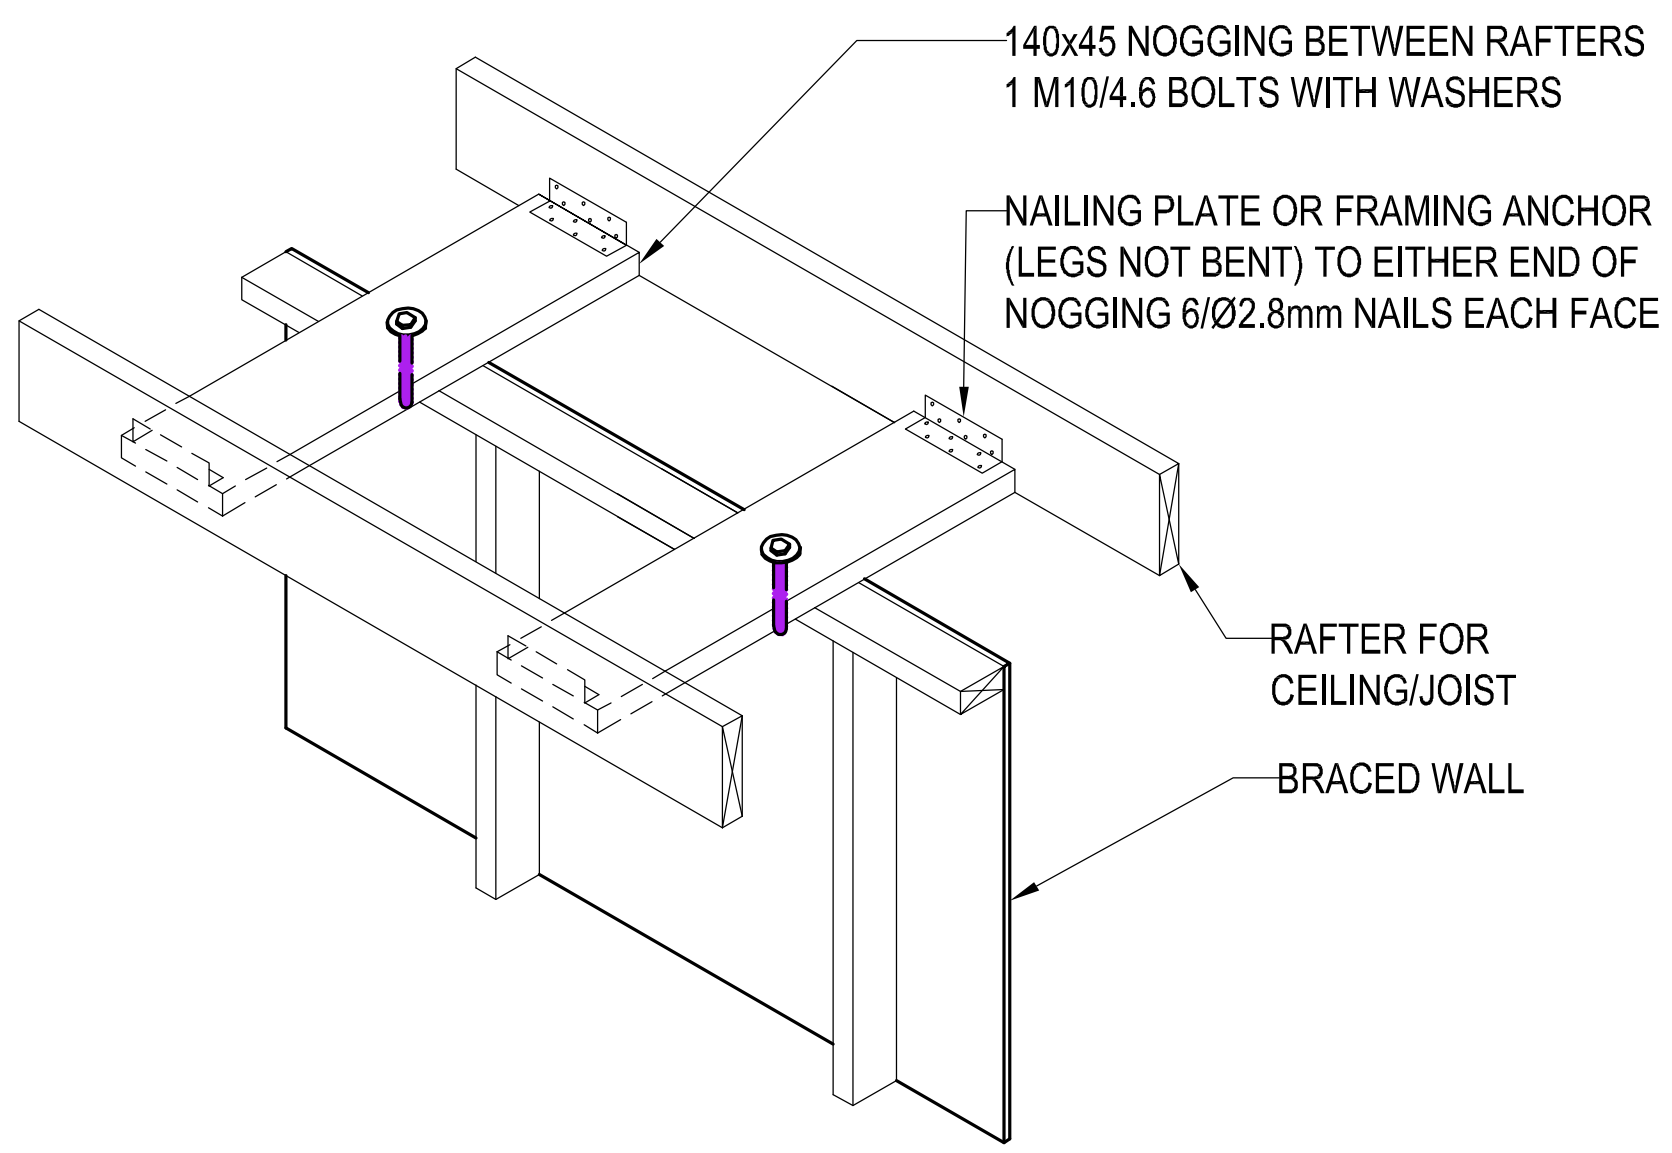

TYPICAL JOIST OR RAFTER PERPENDICULAR TO BRACING WALL CONNECTION

NTS

HCT ENGINEERING

HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

PROJECT:
PROPOSED SECONDARY DWELLING
WITH ATTACHED GARAGE
NO.8 IONA STREET, BLACKTOWN, NSW 2148

DRG. TITLE:
TYPICAL BRACING DETAIL

SHEET A3 | DRG No. | HCT - 2898 - ST301 | APP: FN

ISSUE	AMENDEMENT	BY	DATE
B	ISSUED FOR CDC	PD	21.07.2026
A	ISSUED FOR CDC	PD	10.07.2026