

PROPOSED RESIDENCE

LOT 4 NO. 100 MILKY WAY, CAMPBELLTOWN

DWG No.	DESCRIPTION
S00	COVER SHEET
S01	GENERAL NOTES
S02	GROUND FLOOR SLAB PLAN
S03	WAFFLE SLAB SCHEDULE & LEGEND
S04	FOOTING DETAILS - SHEET 1
S05	FOOTING DETAILS - SHEET 2
S06	FOOTING DETAILS - SHEET 3
S07	FOOTING DETAILS - SHEET 4
S08	FOOTING DETAILS - SHEET 5
S09	FOOTING DETAILS - SHEET 6
S10	FOOTING DETAILS - SHEET 7
S11	FIRST FLOOR & LOWER ROOF PLAN
S12	UPPER ROOF PLAN
S13	FRAMING DETAILS - SHEET 1
S14	FRAMING DETAILS - SHEET 2
S15	FRAMING DETAILS - SHEET 3
S16	FRAMING DETAILS - SHEET 4
S17	FRAMING DETAILS - SHEET 5
S18	FRAMING DETAILS - SHEET 6
S19	ARTICULATION JOINT ELEVATIONS
S20	ARTICULATION JOINT DETAILS - SHEET 1
S21	GROUND FLOOR BRACING PLAN
S22	FIRST FLOOR BRACING PLAN
S23	BRACING DETAILS - SHEET 1
S24	BRACING DETAILS - SHEET 2
S25	BRACING DETAILS - SHEET 3
S26	BRACING DETAILS - SHEET 4

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE			
						DRAWING COVER SHEET			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW		260362	ENGINEER: E.I.	DRAWN: Y.Z	REV
03	CONSTRUCTION ISSUE	20.07.26					SHEET NO.	NO. OF SHEETS	04
02	CONSTRUCTION ISSUE	13.07.26				S00	27		
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

GENERAL NOTES

GENERAL

- G1. THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANT'S DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ANY DISCREPANCY SHALL BE REFERRED TO THE ENGINEER OR ARCHITECT BEFORE PROCEEDING WITH THE WORK.
- G2. ALL DIMENSIONS ARE TO BE OBTAINED FROM THE ARCHITECT'S DRAWINGS OR FROM SITE. ENGINEER'S DRAWINGS MUST NOT BE SCALED.
- G3. DURING CONSTRUCTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE STRUCTURE IN A STABLE CONDITION AND ENSURING NO PART SHALL BE OVERSTRESSED UNDER CONSTRUCTION ACTIVITIES.
- G4. MATERIAL AND WORKMANSHIP ARE TO BE IN ACCORDANCE WITH THE RELEVANT SAA CODES EXCEPT WHERE VARIED BY THE PROJECT SPECIFICATION.
- G5. THE APPROVAL OF A SUBSTITUTION BY THE ENGINEER IS NOT AN AUTHORISATION FOR AN EXTRA. ANY EXTRA INVOLVED MUST BE TAKEN UP WITH THE ARCHITECT BEFORE WORK COMMENCES.
- G6. THE STRUCTURAL WORK SHOWN ON THESE DRAWINGS HAS BEEN DESIGNED FOR THE FOLLOWING LIVE LOADS:-

AREA	LIVE LOAD
FLOOR	1.5 kPa
ROOF	0.25 kPa 'OR' (1.8/A + 0.12) WHICHEVER IS GREATER
BALCONY (IF APPLICABLE)	2.0 kPa
GARAGE	2.5 kPa

- G7. FOUNDATION MATERIAL TO BE APPROVED BEFORE POURING CONCRETE FOR A SAFE BEARING CAPACITY OF: 50kPa.....BIAX AND WAFFLE SLAB
100kPa.....STRIP FOOTING

STRUCTURAL STEELWORK

- S1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS 4100-2020.
- S2. WELDING SHALL BE PERFORMED BY AN EXPERIENCED OPERATOR IN ACCORDANCE WITH AS 1554.1-2014.
- S3. HIGH STRENGTH BOLTING SHALL BE IN ACCORDANCE WITH AS 4100.
- S4. TWO COPIES OF THE SHOP DETAIL DRAWINGS ARE TO BE SUBMITTED TO THE ENGINEERS AND APPROVAL OF SAME OBTAINED BEFORE COMMENCING FABRICATION. APPROVAL WILL NOT COVER DIMENSIONS OR LAYOUT.
- S5. THE CONTRACTOR SHALL PROVIDE AND LEAVE IN PLACE UNTIL PERMANENT BRACING ELEMENTS ARE CONSTRUCTED SUCH TEMPORARY BRACING AS IS NECESSARY TO STABILISE THE STRUCTURE DURING ERECTION.
- S6. CAMBER TO STRUCTURAL STEEL ROOF BEAMS, TRUSSES, PORTALS, ETC.,TO BE 2mm FOR EVERY 1m OR SPAN (U.N.O.).
- S7. ALL CLEAT AND DRILLING FOR FIXING OF TIMBER MEMBERS, ETC., TO BE PROVIDED BY FABRICATOR.
- S8. EXCEPT WHERE OTHERWISE SHOWN, CONNECTIONS SHALL HAVE 6mm CONTINUOUS FILLET WELDS, 2-M16 8.8/S BOLTS IN 1.5mm CLEARANCE HOLES AND 10mm THICK CLEAT PLATE.
- S9. CONCRETE ENCASED STEELWORK SHALL BE WRAPPED WITH SLAB FABRIC, (U.N.O.).
- S10. STEELWORK SHALL BE THOROUGHLY WIRE BRUSHED AND GIVEN ONE SHOP COAT OF APPROVED PRIMER EXCEPT THAT NONE SHALL BE APPLIED AT CONTACT SURFACES WHERE H.S. BOLTS USED.
- S11. ALL STEEL BEAMS AND LINTELS ARE TO HAVE 100mm MIN. END BEARING UP TO 1.0m & 150mm MIN. END BEARING OVER 1.0m, (U.N.O.).
- S12. STEEL FRAMING MUST BE PROTECTED FROM CORROSION WHERE REQUIRED IN ACCORDANCE WITH N.C.C VOL 2 PART 3.4.4.4.

CONCRETE

- C1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS3600.
- C2. CONCRETE COVER TO ALL REINFORCEMENT (FINISHES NOT INCLUDED).
- | ELEMENT | FORMED AND SHELTERED | FORMED AND EXPOSED | NO FORM WORK |
|-----------------|----------------------|--------------------|--------------|
| SLABS AND WALLS | 20mm | 30mm | 65mm |
| BEAMS | 25mm | 40mm | 65mm |
| COLUMNS | 40mm | 50mm | 75mm |
| FOOTINGS | | 65mm | 75mm |
- C3. CONCRETE SIZES SHOWN DO NOT INCLUDE FINISH AND MUST NOT BE REDUCED OR HOLED IN ANY WAY WITHOUT THE ENGINEER APPROVAL.
- C4. DEPTHS OF BEAMS ARE GIVEN FIRST AND INCLUDE SLAB THICKNESS.
- C5. CONSTRUCTION JOINTS WHERE NOT SHOWN SHALL BE PROPERLY FORMED AND LOCATED TO THE APPROVAL OF THE ENGINEER.
- C6. REINFORCEMENT IS SHOWN DIAGRAMMATICALLY AND NOT NECESSARILY IN TRUE PROJECTION.
- C7. SPLICES IN REINFORCEMENT SHALL BE MADE ONLY IN POSITIONS SHOWN. WELDING OF REINFORCEMENT WILL NOT BE PERMITTED UNLESS SHOWN ON THE STRUCTURAL DRAWINGS.
- C8. REINFORCEMENT SYMBOLS:-
L LOW DUCTILITY BARS TO AS 4761
N NORMAL DUCTILITY BARS TO AS 4761
E SEISMIC (EARTHQUAKE) DUCTILITY BAR TO AS 4761
THE NUMBER FOLLOWING THE BAR SYMBOL IS THE NOMINAL BAR DIAMETER IN MILLIMETRES.
- C9. CAMBER TO BEAMS AND SLABS SHALL BE 2mm FOR EVERY 1m OF SPAN (U.N.O.).
- C10. ALL CONCRETE SHALL BE GRADE 20MPa - 100mm SLUMP (U.N.O.).
- C11. ALL REINFORCEMENT SHALL BE SUPPORTED IN ITS CORRECT POSITION SO AS NOT TO BE DISPLACED DURING CONCRETING ON APPROVED BAR CHAIRS AT 1.0m MAX CRS BOTH WAYS. WHERE REQUIRED PROVIDE SUPPORT BARS N16 AT 1.0M MAX CRS.
- C12. CONCRETE TO BE KEPT FREE OF SUPPORTING BRICKWORK BY TWO LAYERS OF A SUITABLE MEMBRANE (MALTHOID, ETC.), OR AS DIRECTED BY THE ENGINEER. VERTICAL FACES OF CONCRETE TO BE KEPT FREE BY 10mm THICKNESS OF BITUMINOUS CANITE.
- C13. WHERE WALLS ARE NON-LOAD BEARING AT EITHER HORIZONTAL OR VERTICAL FACES THEY SHALL BE SEPARATED FROM CONCRETE OR BRICKWORK BY 10mm THICK CANITE.
- C14. ALL REINFORCEMENT FOR ANY ONE POUR SHALL BE COMPLETELY PLACED AND TIED PRIOR TO INSPECTION BY THE ENGINEER OR ARCHITECT. NO CONCRETE SHALL BE POURED UNTIL REINFORCEMENT HAS BEEN INSPECTED AND APPROVED.
- C15. WHERE SLABS AND BEAMS ARE TO SUPPORT BRICKWORK OVER, FORMWORK AND PROPS MUST BE REMOVED BEFORE COMMENCEMENT OF BRICKWORK.
- C16. TRENCH MESH IN BEAMS TO BE LAID CONTINUOUSLY WITH EACH LAYER BEING LAPPED FOR ITS FULL WIDTH AT INTERSECTIONS AND FOR A MINIMUM OF 500mm AT SPLICES. THE TRENCH MESH SHALL BE OVERLAPPED BY THE WIDTH OF THE FABRIC AT T & L JUNCTIONS.
- C17. AS A GENERAL POLICY, INTRAX DO NOT RECOMMEND THE USE OF POLISHED CONCRETE. THE OWNER SHOULD BE MADE AWARE BY THE BUILDING DESIGNER AND BUILDER THAT CONCRETE IS A NATURAL MATERIAL AND THE POSSIBILITY OF SURFACE CRACK FORMATION MAY OCCUR AND CANNOT BE GUARANTEED EITHER IN THE SHORT OR LONG TERM, WE HIGHLY RECOMMEND CURING THE SLAB USING AN APPROVED CURING SPRAYED MEMBRANE.

BRICKWORK

- B1. THE UNCONFINED COMPRESSIVE STRENGTH OF A BRICK UNIT TO BE MIN. OF 15MPa AND COMPRESSIVE STRENGTH OF MASONRY TO BE A MIN. OF 5.4 MPa.
- B2. THE MORTAR MIX FOR BRICKWORK SHALL BE 1:1:6
- B3. FOR NON-LOAD BEARING WALLS SEE NOTE C13.
- B4. ARTICULATION (OR EXPANSION) JOINT SPACING MUST BE IN ACCORDANCE WITH AS 4773.1-2015, AS 4773.2-2015 & TECHNICAL NOTE 61 (AUG 2008) FOR ARTICULATED WALLING (U.N.O.).
- B5. ALL WALL TIES MUST BE GALVANISED.

STRUCTURAL TIMBER

- T1. ALL TIMBER FRAMING IS TO BE IN ACCORDANCE WITH AS 1684.2 RESIDENTIAL TIMBER FRAMED CONSTRUCTION.
- T2. ALL TIMBER STRESS GRADES NOMINATED SHALL BE IN ACCORDANCE WITH THE RELEVANT CODES AND MEANS THE STRUCTURAL QUALITY OF A TIMBER SECTION (REFER TO AS 1720).
- T3. TIMBER SHALL BE STORED AND HANDLED SO AS NOT TO BE DETRIMENTAL TO THEIR PERFORMANCE OR DAMAGE THEM. REFER APPENDIX H AS 1684.2.
- T4. ALL TIMBER SHALL BE DRY, IE: LESS THAN 15% MOISTURE CONTENT AT THE TIME OF CONSTRUCTION AND SHALL BE PROTECTED AND/OR TREATED AS NOTED.
- T5. ALL TIMBER BEAMS AND LINTELS ARE TO BEAR ON DOUBLE STUDS (ONE JAMB AND ONE BEARING STUD), UNLESS OTHERWISE NOTED.
- T6. BEAMS/STUDS HAVING MORE THAN 1 MEMBER TO BE NAIL LAMINATED TOGETHER IN ACCORDANCE WITH AS 1684.2.
- T7. ALL EXPOSED TIMBER SHALL BE MINIMUM H3 TREATED OR DURABLE SPECIES, (U.N.O.).

FRAMING

- F1. PROVIDE SOLID BLOCKING (45 WIDE x D-25 DEEP) SECURELY NAILED TO JOISTS/RAFTERS (D=DEPTH OF JOIST/RAFTER) AT 1800 MAX. CRS.
- F2. ALL EXTERNAL OR EXPOSED STEELWORK TO BE HOT DIP GALVANISED.
- F3. WATERPROOFING TO ARCHITECTS DETAILS.
- F4. ALL TIMBER FRAMING & BRACING NOT SHOWN TO COMPLY WITH AS 1684.2.
- F5. ALL BRICKWORK LINTELS TO ARCHITECTS DETAILS. ALL BRICKWORK LINTELS TO COMPLY WITH NCC VOLUME 2 PART 3.3.5.12.
- F6. ALL BEAMS/GIRDER & HIP TRUSSES TO BE SUPPORTED ON DOUBLE STUDS EACH END, (U.N.O.).
- F7. ALL LINTELS TO BE SUPPORTED ON SINGLE STUD AND JAMB STUD, (U.N.O.).
- F8. ALL TRUSSES & WALL FRAMES TO MANUFACTURER'S DESIGN & DETAILS.
- F9. TRUSS DIRECTION ASSUMED AS SHOWN (IF APPLICABLE). CONTACT THIS OFFICE IF DIFFERENT TRUSS LAYOUT IS USED SO LINTELS ETC CAN BE REDESIGNED (IF REQUIRED).
- F10. ALL TIMBER LINTELS TO BE DESIGNED BY THE TRUSS MANUFACTURER. TYPICAL, (U.N.O.).
- F11. BUILDER TO SUPPLY MANUFACTURERS TRUSS LAYOUT TO THIS OFFICE FOR APPROVAL PRIOR TO CONSTRUCTION. TRUSS DESIGN MUST BE IN ACCORDANCE WITH AS 1720.5-2015 AND AS 1684.2. TRUSS FABRICATOR/BUILDER IS RESPONSIBLE FOR PROVIDING ADEQUATE ROOF/WALL BRACING TO ENSURE STABILITY OF THE STRUCTURE IN ACCORDANCE TO AS 1684.2.
- F12. ALL INTERNAL WALLS TO BE NON-LOAD BEARING (TYPICAL) UNLESS HATCHED OTHERWISE ON PLANS.

INSPECTIONS


- I1. ALL STRUCTURAL WORK MUST BE INSPECTED AND APPROVED IN WRITING PRIOR TO ANY WORK PROCEEDING. 48 HOUR MIN. NOTICE IS REQUIRED FOR ALL INSPECTIONS.

SITE DRAINAGE

- D1. AT THE TIME OF THE PREPARATION OF THIS DOCUMENT, IF THE DRAINAGE DESIGN WAS NOT PREPARED OR CERTIFIED BY THIS OFFICE THEN THE DRAINAGE SYSTEM MAY NEED TO BE DOCUMENTED BY A SUITABLY QUALIFIED PERSON TO COMPLY WITH AS2870-2011. THE DRAINAGE DESIGNER SHOULD ENSURE THAT THE ELEMENTS OF THE DRAINAGE SYSTEM DESIGN ARE CONSIDERED WITH RESPECT TO THE PROPOSED FOOTING SYSTEM.WE RECOMMEND THAT INTRAX CONSULTING ENGINEERS OR AN EQUIVALENT CERTIFIED PRACTITIONER, REVIEW ALL THE DOCUMENTATION TO ENSURE COMPLIANCE.
- D2. SITES SHOULD BE DRAINED SO THAT WATER CANNOT POND AGAINST OR NEAR THE HOUSE. THE GROUND IMMEDIATELY ADJACENT TO THE HOUSE SHOULD BE GRADED TO FALL 50mm OVER THE FIRST METRE.WHERE THIS IS IMPRACTICABLE (IE: ON SEVERE SLOPING SITES) USE A.G. DRAINS ADJACENT TO FOOTINGS WHERE THE GROUND FALLS TOWARDS THE BUILDING.

FOOTING: ANGLE OF REPOSE

- A1. FOOTING MUST NOT UNDERMINE EXISTING FOOTING OR BE UNDERMINED BY PROPOSED EXCAVATION.
- A2. ENSURE ADEQUATE ANGLE OF REPOSE AT ALL TIMES (REFER DETAILS BELOW).
- A3. NOTIFY THIS OFFICE IF FOOTING UNDERMINE OCCURS.
- A4. PIPE DEPTH & LOCATION MUST BE CONFIRMED PRIOR TO CONSTRUCTION.




ANGLE OF REPOSE

- 30° MAX IN SAND/SILT
45° MAX IN CLAY
60° MAX IN ROCK

OCCUPATIONAL, HEALTH AND SAFETY

- O1. FOR ALL WORKS CONDUCTED ON THIS PROJECT, THE BUILDER SHALL HAVE ALL APPROPRIATE AND SUFFICIENT SAFETY MEASURES AND PROCEDURES IN PLACE.
- O2. DEEP TRENCHES MAY EXIST ON THIS SITE. BUILDER TO ENSURE NECESSARY SAFETY MEASURES ARE TAKEN TO PREVENT FALL AND TRIPPING HAZARDS ARE ELIMINATED.
- O3. FOR LARGE SPAN BEAMS (≥ 6000mm), BUILDER TO ENSURE SEAT PLATES/ANGLES TO STEEL COLUMNS FOR MAJOR BEAMS AND LINTELS ARE INSTALLED FOR SAFER CONNECTION, BOLTING AND SITE WELDING.
- O4. ADEQUATE PROPPING MAY BE REQUIRED FOR ANY RETAINING/LOAD BEARING WALLS ON BOUNDARIES. TEMPORARY SHORING MAY BE REQUIRED.
- O5. PROVISIONS SHALL BE MADE FOR APPROPRIATE DISTANCE FOR ROOF BATTENS/RAFTERS TO PROVIDE A SAFE WORKING PLATFORM DURING ROOF INSTALLATION AND WORKING AT HEIGHTS.
- O6. BUILDER MAY NEED TO BE AWARE OF APPROPRIATE MEASURES TO DEAL WITH HAZARDOUS MATERIALS SUCH AS ASBESTOS WHICH STILL CAN BE FOUND IN SERVICE PITS.
- O7. IF A CRANE IS REQUIRED, THE BUILDER IS TO PROVIDE ADEQUATE SAFETY MEASURES FOR CRANE USAGE AROUND POWER LINES.
- O8. IF ANY DIGGING IS REQUIRED OUTSIDE OF SITE BOUNDARIES, INFORMATION REGARDING EXISTING COUNCIL ASSETS NEED TO BE SOUGHT FROM "DIAL BEFORE YOU DIG".
- O9. THE SAFETY CONCERNS AND HAZARDS IDENTIFIED ABOVE REPRESENT COMMONLY OCCURRING RISKS. THE LIST DOES NOT COVER THE FULL RANGE OF RISK AVOIDANCE MEASURES REQUIRED.

			 Melbourne Sydney Brisbane Adelaide Perth 03 8371 0100 02 8355 1200 07 3067 0800 08 8165 0122 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE				
				DRAWING GENERAL NOTES						
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER:	E.I.	DRAWN:	Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO.	NO. OF SHEETS			
02	CONSTRUCTION ISSUE	13.07.26				S01	27			
01	CONSTRUCTION ISSUE	17.06.26								
REV.	REMARK/COMMENT	DATE:								

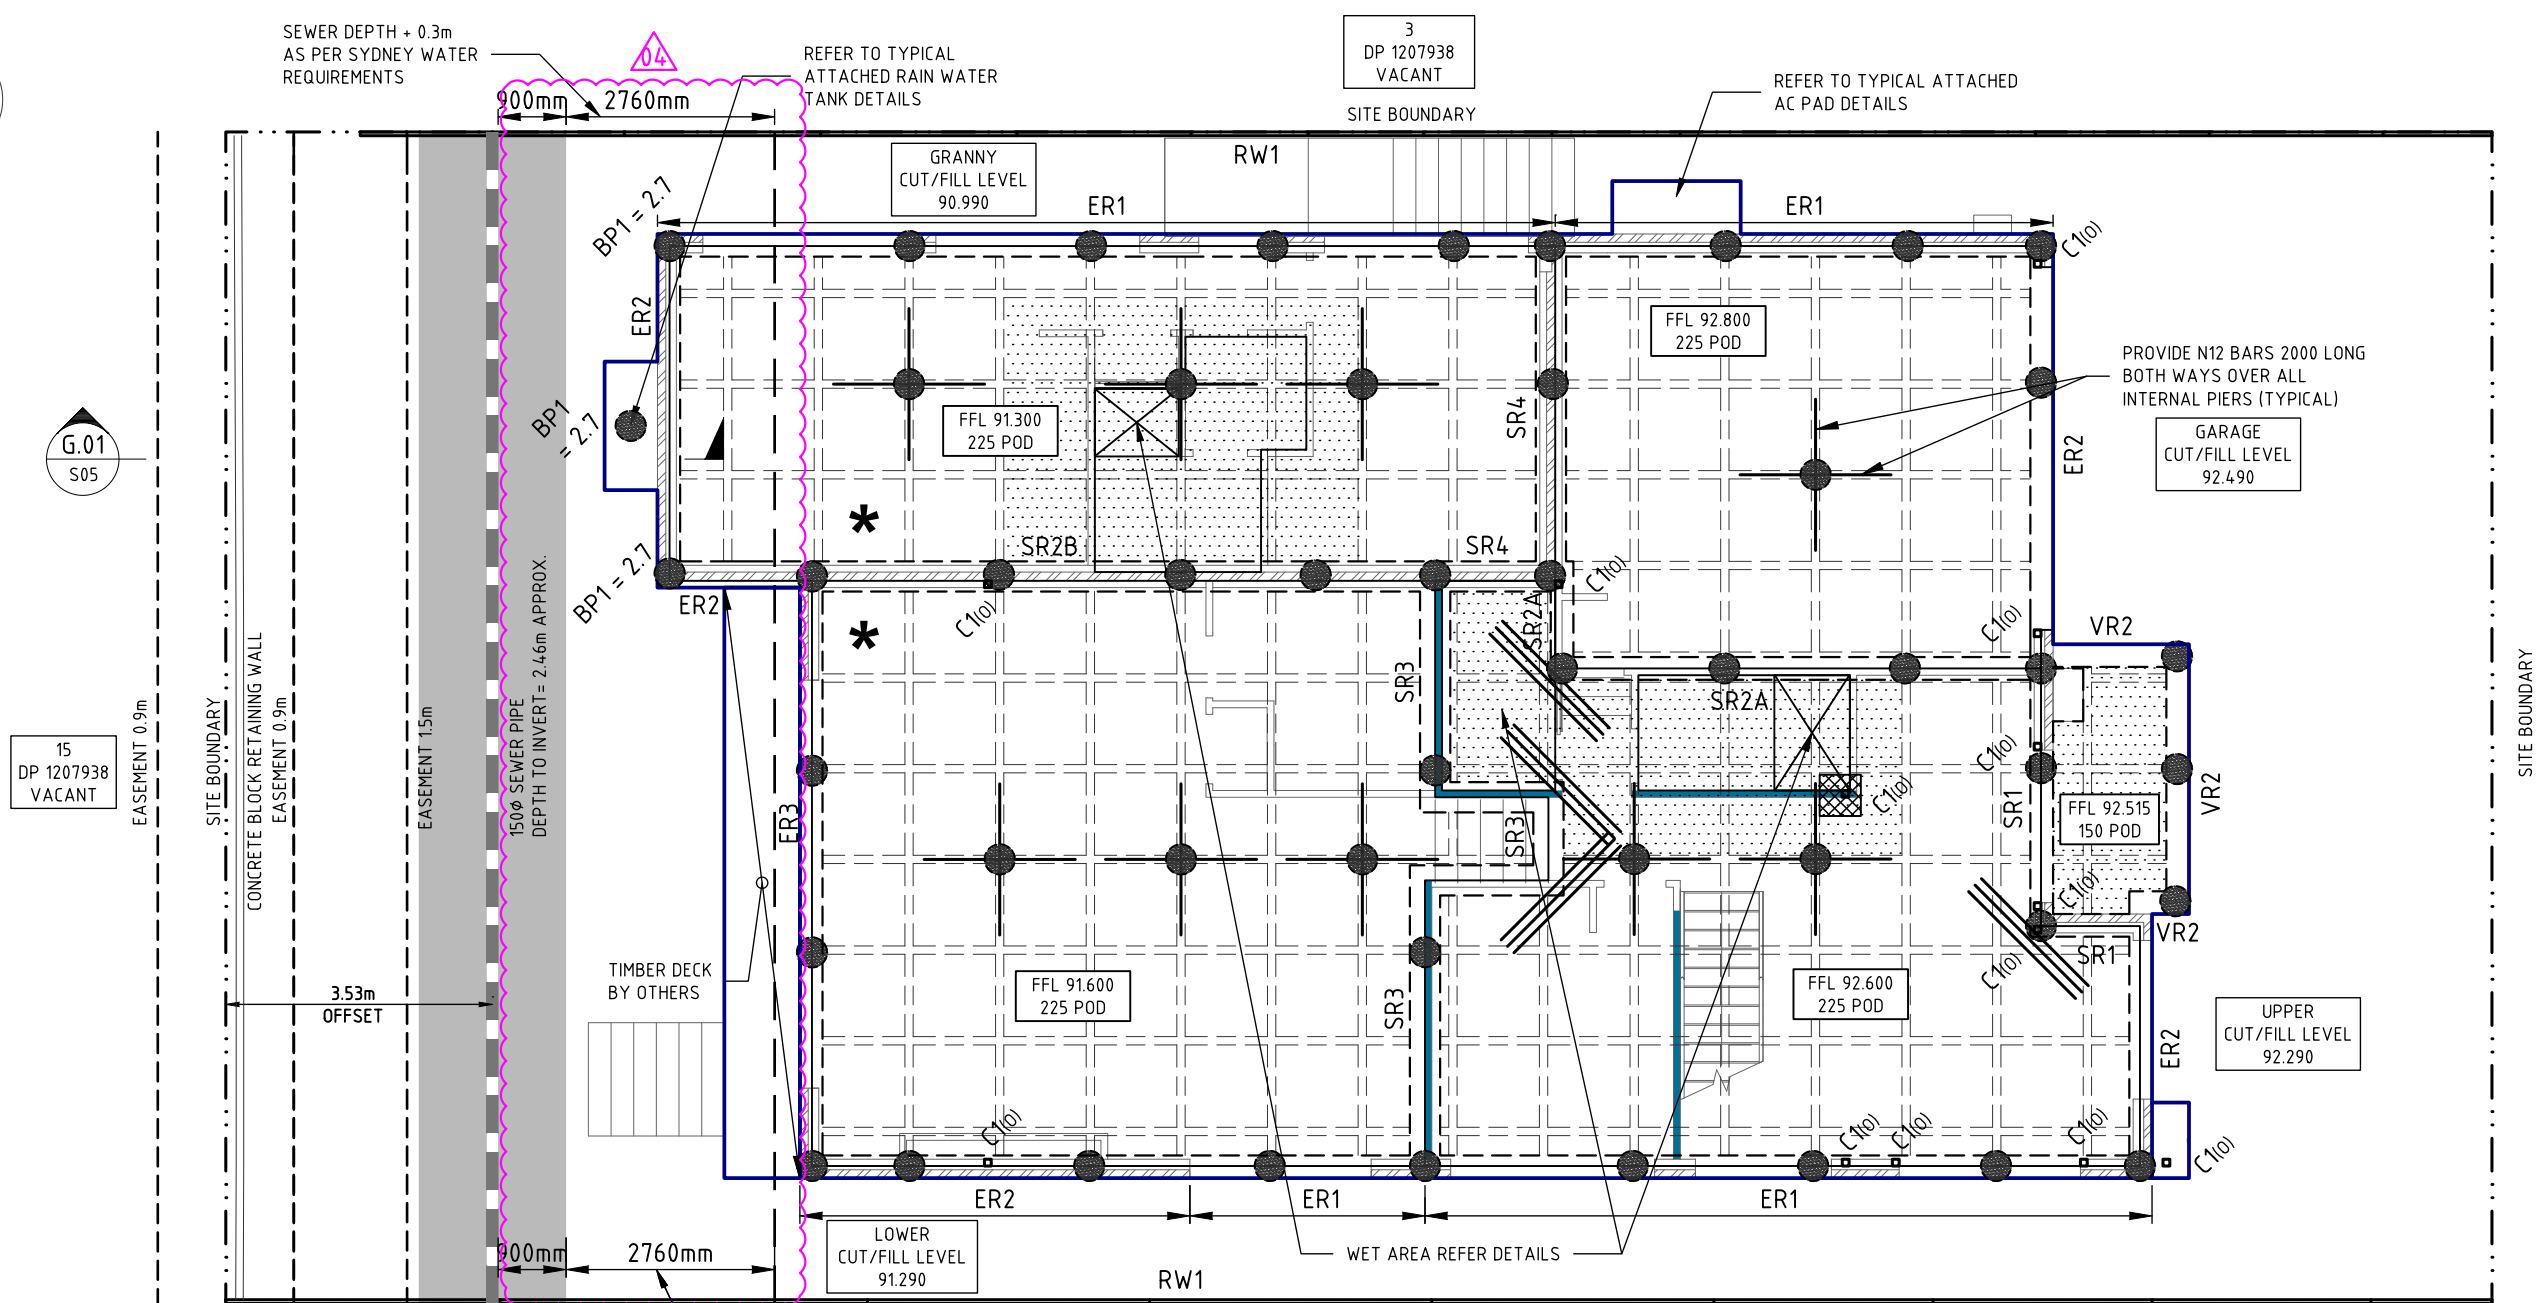

NOTE:
FOOTING TO BE LOCALLY
WIDENED AT ALL BRICK PIER
LOCATIONS TYPICAL U.N.O.

SCALE = 1:100

INTERNAL LOAD BEARING WALLS UNDER	DENOTES INTERNAL RIB TO MATCH EXTERNAL RIB PROPERTIES U.N.O. (SEE WAFFLE SLAB SCHEDULE)	DENOTES 3-N12 OR 3-L11TM CRACK CONTROL BARS 2000mm LONG TIED TO UNDERSIDE OF SLAB MESH.	DENOTES WAFFLE BOX SETDOWN
STEEL COLUMN OVER (REFER TO FRAMING PLAN)	REMOVE WAFFLE POD TO FORM MASS CONCRETE PAD WITH SLAB FABRIC TOP & BOTTOM (MATCHING WAFFLE SLAB SCHEDULE) TO SUPPORT POINT LOAD OVER TYPICAL	DENOTES STARTING POINT FOR WAFFLE BOX	RW1 SLEEPER RETAINING WALL. REFER S10 FOR DETAILS (SEQUENCE SHALL BE FOLLOWED IF SHOWN IN DETAIL)

WAFFLE SLAB SPECIFICATIONS:	
OVERALL SLAB DEPTH (mm)	310
SLAB THICKNESS (mm)	85
TOP SLAB FABRIC COVER: 20mm INTERNAL, 30mm EXTERNAL	SL82
SLAB CONCRETE STRENGTH (f'c)	20 MPa

04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26
REV.	REMARK/COMMENT	DATE:



Intrax
HOUSING

Melbourne 03 8371 0100
 Sydney 02 8355 1200
 Brisbane 07 3067 0800
 Adelaide 08 8165 0122
 Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
 VIC | NSW | QLD | SA | WA

PROJECT

PROPOSED RESIDENCE

LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT

THE MAKAAAN BUILDERS - NSW

DRAWING

GROUND FLOOR SLAB PLAN

260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
	SHEET NO. S02	NO. OF SHEETS 27	

NO STORMWATER PIPE INFORMATION

NOTES:

- STORMWATER PIPE INFORMATION WAS NOT PROVIDED DURING THIS DESIGN;
- THIS OFFICE SHOULD BE CONTACTED WHEN STORMWATER PIPE INFORMATION IS AVAILABLE FOR FURTHER ADVICE.

TOTAL REINFORCEMENT
REQUIREMENTS WITHIN BEAMS

(IN ACCORDANCE WITH AS2870)

STEM WIDTH (mm)	TOP REINFORCEMENT (ADDITIONAL TO SLAB MESH)
151 – 220	1 – N12
221 – 330	2 – N12
331 – 440	3 – N12
441 – 550	4 – N12
551 – 660	5 – N12
BEAM BASE WIDTH (mm)	BOTTOM REINFORCEMENT
300 – 330	3 – N12
331 – 440	4 – N12
441 – 550	5 – N12
551 – 660	6 – N12

REFER TO RECOMMENDATIONS & SITE INVESTIGATIONS:

COMPANY: INTRAX CONSULTING ENGINEERS PTY LTD
REF. No.: 260362
DATED: 24.02.2026
CLASS: P/M (AS2870-2011)

REFER TO ARCHITECTURAL WORKING DRAWINGS:

COMPANY: THE MAKAAAN BUILDERS
REF. No.: 070624 – REV G
DATED: 01.07.2026

REFER TO SURFACE DRAINAGE PLAN:


COMPANY: INTRAX CONSULTING ENGINEERS PTY. LTD.
REF. No.: 070624 – REV G
DATED: 01.07.2026

NOTES:

- THIS DESIGN SHOULD BE READ IN CONJUNCTION WITH THE DOCUMENTATION AND DRAWINGS REFERENCED ABOVE;
- SITE BOUNDARY RETAINING WALLS TO BE DESIGNED BY OTHERS AS REQUIRED U.N.O.
- (a) USE APPROPRIATE FLEXIBLE BEDDING MORTAR FOR BRITTLE FLOOR COVERING WHERE BRITTLE AREA IS GREATER THAN 16m² (eg. CERAMIC TILES);
(b) ALTERNATIVELY IF FLEXIBLE ADHESIVE TO BE USED FOR LAYING OF TILES, MINIMUM 90 DAYS WAITING PERIOD IS REQUIRED AFTER SLAB HAS BEEN POURED;
- TWO LAYERS OF POLYETHYLENE MEMBRANE ARE REQUIRED FOR STRIP FOOTINGS AND BEAMS BELOW FINISHED GROUND LEVEL GREATER THAN 700mm DEEP TYPICAL U.N.O.
- IF THE NEW FOOTING CONSTRUCTED TO ADJACENT EXISTING FOOTING IS LESS OR EQUAL TO 1000mm, THIS OFFICE SHOULD BE CONTACTED FOR FURTHER ADVICE
- PERCHED GROUND WATER MAY OCCUR DURING HIGH PERIODS OF RAINFALL WHICH CAN LEAD TO CONSTRUCTION DIFFICULTIES. IF THIS SITUATION IS ENCOUNTERED ONSITE THIS OFFICE IS TO BE CONTACTED TO PROVIDE CONFIRMATION OF FOOTING DESIGN AND ALTERNATIVE CONSTRUCTION METHODS THAT MAY BE REQUIRED

WAFFLE CONSTRUCTION NOTES

- ALL LOOSE SURFACE FILL, ROOTS AND ORGANIC MATERIAL ARE TO BE REMOVED FROM THE BUILDING PLATFORM
- PERFORM THE SITE CUT TO REQUIRED BENCH LEVEL.
- IN AREAS WHERE THE SLAB IS SUSPENDED OVER BORED OR BULK PIERS, FILL IS NOT REQUIRED TO BE REMOVED OR COMPACTED AS ABOVE.
- A MAXIMUM OF 50mm LAYER OF BEDDING MATERIAL IS RECOMMENDED TO BE PLACED OVER THE BUILDING AREA (EXTENDING 1000mm OUTSIDE THE BUILDING EDGE LINE), WHICH IS WELL GRADED CRUSHED ROCK EQUIVALENT TO CLASS 3 QUARRY PRODUCT OR SIMILAR. IT IS ACCEPTABLE TO EXCEED 50mm IN DEPTH FOR SMALL DEPRESSIONS LOCALLY IN SUB BASE, PROVIDED THESE AREAS ARE WELL COMPACTED IN ACCORDANCE WITH FOOTING CODE AS2870.
- PLUMBER IS TO LAY DRAINAGE PIPES BELOW THE GROUND SURFACE. ALL RISERS ARE TO BE FIRMLY STAKED.
- PREPARE THE FORMWORK IN ACCORDANCE WITH THE FOOTING PLAN AND DETAILS. WAFFLE PODS TO BE CONSTRUCTED WITH THE START LOCATION SHOWN ON THE SLAB LAYOUT PLAN; AROUND PLUMBING PIPES, WAFFLE PODS REQUIRED TO BE CUT AND TAPED.
- ALL SLAB REINFORCEMENT TO BE PLACED CORRECTLY AS INDICATED ON THE SLAB LAYOUT PLAN.
- ALL EXTERNAL & INTERNAL RIBS WIDER THAN 300mm SHALL BE REINFORCED WITH AN ADDITIONAL N12 BAR TOP & BOTTOM FOR EVERY 110mm IN ADDITIONAL WIDTH (TYPICAL).



TREE EFFECT SITE KEY PLAN

SCALE = NTS

BORED PIER SCHEDULE

PIER TYPE	PIER DIA Ø	FOUNDING MATERIAL	BORED PIER BASE INTO FOUNDING MATERIAL (mm)	AVERAGE FOUNDING FROM NGL APPROX (mm)
	400mm	CLAY	1500	2100
	400mm	CLAY	2100	2700

NOTES: 1: MIN f'c = 20 MPa FOR ALL CONCRETE PIERS (U.N.O.)

NOTES:

LOCATION OF TREES SHOWN INDICATIVE ONLY
A - DENOTES EXISTING IMMATURE SINGLE TREE AT NATURE STRIP WITH ASSUMED MAX MATURE TREE HEIGHT 15m.

TREE EFFECT NOTE:

- THIS SLAB DESIGN HAS TAKEN TREE EFFECT (IDENTIFIED AT THE TIME OF SOIL INVESTIGATION) INTO CONSIDERATION;
- BUILDER TO REMOVE ALL TREES AND TREE ROOTS/MATERIAL OVER THE PROPOSED BUILDING AREA;
- ANY SOFT OR LOOSE MATERIAL THAT DOES NOT RESPOND TO COMPACTION SHOULD BE EXCAVATED TO ACHIEVE A FIRM BASE, BACKFILL HOLES WITH NON POROUS MATERIAL, COMPACTED IN MAXIMUM 150mm LAYERS.
- THE TREE HEIGHTS AND/OR SPECIES ARE BASED ON THE BEST INFORMATION AVAILABLE TO INTRAX AT THE TIME OF DESIGN. SHOULD INFORMATION TO THE CONTRARY TO THE DESIGN ASSUMPTION BECOME AVAILABLE, THIS OFFICE SHALL BE CONTACTED FOR REVIEW.



Intrax
HOUSING

Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT

PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT

THE MAKAAAN BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING


WAFFLE SLAB SCHEDULE & LEGEND

260362

ENGINEER: E.I.
SHEET NO. S03


DRAWN: Y.Z
NO. OF SHEETS 27

REV
04

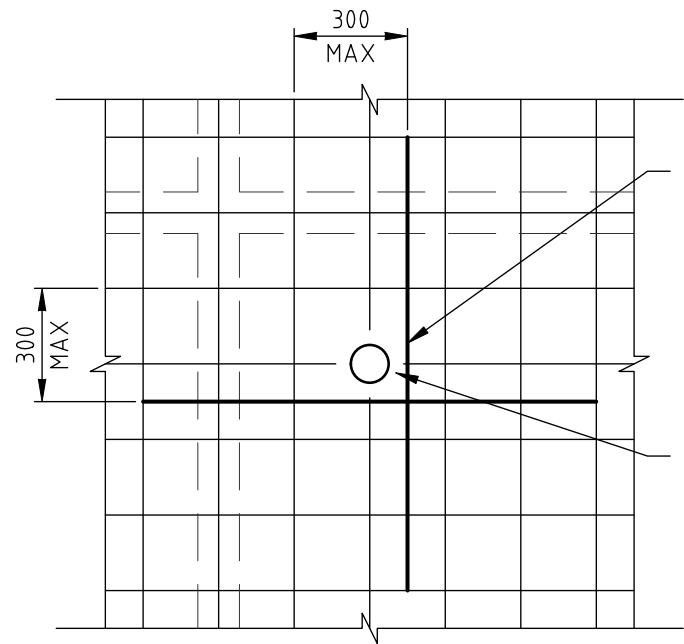


NOTE:
ADDITIONAL BARS REQUIRED AROUND PENETRATION IF SLAB FABRIC WIRES ARE CUT, DAMAGED OR BENT (TYP.). ALTERNATIVELY PROVIDE, ADDITIONAL LAYER OF SLAB FABRIC OVER PENETRATION WITH LAPPING TO BE IN ACCORDANCE WITH AS2870-2011 SECTION 5.3.2. COVER MUST BE MAINTAINED FROM PENETRATION AND CONCRETE SURFACE.

TYPICAL SLAB PENETRATION DETAIL
N.T.S.

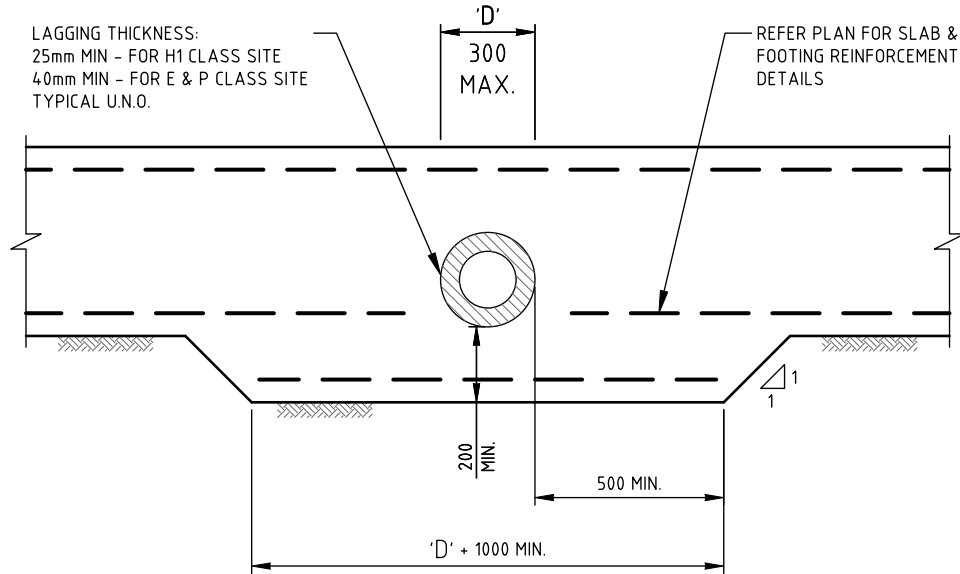


TYPICAL PENETRATION THROUGH FOOTING DETAIL
SCALE = 1:20

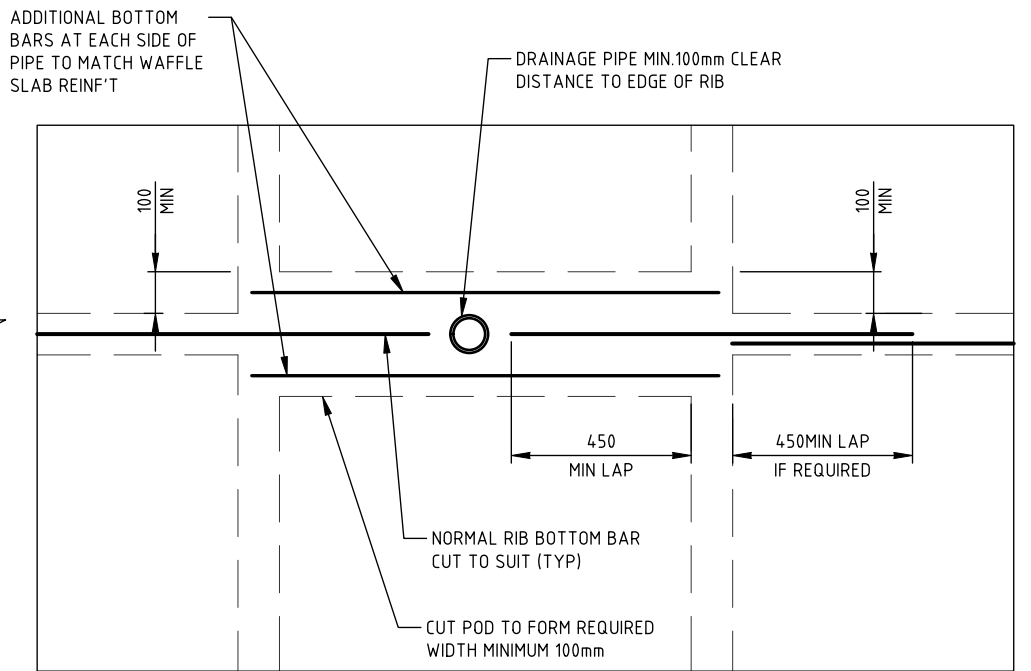

TYPICAL PIPE THROUGH WAFFLE RIB PLAN VIEW
SCALE = 1:20

GRADE SITE AROUND SLAB AS NOTED IN SITE DRAINAGE NOTES ON S1

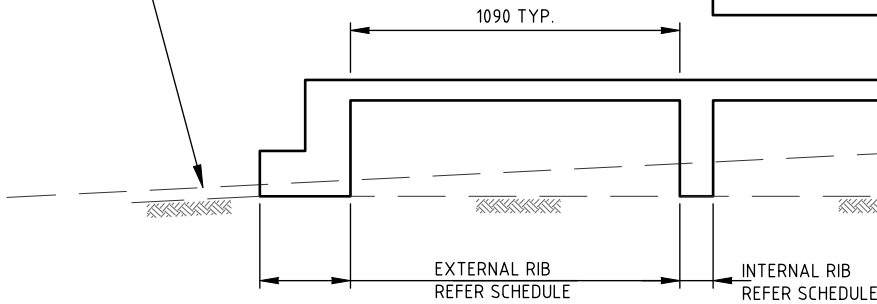

- NOTES:**
- 0.2mm THICK POLYETHYLENE MEMBRANE TO BE APPROVED, TAPED AROUND PIPES AND LAPPED A MINIMUM OF 200mm.
 - MINOR PENETRATION IS ACCEPTABLE AS PER AS2870 C5.3.3.
 - 30mm COVER FOR BEAM REINFORCEMENT, AT SPLICES (500mm LAP FOR N12 BARS, 700mm LAP FOR N16 BARS) AND FULL BEAM WIDTH AT INTERSECTIONS.
 - SLAB REINFORCEMENT COVER TO HAVE 20mm MINIMUM, LAP LENGTH TO BE MINIMUM 225mm OR 2 CROSS WIRES AND SHOULD BE SUPPORTED ON BAR CHAIRS, SPACE OF BAR CHAIRS SHOULD NOT EXCESS 1000mm CRS BOTH WAYS.
 - CONCRETE SHALL BE VIBRATED INTO PLACE AND REINFORCEMENT SHALL BE FIXED IN POSITION BY BAR CHAIRS OR SIMILAR APPROVED.
 - TRANSPORTATION, POURING, VIBRATION AND CURING OF CONCRETE SHOULD BE IN ACCORDANCE WITH GOOD BUILDING PRACTICE.

GRADE SITE AROUND SLAB AS NOTED IN SITE DRAINAGE NOTES ON S1

EXISTING APPROX. NATURAL SURFACE

CUT TOE FOR DRAINAGE DURING CONSTRUCTION AS REQUIRED

TYPICAL SECTION THROUGH WAFFLE SLAB
N.T.S.


- NOTES:**
- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
 - MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL

			 Melbourne Sydney Brisbane Adelaide Perth 03 8371 0100 02 8355 1200 07 3067 0800 08 8165 0122 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING FOOTING DETAILS - SHEET 1			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S04	NO. OF SHEETS 27	04
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

NOTES:

- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
- MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL


04

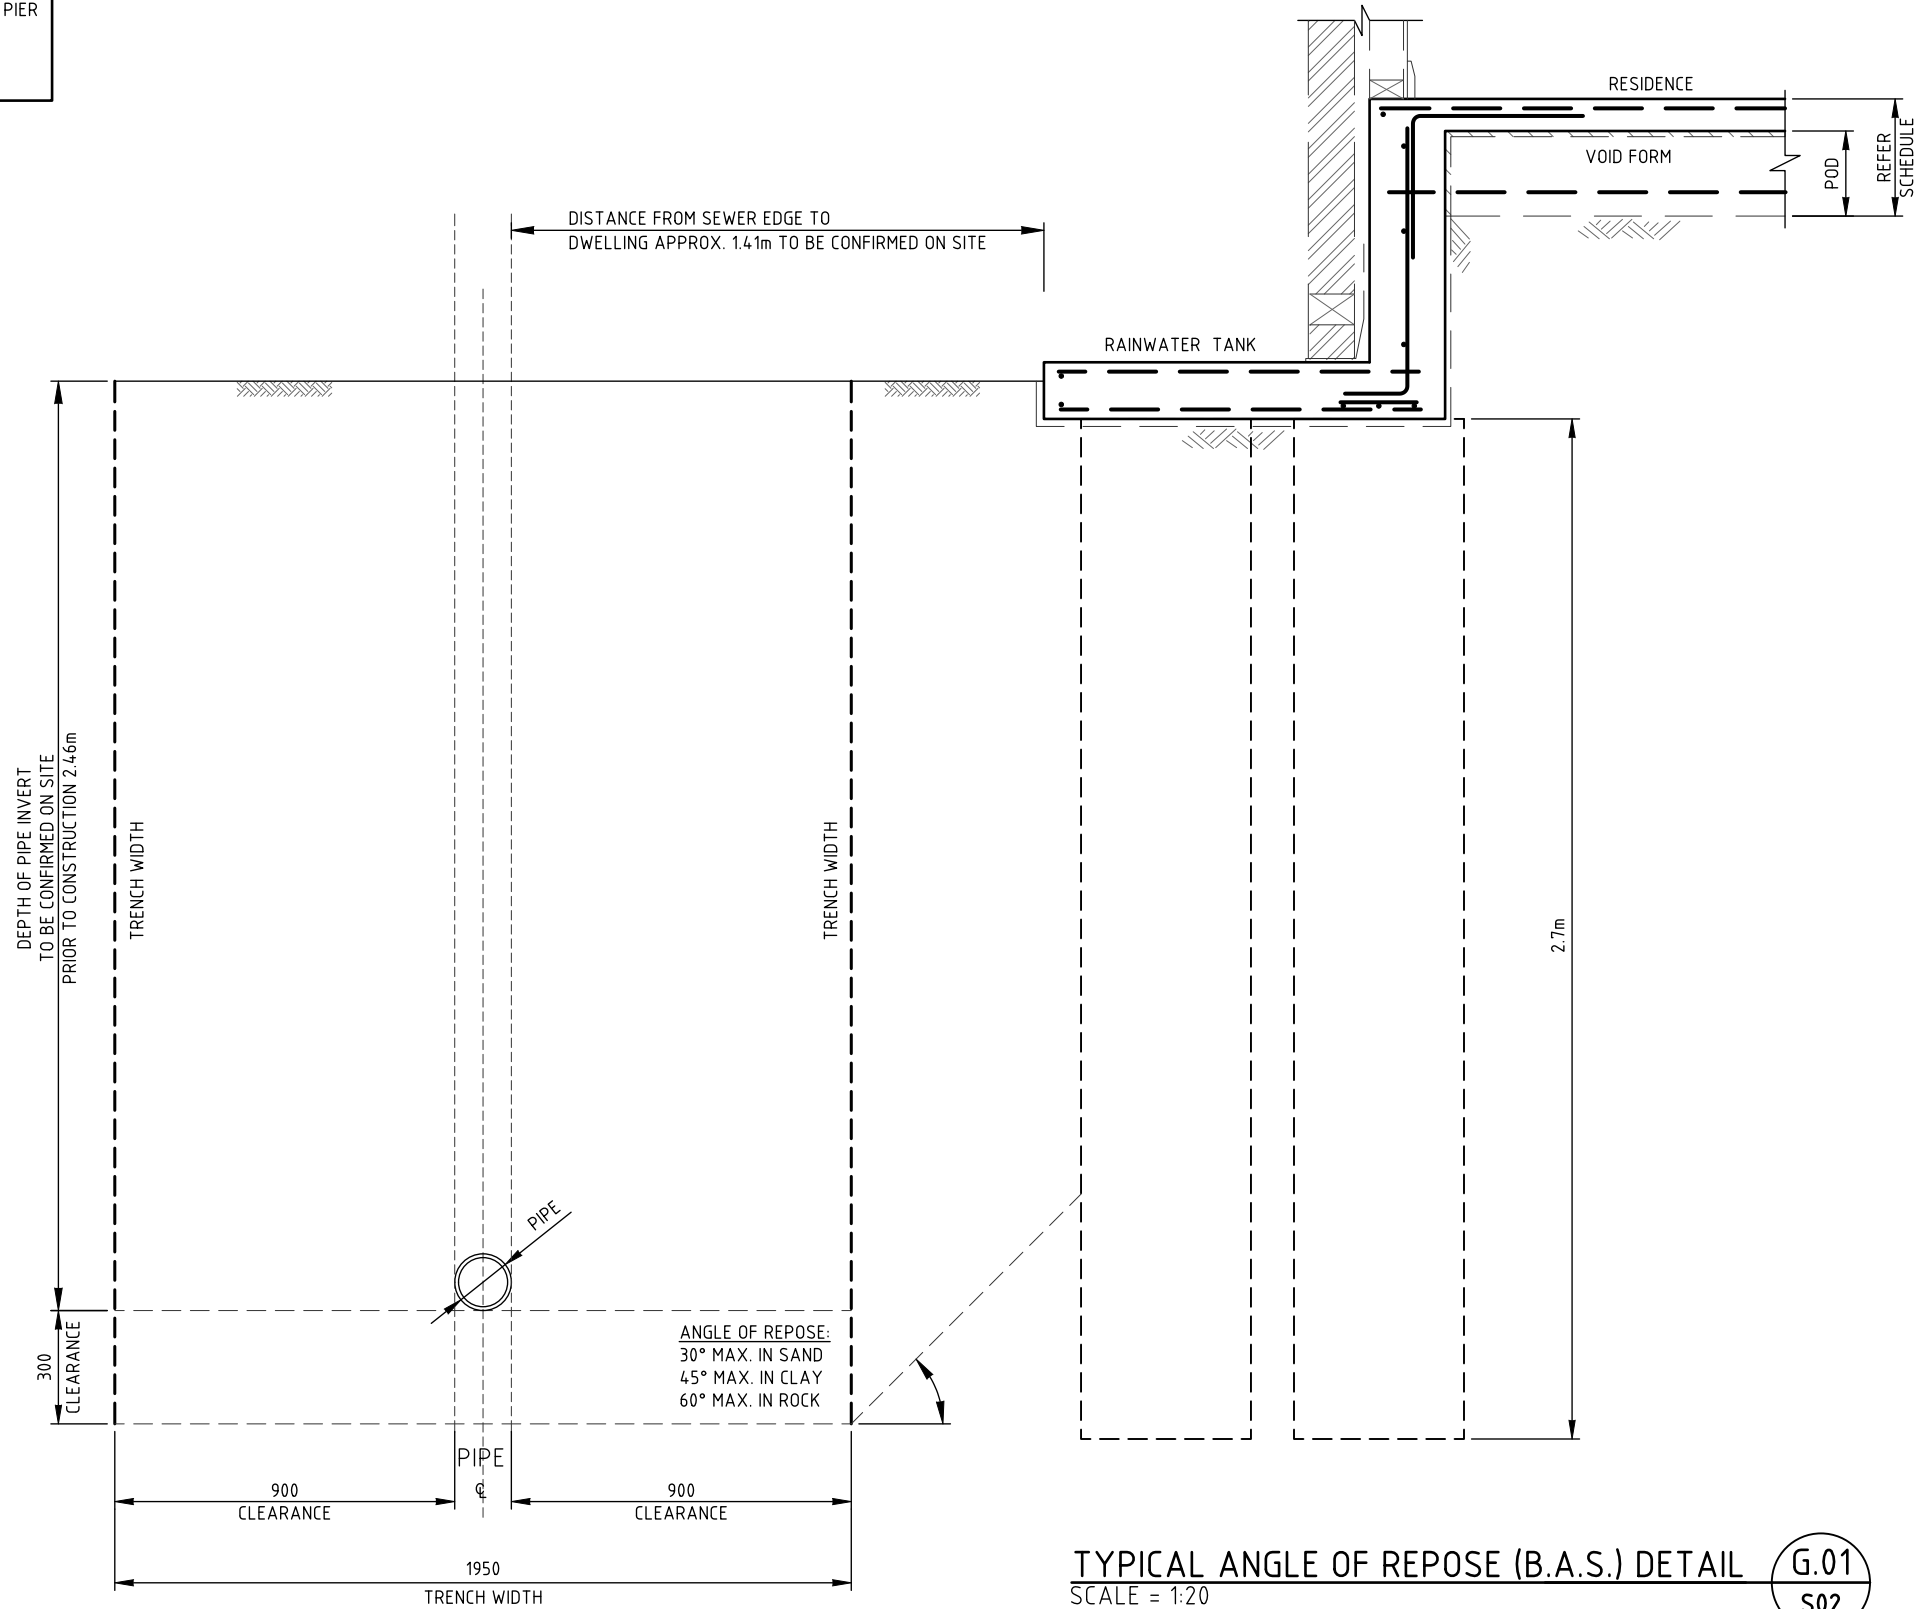


			 Intrax HOUSING Melbourne Sydney Brisbane Adelaide Perth 03 8371 0100 02 8355 1200 07 3067 0800 08 8165 0122 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE			
				DRAWING FOOTING DETAILS - SHEET 2					
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV	
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S05	NO. OF SHEETS 27	04	
02	CONSTRUCTION ISSUE	13.07.26							
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

NOTES:


- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
- MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL

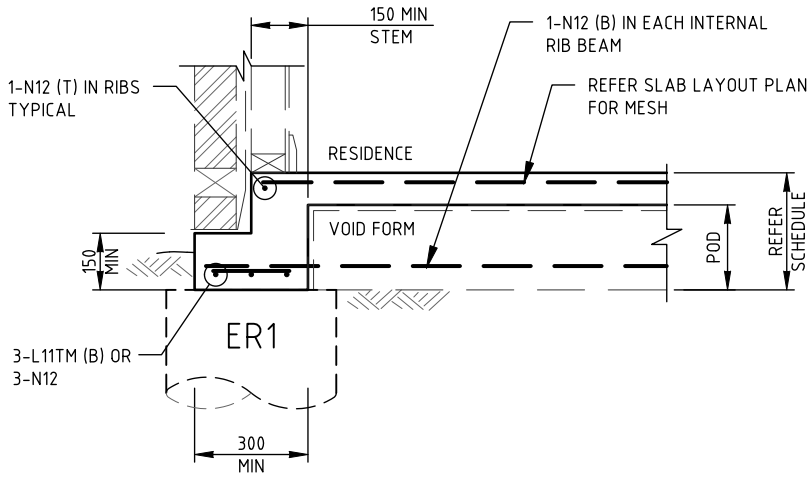


TYPICAL ER1 DETAIL
SCALE = 1:20

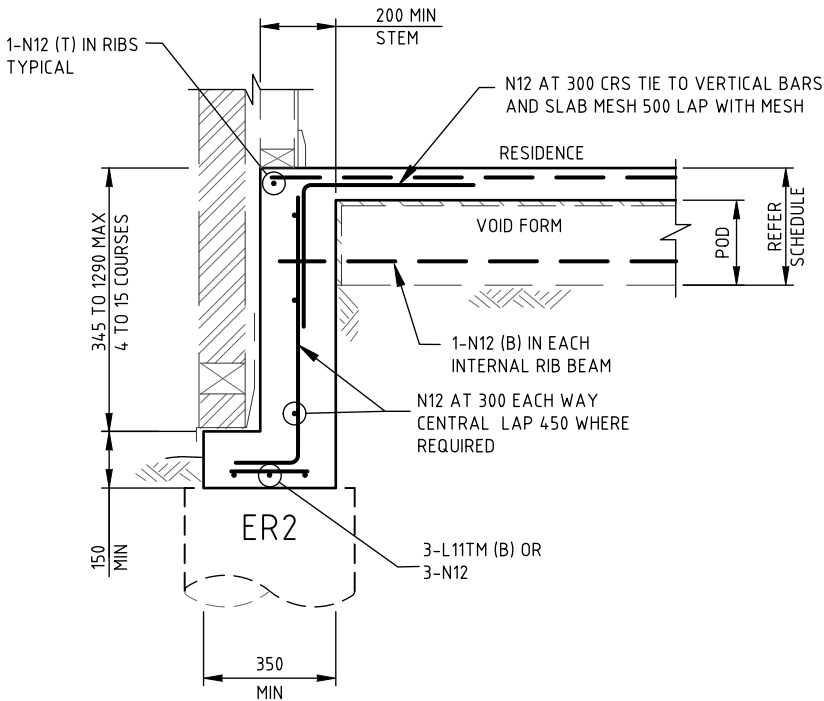


TYPICAL ER2 DETAIL
SCALE = 1:20

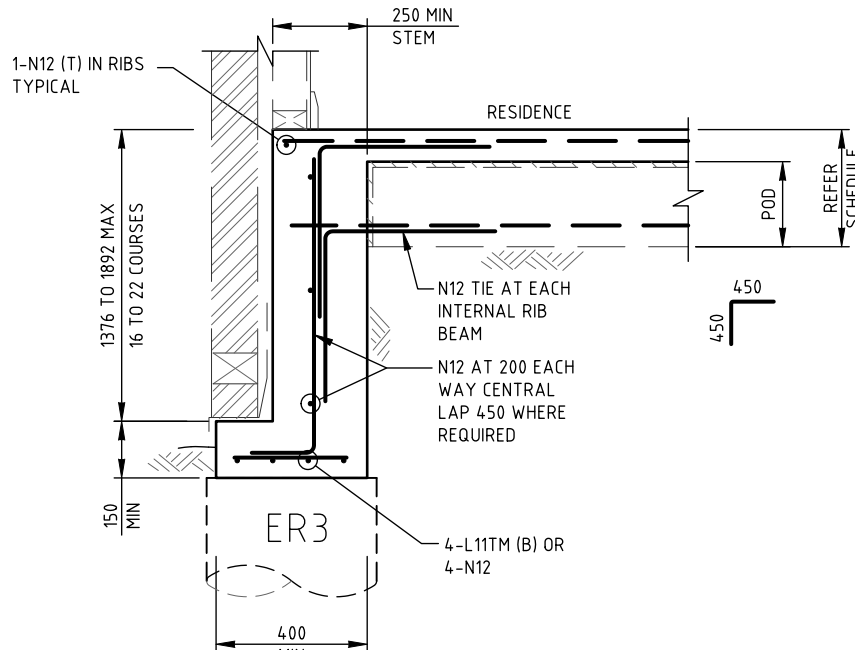


TYPICAL ER3 DETAIL
SCALE = 1:20

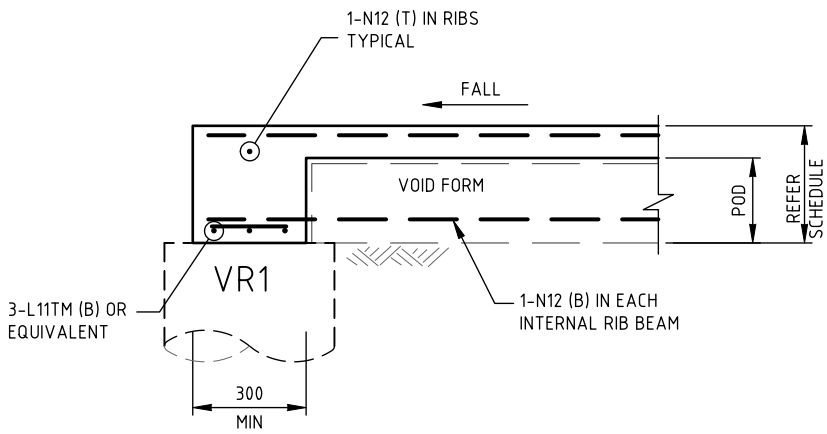

TYPICAL VR1 DETAIL
SCALE = 1:20

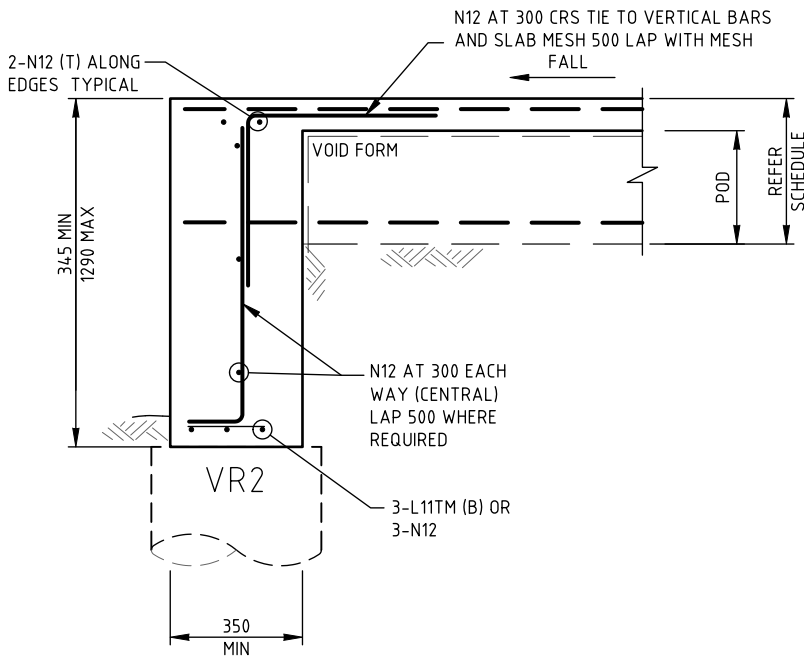

TYPICAL VR2 DETAIL
SCALE = 1:20

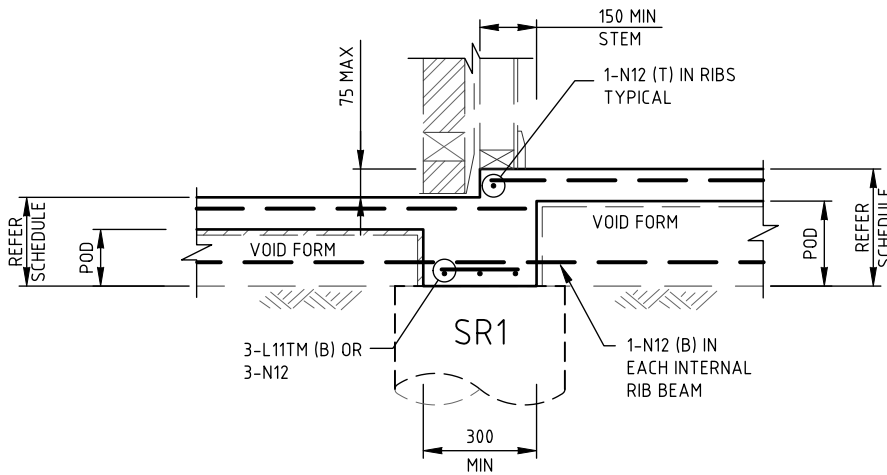

TYPICAL SR1 DETAIL
SCALE = 1:20

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695
www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT

PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT

THE MAKAAAN BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING

FOOTING DETAILS - SHEET 3

260362

ENGINEER:

E.I.

DRAWN:

Y.Z

REV

SHEET NO.


S06

NO. OF SHEETS


27

04


- NOTES:
- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
 - MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL

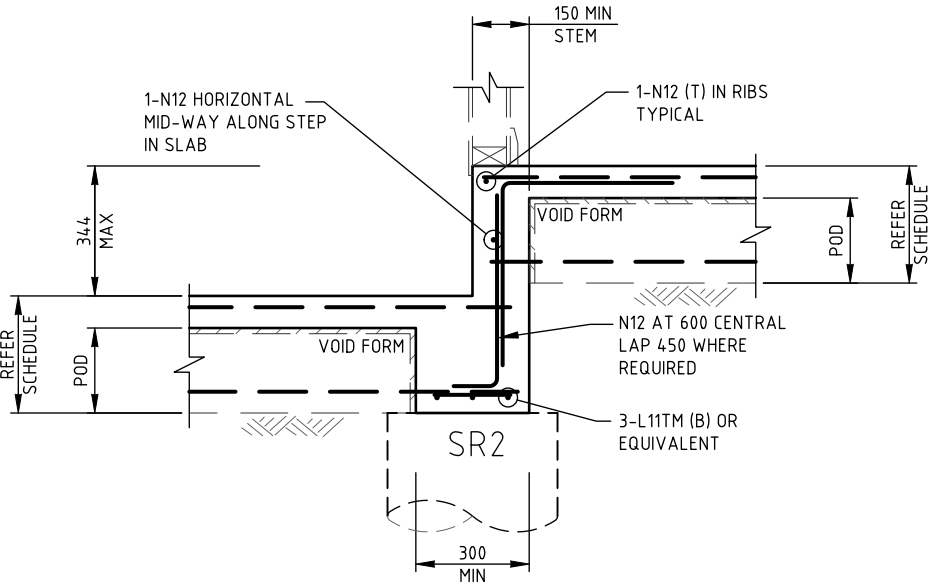


TYPICAL SR2 DETAIL
SCALE = 1:20

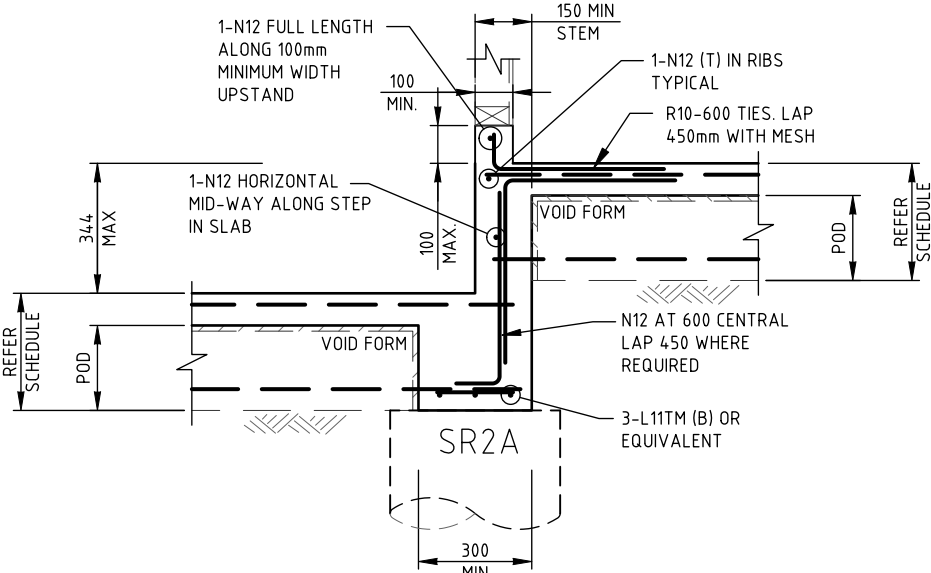


TYPICAL SR2A DETAIL
SCALE = 1:20

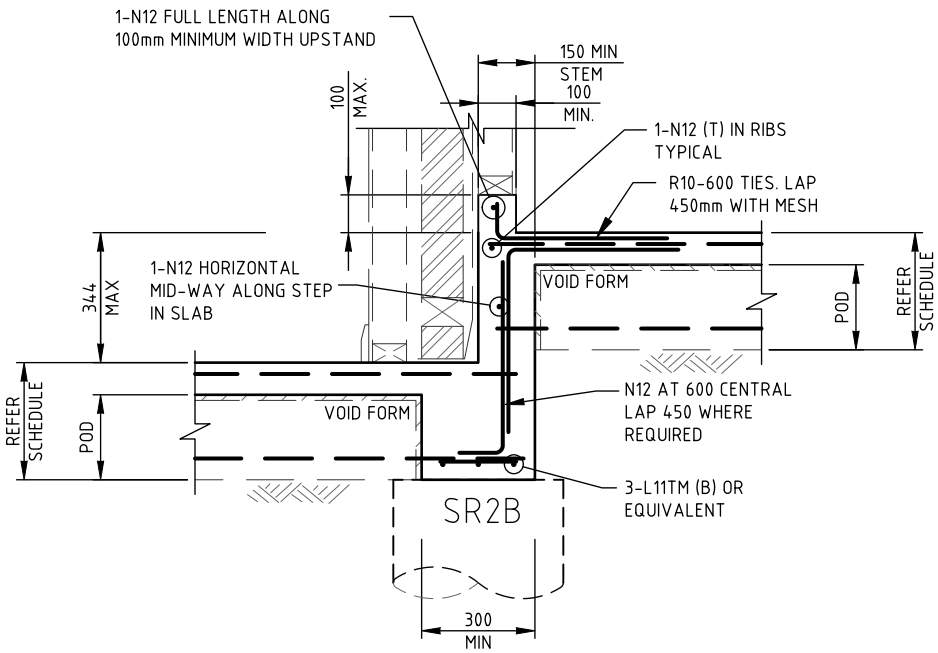


TYPICAL SR2B DETAIL
SCALE = 1:20

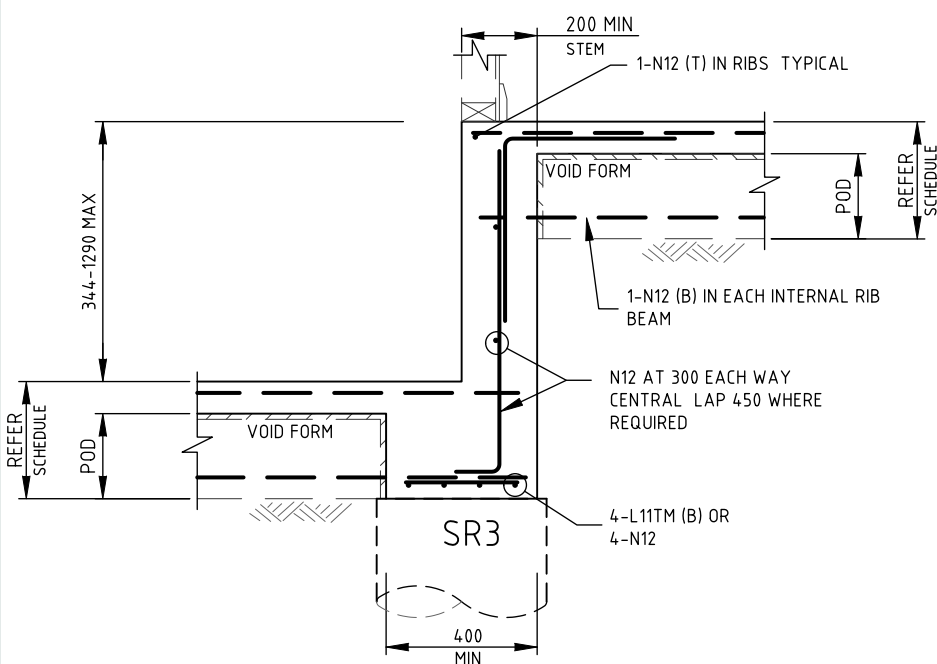

TYPICAL SR3 DETAIL
SCALE = 1:20

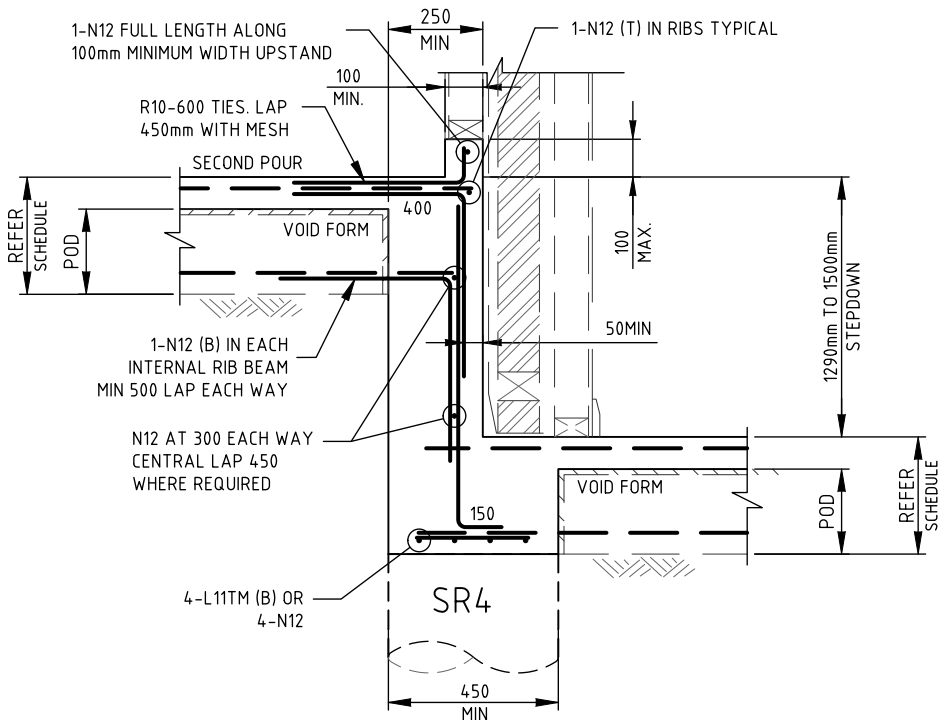

TYPICAL SR4 DETAIL
SCALE = 1:20

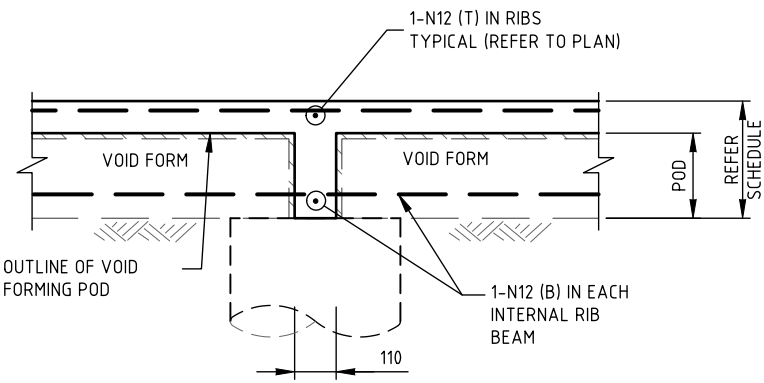

TYPICAL INTERNAL RIB DETAIL
SCALE = 1:20

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26




Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695
www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT	PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN
CLIENT	THE MAKAA BUILDERS - NSW


CONSTRUCTION ISSUE			
DRAWING FOOTING DETAILS - SHEET 4			
260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
	SHEET NO. S07	NO. OF SHEETS 27	

NOTES:


- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
- MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL

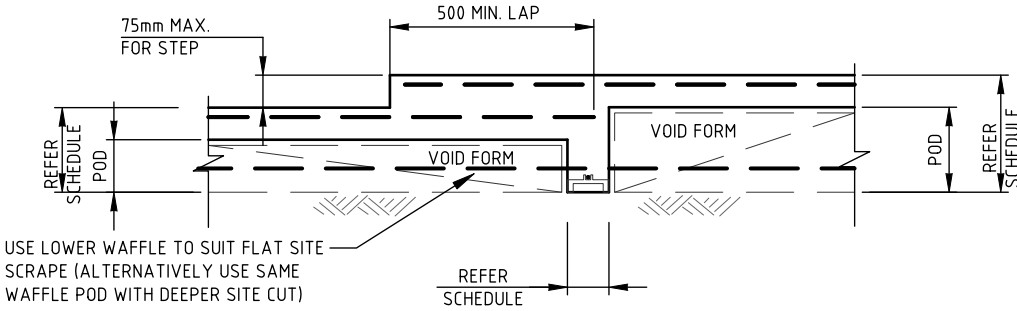


TYPICAL SLAB RECESS (WET AREA) DETAIL
SCALE = 1:20

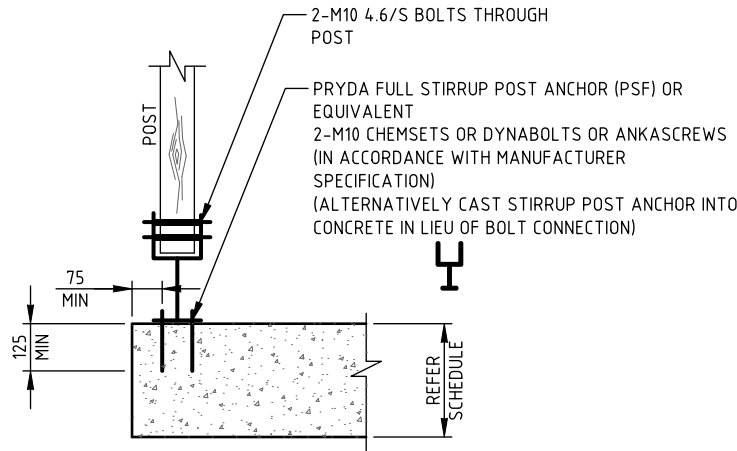

TYPICAL TIMBER FULL STIRRUP POST ON
CONCRETE SLAB/FOOTING DETAIL
SCALE = 1:20

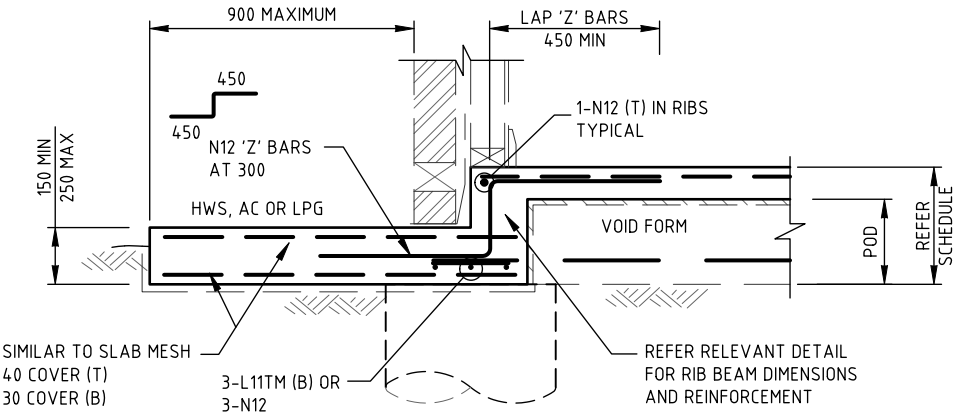

HWS/AC PAD DETAIL
SCALE = 1:20

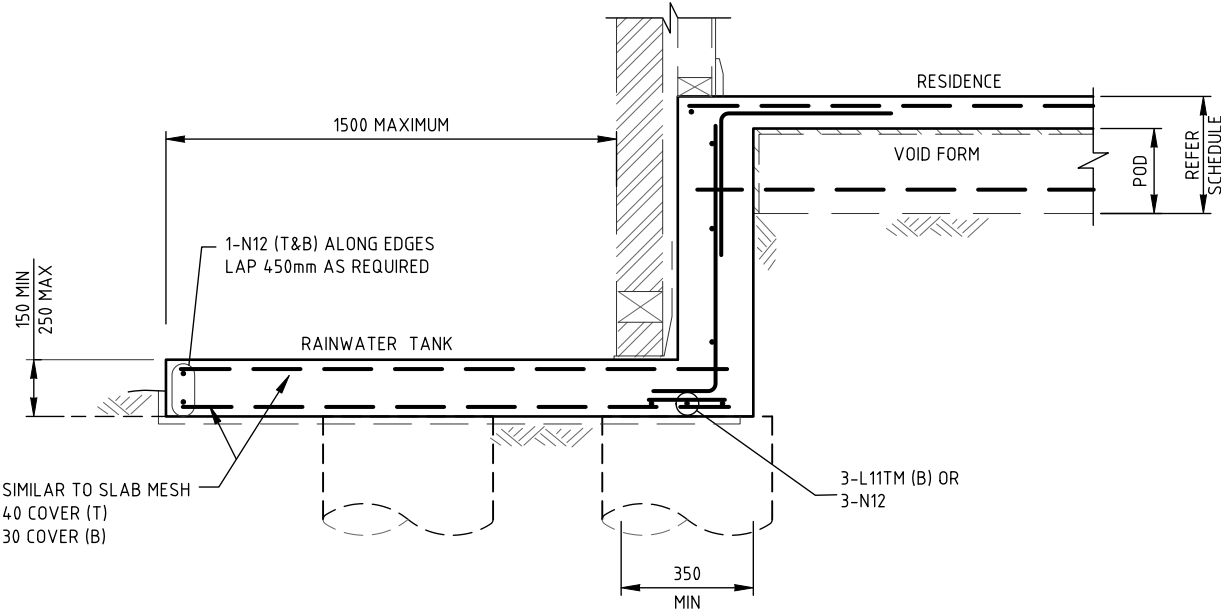


RAINWATER TANK DETAIL
SCALE = 1:20

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING FOOTING DETAILS - SHEET 5			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S08	NO. OF SHEETS 27	04
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						


NOTES:

- REFER SLAB LAYOUT PLAN FOR RELEVANT POD DIMENSIONS AND PIER LOCATION TYPICAL.
- MEMBRANE IN ACCORDANCE WITH NCC OVER COMPACTED QUARRY PRODUCT AS REQUIRED TYPICAL

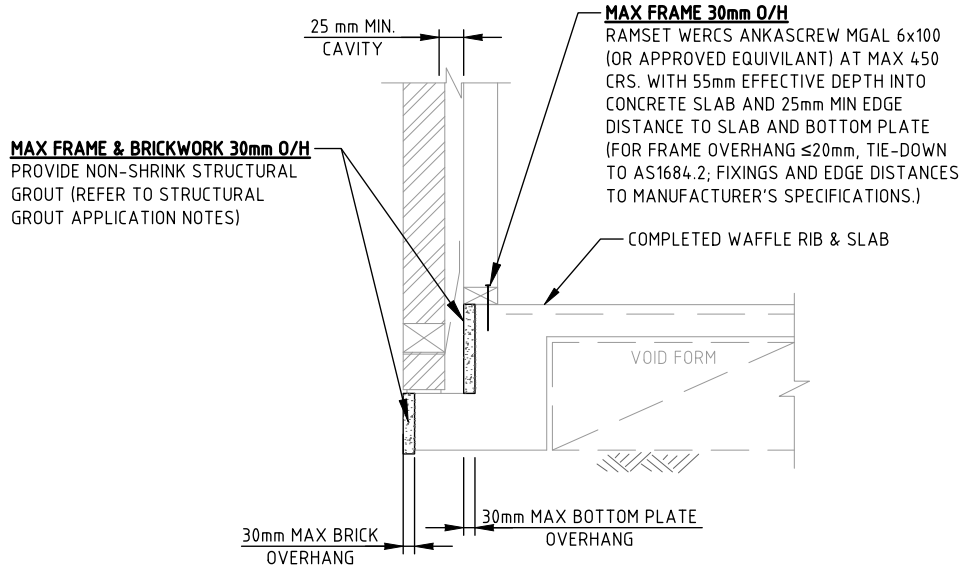

**PROVISIONAL ALTERNATIVE EDGE RIB
DETAIL FOR BRICK & FRAME OVERHANG
(MAX O/H 30mm FRAME & BRICKWORK)**

SCALE = N.T.S.

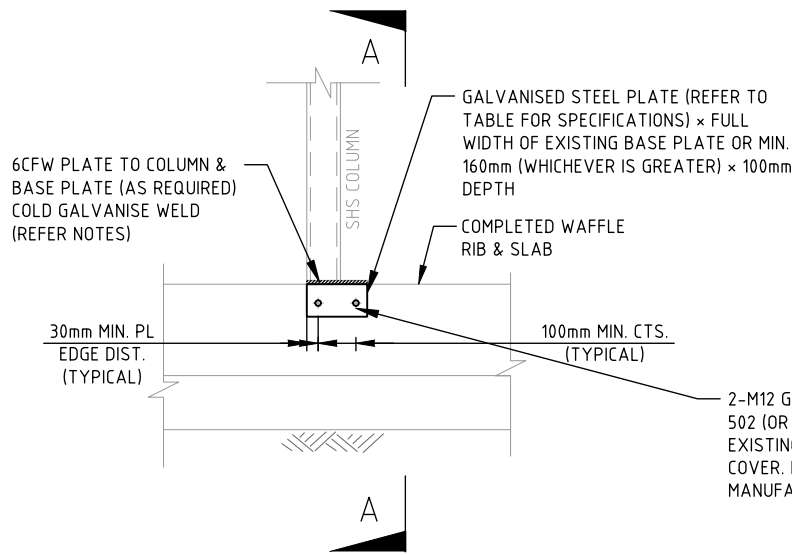


**PROVISIONAL ALTERNATIVE TYPICAL SHS COLUMN
& BASE PLATE OVERHANG (15mm MAX.)**

SCALE = N.T.S.

MAX FRAME 45mm O/H
90x35/45mm MGP10 H3 TREATED PINE TIMBER BEAM FIXED TO FACE OF SLAB BEAM (ALT. ANGLE AS PER BRICK OVERHANG) (SIZE OF TIMBER TO SUIT O/H)


MAX BRICKWORK 45mm O/H
75 x 100 x 8 GALVANISED ANGLE FIXED TO FACE OF SLAB EDGE. GRIND ANGLE FLUSH WITH BRICK FACE. COLD GALVANISED GROUND EDGE (REFER NOTES)

MAX BRICKWORK 45mm O/H
M12 GALVANISED BOLTS CHEMSET 502 (OR EQUIVALENT) AT 400 CRS, MIN 150mm INTO EXISTING SLAB. INSTALL IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS

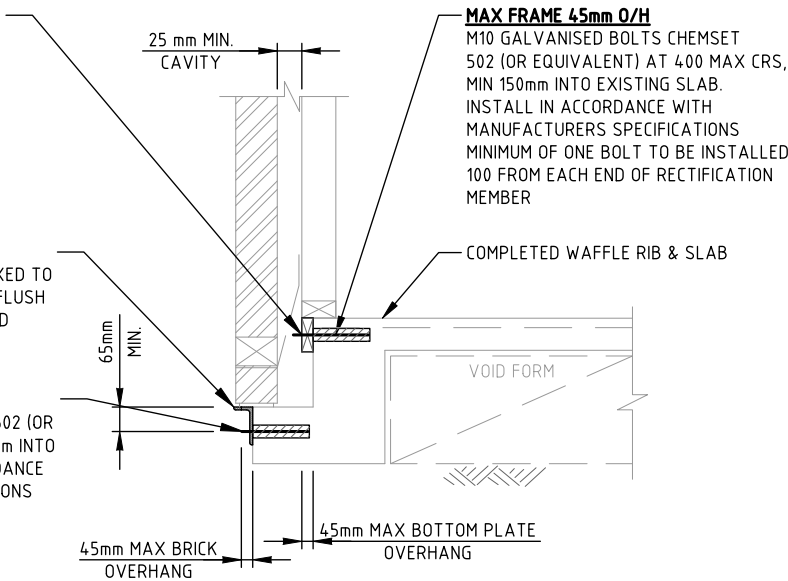

**PROVISIONAL ALTERNATIVE EDGE RIB
DETAIL FOR BRICK & FRAME OVERHANG
(MAX O/H 45mm FRAME & BRICKWORK)**

SCALE = N.T.S.

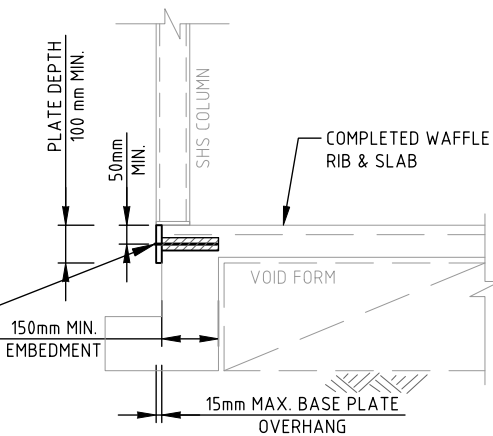

NOTE:
WHERE REBATE DEPTH IS <100mm, PROVIDE FULL DEPTH GALVANISED PLATE WITH NON-SHRINK STRUCTURAL GROUT (MAX 10mm THICK) BETWEEN PLATE AND REBATE BASE

VIEW A-A

SCALE = N.T.S.

GENERAL NOTES:

- CONTRACTOR IS TO CHECK & VERIFY ALL DIMENSIONS OF THE PROPOSED RECTIFICATION WORK AGAINST THE EXISTING SITE CONDITION FOR SUITABILITY PRIOR TO FABRICATION WORK, AND ADVISE THIS OFFICE OF ANY DISCREPANCIES
- ALL CHEMSET BOLTS TO BE EMBEDDED INTO EXISTING FOOTING/SLAB IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS, **DYNABOLTS ARE NOT PERMITTED.**
- ALL HOT ROLLED STEEL WORKS TO BE HOT DIPPED GALVANISED.
- ALL WELDS SHALL BE COMPLETED TO THE REQUIREMENTS OF AS1554 AND ALL SITE WELDS, CUTS AND GRINDS SHALL BE COLD GALVANISED USING 'GALMET PROTECTION SYSTEM' OR AN APPROVED EQUIVALENT. ALL EXTERNAL SITE WELDS, CUTS, AND GRINDS SHALL BE PAINTED WITH 'DULUX Zincanode 402' OR APPROVED EQUIVALENT.
- ALL ASSOCIATED FASTENERS/ANCHORS TO BE GALVANISED
- EXTERNAL WALL, COLUMN BASE PLATE & BOLTS OMITTED FOR CLARITY.
- BUILDER TO ENSURE MIN. 25mm MASONRY CAVITY IS ACHIEVED & MAINTAINED.
- REFER TO ENGINEERING DRAWINGS FOR COLUMN BASE PLATE TO CONCRETE SLAB CONNECTION DETAIL. BUILDER TO ENSURE BOLTS DO NOT CLASH WITH OVERHANG RECTIFICATION BOLTS.

STRUCTURAL GROUT APPLICATION NOTES:

- THE EDGES OF THE EXISTING CONCRETE SLAB ARE TO BE SCABBLED OR ACID WASHED AND THEN RINSED TO PROVIDE A COARSE SURFACE TO ACCEPT THE NON-SHRINK GROUT.
- APPLY A BONDCRETE OR BONDIT PRODUCT TO THE EDGES OF THE CONCRETE SLAB TO RECEIVE THE NON-SHRINK GROUT, IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.
- WHILE THE SLURRY MIX IS STILL WET, PROVIDE HIGH-STRENGTH NON-SHRINK GROUT TO BENEATH OF THE OVERHANG. (SUCH AS LANKO 702 DURABED OR SIMILAR APPROVED) INSTALLED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS. BENEATH THE OVERHANG THE THICKNESS OF THE GROUT MUST BE CONSISTENT WITH THE OVERHANG & GROUT MUST BE AT LEAST 150mm DEEP OR TO FULL DEPTH OF STEPDOWN/REBATE.
- CONCRETE OVERPOUR/BLOWOUT MAY BE TRIMMED BACK MAX. 10mm AND MADE GOOD WITH STRUCTURAL GROUT IN ACCORDANCE WITH NOTATION TO ACHIEVE A LEVEL SURFACE. IF >10mm, CONTACT THIS OFFICE.

TIMBER OVERHANG RECTIFICATION LIMITATIONS NOTES:

IF ONE OR MORE OF THE FOLLOWING CONDITIONS ARE MET AT THE OVERHANG AREA, BUILDER SHOULD SUBMIT DETAILS TO INTRAX CONSULTING ENGINEERS, PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION WORKS

- BRACED WALL WITH SPECIFIED FIXING, OTHER THAN NOMINAL FIXING
- UNDER CONCENTRATED LOADS (DOUBLE/TRIPLE/QUADRUPLE STUDS OR STEEL COLUMN)
- SLAB FOOTING SHOWS SIGNS OF CRACKING OR VOIDS ON SURFACE OF EXTERNAL RIBS (DUE TO POOR COMPACTION/ VIBRATION)
- TIMBER FRAMING WALL IS LESS THAN 90mm WIDE
- TIMBER FRAMING WALL IS GREATER THAN 2700mm HIGH
- WIND CLASSIFICATION OF N3 OR ABOVE**
- WALL IS NOT SINGLE LEAF MASONRY

NOTE:

GROUTING APPLICATION TO BE COMPLETED AND ALLOWED TO CURE FOR MINIMUM 48 HOURS PRIOR TO INSTALLATION OF ANKASCREW BOTTOM PLATE ANCHORS.

STEEL OVERHANG NOTES:

MAX. PLATE THICKNESS FOR STEEL COLUMN OVERHANG:


- 5mm MIN. PLATE FOR UP TO MAX. 5mm COLUMN OVERHANG
- 10mm MIN. PLATE FOR UP TO MAX. 10mm COLUMN OVERHANG
- 15mm MIN. PLATE FOR UP TO MAX. 15mm COLUMN OVERHANG

STEEL OVERHANG RECTIFICATION LIMITATIONS NOTES:

IF ONE OR MORE OF THE FOLLOWING CONDITIONS ARE MET AT THE OVERHANG AREA, BUILDER SHOULD SUBMIT DETAILS TO INTRAX CONSULTING ENGINEERS, PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION WORKS

- COLUMN OVERHANG EXCEED 15mm.
- COLUMN IS LOCATED AT SLAB CORNER.
- OTHER COLUMN TYPES OTHER THAN SHS COLUMN HAS BEEN NOMINATED (i.e. PORTAL FRAME COLUMNS/UB/UC STEEL COLUMNS ETC. & ANY OTHER TYPES)
- SLAB FOOTING SHOWS SIGNS OF CRACKING OR VOIDS ON SURFACE OF EXTERNAL RIBS (DUE TO POOR COMPACTION/ VIBRATION)

			 Intrax HOUSING Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE				
					DRAWING FOOTING DETAILS - SHEET 6				
04	CONSTRUCTION ISSUE	24.07.26			CLIENT THE MAKAA BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26					SHEET NO. S09	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26							
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

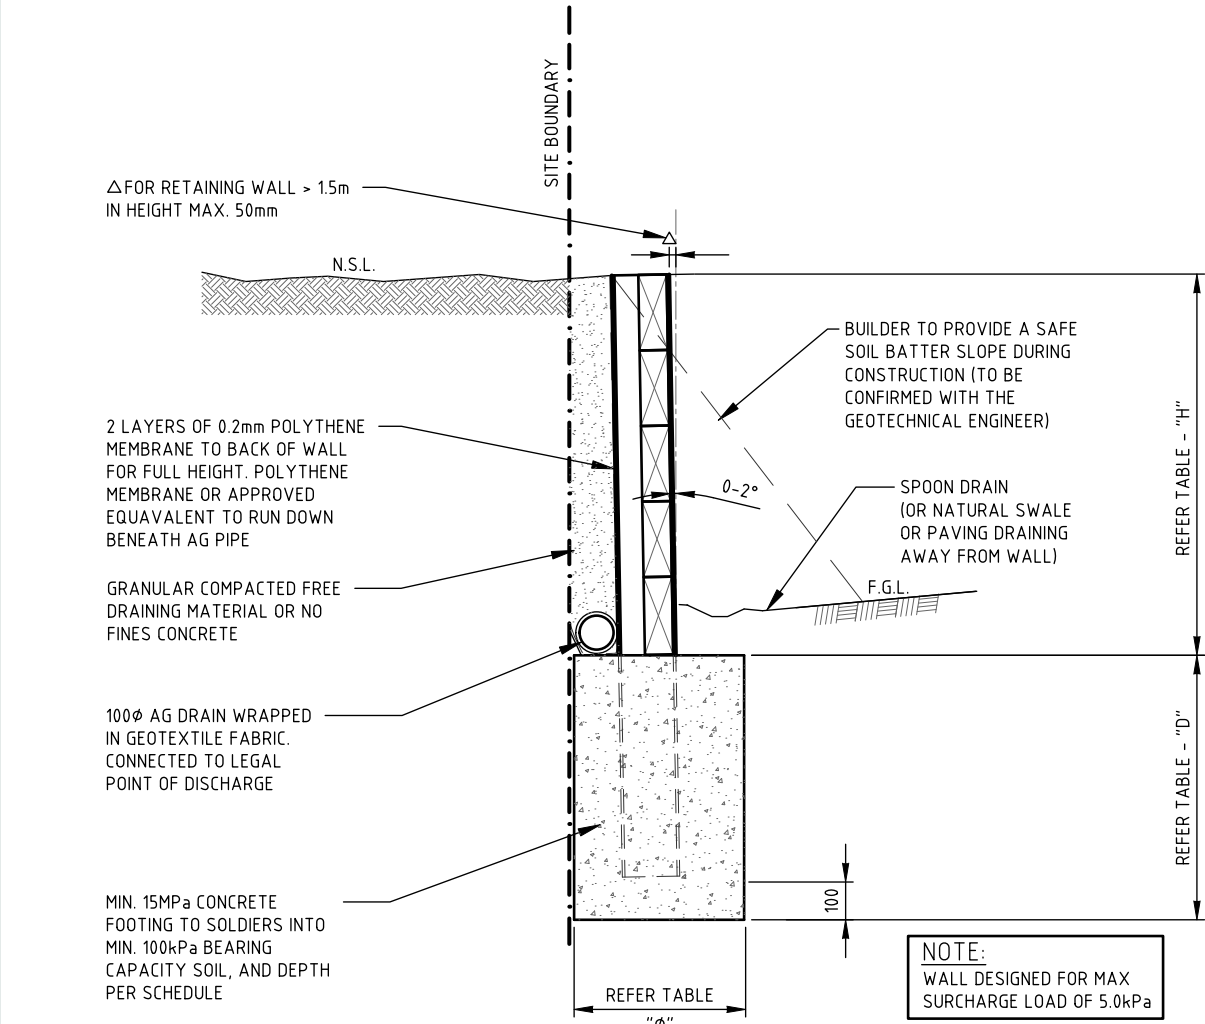

TYPICAL RETAINING WALL DETAIL (CUT RW1)
SCALE 1 : 20

RETAINING WALL SEQUENCE

1. BULK EXCAVATE SITE TO ALLOW SAFE BATTER SLOPE INSIDE PROPERTY BOUNDARIES IN ACCORDANCE WITH THE GEOTECHNICAL ENGINEERS RECOMMENDATIONS.
2. DRILL BORED PIERS HOLES SIZES AS REQUIRED AND ENSURE HOLES ARE CLEAN OF LOOSE SOIL AND DEBRIS
3. CAST IN VERTICAL GALVANISED POST TO THE APPROPRIATE DEPTH AND ALIGNMENT.
4. POUR FOOTING UP TO 100mm BELOW FINISH CUT LEVEL (FCL).
5. CAREFULLY EXCAVATE BETWEEN TWO POSTS AT ONE TIME AND INSERT RETAINING SLEEPERS AND GEOTEXTILE FABRIC IMMEDIATELY AFTER EXCAVATION. THEN BACKFILL WITH COMPACTED FREE DRAINING MATERIAL AS SHOWN ON TYPICAL DETAILS
6. REPEAT ITEMS 5 ONLY WHEN PREVIOUSLY RETAINING BAY HAS BEEN FULLY CONSTRUCTED AND BACKFILLED. AT NO STAGE ARE TWO BAYS BETWEEN POSTS TO BE EXCAVATED AT THE SAME TIME.

NOTE: RETAINING WALL CONSTRUCTION SEQUENCE IS PERMISSIBLE TO BE OMITTED ONLY IF

- 1) THERE IS NO SIGHTING OF ADJACENT NEIGHBOUR FOOTING OR OVER EXCAVATION, **AND**
- 2) SOIL RETAINING HEIGHT IS UP TO 1201mm, **AND**
- 3) RETAINING SOIL DOES NOT CONTAIN ANY SILT OR SAND MATERIAL, **AND**
- 4) RETAINING WALL CONSTRUCTION IS COMPLETED WITHIN 24 HOURS AFTER EXCAVATION

NOTE: IF RETAINING WALL SEQUENCE UTILISED, STRIP DRAIN TO BE PROVIDED AND CONNECTED TO AGI DRAIN AT INTERNAL FACE OF WALL

SOLDIER PILE AND SLEEPER RETAINING WALL TABLE (RW1)					
RETAINING WALL HEIGHT 'H' (mm)	SOLDIER PILE SIZE AND GRADE	MAX. SPACING OF SOLDIER PILE (mm)	SLEEPER SIZE AND GRADE	FOOTING DEPTH 'D' (mm)	FOOTING DIAMETER 'Ø' (mm)
≤ 400	100 UC 15	2400	75 × 200 H4 TREATED F7 KD PINE	1200	400
≤ 600	100 UC 15	1200	75 × 200 H4 TREATED F7 KD PINE	1200	400
≤ 800	100 UC 15	1200	75 × 200 H4 TREATED F7 KD PINE	1200	400
≤ 1000	100 UC 15	1200	75 × 200 H4 TREATED F7 KD PINE	1200	400
ALL STEELWORK TO BE HOT DIP GALVANIZED					

NOTE:
ALL TIMBER MEMBER SHALL BE SUITABLE FOR THE RELEVANT BAL RATING.

NOTE:
BUILDER IS TO ENSURE RETAINING WALL CUT DOES NOT CAUSE INSTABILITY TO EXISTING TREES ON SITE. EXISTING TREES LOCATION TO BE CONFIRMED ON SITE PRIOR TO CONSTRUCTION THIS OFFICE IS TO BE CONFIRMED FOR FURTHER GUIDANCE.

NOTE:
FOOTINGS TO BE DRILLED INTO NATURAL GROUND WITH 100 K.P.A BEARING CAPACITY, U.N.O.

RETAINING POSITION MAY VARY DUE TO SITE CONDITIONS, BUILDER TO ADOPT SCHEDULE TO SUIT, U.N.O.

NOTE:
IF SOIL REPORT INDICATES BASALT FLOATERS/ROCK FROM ITS BORELOG, IT IS LIKELY THAT SOME DIFFICULTY MAY BE ENCOUNTERED WHEN UNDERTAKING EXCAVATIONS AT THIS SITE. IT SHOULD BE NOTED THAT IF SIGNIFICANT EXCAVATIONS ARE PLANNED AT THIS SITE ROCK BREAKING EQUIPMENT MAY BE REQUIRED.

NOTE:
NO EXCAVATION IS TO BE CARRIED OUT BEYOND THE SITE BOUNDARY UNLESS APPROVAL OBTAINED.
THE BUILDER IS TO MAINTAIN STABILITY OF EXISTING SITE CUT AND EXCAVATION DURING CONSTRUCTION BY SHORING, PROPPING ETC. AS REQUIRED

SAFE EXCAVATED BATTERS:

A BUILDER FAMILIAR WITH THIS TYPE OF EXCAVATION WORK MUST ENSURE ADEQUATE STABILITY OF EXCAVATED SLOPES DURING CONSTRUCTION.
IF SAFE EXCAVATED BATTERS CANNOT BE ACHIEVED AN ALTERNATIVE DESIGN MAY BE TO CONSTRUCT THE RETAINING WALL IN STAGES . CONTACT THIS OFFICE FOR FURTHER ADVICE. FOR ALL SAFE EXCAVATION BATTERS BUILDER TO FOLLOW THE RECOMMENDATONS IN SOIL REPORT AND IN THE ABSENCE OF THIS INFORMATION, RECOMMENDATONS FOR SLOPES CAN BE FOUND BELOW:

SOIL TYPE	MAXIMUM SLOPE
SILT/SAND/FILLING	30 DEGREES
CLAY	45 DEGREES
WEATHERED ROCK	60 DEGREES

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT
THE MAKAAAN BUILDERS - NSW

CONSTRUCTION ISSUE



DRAWING
FOOTING DETAILS - SHEET 7

260362

ENGINEER: E.I.
SHEET NO. S10

DRAWN: Y.Z
NO. OF SHEETS 27

REV
04

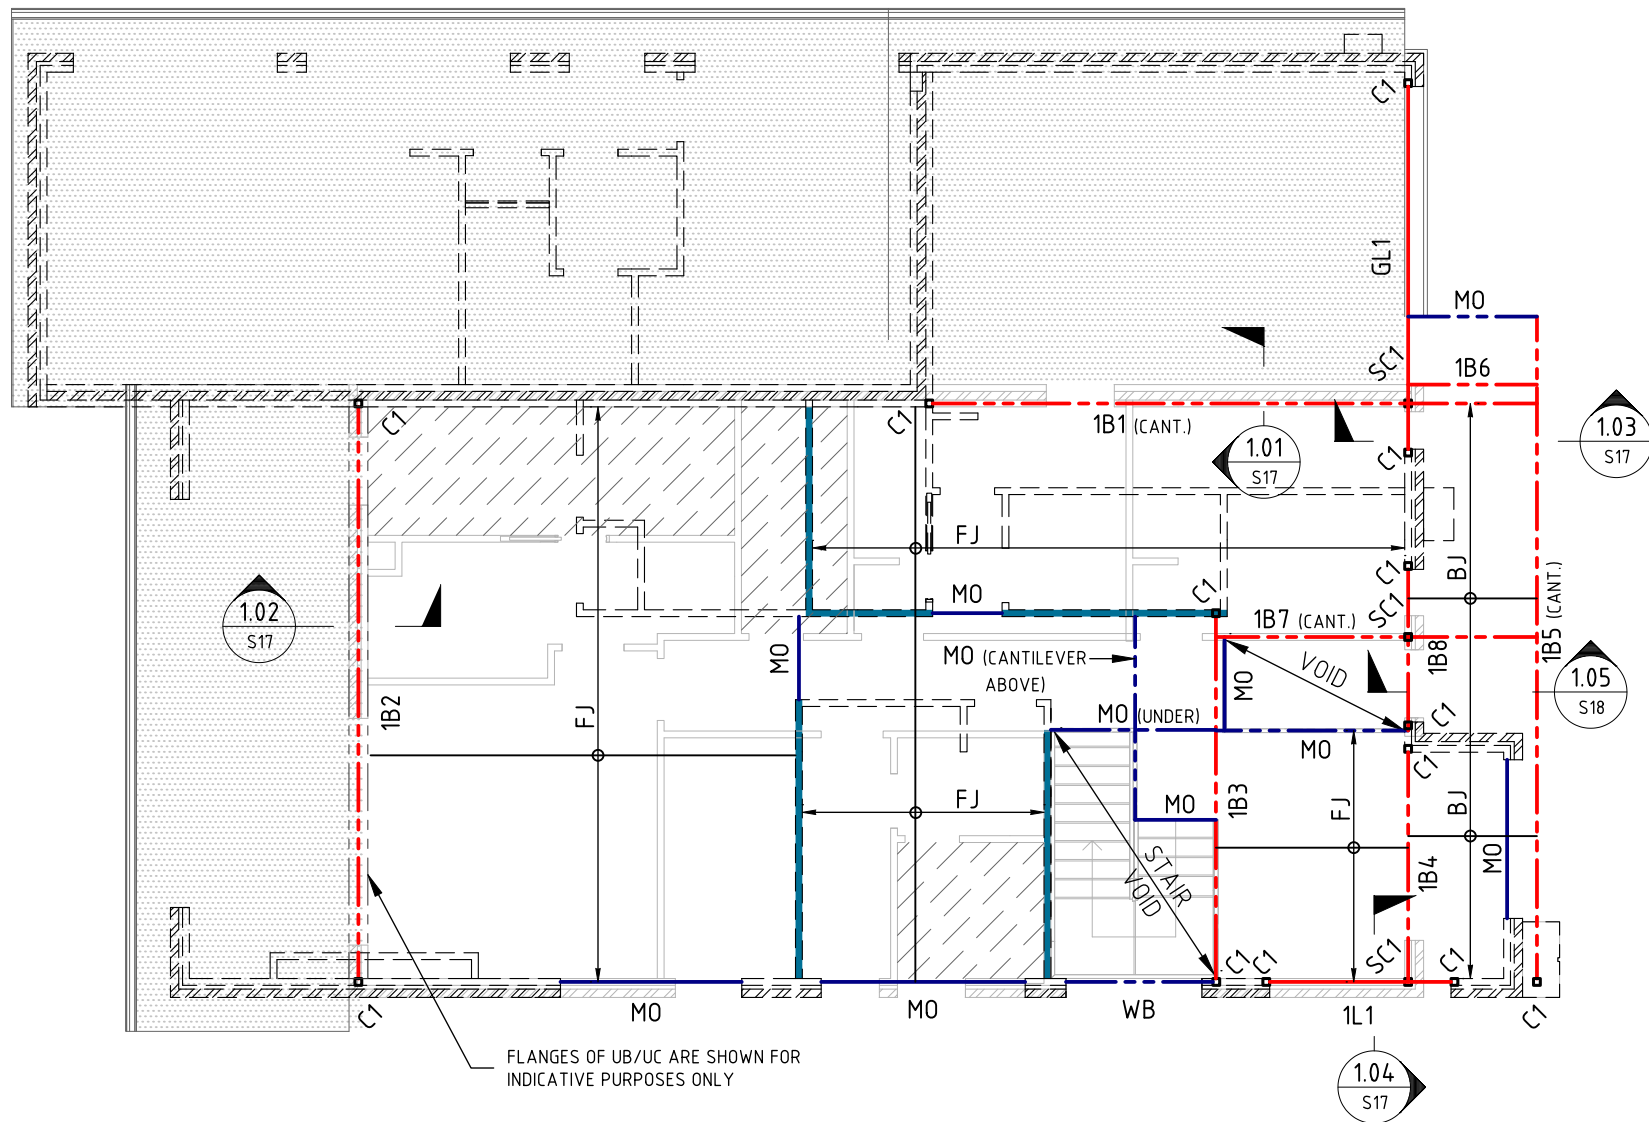

LEGEND

	BRICKWORK UNDER
	TIMBER STUD WALLS UNDER
	BRICKWORK OVER
	TIMBER STUD WALLS OVER
	INTERNAL LOAD BEARING WALLS UNDER
	LOWER TRUSS ROOF BY OTHERS
	WET AREA, FLOOR JOISTS TO SUIT
	UC/UB STEEL BEAM

FIRST FLOOR & LOWER ROOF PLAN

SCALE = 1:100

FIRST FLOOR AND LOWER ROOF MEMBER SCHEDULE		
MARK	SECTION	REMARKS/CONNECTIONS
GL1	250 PFC + 200 x 15 PL	REFER TYPICAL DETAIL
1B1	380 PFC + 200 x 10 PL	6320mm MIN. BACKSPAN 1720mm MAX. CANTILEVER REFER TYPICAL DETAIL
1B2	310 UC 158	
1B3	200 PFC	
1B4	200 PFC + 200 x 10 PL	REFER TYPICAL DETAIL
1B5	300 PFC	7600mm MIN. BACKSPAN 1160mm MAX. CANTILEVER
1B6	200 PFC	
1B7	250 PFC	2500 MIN. BACKSPAN 1800 CANTILEVER
1B8	200 PFC + 200 x 10 PL	REFER TYPICAL DETAIL
1L1	200 PFC + 200 x 10 PL	REFER TYPICAL DETAIL
BJ	BALCONY JOIST	BY OTHERS
FJ	FLOOR JOIST	BY OTHERS
C1	75 x 75 x 3.5 SHS (C350)	
SC1	89 x 89 x 5 SHS (C350)	STUB COLUMN
WB	WIND BEAM	BY OTHERS
M0	MEMBER	BY OTHERS

GENERAL FRAMING NOTES

- ALL DOUBLE TIMBER MEMBERS TO BE NAIL LAMINATED TO AS1684 OR FIXED TOGETHER AS PER MANUFACTURER'S SPECIFICATIONS U.N.O.
- ALL FRAMING MEMBERS SHALL BE SUITABLE FOR THE RELEVANT BAL RATING
- EXPOSED TIMBER MEMBERS SHALL BE PROTECTED IN ACCORDANCE WITH AS1684.2 APPENDIX B.
- ALL STRUCTURAL STEEL CORROSION PROTECTION SHALL BE IN ACCORDANCE WITH NCC AND SUITABLE ATMOSPHERIC ENVIRONMENT. MIN. HOT DIP GALVANISED OR ALTERNATIVE CORROSIVE PROTECTION TO AS2312.1/2 SHALL BE ADOPTED.

NOTE:

ALL LINTELS TO BE SUPPORT BY 2-90x35 MGP10 STUDS EACH END, U.N.O.

NOTE:

WALL THAT IS GREATER THAN 3000mm HEIGHT PROVIDE 90x42 SMARTLVL15 STUDS

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26



Intrax
HOUSING

Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT

PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT

THE MAKAA BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING

FIRST FLOOR & LOWER ROOF PLAN

260362

ENGINEER:

E.I.

DRAWN:

Y.Z

REV


SHEET NO.

S11


NO. OF SHEETS

27

04



MEMBER SCHEDULE		
MARK	SECTION	REMARKS/CONNECTIONS
RB1	200 PFC	
RB2	300 PFC	3400mm MIN. BACKSPAN 1700mm MAX. CANTILEVER
C1	75 × 75 × 3.5 SHS (C350)	
M0	MEMBER	BY OTHERS
DSx	REFER TO TIMBER STUD SCHEDULE ON DETAIL PAGE	SAME APPLIES TO TSx/QSx/FSx

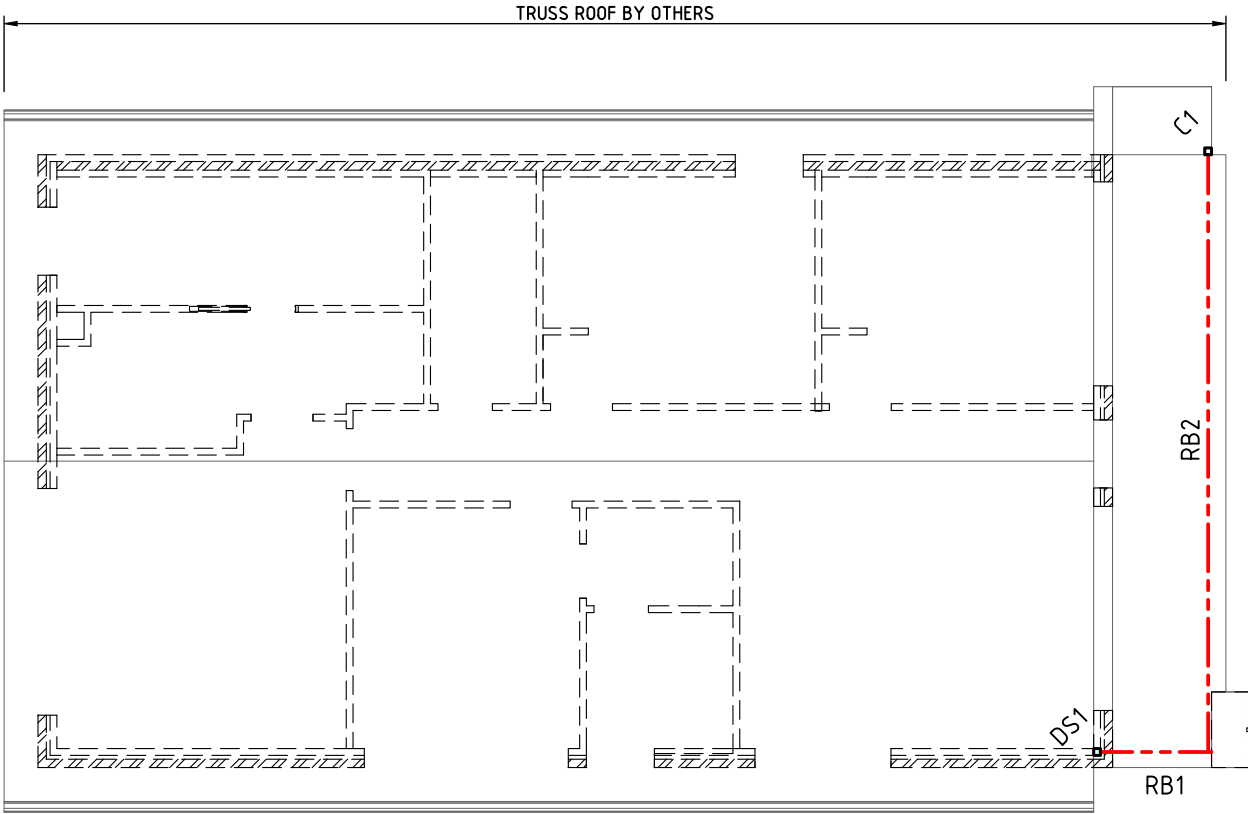

UPPER ROOF PLAN

SCALE = 1:100

LEGEND




	BRICKWORK UNDER
	TIMBER STUD WALLS UNDER

NOTE:
WALL THAT IS GREATER THAN 3000mm HEIGHT PROVIDE 90x42
SMARTLVL15 STUDS

GENERAL FRAMING NOTES



- ALL DOUBLE TIMBER MEMBERS TO BE NAIL LAMINATED TO AS1684 OR FIXED TOGETHER AS PER MANUFACTURER'S SPECIFICATIONS U.N.O.
- ALL FRAMING MEMBERS SHALL BE SUITABLE FOR THE RELEVANT BAL RATING
- EXPOSED TIMBER MEMBERS SHALL BE PROTECTED IN ACCORDANCE WITH AS1684.2 APPENDIX B.
- ALL STRUCTURAL STEEL CORROSION PROTECTION SHALL BE IN ACCORDANCE WITH NCC AND SUITABLE ATMOSPHERIC ENVIRONMENT. MIN. HOT DIP GALVANISED OR ALTERNATIVE CORROSIVE PROTECTION TO AS2312.1/2 SHALL BE ADOPTED.

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
				CLIENT THE MAKAAH BUILDERS - NSW	DRAWING UPPER ROOF PLAN			
04	CONSTRUCTION ISSUE	24.07.26			260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S12	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

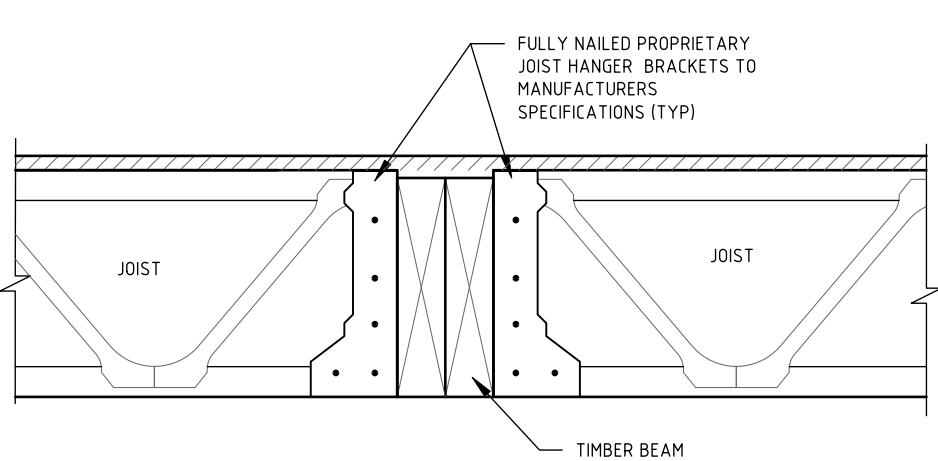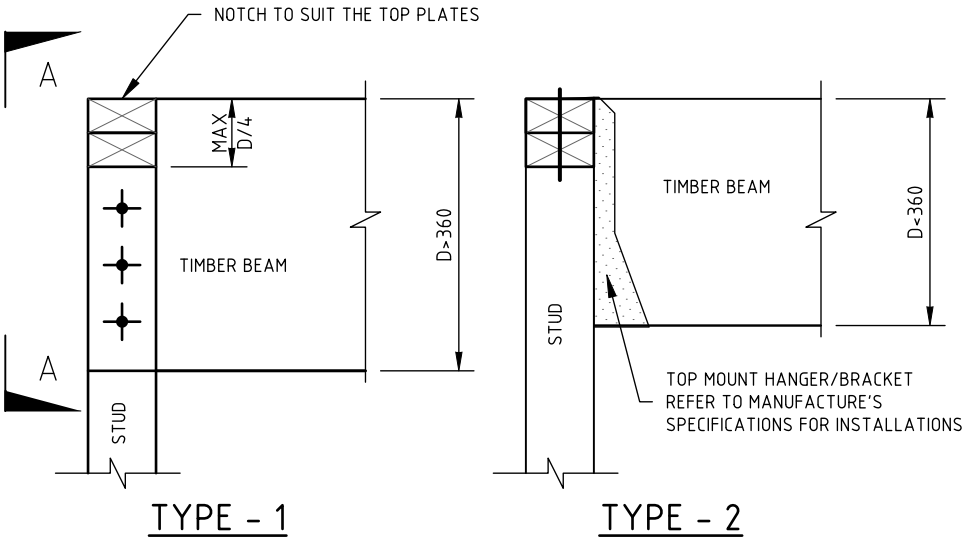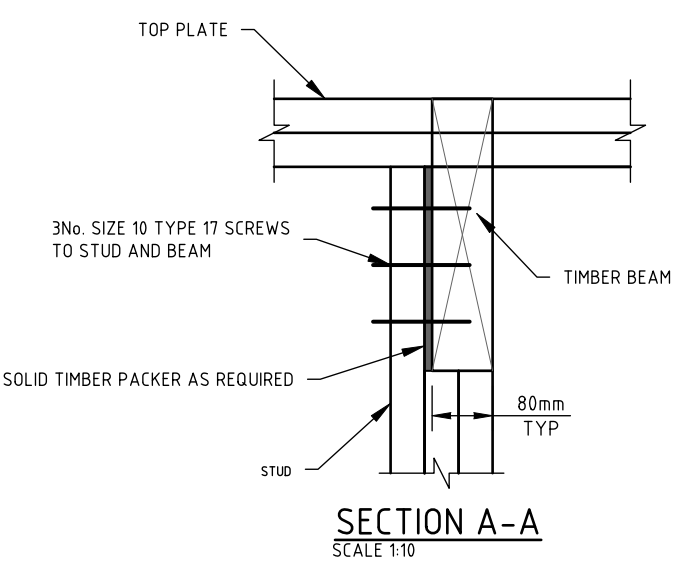

FLOOR JOISTS TO TIMBER BEAM
CONNECTION DETAIL
SCALE 1 : 10


ALL STUDS SHALL BE NAIL LAMINATED IN ACCORDANCE WITH AS1684.2		DS1	DS2	DS3	DS4	TS1	TS2	TS3	QS1	QS2	FS1	FS2
		90x45	90x45	70x45	120x45	90x45	90x45	70x45	90x45	90x45	90x45	90x45
		MGP10	F17 KD HW	F17 KD HW	MGP10	MGP10	F17 KD HW	F17 KD HW	MGP10	F17 KD HW	MGP10	F17 KD HW
LINTEL	NO. OF BEARING STUD	1	1	1	1	1	1	1	2	2	2	2
	NO. OF JAMB STUD	1	1	1	1	2	2	2	2	2	3	3
BEAM	NO. OF BEARING STUD	2	2	2	2	3	3	3	4	4	5	5

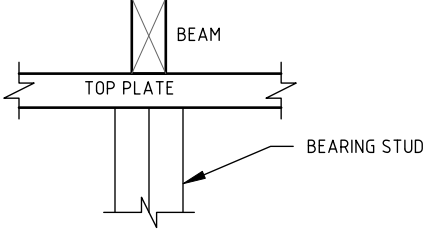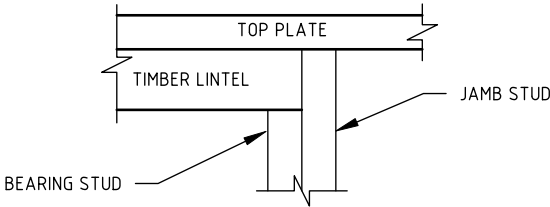

LINTEL SUPPORT ON
STUDS

BEAM SUPPORT ON
STUDS

TIMBER STUDS SCHEDULE

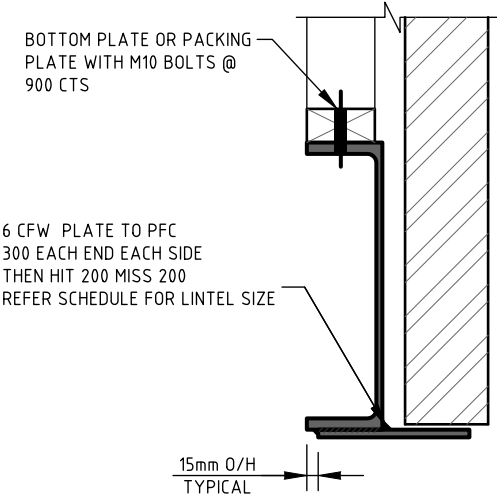


LINTELS TO BE PROPPED AT MID SPAN UNTIL BRICKWORK IS A MINIMUM OF 3 DAYS OLD


PROVIDE CORROSION PROTECTION TO FULL MEMBER AS PER TABLES ABOVE

PFC/PLATE LINTEL DETAIL
SCALE 1 : 10


			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
04	CONSTRUCTION ISSUE	24.07.26			DRAWING FRAMING DETAILS - SHEET 1			
03	CONSTRUCTION ISSUE	20.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
02	CONSTRUCTION ISSUE	13.07.26				SHEET NO. S13	NO. OF SHEETS 27	
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

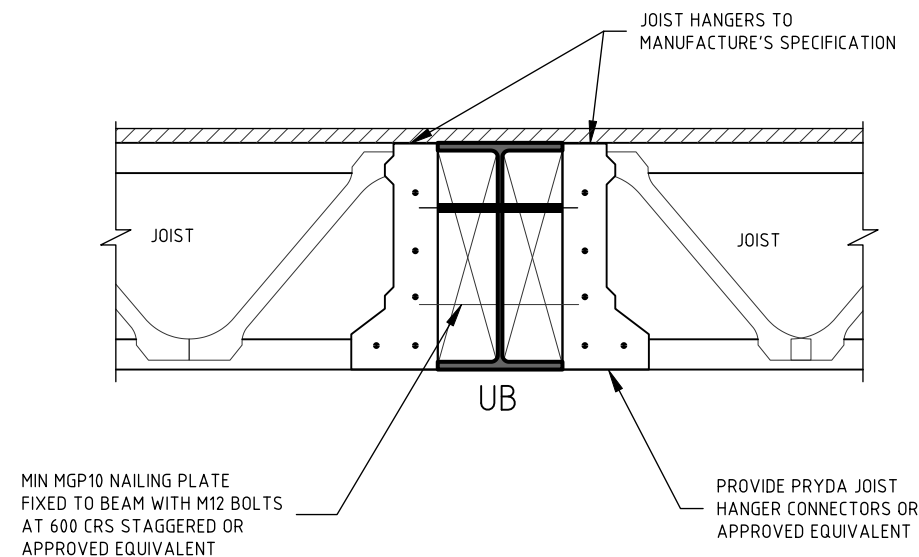

FLOOR JOIST TO UB/UC DETAIL

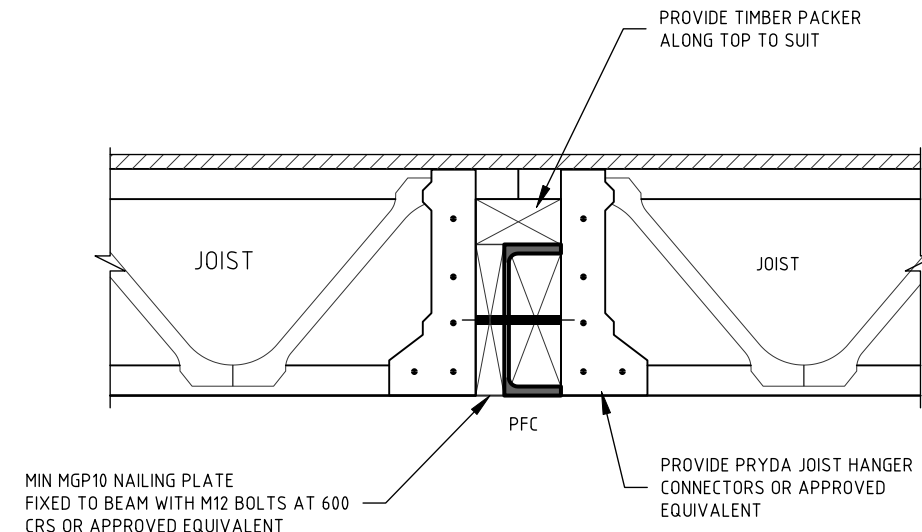


FLOOR JOIST TO PFC DETAIL

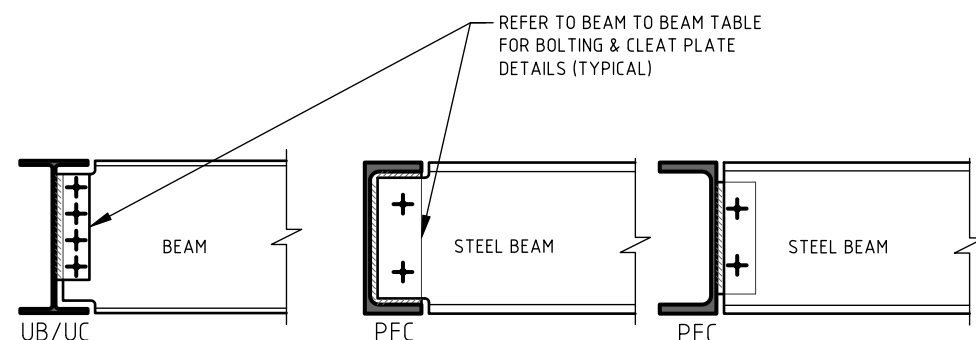


BEAM TO BEAM CONNECTION TABLE		
MEMBER SIZE	BOLTS REQUIRED	CLEAT PLATE THICKNESS
UPTO 250UB/PFC	2-M16 4.6/S BOLTS	10mm
UPTO 360UB & 380PFC	3-M20 4.6/S BOLTS	10mm
NOTES: • THIS TABLE IS APPLICABLE TO ALL STEEL BEAM TO STEEL BEAM CONNECTION TYPICAL (U.N.O. ON DETAILS). • ALL WELDING TO BE 6mm CFW TYPICAL (U.N.O. ON DETAILS).		

TYPICAL STEEL BEAM TO STEEL BEAM CONNECTION DETAIL & TABLE
N.T.S.

NOTES:
 WHERE BOTTOM PLATE IS DISCONTINUED VIA NOTCH OR PENETRATION UP TO 250mm:
 • WHERE BOTTOM PLATE IS SUPPORTED BY SLAB;
 o FIX EACH SIDE OF NOTCH/HOLE VIA MASONRY NAILS WITH 30mm MIN. EMBEDMENT DEPTH
 • WHERE BOTTOM PLATE IS SUPPORTED BY TIMBER MEMBERS;
 o FIX EACH SIDE OF NOTCH/HOLE VIA 2/2.8mm DIA. NAILS
 o BOTTOM PLATE TO BE CONTINUOUS EACH SIDE OF DISCONTINUATION FOR MIN. 1500mm
 FOR DISCONTINUED BOTTOM PLATE FIXING REQUIREMENTS UNDER OPENINGS, REFER TO AS1684.2

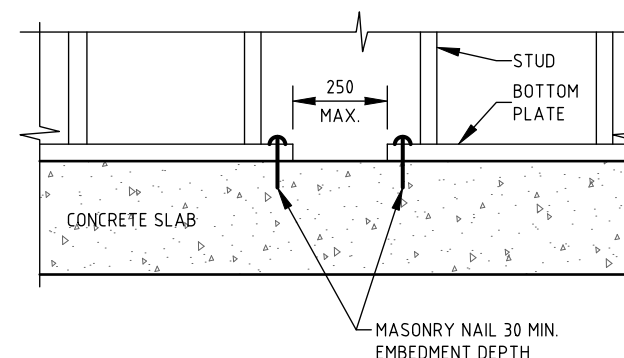


DISCONTINUED BOTTOM PLATE - SLAB SUPPORTED
N.T.S.

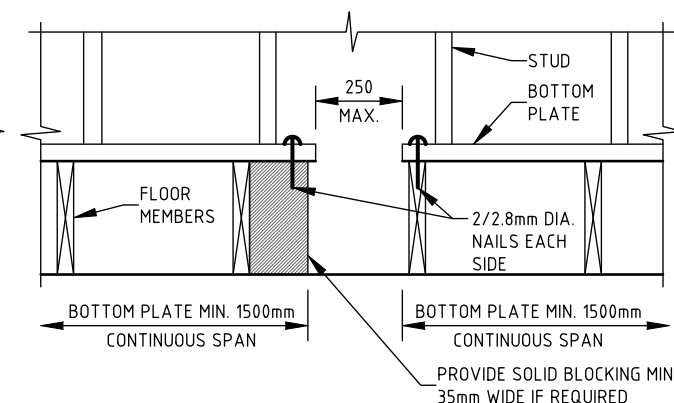


DISCONTINUED BOTTOM PLATE - FRAMED FLOOR SUPPORTED
N.T.S.

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE				
				DRAWING FRAMING DETAILS - SHEET 2						
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAH BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04		
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S14	NO. OF SHEETS 27			
02	CONSTRUCTION ISSUE	13.07.26								
01	CONSTRUCTION ISSUE	17.06.26								
REV.	REMARK/COMMENT	DATE:								

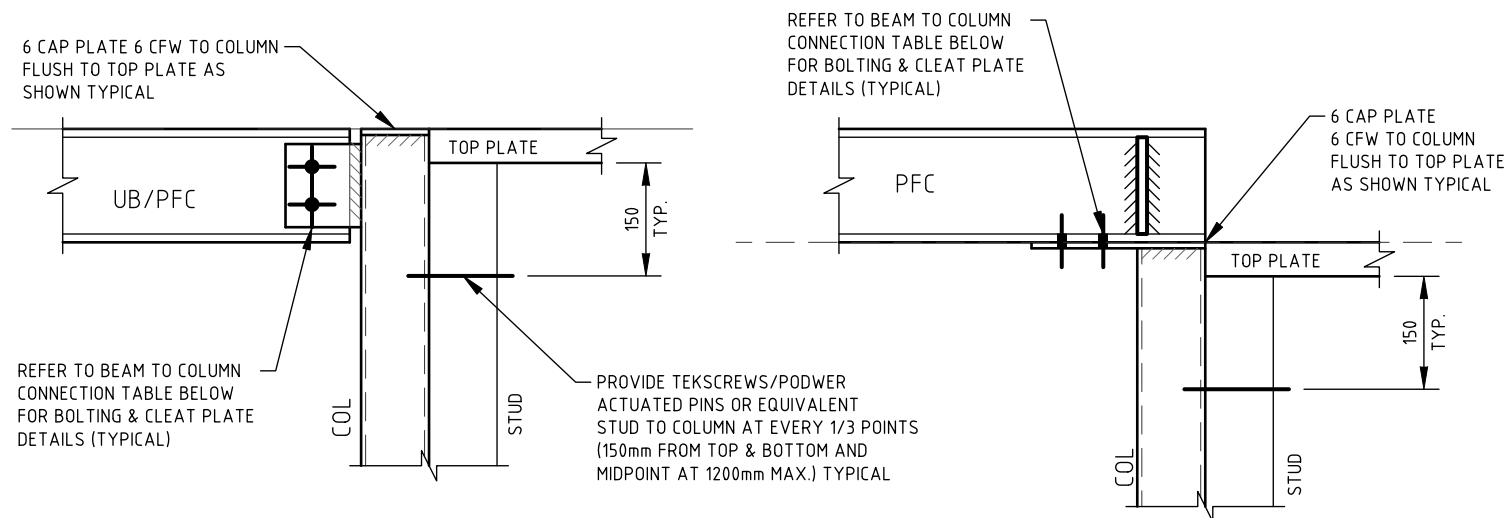


BEAM TO COLUMN CONNECTION TABLE		
MEMBER SIZE	BOLTS REQUIRED	CLEAT/CAP PLATE THICKNESS
UPTO 250UB/PFC	2-M16 4.6/S BOLTS	10mm
UPTO 360UB & 380PFC	3-M20 4.6/S BOLTS	10mm
NOTES: - THIS TABLE IS APPLICABLE TO ALL STEEL BEAM TO COLUMN CONNECTION TYPICAL (U.N.O. ON DETAILS). - ALL WELDING TO BE 6mm CFW TYPICAL (U.N.O. ON DETAILS). - LEVEL OF TOP PLATES ARE INDICATIVE ONLY, NUMBER OF TOP PLATES MAY VARY. - BUILDER/CONTRACTOR TO CONFIRM HEIGHT OF LINTEL & CLEAT PLATE TO SUIT WINDOW/DOOR OPENING.		

TYPICAL STEEL BEAM TO STEEL
COLUMN CONNECTION DETAIL & TABLE
N.T.S.

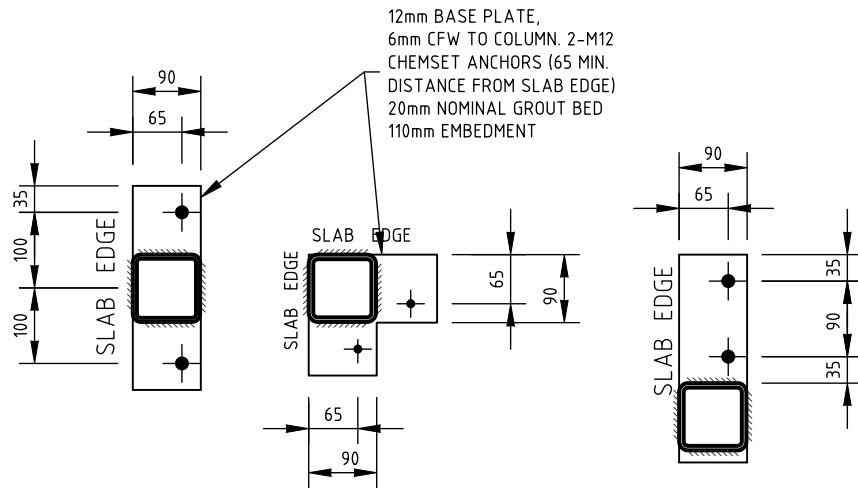


BASE PLATE PLAN
SCALE 1 : 10

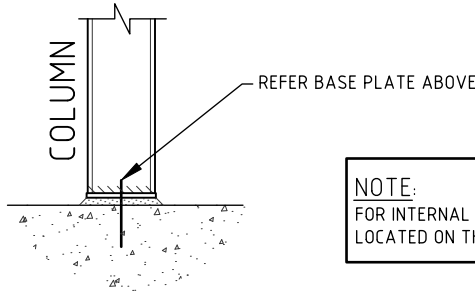


NOTE:
FOR INTERNAL COLUMN BASE PLATE BOLTS TO BE
LOCATED ON THE CENTER OF THE BASE PLATE

TYPICAL COLUMN BASE
CONNECTION DETAILS

			 Intrax HOUSING Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING FRAMING DETAILS - SHEET 3			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S15	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

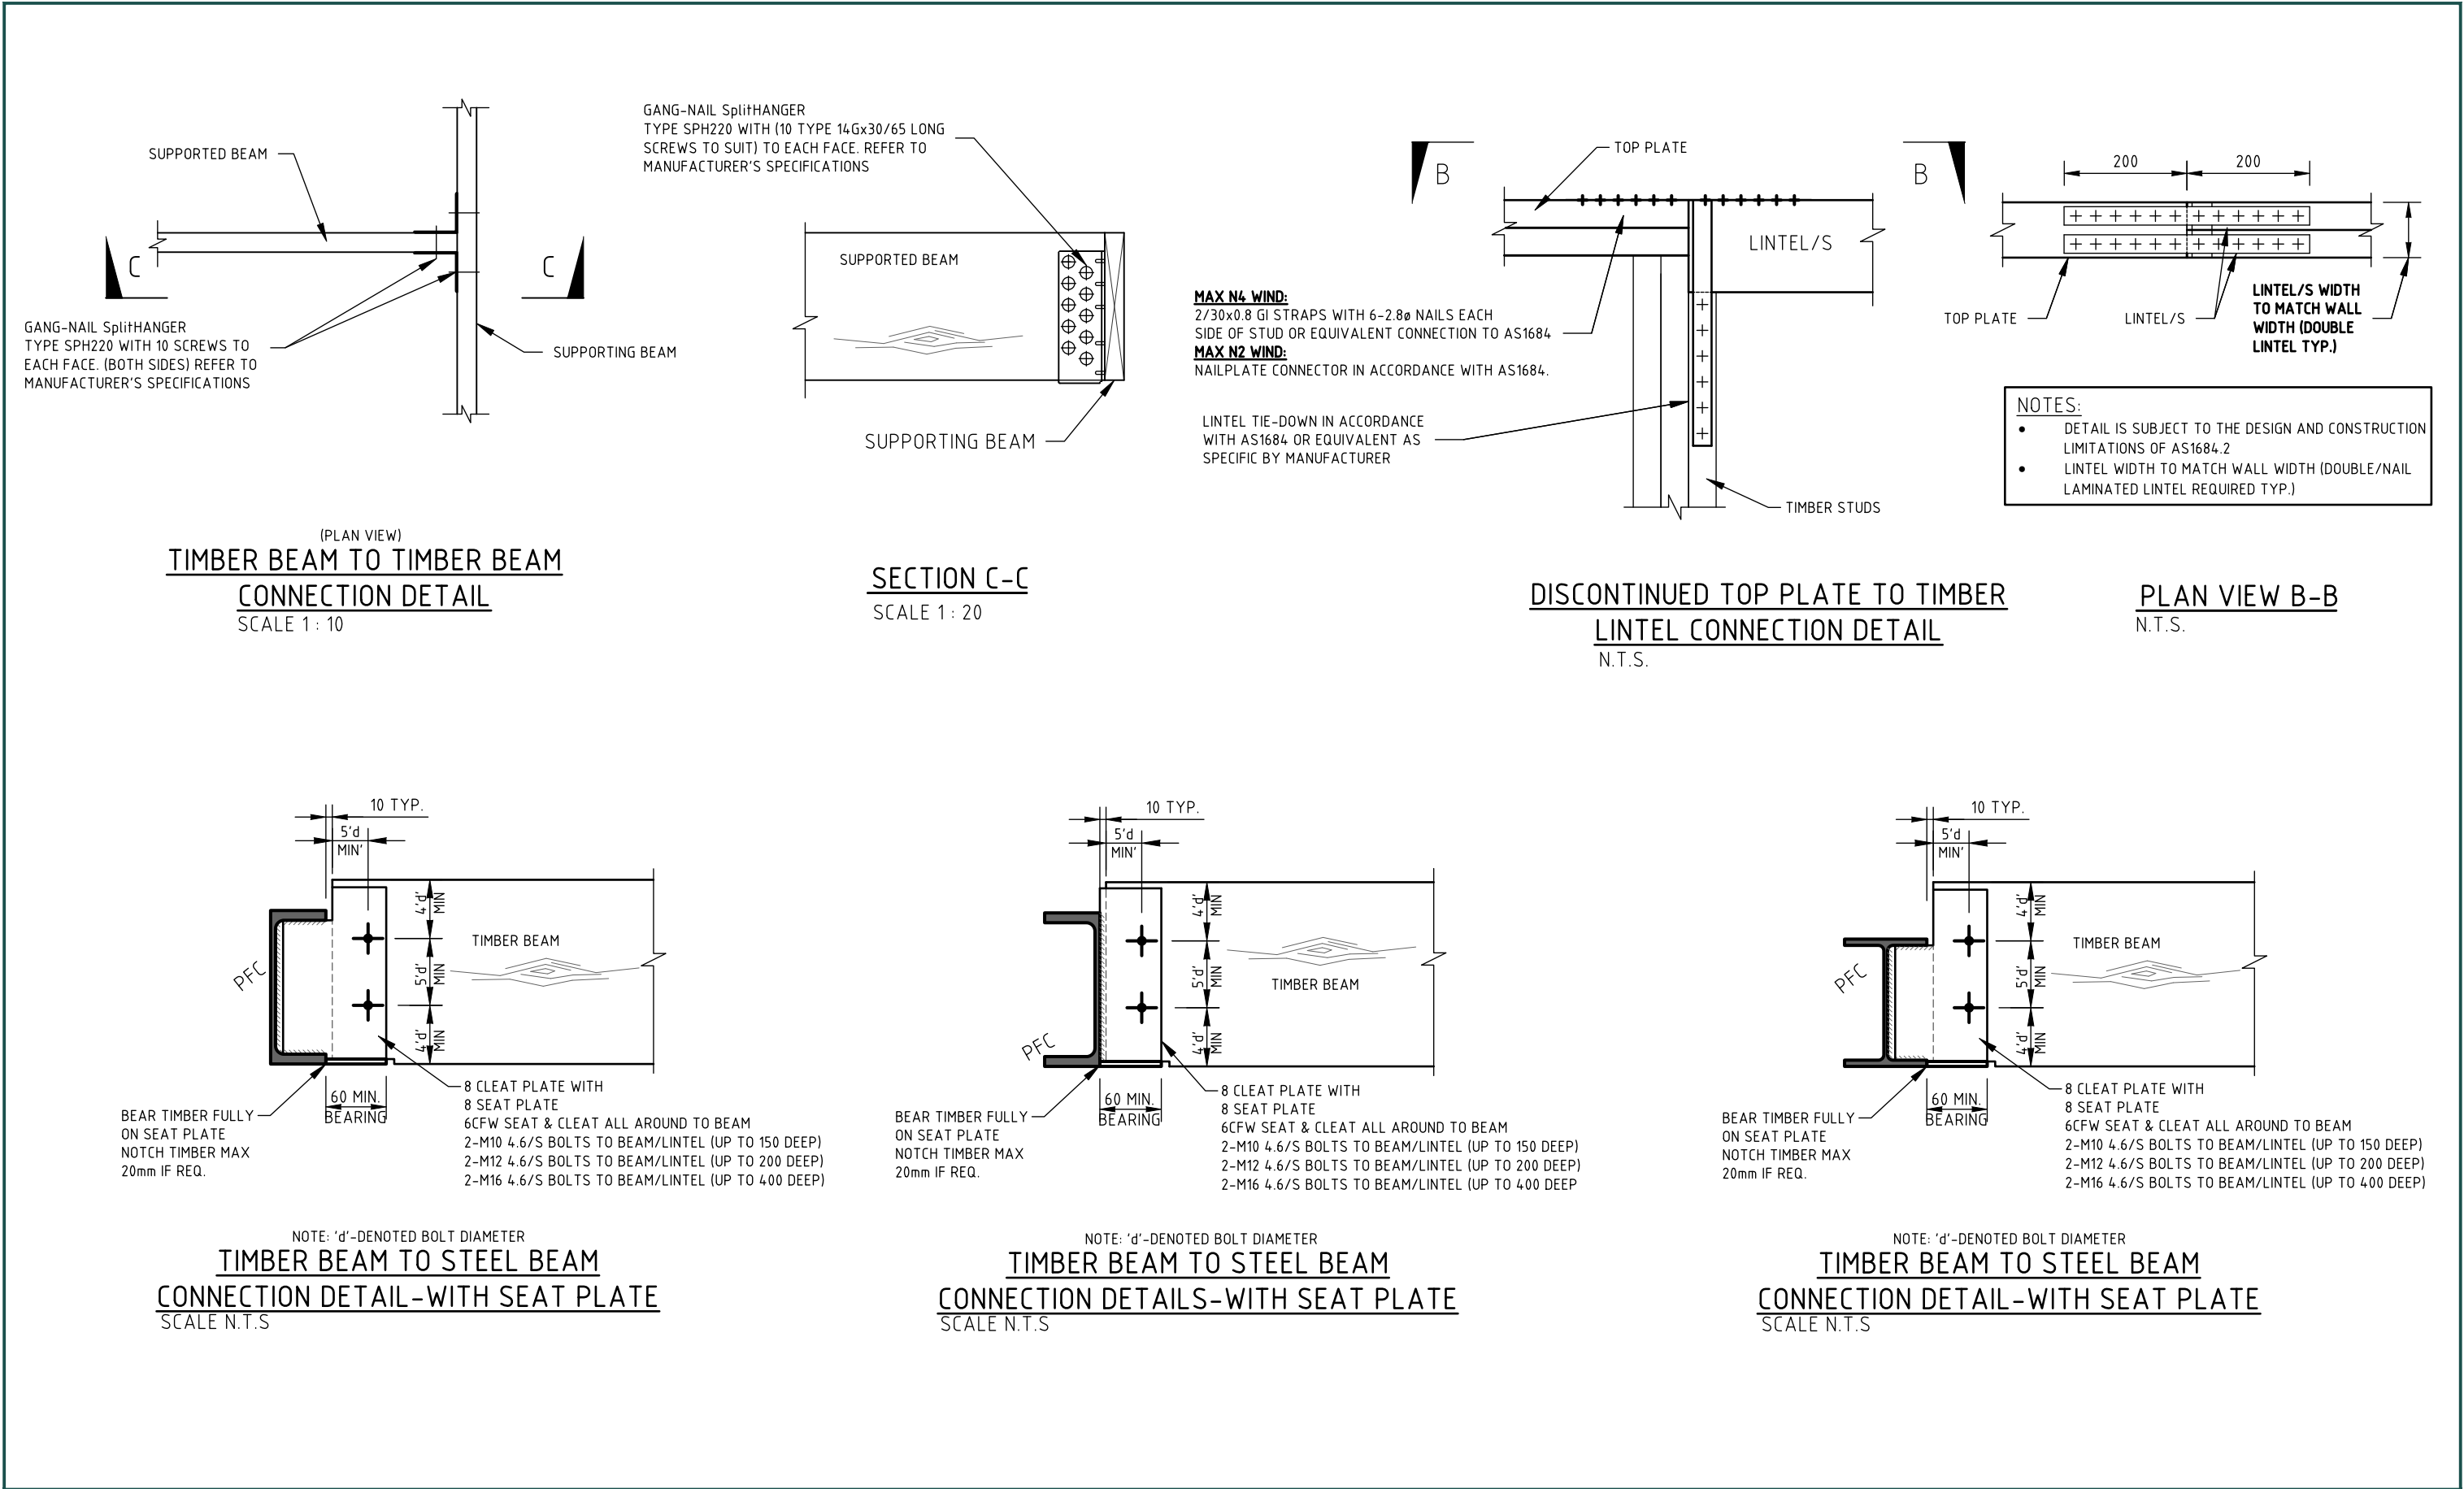


			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE			
				DRAWING FRAMING DETAILS - SHEET 4					
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW		260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26					SHEET NO. S16	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26							
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

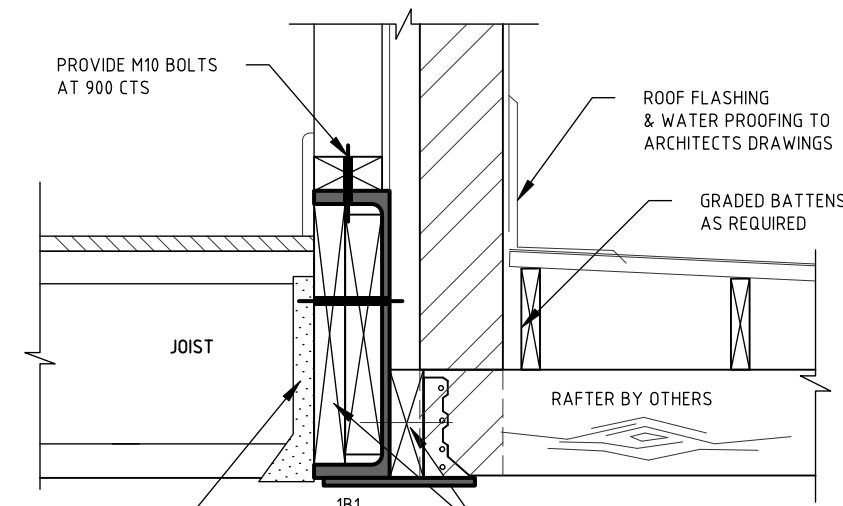

APPROVED FULLY NAILED PROPRIETARY JOIST HANGER BRACKETS TO MANUFACTURERS SPECIFICATIONS (TYP)

MIN MGP10 NAILING PLATE FIXED TO BEAM WITH M12 BOLTS AT 600 CRS STAGGERED OR APPROVED EQUIVALENT


SECTION 1.01
1:10
S11

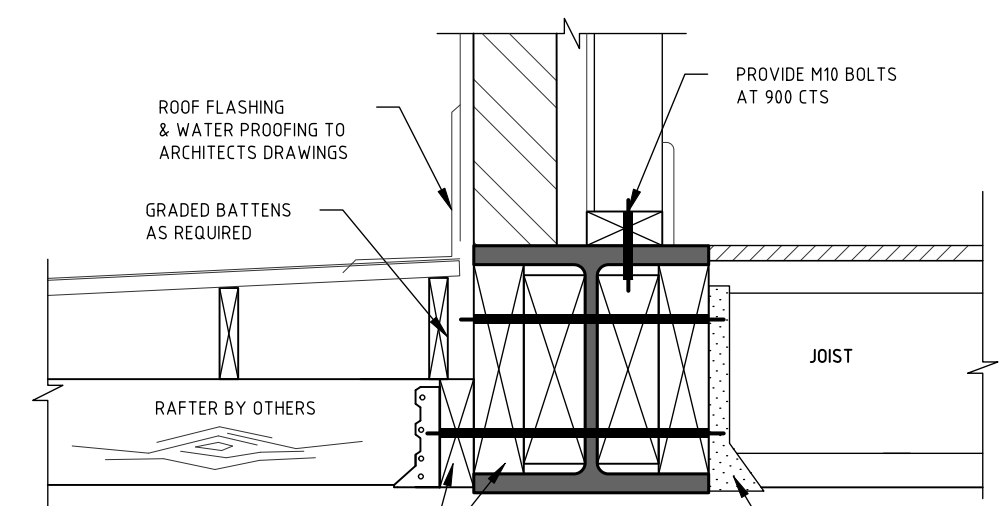


MIN MGP10 NAILING PLATE FIXED TO BEAM WITH M12 BOLTS AT 600 CRS STAGGERED OR APPROVED EQUIVALENT

APPROVED FULLY NAILED PROPRIETARY JOIST HANGER BRACKETS TO MANUFACTURERS SPECIFICATIONS (TYP)


SECTION 1.02
1:10
S11

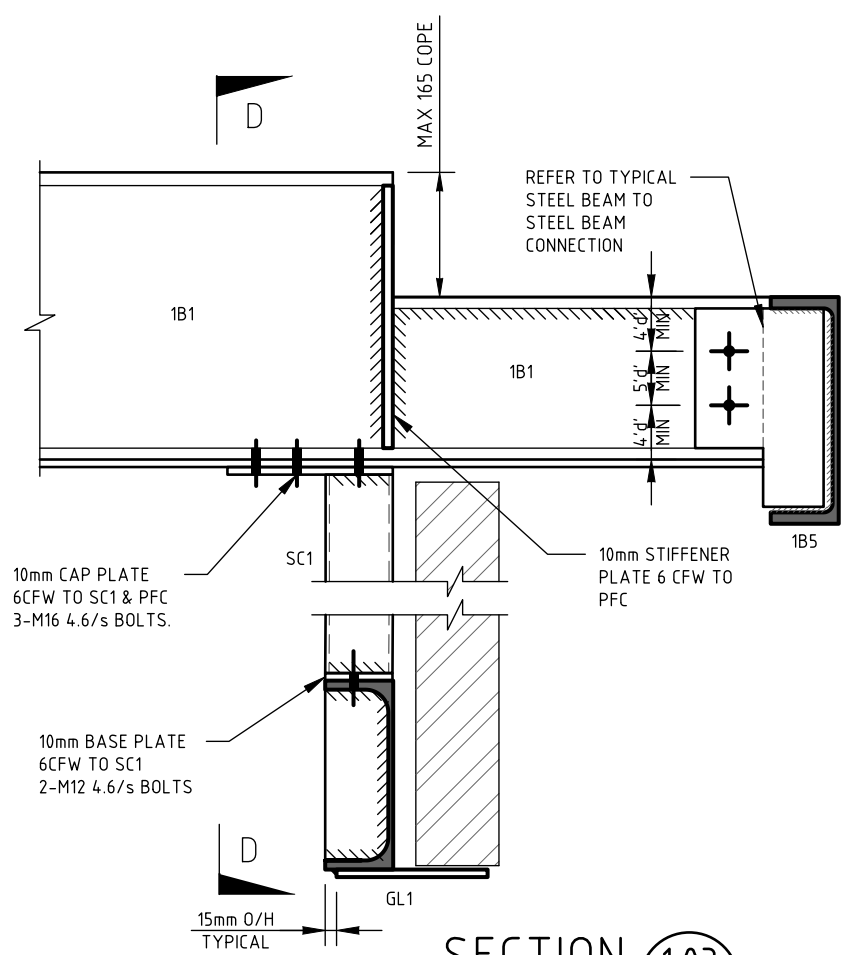


SECTION 1.03
1:10
S11

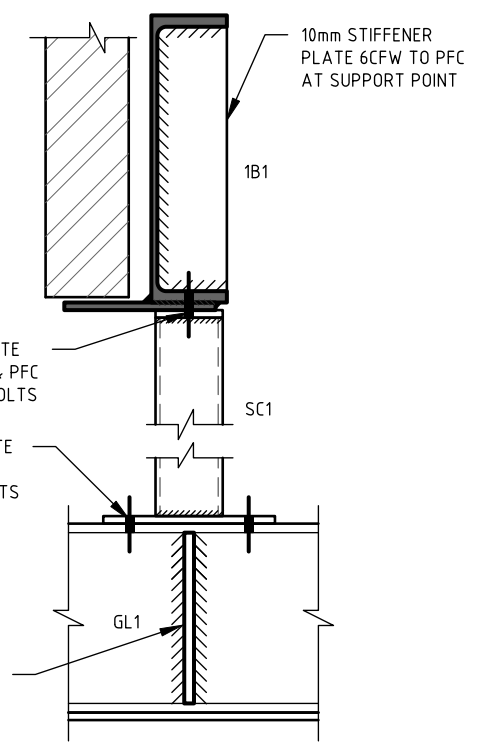

VIEW D-D
SCALE = 1:10

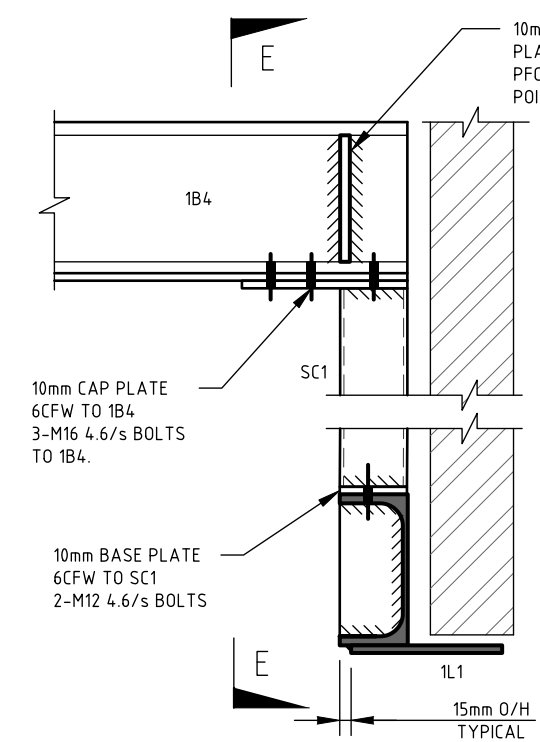

SECTION 1.04
1:10
S11

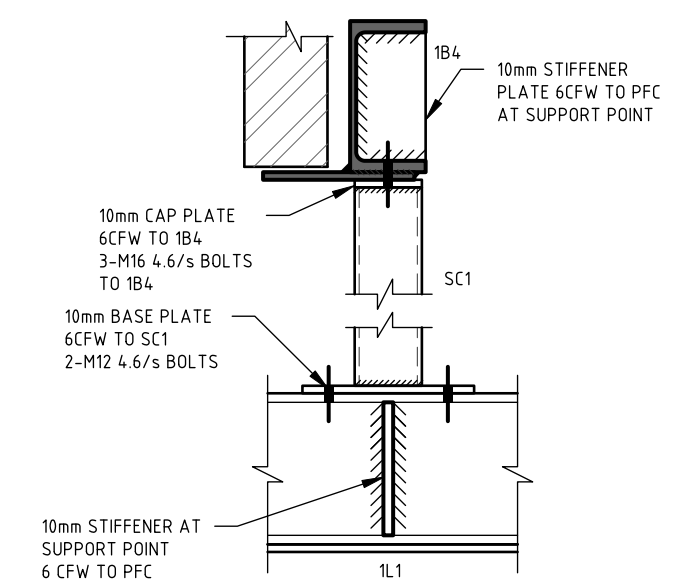

VIEW E-E
SCALE = 1:10



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT
THE MAKAA BUILDERS - NSW

CONSTRUCTION ISSUE


DRAWING
FRAMING DETAILS - SHEET 5

260362


ENGINEER: E.I.
SHEET NO. **S17**

DRAWN: Y.Z
NO. OF SHEETS **27**


REV
04

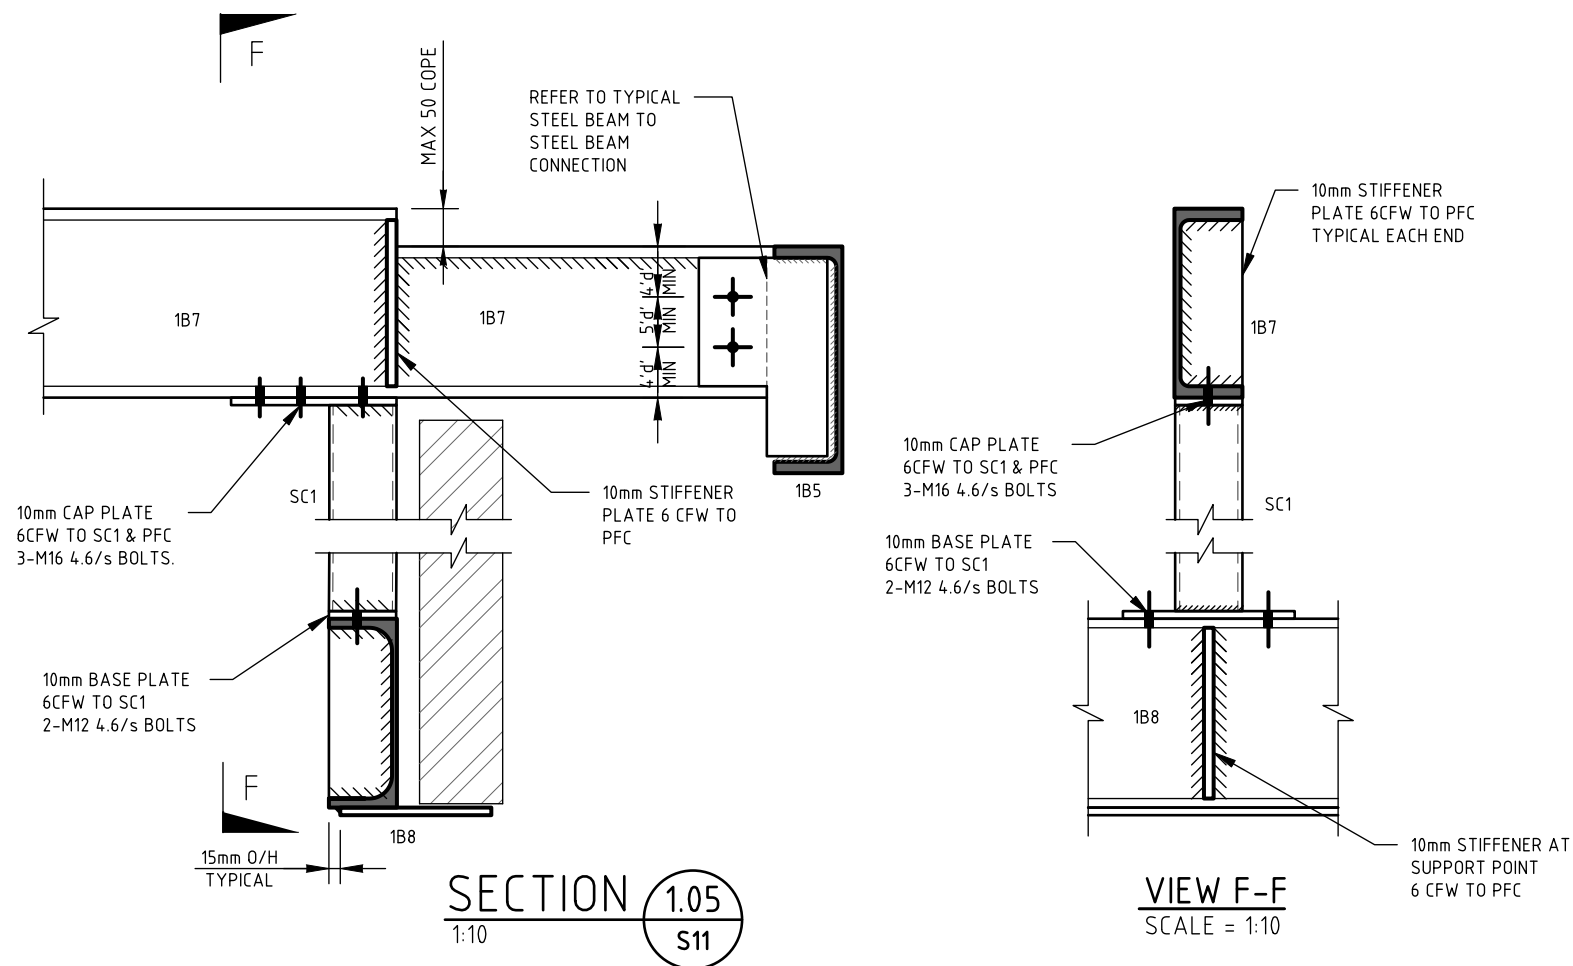


			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN		CONSTRUCTION ISSUE			
						DRAWING FRAMING DETAILS - SHEET 6			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW		260362	ENGINEER: E.I.	DRAWN: Y.Z	REV
03	CONSTRUCTION ISSUE	20.07.26					SHEET NO. S18	NO. OF SHEETS 27	04
02	CONSTRUCTION ISSUE	13.07.26							
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

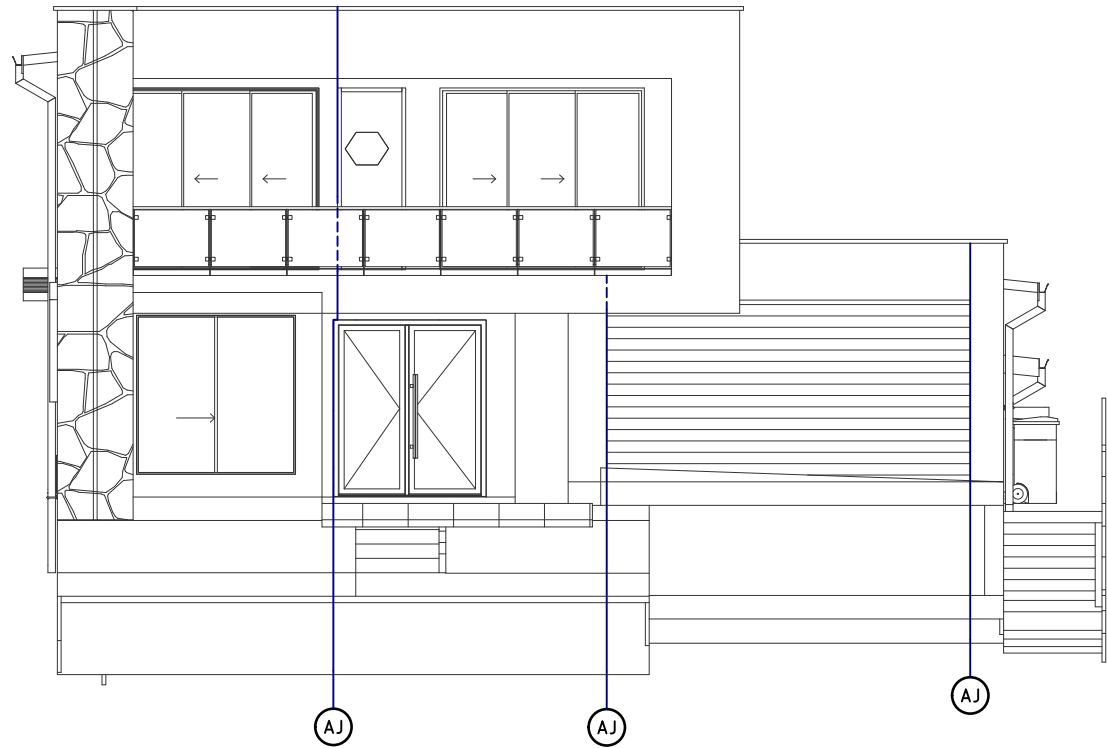


ELEVATION A

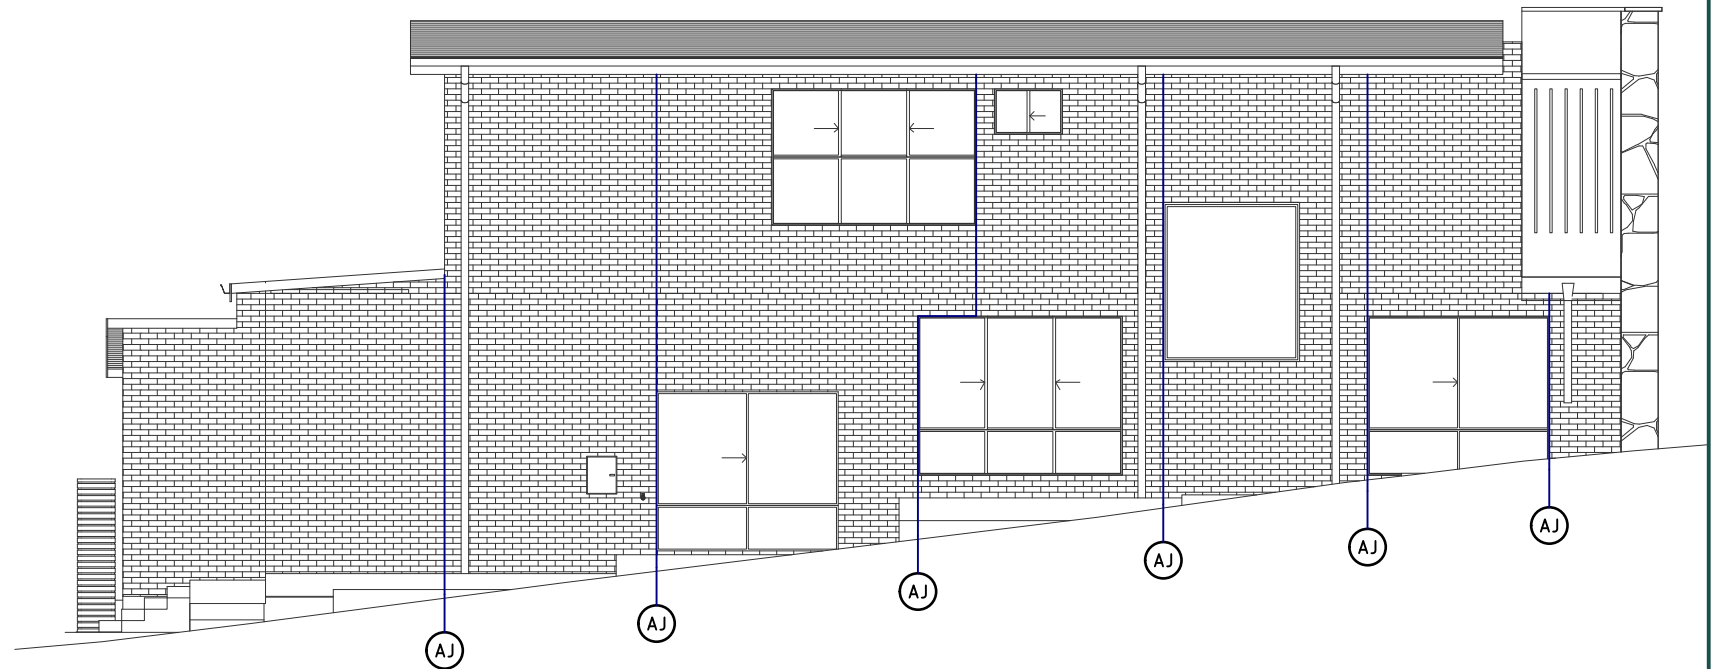

ELEVATION B

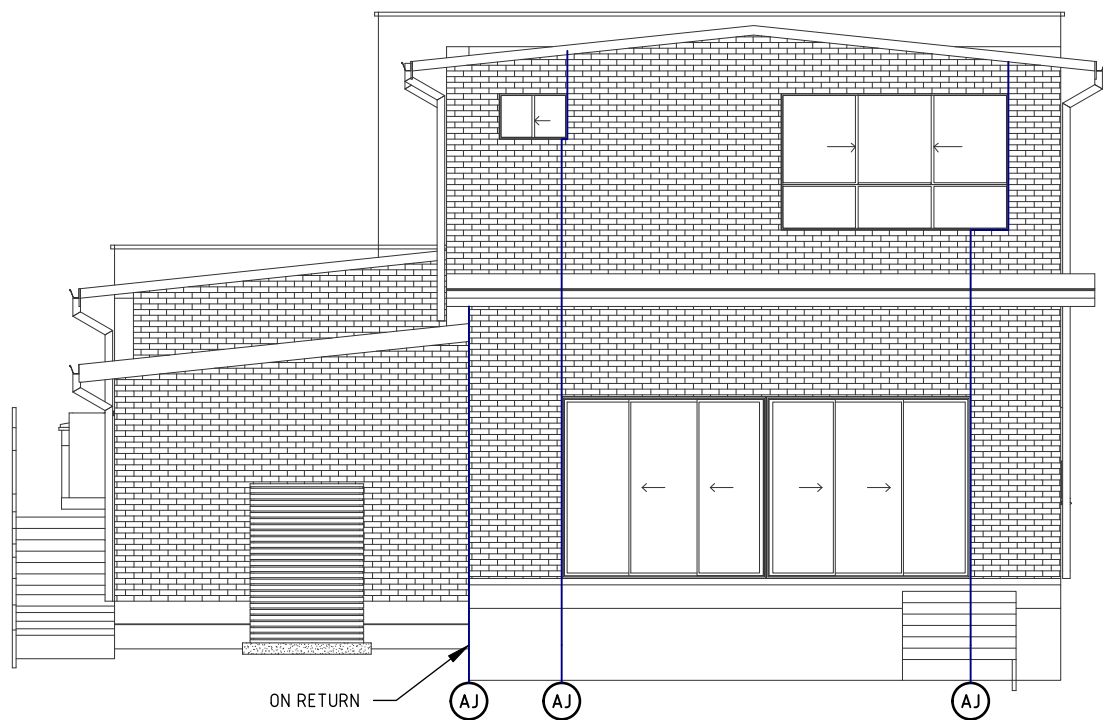

ELEVATION C

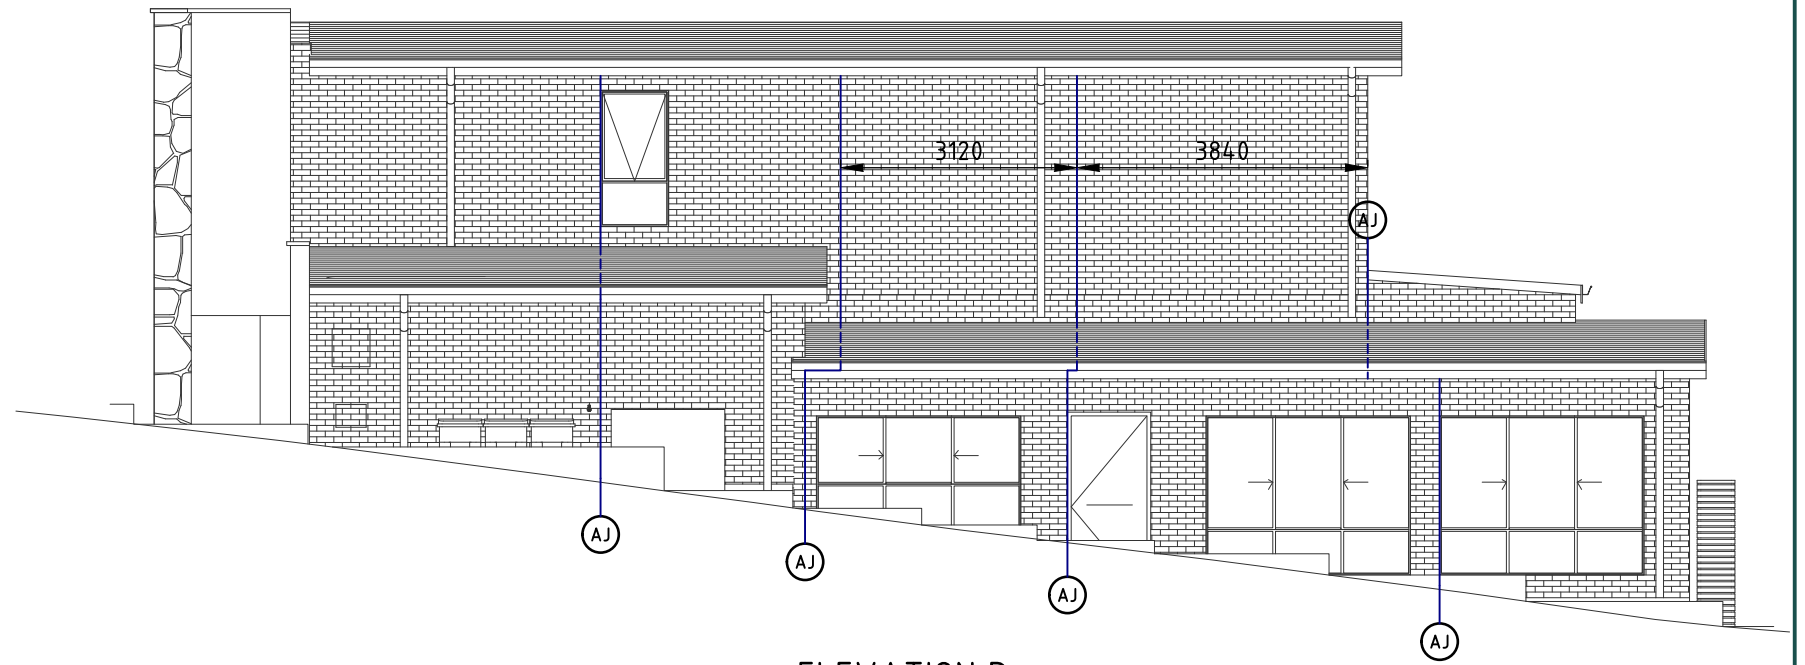

ELEVATION D

LEGEND

-  - INDICATES ARTICULATION JOINT
-  - INDICATES INTERNAL ARTICULATION JOINT

ARTICULATION JOINT ELEVATIONS

SCALE= 1:100

NOTE:

ARTICULATION JOINT ON BOUNDARY WALL TO BE FIRE RATED AS PER BCA REQUIREMENTS.



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695
www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT
THE MAKAA BUILDERS - NSW

CONSTRUCTION ISSUE


DRAWING
ARTICULATION JOINT ELEVATIONS

260362

ENGINEER: E.I.
SHEET NO. S19


DRAWN: Y.Z
NO. OF SHEETS 27

REV
04

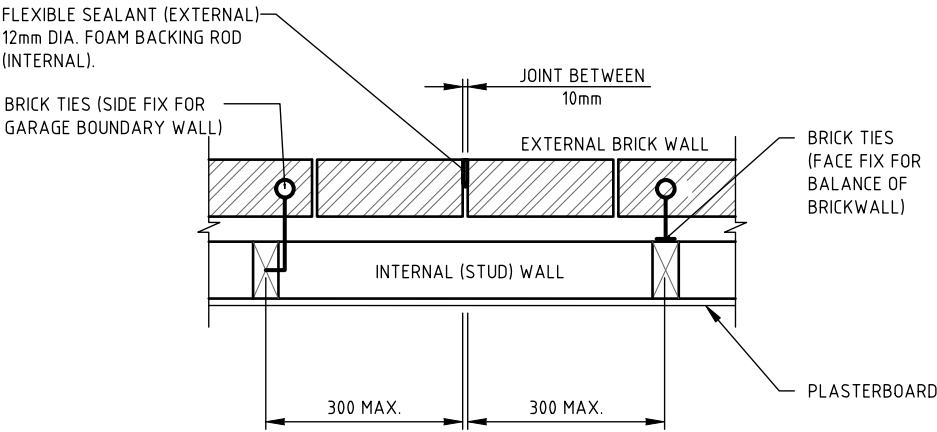


NOTE:
MAXIMUM BRICK TIE FIXING DISTANCE IS
300mm FROM THE ARTICULATION JOINT

BRICK VENEER WALL
ARTICULATION JOINT DETAILS
N.T.S.


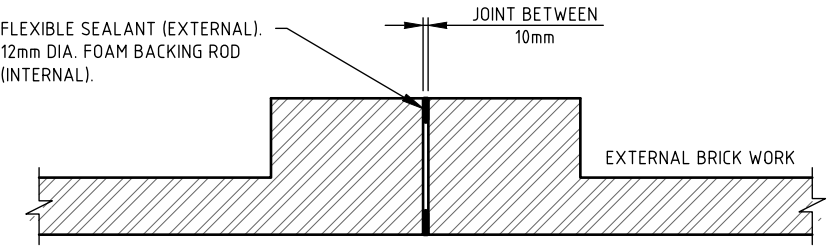


ENGAGED BRICK PIER
ARTICULATION JOINT DETAILS
N.T.S.

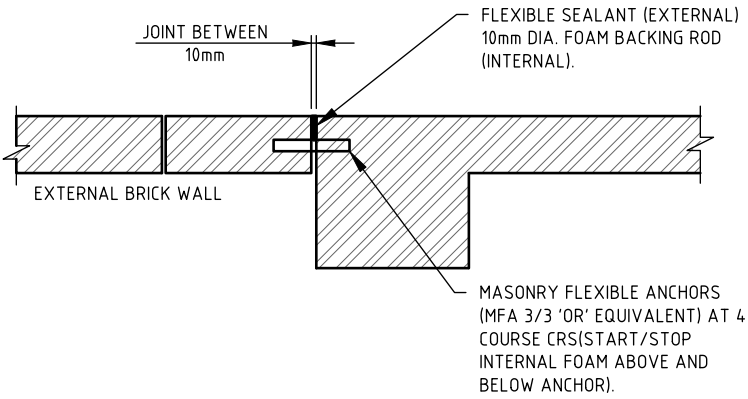

ENGAGED BRICK PIER
ARTICULATION JOINT DETAILS
N.T.S.

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING ARTICULATION JOINT DETAILS - SHEET 1			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S20	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

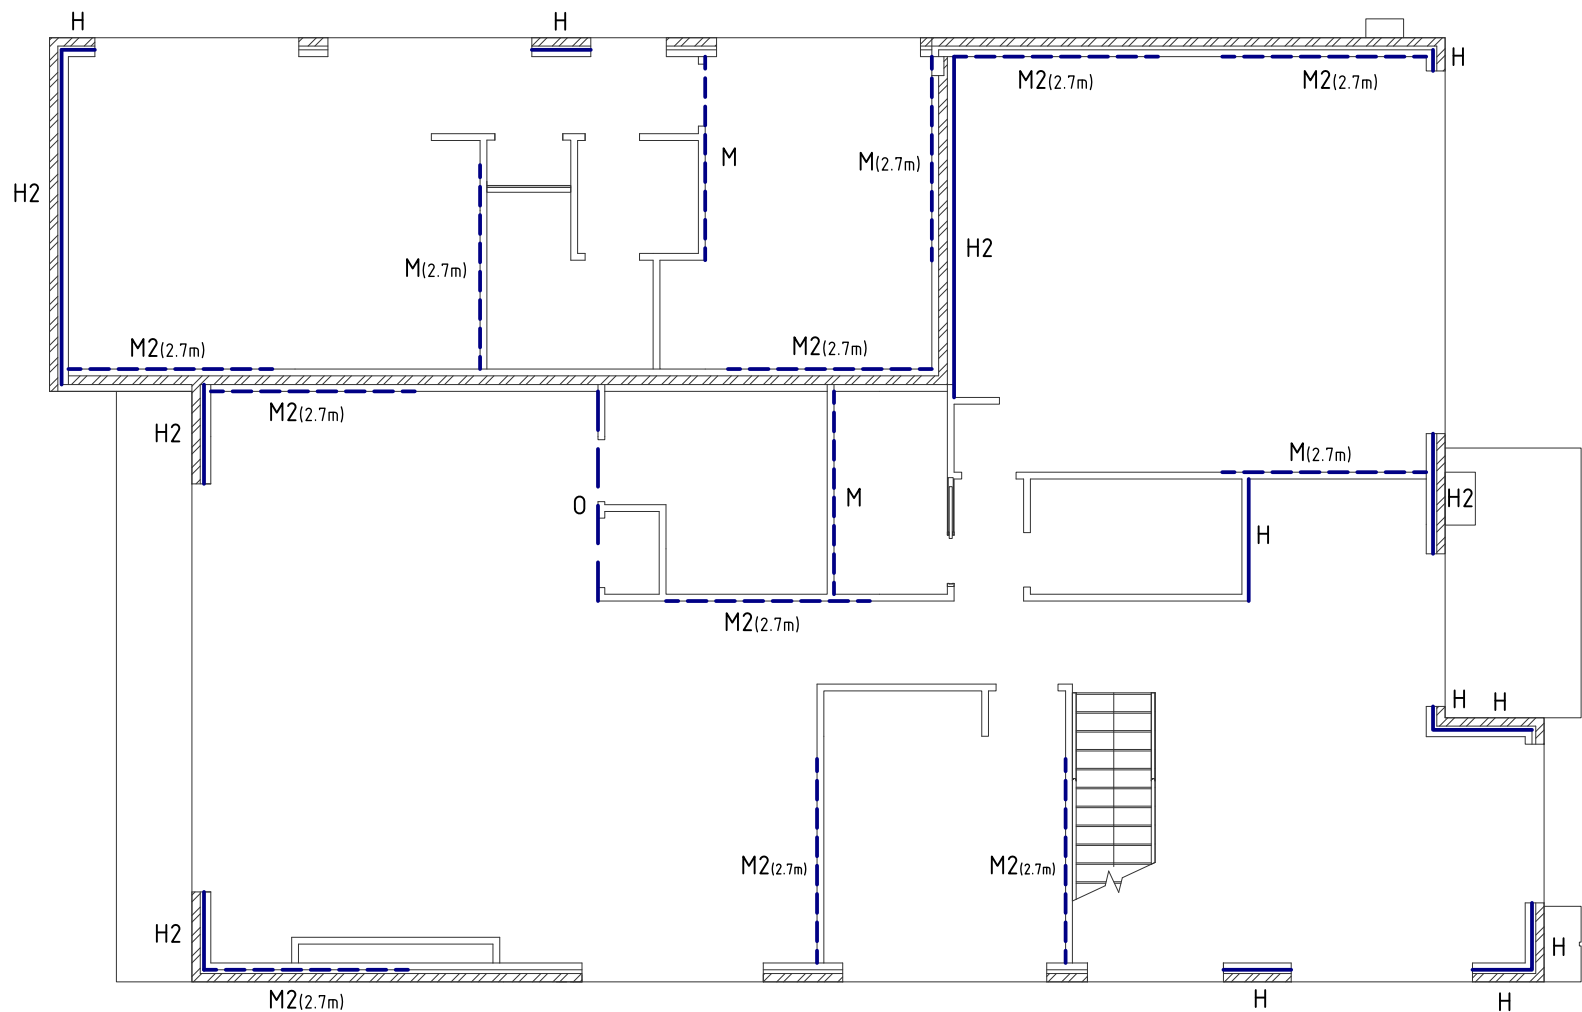

GROUND FLOOR BRACING PLAN
SCALE = 1:100

BRACING LEGEND

M	1.5kN/m CAPACITY METAL STRAP BRACING - REFER TO TYPICAL DETAILS
M2	3.0kN/m CAPACITY METAL STRAP BRACING - REFER TO TYPICAL DETAILS
H	3.4kN/m CAPACITY HYNE OS' @BRACING SYSTEM - REFER TO TYPICAL DETAILS
H2	6.0kN/m CAPACITY HYNE OS' @BRACING SYSTEM - REFER TO TYPICAL DETAILS
O	HYNE OS' @BRACING SYSTEM OVER ALL WALL AREA, AROUND OPENINGS REFER TO TYPICAL DETAILS

NOTE:
BRACING DESIGN CONSIDERS USE OF JD4 FRAMING MATERIAL (INC. HEART-IN 'OR' NON-HEART) IN ACCORDANCE WITH AS1684.2 CLAUSE 8.3.6.3 STRUCTURAL WALL BRACING TABLE 8.18

WIND RATING - N2

- MAXIMUM DESIGN GUST WIND SPEED FOR THIS SITE IS 40 M/S;
- WIND SPEED CALCULATION (VH) FOR USE IN ULTIMATE LIMIT STATE DESIGN ONLY, CALCULATED IN ACCORDANCE WITH THE LIMITATIONS AS IN AS 4055, SECTION 2.1.

ALTERNATIVE BRACING METHOD NOTE:

- OTHER EQUIVALENT CAPACITY BRACING METHOD IS PERMITTED IN LIEU OF SPECIFIED BRACING METHOD SHOWN ON DRAWINGS;
- INSTALLATION OF ALL BRACING UNITS MUST BE IN ACCORDANCE WITH THE RESIDENTIAL TIMBER FRAMED CONSTRUCTION MANUALS AS 1684.2

04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26
REV.	REMARK/COMMENT	DATE:



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695

www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA



PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT
THE MAKAAAN BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING
GROUND FLOOR BRACING PLAN

260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
	SHEET NO. S21	NO. OF SHEETS 27	

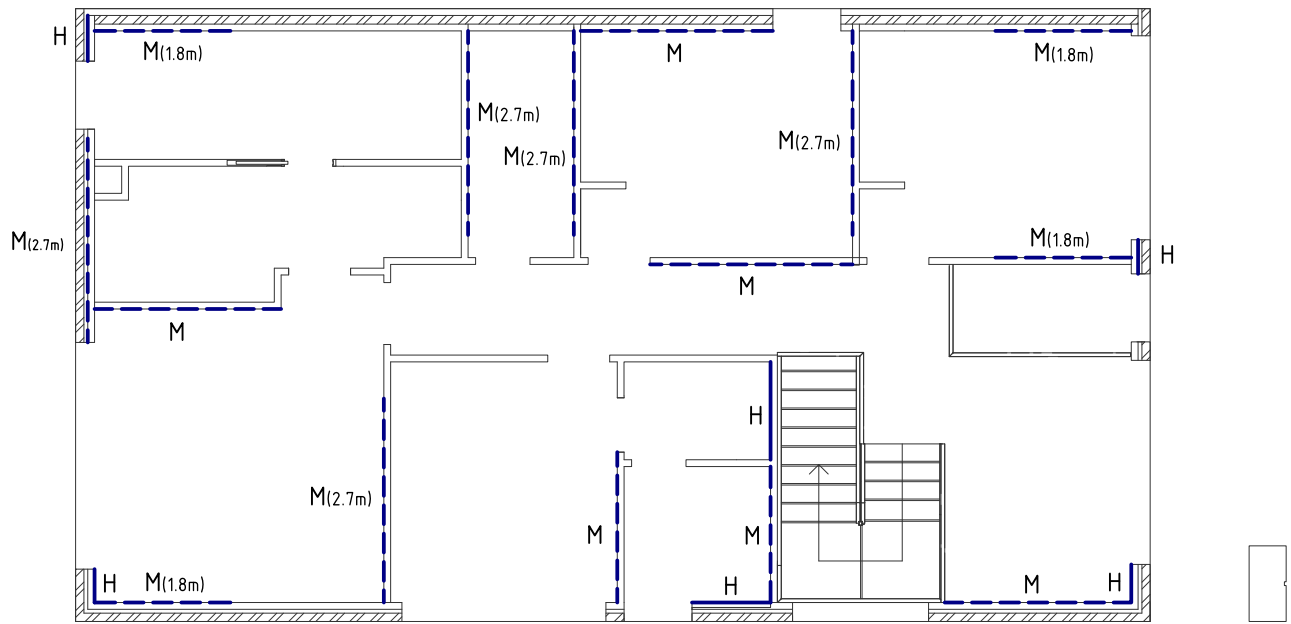

FIRST FLOOR BRACING PLAN
SCALE = 1:100

BRACING LEGEND

M	1.5kN/m CAPACITY METAL STRAP BRACING - REFER TO TYPICAL DETAILS
H	3.4kN/m CAPACITY HYNE OS®BRACING SYSTEM - REFER TO TYPICAL DETAILS

NOTE:
BRACING DESIGN CONSIDERS USE OF JD4 FRAMING MATERIAL (INC. HEART-IN 'OR' NON-HEART) IN ACCORDANCE WITH AS1684.2 CLAUSE 8.3.6.3 STRUCTURAL WALL BRACING TABLE 8.18


WIND RATING - N2

- MAXIMUM DESIGN GUST WIND SPEED FOR THIS SITE IS 40 M/S;
- WIND SPEED CALCULATION (VH) FOR USE IN ULTIMATE LIMIT STATE DESIGN ONLY, CALCULATED IN ACCORDANCE WITH THE LIMITATIONS AS IN AS 4055, SECTION 2.1.


ALTERNATIVE BRACING METHOD NOTE:

- OTHER EQUIVALENT CAPACITY BRACING METHOD IS PERMITTED IN LIEU OF SPECIFIED BRACING METHOD SHOWN ON DRAWINGS;
- INSTALLATION OF ALL BRACING UNITS MUST BE IN ACCORDANCE WITH THE RESIDENTIAL TIMBER FRAMED CONSTRUCTION MANUALS AS 1684.2

			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING FIRST FLOOR BRACING PLAN			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO.	NO. OF SHEETS	04
02	CONSTRUCTION ISSUE	13.07.26			S22	27		
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

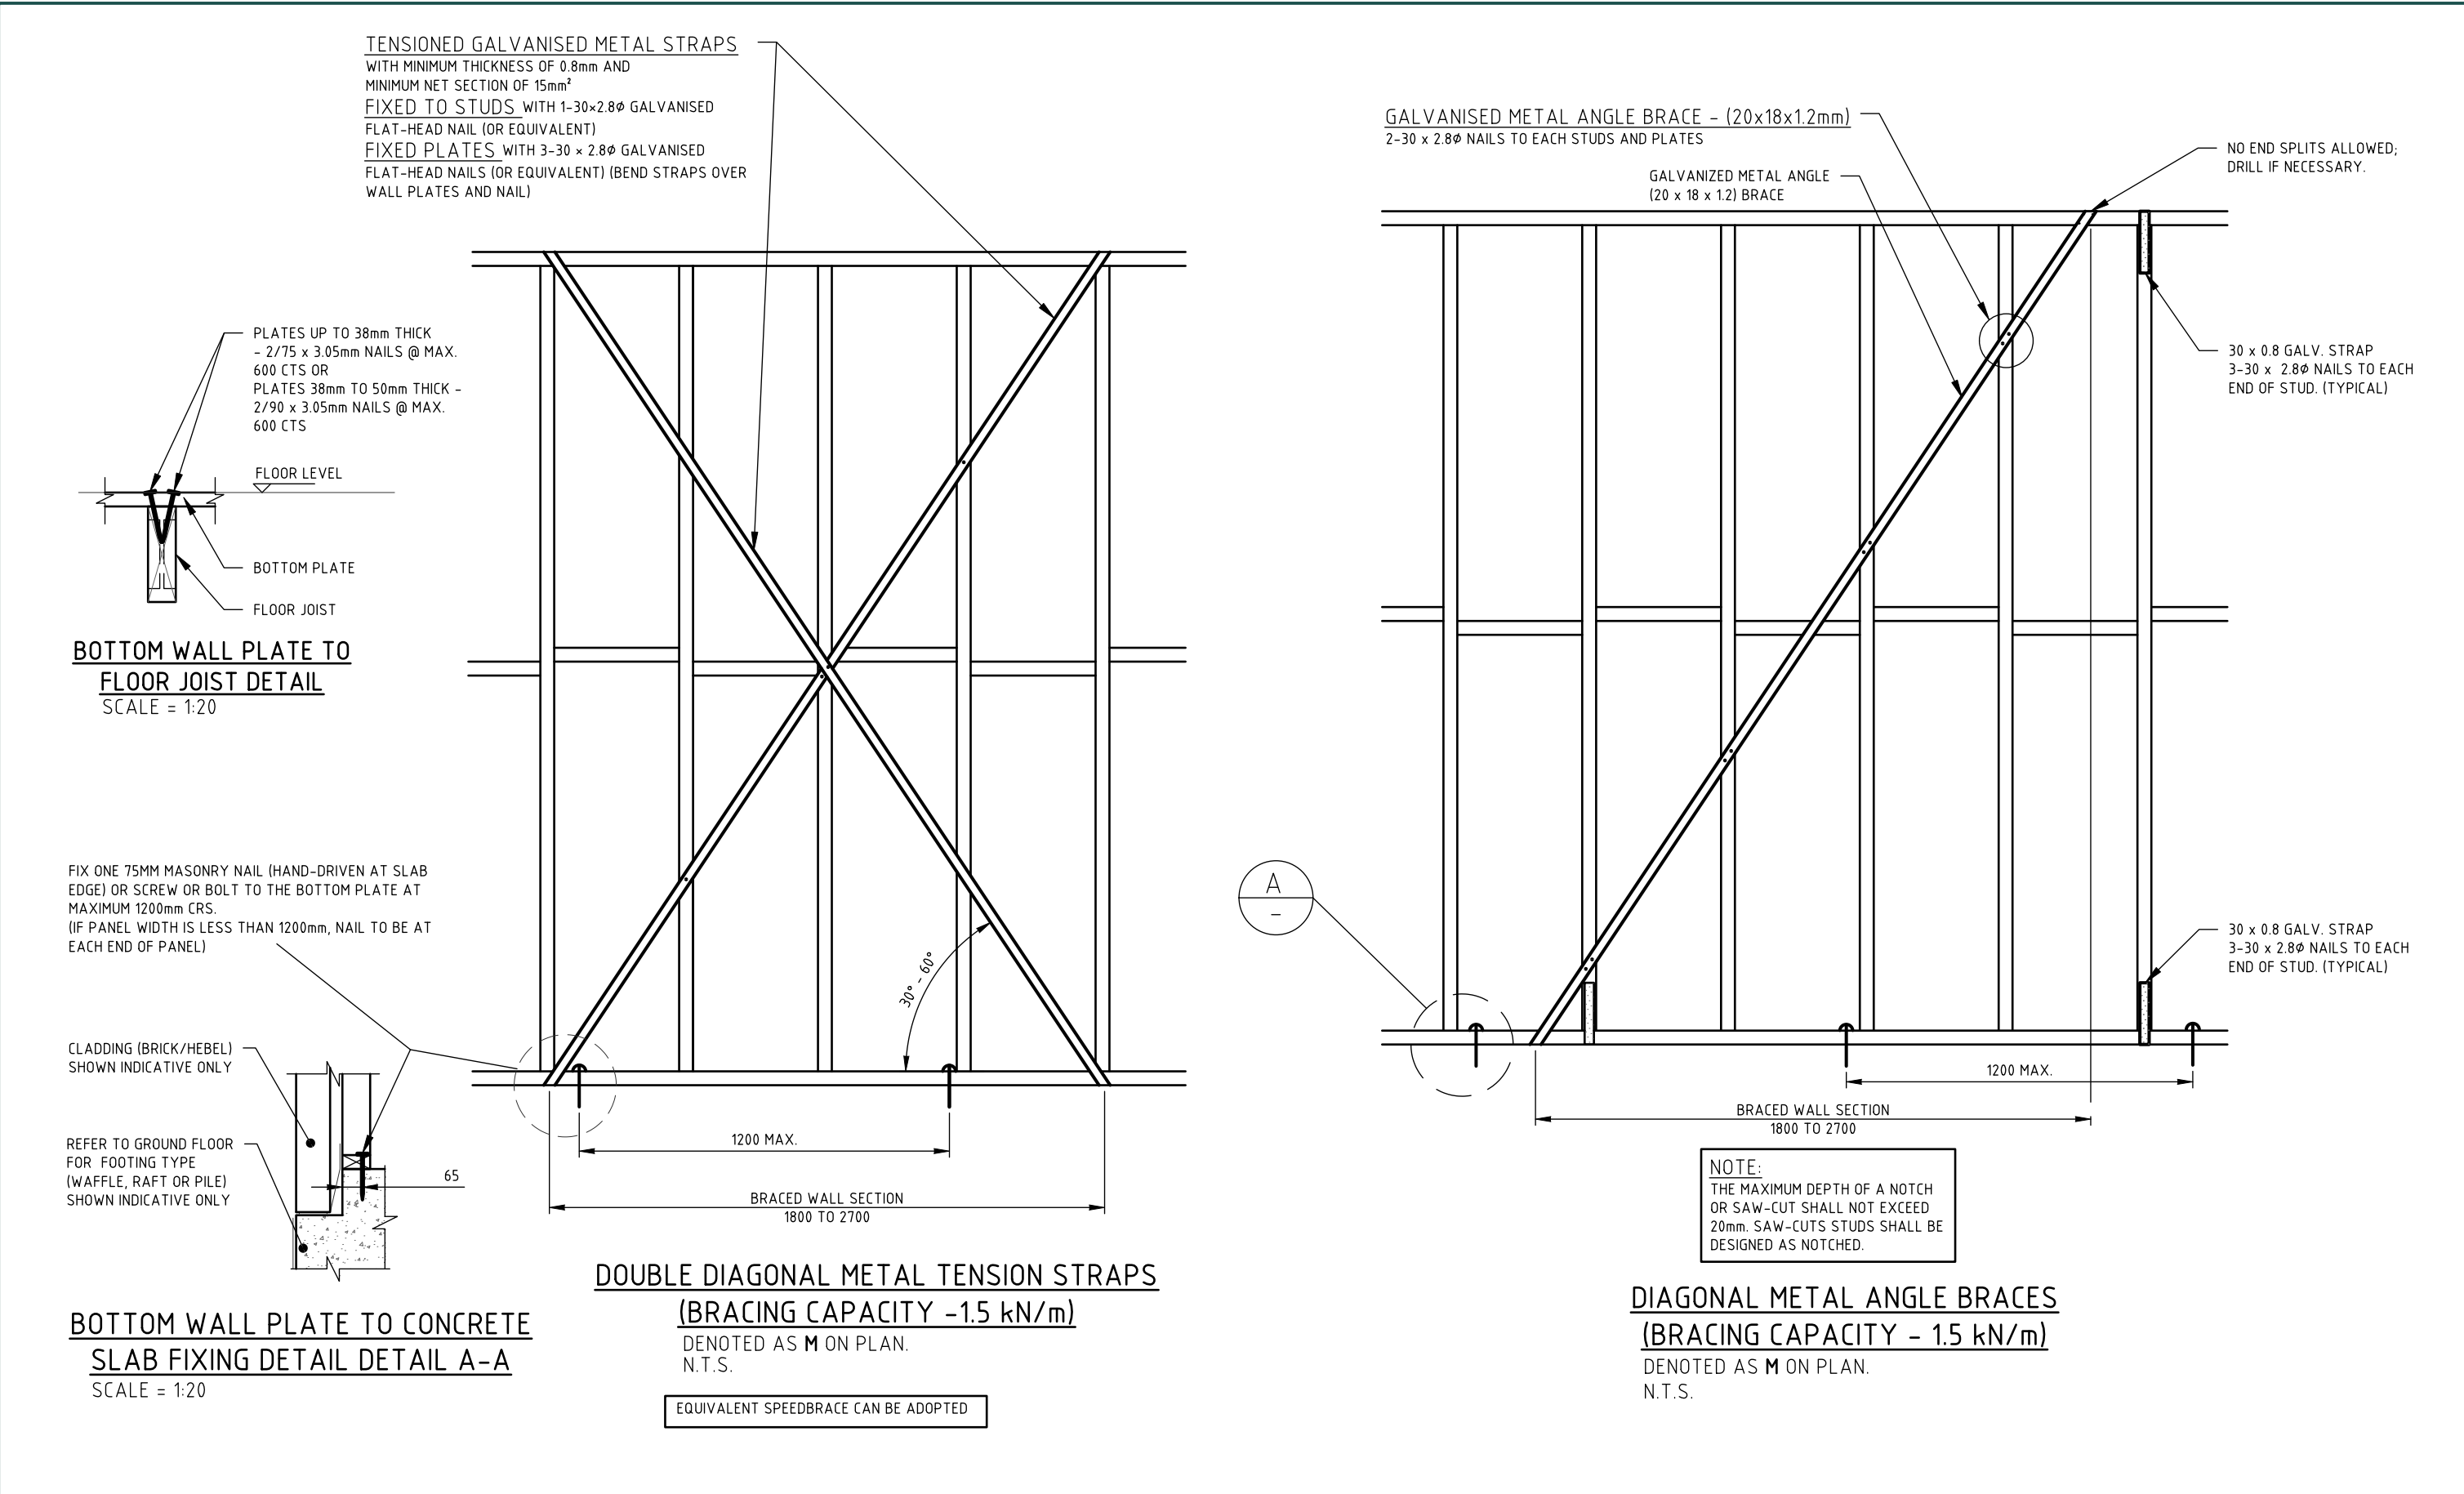


			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE			
					DRAWING BRACING DETAILS - SHEET 1			
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S23	NO. OF SHEETS 27	
02	CONSTRUCTION ISSUE	13.07.26						
01	CONSTRUCTION ISSUE	17.06.26						
REV.	REMARK/COMMENT	DATE:						

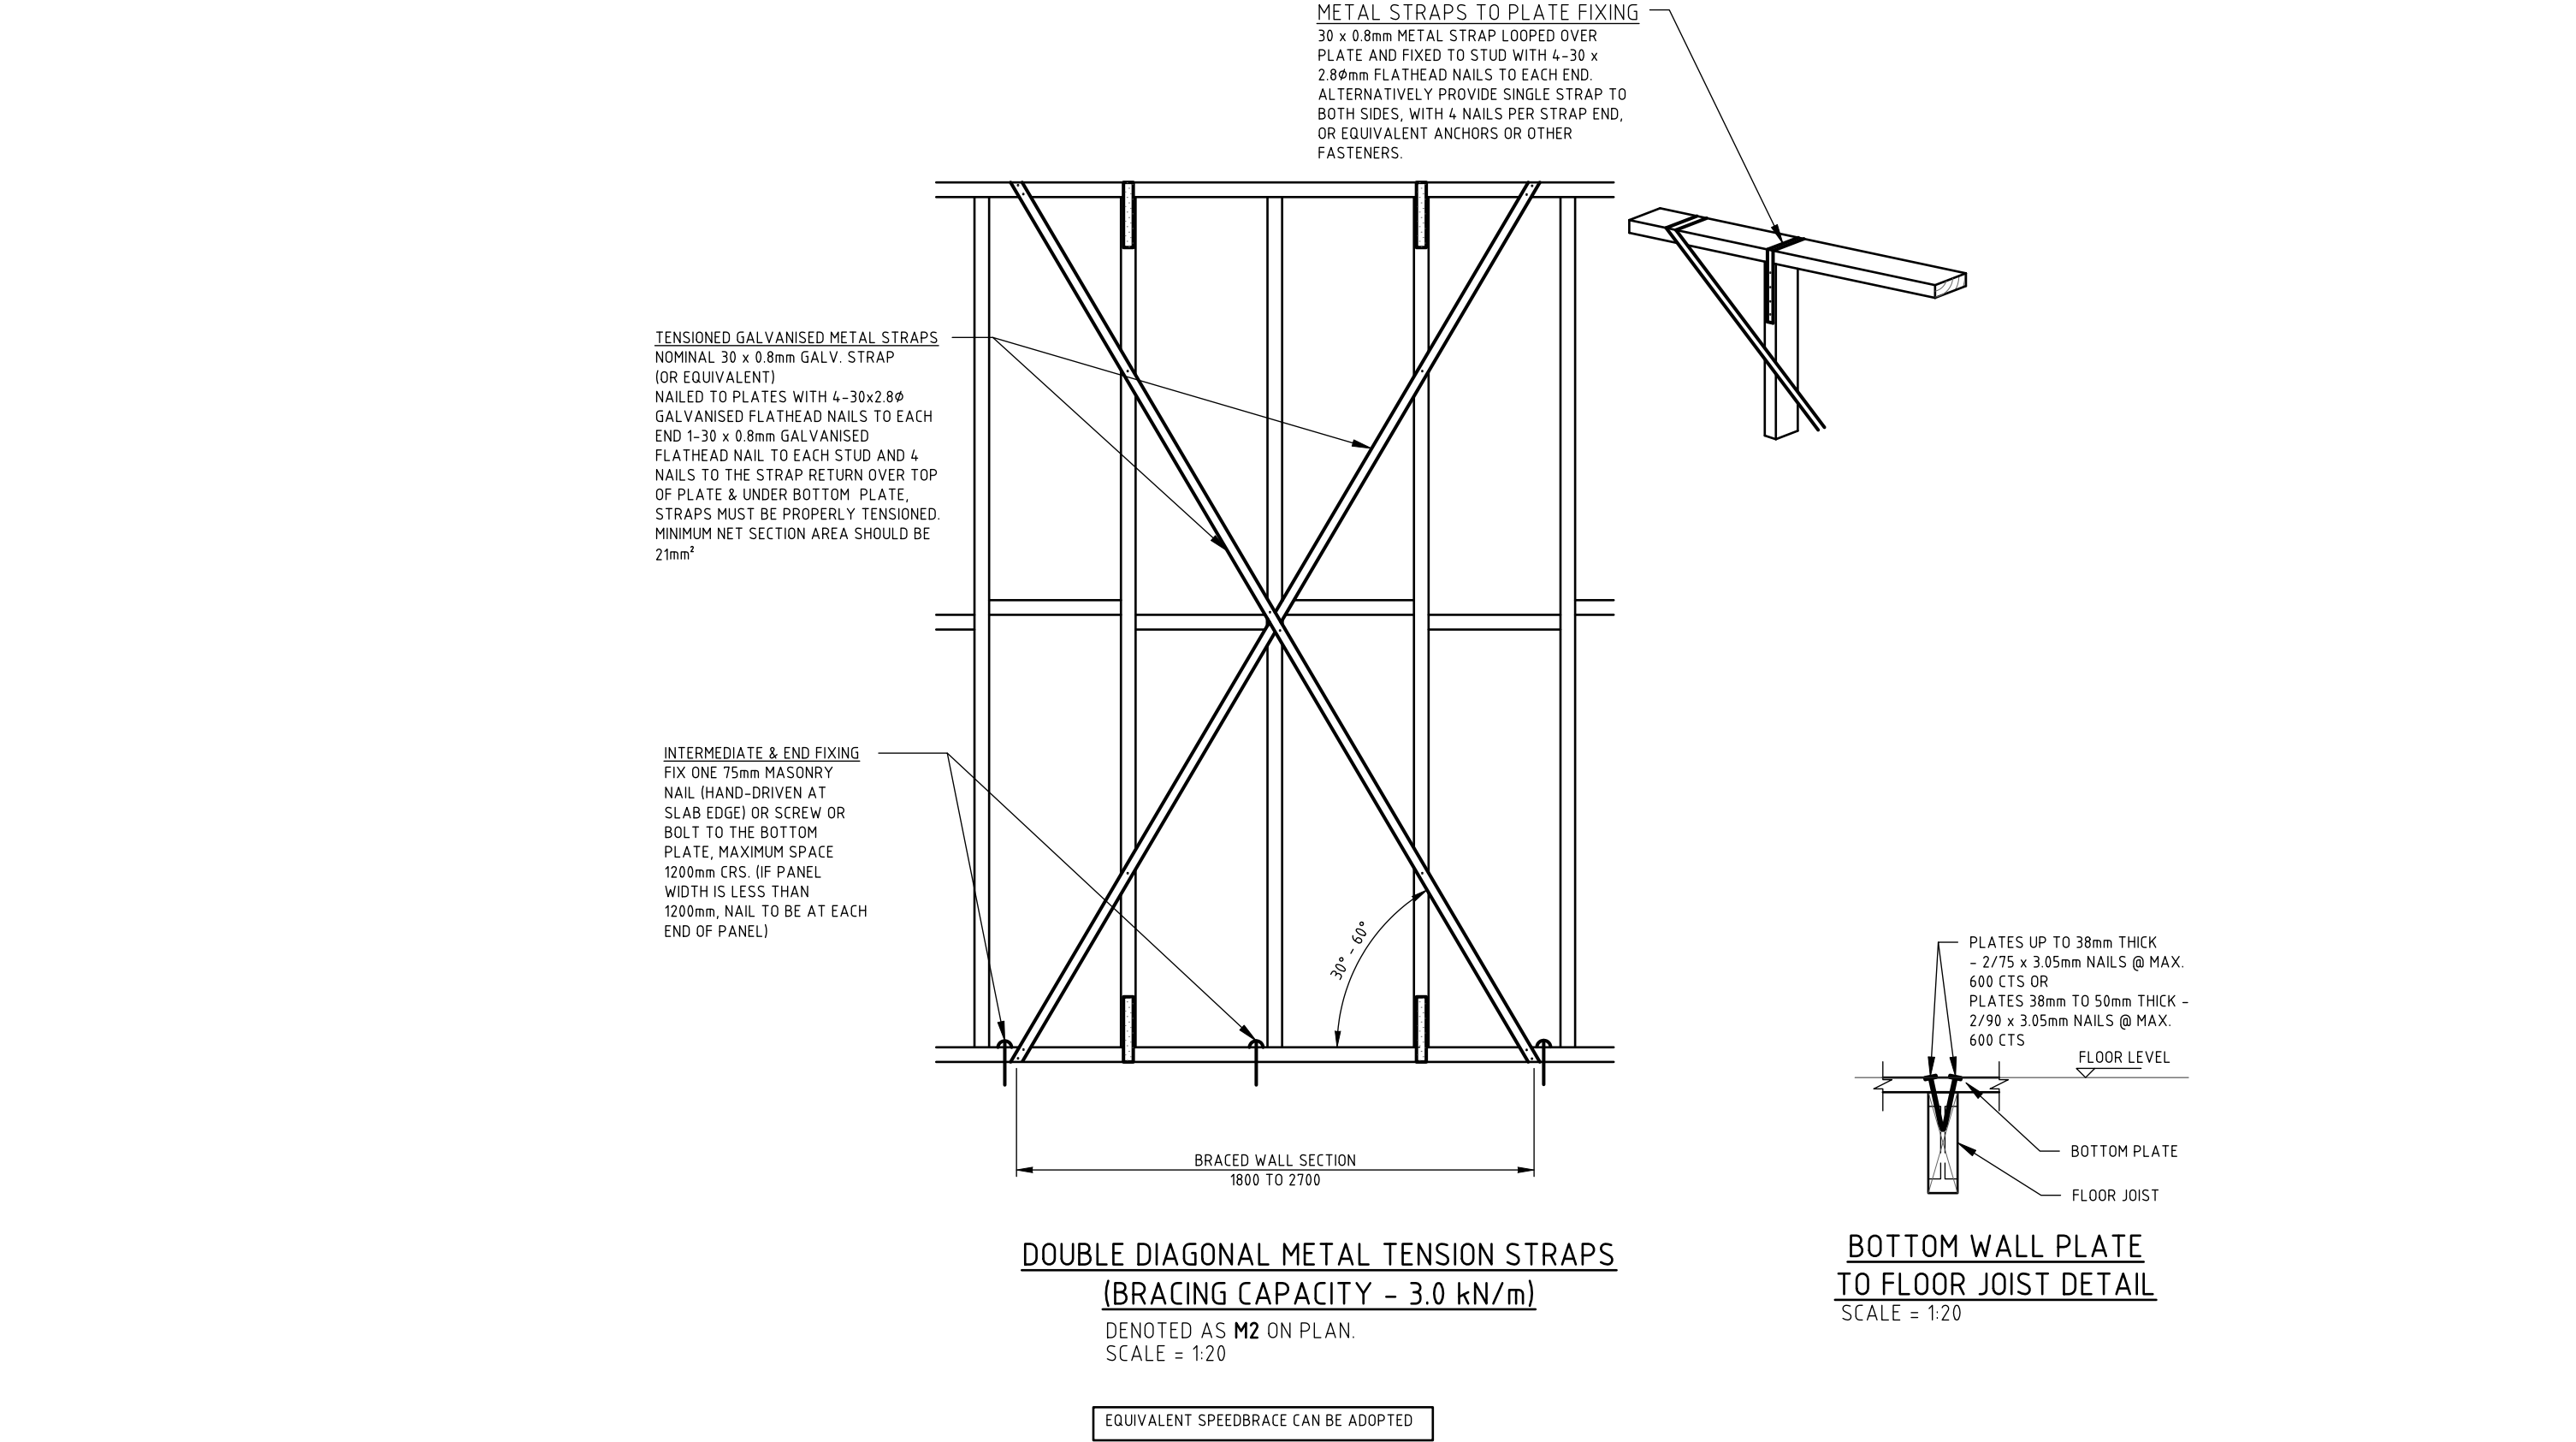


			 Melbourne 03 8371 0100 Sydney 02 8355 1200 Brisbane 07 3067 0800 Adelaide 08 8165 0122 Perth 0447 907 695 www.intrax.com.au Intrax Consulting Group VIC NSW QLD SA WA	PROJECT PROPOSED RESIDENCE LOT 4 NO. 100 MILKY WAY CAMPBELLTOWN	CONSTRUCTION ISSUE				
					DRAWING BRACING DETAILS - SHEET 2				
04	CONSTRUCTION ISSUE	24.07.26		CLIENT THE MAKAAAN BUILDERS - NSW	260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04	
03	CONSTRUCTION ISSUE	20.07.26				SHEET NO. S24	NO. OF SHEETS 27		
02	CONSTRUCTION ISSUE	13.07.26							
01	CONSTRUCTION ISSUE	17.06.26							
REV.	REMARK/COMMENT	DATE:							

- NOTES:
- 1. HYNE OS'BRACE SHALL COMPLY WITH AS/NZS 1859.4.
 - 2. HYNE OS'BRACE SHALL BE NAILED TO FRAME USING MINIMUM $\phi 30 \times 2.8\text{mm}$ GALVANIZED FLAT-HEAD NAILS OR EQUIVALENT.
 - 3. NAILS SHALL BE LOCATED A MINIMUM OF 10mm FROM THE VERTICAL EDGES AND 15mm FROM THE TOP AND BOTTOM EDGES. MAXIMUM 600mm STUD SPACING.
 - 4. AT LEAST ONE SIDE OF THE BRACING WALL SHALL BE LINED WITH GYPSUM PLASTER BOARD OR APPROVAL EQUIVALENT
 - 5. BRACING CAPACITIES ARE BASED ON JD4 JOINT GROUP, TBC BY TIMBER SUPPLIER/MANUFACTURER

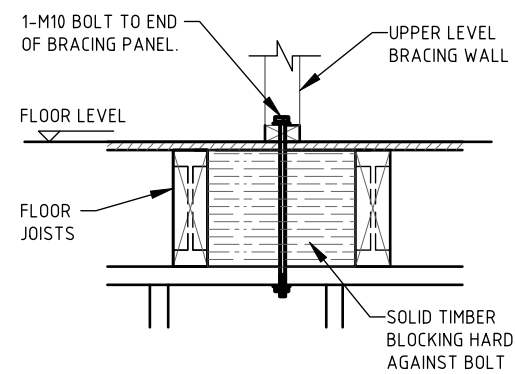


**BRACING WALL
PARALLEL TO JOISTS**
(INTERNAL BRACING
WALL SHOWN)

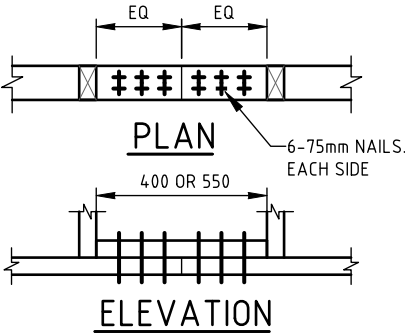


- NOTE:
- SPLICE PLATE MUST BE SAME SIZE & STRESS GRADE AS TOP & BOTTOM PLATES
 - WHERE TOP & BOTTOM PLATES IN BRACED SECTIONS ARE DISCONTINUED, THEY MUST BE SPLICED AS SHOWN IN THIS DETAIL


**TYPICAL TOP & BOTTOM
PLATE SPLICE DETAIL**

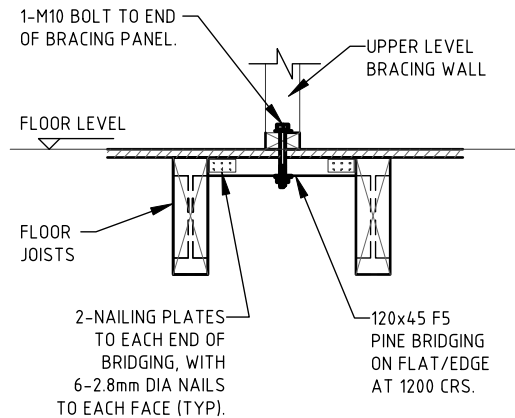


**BRACING WALL
PARALLEL TO JOISTS**
(NO STUD WALL UNDER)

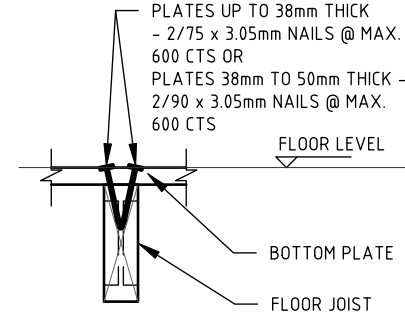

**BOTTOM WALL PLATE TO
FLOOR JOIST DETAIL**
(APPLICABLE TO PANEL WIDTH
LESS THAN 1200mm ONLY)

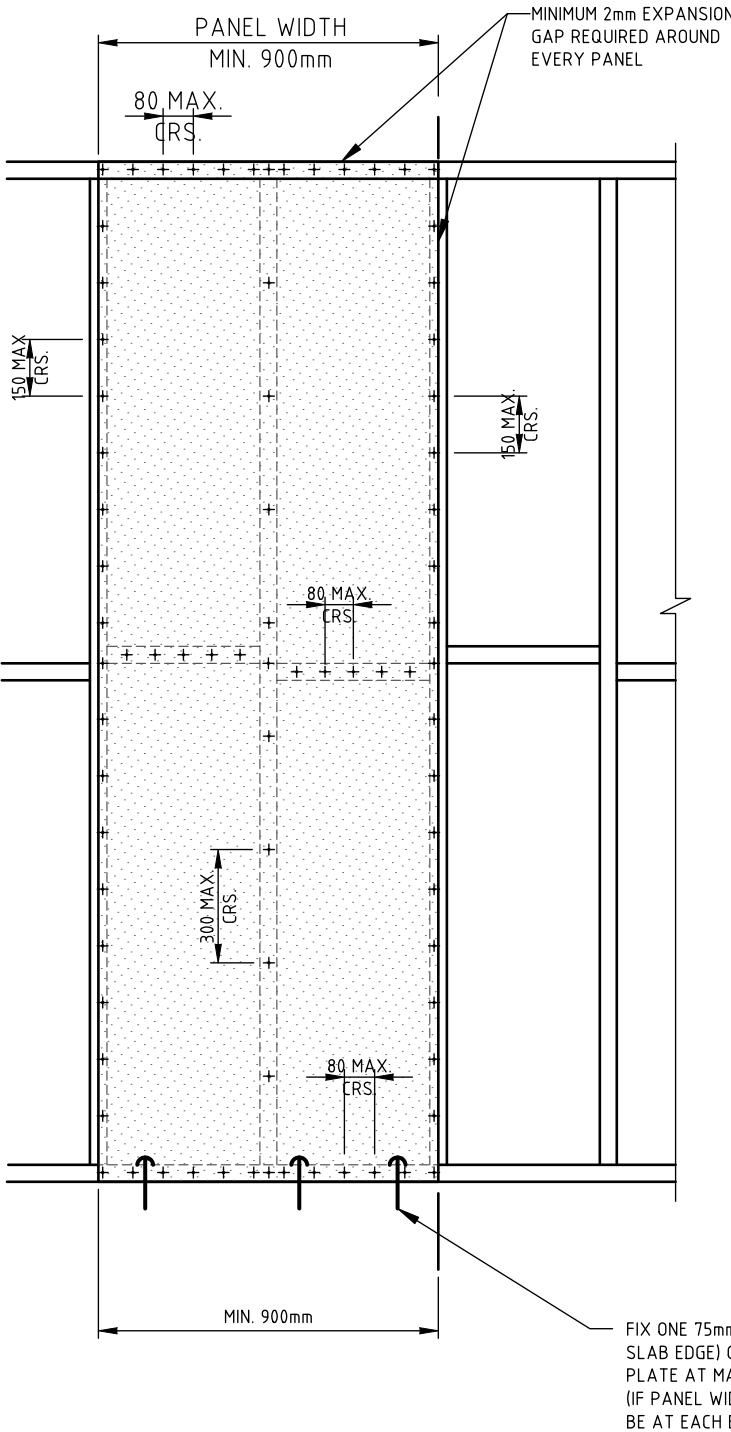

HYNE OS' BRACING® SYSTEM
(BRACING CAPACITY - 3.4 kN/m)
DENOTED AS **H** ON PLAN.
N.T.S.

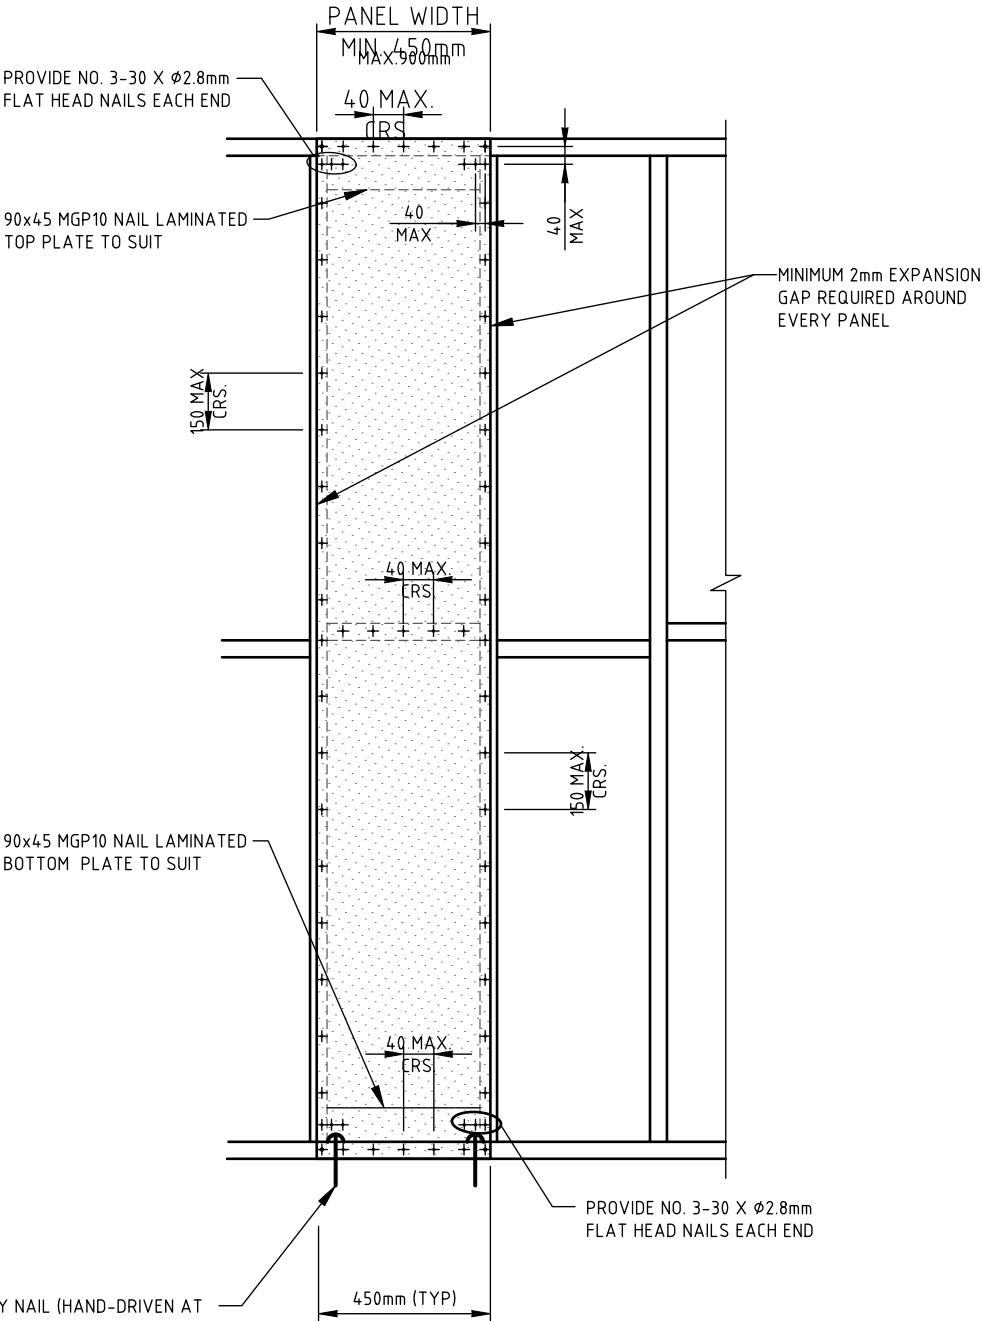

HYNE OS' BRACE® SYSTEM DETAIL
(BRACING CAPACITY - 2.2 kN/m)
DENOTED AS **H** ON PLAN.
N.T.S.

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695
www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN


CLIENT
THE MAKAAH BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING
BRACING DETAILS - SHEET 3


260362	ENGINEER: E.I.	DRAWN: Y.Z	REV 04
	SHEET NO. S25	NO. OF SHEETS 27	

- NOTES:
- 1. HYNE OS'BRACE SHALL COMPLY WITH AS/NZS 1859.4.
 - 2. HYNE OS'BRACE SHALL BE NAILED TO FRAME USING MINIMUM $\phi 30 \times 2.8\text{mm}$ GALVANIZED FLAT-HEAD NAILS OR EQUIVALENT.
 - 3. NAILS SHALL BE LOCATED A MINIMUM OF 10mm FROM THE VERTICAL EDGES AND 15mm FROM THE TOP AND BOTTOM EDGES. MAXIMUM 600mm STUD SPACING.
 - 4. AT LEAST ONE SIDE OF THE BRACING WALL SHALL BE LINED WITH GYPSUM PLASTER BOARD OR APPROVAL EQUIVALENT
 - 5. BRACING CAPACITIES ARE BASED ON JD4 JOINT GROUP, TBC BY TIMBER SUPPLIER/MANUFACTURER

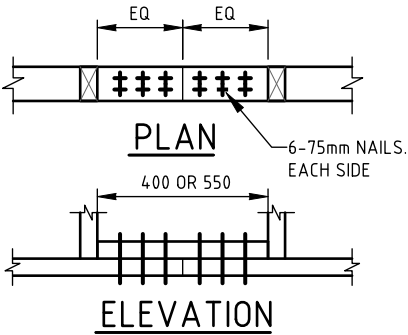


- NOTE:
- SPLICE PLATE MUST BE SAME SIZE & STRESS GRADE AS TOP & BOTTOM PLATES
 - WHERE TOP & BOTTOM PLATES IN BRACED SECTIONS ARE DISCONTINUED, THEY MUST BE SPLICED AS SHOWN IN THIS DETAIL

TYPICAL TOP & BOTTOM
PLATE SPLICE DETAIL

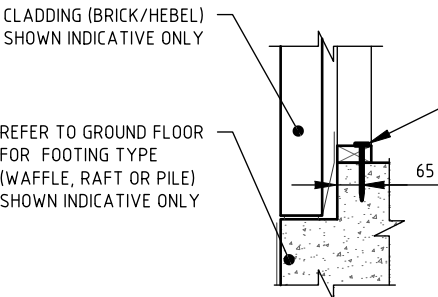


BOTTOM WALL PLATE END FIXINGS:
2-M8 CHEMSET (ALTERNATIVELY EXCALIBUR
SCREWBOLT OR APPROVED EQUIVALENT) TO EACH
END OF BRACED SECTION.


BOTTOM WALL PLATE TO CONCRETE
SLAB FIXING DETAIL (END FIXING)
N.T.S.

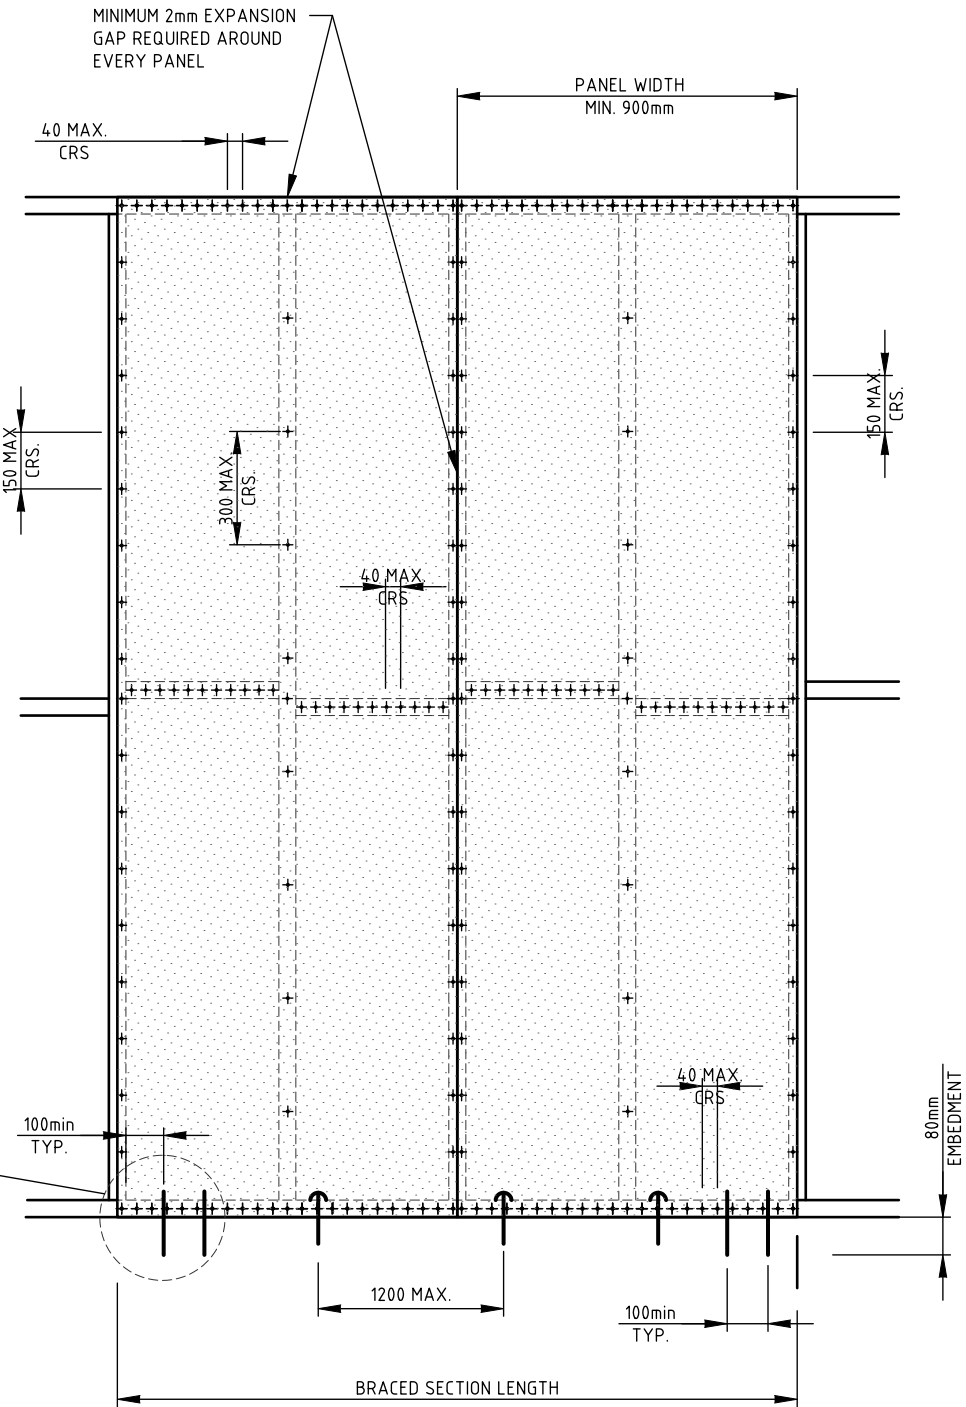

HYNE OS' BRACE®SYSTEM DETAIL
(BRACING CAPACITY - 6.0 kN/m)
DENOTED AS H2 ON PLAN.
N.T.S.

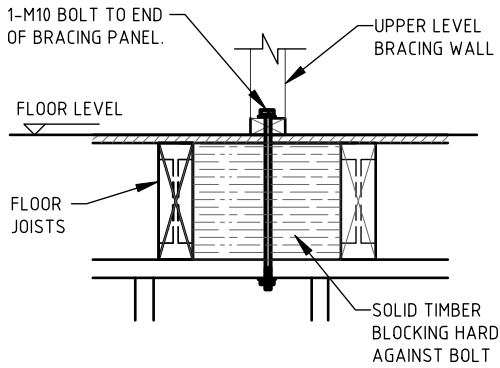

BRACING WALL
PARALLEL TO JOISTS
(INTERNAL BRACING
WALL SHOWN)

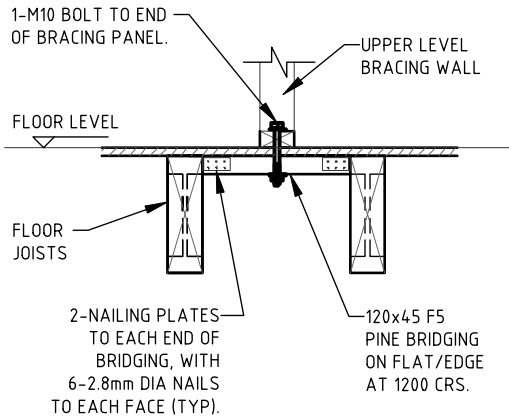

BRACING WALL
PARALLEL TO JOISTS
(NO STUD WALL UNDER)

REV.	REMARK/COMMENT	DATE:
04	CONSTRUCTION ISSUE	24.07.26
03	CONSTRUCTION ISSUE	20.07.26
02	CONSTRUCTION ISSUE	13.07.26
01	CONSTRUCTION ISSUE	17.06.26



Melbourne 03 8371 0100
Sydney 02 8355 1200
Brisbane 07 3067 0800
Adelaide 08 8165 0122
Perth 0447 907 695
www.intrax.com.au
Intrax Consulting Group
VIC | NSW | QLD | SA | WA

PROJECT
PROPOSED RESIDENCE
LOT 4 NO. 100 MILKY WAY
CAMPBELLTOWN

CLIENT
THE MAKAA BUILDERS - NSW

CONSTRUCTION ISSUE

DRAWING
BRACING DETAILS - SHEET 4

260362

ENGINEER: E.I.
SHEET NO. S26

DRAWN: Y.Z
NO. OF SHEETS 27

REV
04