

DUAL OCCUPANCY


3 JOHNSTON AVE, KIRRAWEE, NSW 2232

GENERAL

- G1. THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT.
- G2. ALL DISCREPANCIES SHALL BE REFERRED TO THE ENGINEER FOR A DECISION BEFORE PROCEEDING WITH THE WORK.
- G3. APPROVAL FOR THE USE OF ALTERNATIVE PRODUCTS OR DETAILS SHALL BE SOUGHT FROM THE ENGINEER. ANY APPROVAL GIVEN DOES NOT CONSTITUTE AUTHORISATION OF A VARIATION, WHICH MUST BE REFERRED TO THE ARCHITECT SUPERINTENDENT FOR AUTHORISATION BEFORE THE WORK COMMENCES.
- G4. ALL DIMENSIONS ARE IN MILLIMETRES AND ALL LEVELS ARE IN METRES UNLESS STATED OTHERWISE.
- G5. ALL DIMENSIONS RELEVANT TO SETTING OUT AND OFF-SITE WORK SHALL BE VERIFIED BY THE CONTRACTOR BEFORE FABRICATION OR CONSTRUCTION COMMENCES.
- G6. DIMENSIONS SHALL NOT BE OBTAINED BY SCALING THE DRAWINGS.
- G7. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE BCA, RELEVANT AUSTRALIAN STANDARDS AND THE REQUIREMENTS OF LOCAL COUNCIL AND OTHER RELEVANT STATUTORY AUTHORITIES.
- G8. ALL CODES AND STANDARDS REFERRED TO IN THESE NOTES OR ON THE DRAWINGS ARE THE CURRENT EDITION INCLUDING AMENDMENTS.
- G9. DURING CONSTRUCTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE STRUCTURE IN A STABLE CONDITION AND ENSURING THAT NO PART IS OVER STRESSED UNDER CONSTRUCTION ACTIVITIES. THE BUILDER IS RESPONSIBLE FOR THE DESIGN AND CONSTRUCTION OF ALL TEMPORARY WORKS REQUIRED FOR THE BUILDING OF THE PROJECT.
- G10. THE CONTRACTOR SHALL EMPLOY A QUALIFIED GEOTECHNICAL ENGINEER AS REQUIRED FOR ALL GEOTECHNICAL ASPECTS OF THE BUILDING WORKS.
- G11. THE CONTRACTOR SHALL GIVE 48 HOURS NOTICE OF INSPECTIONS BEING REQUIRED BEFORE ANY STRUCTURAL WORK IS CONCEALED.
- G12. THE CONTRACTOR SHALL INSPECT AND SIGN OFF ALL STRUCTURAL ELEMENTS PRIOR TO REQUESTING AN INSPECTION FROM THE ENGINEER.
- G13. THE CONTRACTOR SHALL SUBMIT ONE (1) SET OF WORK SHOP DRAWINGS FOR PREFABRICATED COMPONENTS OF THE WORK TO THE ENGINEER FOR REVIEW AT LEAST THREE (3) WEEKS PRIOR TO FABRICATION. ALLOW FIVE (5) WORKING DAYS FOR THE REVIEW. FABRICATION SHALL NOT COMMENCE UNTIL ALL REVIEW COMMENTS ON THE WORKSHOP DRAWINGS HAVE BEEN RESOLVED TO THE ENGINEER'S SATISFACTION.
- G14. THE "TENDER" ISSUE SET OF THESE DRAWINGS IS BASED ON PRELIMINARY ARCHITECTURAL INFORMATION AND PRELIMINARY ENGINEERING DESIGN. ANY QUANTITIES AND RATES GIVEN ARE FOR INITIAL PRICING AND MAY VARY IN LATER "FOR CONSTRUCTION" ISSUE DOCUMENTS.
- G15. THE WORD "ENGINEER" USED IN THESE NOTES OR ON THE DRAWINGS REFER TO AN EMPLOYEE OR NOMINATED REPRESENTATIVE OF STRUCTURAL LINK.


FOUNDATION

- F1. THE CONTRACTOR SHALL ENGAGE A GEOTECHNICAL ENGINEER TO VERIFY THE ADEQUACY OF FOUNDATION MATERIAL IN ALL FOOTINGS PRIOR TO PLACEMENT OF CONCRETE.
- F2. FOOTINGS SHALL BE LOCATED CENTRALLY BENEATH WALLS AND COLUMNS UNLESS SHOWN OTHERWISE.
- F3. ALL LOOSE MATERIAL AND WATER SHALL BE CLEANED OUT OF FOOTING EXCAVATIONS PRIOR TO PLACEMENT OF CONCRETE.
- F4. FOUNDING LEVELS, WHERE SHOWN ON THE DRAWINGS, ARE INDICATIVE ONLY. ACTUAL FOUNDING LEVELS WILL BE DETERMINED BY SITE CONDITIONS.
- F5. WHERE FOOTING ELEVATION IS DEEPER THAN SPECIFIED, THE EXCESS EXCAVATION SHALL BE BACKFILLED WITH MASS CONCRETE, GRADE N20.
- F6. FOOTINGS LOCATED ADJACENT TO EXCAVATIONS, BASEMENTS AND THE LIKE SHALL BE FOUNDATION AT A LEVEL SUCH THAT LINE OF INFLUENCE FALLS BELOW THE EXCAVATION. STABILITY OF EXCAVATION BY OTHERS, WHERE NECESSARY, LOWER THE FOUNDING LEVEL AND BACKFILL WITH CONCRETE AS PER NOTE F7.
- F7. EXCAVATION SHALL NOT BE CARRIED OUT BELOW THE LINE OF INFLUENCE OF NEW OR EXISTING FOOTINGS WITHOUT THE ENGINEER'S APPROVAL.
- F8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING EXCAVATIONS IN A STABLE CONDITION, WITHOUT AFFECTING ADJACENT PROPERTIES OR SERVICES. WHERE REQUIRED, TEMPORARY SHORING SHALL BE PROVIDED TO THE SIDES OF EXCAVATIONS.
- F10. DO NOT BACKFILL RETAINING WALLS (OTHER THAN CANTILEVER WALLS) UNTIL FLOOR CONSTRUCTION AT TOP AND BOTTOM IS COMPLETED AND THE WALL IS PROPERLY TIED IN.

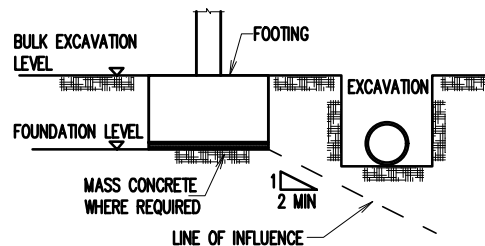


REINFORCEMENT

- R1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS 3600-2018 AND OTHER RELEVANT AUSTRALIAN CODES.
- R2. REINFORCEMENT TYPE AND GRADE.
- | TYPE | DESCRIPTION | STANDARD | GRADE |
|------|----------------------------|--------------|-------|
| N | HOT ROLLED DEFORMED BAR | AS 4671-2019 | D500N |
| R | HOT ROLLED PLAIN ROUND BAR | AS 4671-2019 | R250N |
| SL | SQUARE MESH | AS 4671-2019 | D500L |
| RL | RECTANGULAR MESH | AS 4671-2019 | D500L |
| LM | TRENCH MESH | AS 4671-2019 | D500L |
| RW | COLD ROLLED RIBBED WIRE | AS 4671-2019 | D500L |
| W | COLD DRAWN ROUND WIRE | AS 4671-2019 | D500L |
- R3. REINFORCING BARS ARE DENOTED ON THE DRAWING AS FOLLOWS:- No. OF BARS, TYPE, BAR SIZE (mm), SPACING (mm), LAYER e.g. 20 N16-200 (1)
- R4. REINFORCEMENT LAYERS ARE AS FOLLOWS:-
-
- R5. REINFORCEMENT MESH IS DENOTED ON THE DRAWINGS AS FOLLOWS:- TYPE, AS 4671:2019 REFERENCE NUMBER, LOCATION e.g. RL818 TOP.
- R6. REINFORCEMENT IS REPRESENTED DIAGRAMMATICALLY AND NOT NECESSARILY SHOWN IN TRUE PROJECTION.
- R7. ALL REINFORCEMENT SHALL BE SECURELY SUPPORTED AND MAINTAINED IN CORRECT POSITION DURING CONCRETING.
- R8. BAR CHAIRS TO EXTERIOR SURFACES WITHIN 1 km OF THE COAST SHALL BE FULLY PLASTIC.
- R9. COMPRESSION LAPS

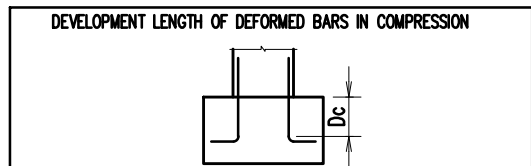

f _c MPa	N10	N12	N16	N20	N24	N28	N32
20	250	300	400	500	600	700	800
≥25	225	275	350	450	525	625	700

LAPPED SPLICES FOR BARS IN COMPRESSION

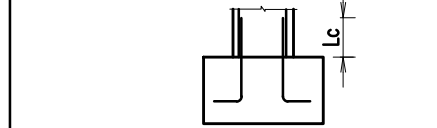


f _c MPa	N10	N12	N16	N20	N24	N28	N32
≥20	400	500	600	800	1000	1150	1300

NOTE:

- FOR BUNDLED BARS, LENGTH BASED ON LARGEST BAR.
- FOR 3-BAR BUNDLE INCREASE LENGTHS BY 20%
- FOR 4-BAR BUNDLE INCREASE LENGTHS BY 33%
- INDIVIDUAL BAR SPLICES WITHIN A BUNDLE SHALL NOT OVERLAP

R11. TENSION LAPS

DEVELOPMENT LENGTH FOR A DEFORMED BARS IN TENSION

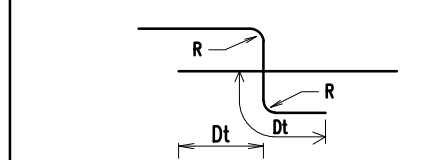

f _c MPa	N10	N12	N16	N20	N24	N28	N32
20	475	600	800	1000	1250	1500	1800
25	425	500	700	900	1150	1350	1600
32	375	450	650	800	1000	1200	1450
40	325	400	550	750	900	1100	1300
50	300	350	500	650	800	950	1150
≥65	300	350	500	600	700	850	1000

LAPPED SPLICES FOR BARS IN TENSION

f _c MPa	N10	N12	N16	N20	N24	N28	N32
20	575	700	1000	1250	1550	1800	2250
25	525	650	900	1150	1400	1700	2000
32	450	550	800	1000	1250	1500	1800
40	400	500	700	900	1100	1350	1600
50	375	450	650	800	1000	1200	1450
≥65	325	400	550	700	900	1050	1250

NOTE:

- INCREASE LENGTHS BY 30% FOR A HORIZONTAL BAR WITH MORE THAN 300mm OF CONCRETE CAST BELOW THE BAR.
- FOR BUNDLED BARS, LENGTHS BASED ON LARGEST BAR
- FOR 3-BAR BUNDLES INCREASE LENGTHS BY 20%
- FOR 4-BAR BUNDLES INCREASE LENGTHS BY 33%

CONCRETE

- C1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS 3600-2018 AND OTHER RELEVANT AUSTRALIAN STANDARDS.
- C2. CONCRETE SHALL BE SUPPLIED BY AN APPROVED MANUFACTURER IN ACCORDANCE WITH AS 1379-2007.
- C3. SIZES OF CONCRETE ELEMENTS DO NOT INCLUDE THICKNESS OF APPLIED FINISHES.
- C4. BEAM DEPTHS ARE WRITTEN FIRST AND INCLUDE SLAB THICKNESS, IF ANY.
- C5. CONSTRUCTION JOINTS (CJ) SHALL BE PROPERLY FORMED AND USED ONLY WHERE SHOWN OR SPECIFICALLY APPROVED BY THE ENGINEER. ALL CONSTRUCTION JOINTS SHALL BE THOROUGHLY SCABBLED.
- C6. CONCRETE SHALL BE THOROUGHLY COMPACTED IN THE FORMS BY MEANS OF MECHANICAL VIBRATION.
- C7. WHEN THE SHADE TEMPERATURE EXCEEDS 32°C, THE EXPOSED SURFACE OF CONCRETE SHALL BE SPRAYED WITH A FINE FILM OF APPROVED ALIPHATIC ALCOHOL DURING CONCRETE PLACEMENT AND FINISHING IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. ENSURE ADEQUATE SUPPLY OF ALIPHATIC ALCOHOL ON SITE BEFORE COMMENCING CONCRETE WORK.
- C8. CURING OF CONCRETE SHALL COMMENCE WITHIN 2 HOURS OF FINISHING OPERATIONS AND SHALL BE MAINTAINED FOR A MINIMUM OF 7 DAYS USING AN APPROVED PROPRIETARY CURING COMPOUND IN ACCORDANCE WITH AS 3799-1998 REC:2018 AND COMPATIBLE WITH THE PROPOSED FINISH OR CONTINUOUS PONDING WITH POTABLE WATER FOR 3 DAYS. THE CONTRACTOR TO SUBMIT PROPOSED CURING PROCEDURE FOR APPROVAL OF THE ENGINEER.
- C9. ALL CONCRETE DELIVERED TO SITE SHALL BE SUBJECT TO PROJECT ASSESSMENT IN ACCORDANCE WITH AS 1379-2007. THE CONTRACTOR SHALL NOMINATE A CONCRETE DELIVERY SUPERVISOR WHO SHALL BE A SUITABLE EXPERIENCED PERSON FOR THE APPROVAL OF THE ENGINEER, TO MONITOR THE DELIVERY AND PLACING OF THE CONCRETE FOR EACH POUR ON THE PROJECT. IN ADDITION, THE MANUFACTURER SHALL SAMPLE AND TEST FOR DRYING SHRINKAGE EACH TYPE OF CONCRETE SUPPLIED, AT LEAST EVERY MONTH DURING THE COURSE OF THE PROJECT OR FOR EVERY 1000 CUBIC METRES PLACED.
- C10. NATA TEST CERTIFICATES SHALL BE FORWARDED TO THE ENGINEER. THE RESULTS OF THESE TESTS SHALL ALSO BE KEPT ON SITE.
- C11. CONCRETE SAMPLES AND TESTS
- ARRANGE FOR A NATA REGISTERED TESTING LABORATORY TO TAKE SAMPLES OF AND TEST CONCRETE FOR COMPRESSION, FLEXURAL TENSILE STRENGTH (SLABS & SLABS ON GROUND ONLY) AND SLUMP.
- COMPRESSION TEST SAMPLES SHALL CONSIST OF 3 STANDARD CYLINDERS (4 STANDARD CYLINDERS FOR POST-TENSIONED CONCRETE), TESTED FOR COMPRESSION STRENGTH AS FOLLOWS:
- ONE (1) CYLINDER AT 28 HOURS - (POST-TENSIONED CONCRETE ONLY).
- ONE (1) CYLINDER AT 4 DAYS.
- TWO (2) CYLINDERS AT 28 DAYS.
- THE MINIMUM NUMBER OF DAILY SAMPLES SHALL BE AS FOLLOWS:
- IN COLUMNS / WALLS: 1 SAMPLE PER TRUCK
- ALL OTHER CONCRETE OF ANY ONE TYPE AS FOLLOWS:
- 1 TRUCK PER DAY - 1 SAMPLE
- 2 TO 5 TRUCKS PER DAY - 3 SAMPLES
- 6 TO 10 TRUCKS PER DAY - 5 SAMPLES
- 10 TO 20 TRUCKS PER DAY - 8 SAMPLES
- FOR EACH ADDITIONAL 5 TRUCKS PER DAY, 2 SAMPLES.
- SLUMP:- A SLUMP TEST SHALL BE PERFORMED ON EACH STRENGTH SAMPLE.
- C12. ALL CONCRETE, CONCRETE WORK AND REINFORCEMENT SHALL BE IN ACCORDANCE WITH THE SPECIFICATION.
- C13. REFER TO INDIVIDUAL CONCRETE DRAWINGS FOR CONCRETE QUALITY.
- C14. ALL REINFORCEMENT TO BE AS FOLLOWS:
- | SYMBOL | TYPE |
|--------|--|
| R | STRUCTURAL GRADE PLAIN BARS TO AS/NZS 4671 (250 MPa) |
| SL, RL | FABRIC MESH TO AS/NZS 4671 (500 MPa) |
| N | HOT ROLLED DEFORMED BARS TO AS/NZS 4671 (500 MPa) |
- NOTE: THE NUMBER FOLLOWING R OR N INDICATES THE BAR DIAMETER IN MILLIMETRES.
- C15. CLEAR COVER TO REINFORCEMENT (INCLUDING FITMENTS) SHALL BE AS FOLLOWS U.N.O. WHERE NOT SPECIFICALLY DESIGNATED COVER IS TO BE IN ACCORDANCE WITH AS3600.

CONCRETE	CAST AGAINST FORMWORK	CAST AGAINST GROUND
CHARACTERISTIC STRENGTH f _c	NOT EXPOSED TO WATER *	EXPOSED TO WATER OR WEATHER
20	20	-
25	20	60
32	20	40
40	20	30
50	20	25

* ADD EXTRA 20mm COVER FOR COLUMNS (U.N.O.)

- C16. SIZES OF CONCRETE ELEMENTS DO NOT INCLUDE THICKNESS OF ANY APPLIED FINISHES.
- C17. BEAM DEPTHS ARE NOTED FIRST AND INCLUDE THE THICKNESS OF THE SLAB IF ANY.
- C18. CONSTRUCTION JOINTS WHERE NOT SHOWN ON THE DRAWINGS SHALL BE LOCATED TO THE APPROVAL OF THE ENGINEER.
- C19. FORMS SHALL BE CHAMFERED FOR RE-ENTRANT ANGLES AND FILLETED FOR CORNERS. WHERE THESE WILL BE EXPOSED TO VIEW IN THE COMPLETED PROJECT THE FACE OF THE BEVEL IN EACH CASE SHALL BE 25mm WIDE U.N.O.
- C20. NO HOLES, CHASES OR EMBEDMENTS OF PIPES OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE MADE WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- C21. DISTRIBUTION BARS TO MAIN REINFORCEMENT IN SLABS SHALL BE N12 AT 250mm CENTRES U.N.O.
- C22. NO REINFORCEMENT SPLICES SHALL BE MADE IN POSITIONS OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- C23. MINIMUM LAP FOR FABRICS SHALL BE TWO TRANSVERSE WIRES PLUS 25mm. MINIMUM LAP LENGTHS FOR DEFORMED BARS INCLUDING DISTRIBUTION REINFORCEMENT SHALL BE AS FOLLOWS U.N.O.:

BAR TYPE AND SIZE	VERTICAL BARS	HORIZONTAL BARS	90° COG LENGTH	135° or 180° COG LENGTH
		MORE THAN 300mm OF CONCRETE BELOW BAR	*	*
12	450	450	170	70
16	700	800	200	70
20	1000	1250	250	80
24	1200	1500	300	95
28	1400	1750	350	115
32	1550	1900	400	130
36	1700	2150	450	145

* COG LENGTH MEASURED FROM END OF BEND.

- C24. WELDING OF REINFORCEMENT IS NOT PERMITTED UNLESS SHOWN ON THE DRAWINGS OR APPROVED BY THE ENGINEER.
- C25. CLOSED FITMENTS U.N.O. SHALL HAVE CORNER SPLICES THUS:
-
- C26. TOP AND BOTTOM REINFORCEMENT IN:
- INTERNAL SLABS SHALL BE SUPPORTED ON APPROVED PLASTIC TIPPED CHAIRS,
- EXTERNAL SLABS SHALL BE SUPPORTED ON APPROVED FULL PLASTIC CHAIRS ONLY,
- IN BOTH DIRECTIONS AT MAXIMUM CENTRES OF 600mm FOR 10mm DIAMETER BARS, 900mm FOR 12mm AND 16mm DIAMETER BARS, 1200mm FOR 20mm DIAMETER BARS AND 750mm FOR FABRIC MESH.
- C27. ALL FORMWORK AND BACKPROPPING UNDER SUSPENDED CONCRETE WORK SHALL BE REMOVED IN ACCORDANCE WITH TYPICAL BACKPROPPING NOTES (ON THE FOLLOWING GENERAL NOTES SHEET) BEFORE ANY BRICKWORK OR BLOCKWORK IS BUILT ABOVE.
- C28. THE MINIMUM CLEAR SPACING BETWEEN CONDUITS, CABLES, PIPES AND BARS SHALL BE AS REQUIRED BY AS3600 BUT NOT LESS THAN THREE DIAMETERS HORIZONTALLY FOR HORIZONTAL CONDUITS ETC. IN SLABS WALLS, AND FOOTINGS AND NOT LESS THAN ONE DIAMETER FOR ALL OTHER CONDUITS ETC.
- C29. TYPICAL REINFORCEMENT NOTATION: 23N24-200.2
- 23 DENOTES NUMBER OF BARS REQUIRED
- N DENOTES GRADE OF REINFORCEMENT
- 24 DENOTES BAR DIAMETER IN MILLIMETRES
- 200 DENOTES BAR SPACING IN MILLIMETRES
- 2 DENOTES SECOND LAYER OF REINFORCEMENT LAID
- TYPICAL ABBREVIATIONS:
- BTM DENOTES BARS IN BOTTOM
- ALT DENOTES BARS ALTERNATING
- STAG. DENOTES BARS STAGGERED
- N.F. DENOTES BARS IN NEAR FACE
- F.F. DENOTES BARS IN FAR FACE
- E.F. DENOTES BARS IN EACH FACE
- N.S.O.P. DENOTES NOT SHOWN ON PLAN
- N.S.O.E. DENOTES NOT SHOWN ON ELEVATION
- C30. CONCRETE TO BE KEPT FREE OF SUPPORTING BRICKWORK BY 'HERCULUS' COMPOSITE (HSC) SLIDING JOINT OR EQUIVALENT U.N.O.
- C31. VERTICAL FACES OF CONCRETE SHALL BE SEPERATED BY 12mm THICK 'CANETITE' OR EXPANDING CORK U.N.O.
- C32. ALL COLUMNS AND WALLS SHALL NOT BE POURED WITH THE SLAB OVER.

CONTROL JOINT SHOULD BE PROVIDED FOR ALL CONCRET UPTURN/BALUSTARDE WITH MAXIMUM SPACING OF 6 METERS AND AN EXPANSION JOINT EVERY 12 METERS

SLAB ON GROUND NOTES

- SG1. REFER STRUCTURAL NOTES (DWG S0300) FOR CONCRETE GRADE
- SG2. SLAB TO BE POURED ON A DAMP-PROOFING MEMBRANES OVER.

SG2.1-VAPOUR BARRIERS AND DAMP-PROOFING MEMBRANES: MATERIALS

- A. 0.2 MM THICK POLYETHYLENE FILM IN ACCORDANCE WITH CLAUSE 5.3.3.3, ITEM(A) OF AS2870-2011, AS FOLLOWS:
- (i) VAPOUR BARRIER- MEDIUM IMPACT RESISTANCE IN ACCORDANCE WITH ITEM 5.3.3.3 (B) OF AS2870-2011.
- (ii) DAMP-PROOFING MEMBRANE- HIGH IMPACT RESISTANCE IN ACCORDANCE WITH CLAUSE 5.3.3.3 OF AS2870-2011, ITEM (B), AND RESISTANT TO PUNCTURE AND PENETRATION IN ACCORDANCE WITH CLAUSE 5.3.3.3 OF AS2870-2011, ITEM(C).
- B. FILM BRANDED CONTINUOUSLY AS 2870-2011 CONCRETE UNDERLAY, 0.2MM- MEDIUM (OR HIGH AS APPROPRIATE) IMPACT RESISTANCE, TOGETHER WITH MANUFACTURER OR DISTRIBUTORS NAME, TRADEMARK OR CODE.
- SG2.2- PROPERTIES:

PROPERTIES SPECIFIED FOR VAPOUR BARRIERS AND DAMP-PROOFING MEMBRANES SHALL BE DETERMINED BY THE FOLLOWING METHODS:

- A. FILM THICKNESS 0.2 MM- SHALL BE DETERMINED USING THE METHOD OF TEST OUTLINED IN AS/NZS 4347.9, EXCEPT THAT THREE TESTS PER METER WIDTH OF FILM SHALL BE CARRIED OUT ACROSS THE FULL WIDTH OF THE FILM WITH THE RESULTING MEAN AVERAGE THICKNESS TO BE BETWEEN 0.18 MM TO 0.22 MM AND A MAXIMUM OF ONLY ONE MEASUREMENT TO BE BELOW 0.17 MM FOR A MATERIAL PASS TO BE RECORDED.
- B. IMPACT RESISTANCE-SHALL BE DETERMINED USING THE FALLING DART IMPACT TEST OUTLINED IN AS/NZS 4347.6 AND THE FOLLOWING:
- (i) -USING A LOAD OF 180 G FOR MEDIUM IMPACT FILM AND 310 G FOR HIGH IMPACT FILM AND A DROP HEIGHT OF 660 MM, ONE TEST SHALL BE CARRIED OUT ON THE FOLD OF THE FILM AND THE FILM SHALL NOT FAIL.
- (ii) -USING A LOAD OF 200 G FOR MEDIUM IMPACT FILM AND 340 G FOR HIGH IMPACT FILM AND A DROP HEIGHT OF 660 MM, TWO TESTS PER METER WIDTH OF FILM SHALL BE CARRIED OUT ACROSS THE FULL WIDTH OF THE BODY OF THE FILM AND 75% OF THESE TESTS SHALL PASS FOR A MATERIAL PASS TO BE RECORDED.

- C. RESISTANCE TO PUNCTURE AND MOISTURE PENETRATION-SHALL BE DETERMINED USING THE CSIRO 'METHOD FOR THE DETERMINATION OF THE PENETRATION RESISTANCE OF WATER VAPOUR BARRIERS TO FALLING AGGREGATE'. VAPOUR PERMEANCE FOLLOWING THIS TEST SHALL NOT EXCEED 0.02 MG/MS WITH NO PUNCTURES OR RIPS IN THE FILM.
- INSTALLATION:-
- BOTH VAPOUR BARRIERS AND DAMP-PROOFING MEMBRANES SHALL BE INSTALLED AS FOLLOWS:
- A. THE SHEET WALL SHALL BE PLACED BENEATH THE SLAB SO THAT THE BOTTOM SURFACE OF THE SLAB AND BEAMS, INCLUDING INTERNAL BEAMS, IS ENTIRELY UNDERLAIN.
- B. LAPPING FOR CONTINUITY AT JOINTS SHALL BE NOT LESS THAN 200 MM.
- C. PENETRATIONS BY PIPES OR PLUMBING FITTINGS SHALL BE TAPED OR SEALED WITH A CLOSE- FITTING SLEEVE OR MADE CONTINUOUS WITH THE VAPOUR BARRIER OR DAMP-PROOF MEMBRANE BY TAPING OR BY LAPPING IN ACCORDANCE WITH ITEM (B).

- SG3. NO WATER TO BE ADDED TO THE CONCRETE MIX ON SITE
- SG4. CURING OF CONCRETE TO BE IN ACCORDANCE WITH AS 3600-2018 AND SHALL COMMENCE WITHIN 2 HOURS OF FINISHING OPERATIONS AND SHALL BE MAINTAINED FOR A MINIMUM OF 7 DAYS USING AN APPROVED PROPRIETARY CURING COMPOUND OR CONTINUOUS PONDING WITH POTABLE WATER.
- SG5. ALIPHATIC ALCOHOL
- WHEN SHADE TEMPERATURE EXCEEDS 30°C SPRAY THE EXPOSED SURFACE OF CONCRETE SLAB DURING THE PLACING AND FINISHING OPERATION WITH FINE FILM OF APPROVED ALIPHATIC ALCOHOL. REPEAT THE SPRAY IF THE SPRAYED SURFACE HAS BEEN RE-WORKED.
- SG6. CONCRETE MAXIMUM DRYING SHRINKAGE TO BE 600 MICROSTRAIN AT 56 DAYS. ENSURE POINT LOAD ARE 300mm MIN FROM SLAB JOINTS (EDGE DISTANCE).
- SG7. CONCRETE SAW CUTS (Sj) SHALL COMMENCE WITHIN 18 HOURS AFTER CONCRETE SETS

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

ISSUE	AMENDMENT	ENG.	DRA.	DATE
-------	-----------	------	------	------

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

zhinarchitects

Architect

Zhinarchitects Pty Ltd

2 Rose Street
Eastwood, NSW 2122

+61 2 8968 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
28 495 969 790 / m

Beyond Certification Pty Ltd

Reference: 3125176CDC

Date: 17/12/2025

STRUCTURAL LINK Pty Ltd

Office: 02 8021 2626

Address: Level 3, Suite 313, 49-51 Queens Road, Five Dock NSW 2046

Postal Address: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

DUAL OCCUPANCY

3 JOHNSTON AVE, KIRRAWEE, NSW 2232

GENERAL NOTES

SHEET 1/3

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0000

BRICKWORK AND BLOCKWORK

- B1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT SAA MASONRY CODE, AS3700 EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.
- B2. ALL LOAD BEARING BRICKS SHALL BE LAID FROGS UP EXCEPT FOR THE TOP COURSE,WHICH SHALL BE LAID FROGS DOWN. WHEN SUPPORTING A CONCRETE SLAB OR BEAM BRICKWORK SHALL HAVE A LAYER OF MORTAR PLACED ON THE TOP AND TROWELLED SMOOTH, THE TOP 2 COURSES OF BRICKS SHALL BE LAID WITH REINFORCEMENT IN THE JOINTS.
- B3. WHERE WALLS ARE NON LOAD BEARING AT EITHER HORIZONTAL OR VERTICAL FACES THEY SHALL BE SEPARATED FROM THE CONCRETE BY 20mm THICK 'CANEITE' OR EXPANDED POLYSTYRENE U.N.O.
- B4. NO HOLES OR CHASES SHALL BE CUT IN LOAD BEARING BRICKWORK OR BLOCKWORK WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- B5. ALL CONCRETE BLOCK WALLS SHALL BE BUILT TO A GAUGE CONCRETE BLOCK SUCH THAT BLOCK-PLANS-JOINT DIMENSIONS ARE MULTIPLES OF 100mm USING STRETCHER BOND UNLESS SPECIFIED OTHERWISE.
- B6. CONCRETE BLOCKS SHALL BE GRADE 12 UNITS CONFORMING TO AS2733.
- B7. MORTAR SHALL BE FRESHLY PREPARED AND COMPOSED OF CEMENT: LIME:SAND IN THE RATIO OF 1:1:6 AND SHALL CONFORM TO AS3700.
- B8. CORES TO BE FILLED WHERE REQUIRED WITH MIN CONCRETE OF STRENGTH $f_c = 25$ MPa, 10mm MAX. AGGREGATE SIZE AND A MAX. SLUMP OF 230mm, IN LIFTS NOT MORE THAN 1200 mm HIGH. U.N.O.
- B9. CLEAN OUT OPENINGS ARE REQUIRED AT THE BASE OF ALL REINFORCED WALLS AND ABOVE HORIZONTAL CONSTRUCTION JOINTS.
- B10. REINFORCEMENT SHALL BE POSITIONED AS SHOWN AND HAVE A MINIMUM CONCRETE COVER OF 20mm U.N.O.
- B11. JOINT REINFORCEMENT SHALL BE IN ACCORDANCE WITH AS3700.
- B12. VERTICAL CONTROL JOINTS IN BLOCK RETAINING WALLS AND BLOCK WALLS TO BE SPACED AS SHOWN OR AT 6000mm MAX. APART. VERTICAL CONTROL JOINTS IN BRICKWORK TO BE SPACED AT 5000mm MAX. APART. U.N.O.
- B13. A 300mm WIDE STRIP OF COARSE GRAINED MATERIAL IS TO BE PLACED BEHIND ALL RETAINING WALLS.
- B14. BRICK TIES TO COMPLY WITH AS3700 AND BE OF STAINLESS STEEL DUE TO REQUIRED EXPOSURE.
- B15. BED JOINT HORIZONTAL REINFORCEMENT M.E.T. GALVANISED MASONRY REINFORCEMENT (SUPPLIED BY DUNSTONE MAZE OR EQUAL) AT EVERY THIRD BED JOINT.
- B16. CLAY MASONRY BRICKS ARE OF SOLID TYPE AND HAVE A UNCONFINED COMPRESSIVE STRENGTH $f_{uc}=20$ MPa, SOLID TYPE. U.N.O.


BRICK LINTEL SCHEDULE			
OPENING SIZE (mm)	INTERNAL SKIN	EXTERNAL SKIN	END BEARING
UP TO 900mm	100 x 8mm FLAT BAR	100 x 6mm FLAT BAR	100mm
1200	100 x 10mm FLAT BAR	100 x 8mm FLAT BAR	100mm
1500	100 x 100 x 8mm ANGLE	100 x 100 x 6mm ANGLE	150mm
2100	150 x 100 x 8mm ANGLE	150 x 100 x 6mm ANGLE	150mm
2400	150 x 100 x 8mm ANGLE	150 x 100 x 8mm ANGLE	150mm
2700	150 x 100 x 10mm ANGLE	150 x 100 x 10mm ANGLE	150mm
3000	150 x 100 x 12mm ANGLE	150 x 100 x 12mm ANGLE	150mm

NOTES

- ALL STEEL LINTELS TO BE HOT DIPPED GALVANIZED
- ABOVE ALL LINTELS, PROVIDE M.E.T MASONRY REINFORCEMENT FOR 2 COURSES AND CONTINUE 1000mm PAST OPENING.

MASONRY

- M1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS2733, AS4773 & AS3700 CURRENT EDITION WITH AMENDMENTS AND OTHER RELEVANT CODES
- M2. MASONRY UNITS SHALL COMPLY WITH AS4455 AND HAVE A MINIMUM CHARACTERISTIC UNCONFINED STRENGTH OF:
LOAD BEARING BRICK = 20MPa
NON LOAD BEARING (FACADE) BRICK = 20MPa.
- M3. CONCRETE MASONRY BLOCKS SHALL BE OF A MINIMUM COMPRESSIVE STRENGTH GRADE 15 IN ACCORDANCE WITH AS4455.
- M4. ALL CAVITY CONSTRUCTION TO HAVE GALVANISED WALL TIES INSTALLED AS PER AS PER AS3700 CLAUSE 3.4 AND 4.1.
- M5. UNO PROVIDE TYPE A MEDIUM DUTY WALL TIES SPACED & FIXED IN ACCORDANCE WITH BCA VOLUME 2 TABLE. 5.6.5a, 5.6.5b & 5.6.5c.

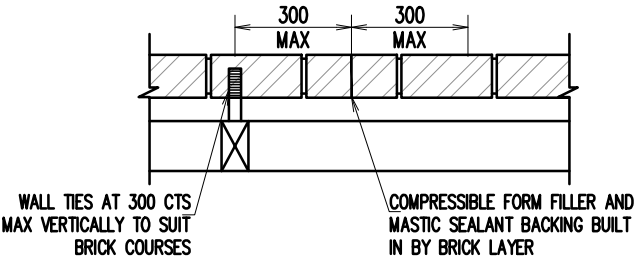

CORROSION PROTECTION FOR WALL TIES BCA VOL 2 TABLE 5.6.5d		
ZONE	EXPOSURE CONDITION	TIE SPECIFICATION
1	<1km FROM BREAKING SURF	• GRADE 316L STAINLESS STEEL OR
	<100m FROM SALT WATER WITHIN HEAVY INDUSTRIAL AREAS	• ENGINEERED POLYMER COMPLYING WITH THE REQUIREMENT OF AS/NZS 2699.1
2	1 TO 10km FROM BREAKING SURF	• GALVANIZED SHEET STEEL TIES-470g/m2 COATING MASS
	100 TO 1000m FROM SALT WATER	• GALVANIZED SHEET STEEL TIES-470g/m2 COATING MASS
3	ALL OTHER AREAS	• GRADE 316L STAINLESS STEEL
		• GALVANIZED SHEET STEEL - 300g/m2 COATING MASS
		• GALVANIZED SHEET STEEL TIES-300g/m2 COATING MASS, GALVANIZED AFTER MANUFACTURE

MASONRY CONTINUED

- M6. MORTAR ADMIXTURES SHALL NOT BE USED WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER.
- M7. BED MASONRY IN FRESHLY PREPARED MORTAR. MORTAR MIX TO BE UNIFORMLY MIXED IN THE RATIO OF ONE PART CEMENT, THREE PARTS SAND AND ONE FOURTH PART LIME CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.
- M8. BEDDING OF MASONRY SHALL BE FULL FACE. JOINT THICKNESS SHALL NOT EXCEED 12mm.
- M9. THE CAVITY SHALL NOT EXCEED 100mm AND SHALL NOT BE SMALLER THAN 40mm UNLESS NOTED OTHERWISE. KEEP CAVITY CLEAN AND CLEAR OF OBSTRUCTIONS.
- M10. NON LOAD-BEARING WALLS SHALL BE SEPARATED FROM THE CONCRETE STRUCTURE ABOVE THEM WITH A MINIMUM 20mm THICK APPROVED COMPRESSIBLE ISOLATION MATERIAL.
- M11. NO CHASES OR RECESSES ARE PERMITTED IN LOAD BEARING MASONRY WITHOUT THE APPROVAL OF THE ENGINEER.
- M12. MASONRY WALLS SHALL COMPLY WITH THE FOLLOWING UNO:
• FILL ALL BED JOINTS AND PERPENDS WITH MORTAR EXCEPT AT WEEP HOLES.
• PROVIDE CLEAN-OUTS AT BASE OF REINFORCED CORES. REMOVE MORTAR
• PROTRUSIONS BEFORE CORE OR CAVITY FILLING.
• COMPACT GROUT FILLING BY RODDING OR MECHANICAL VIBRATION.
• MAXIMUM HEIGHT OF POUR FOR CORE FILLED WALLS TO BE 1200mm.
- M13. WATERPROOF RETAINING FACE OF RETAINING WALLS AS SPECIFIED BY THE BUILDER/WATERPROOFING SPECIALIST.
- M14. BACKFILL TO RETAINING WALLS SHALL BE A HIGHLY PERMEABLE GRANULAR MATERIAL. PROVIDE A SUBSOIL DRAIN AT THE BASE OF THE WALL CONNECTED TO THE STORMWATER DRAINAGE SYSTEM UNO.
- M15. REINFORCED BLOCKWORK RETAINING WALLS SHALL NOT BE BACKFILLED UNTIL 14 DAYS AFTER THE WALL HAS BEEN GROUTED, OR IF APPLICABLE, UNTIL AFTER THE RETAINING SLAB OVER HAS BEEN POURED AND CURED FOR 7 DAYS, OTHERWISE INSTALL TEMPORARY PROPS.
- M16. ARTICULATION JOINTS MUST HAVE A MINIMUM WIDTH OF 10mm.
- M17. EXPANSION TIES MUST BE BUILT INTO THE VERTICAL CONTROL JOINT AT EVERY FOURTH BRICK COURSE.
- M18. PROVIDE BRICKWORK VERTICAL CONTROL JOINTS AT 4.5m MAXIMUM CENTRES OR AS SPECIFIED.
- M19. PROVIDE BRICKWORK VERTICAL CONTROL JOINTS AT A DISTANCE FROM ALL CORNERS NOT GREATER THAN 4.5m AND NOT LESS THAN 470mm FOR CAVITY WALLS OR 230mm FOR VENEER WALLS.
- M20. PROVIDE BLOCKWORK VERTICAL CONTROL JOINTS AT 12.0m MAXIMUM CENTRES, AND 6.0m MAXIMUM FROM CORNERS IN ALL MASONRY WALLS UNO.
- M21. FOR SINGLE LEAF MASONRY WALLS STABILISED WITH RETURN WALLS, OR ENGAGED PIERS, ANY ARTICULATION JOINTS MUST BE WITHIN 300mm OF THE VERTICAL SUPPORT ELEMENT. THESE JOINTS MUST BE SEALED WITH A FLEXIBLE, COMPRESSIBLE MATERIAL.
- M22. PROVIDE VERTICAL CONTROL JOINTS AT FOOTING CONSTRUCTION JOINTS.
- M23. PROVIDE VERTICAL CONTROL JOINTS AT JUNCTIONS OF WALLS CONSTRUCTED OF DIFFERENT MATERIALS.
- M24. PROVIDE VERTICAL CONTROL JOINTS AT THE POSITION WHERE THE WALL HEIGHT CHANGES BY MORE THAN 20% UNO.
- M25. PROVIDE VERTICAL CONTROL JOINTS WHERE MASONRY WALLS CHANGE IN THICKNESS. ENGAGED PIERS ARE NOT CONSIDERED TO BE CHANGES OF THICKNESS. CHASES THAT HAVE LESS THAN 75% OF THE LEAF THICKNESS REMAINING ARE CONSIDERED TO BE CHANGES OF THICKNESS.
- M26. IT IS THE CONTRACTORS RESPONSIBILITY TO CONFIRM MASONRY JOINT LOCATIONS WITH THE BRICKLAYER AND THE ARCHITECT. REFER TO THESE DRAWINGS FOR THE LOCATION OF ALL MASONRY JOINTS. IF JOINT LOCATIONS ARE NOT PROVIDED, REFER TO THESE MASONRY NOTES FOR GUIDANCE.
- M27. WHERE BRITTLE FLOOR COVERING IS TO BE USED IN AN AREA GREATER THAN 16m2, THE PLACEMENT OF THE FLOOR COVERING SHALL BE DELAYED BY A MINIMUM PERIOD OF 3 MONTHS AFTER CONCRETE POUR OR ALTERNATIVELY SELECT THE BEDDING SYSTEM FOR BRITTLE COVERINGS ON THE BASIS OF THE EXPECTED SLAB MOVEMENT AND THE CHARACTERISTICS OF THE FLOOR COVERING OR USE FLEXIBLE ADHESIVE.

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

28 495 969 790 / 061 2 8893 8888 / 06 2517 60 DC / 06 2517 60 DC / 06 2517 60 DC

28 495 969 790 / 061 2 8893 8888 / 06 2517 60 DC / 06 2517 60 DC

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rine Street
Eastwood, NSW 2122
+61 2 8893 8888 / 06 2517 60 DC / 06 2517 60 DC
www.zhinarch.com.au / 06 2517 60 DC / 06 2517 60 DC

CLIENT

Beyond Certification Pty Ltd
Reference: 31251760DC
Date: 17/10/2025

PROJECT

STRUCTURAL LINK Pty Ltd
OFFICE. 02 8021 2626
ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS. PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT

DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT		GENERAL NOTES SHEET 2/3		N	
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0001

STRUCTURAL STEEL WORKS

- S1. ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538, AS1554 AND THE SPECIFICATION.
- S2. UNLESS SHOWN OTHERWISE ON THE DRAWINGS:
- (i) ALL STEEL SHALL BE GRADE 300 IN ACCORDANCE WITH AS1204.
 - (ii) ALL STEEL HOLLOW SECTIONS SHALL BE GRADE 350 IN ACCORDANCE WITH AS1163.
 - (iii) ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 IN ACCORDANCE WITH AS1538.
 - (iv) ALL BOLTS SHALL BE GRADE 8.8/S IN ACCORDANCE WITH AS1252.
- S3. UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
- (i) ALL WELDS SHALL BE 6 mm CONTINUOUS FILLET WELDS ALL ROUND.
 - (ii) ALL BOLTS SHALL BE M20 – 8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION. PURLIN BOLTS TO BE M12 – 4.6/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END.
 - (iii) ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK U.N.O.
 - (iv) ALL CAP PLATES SHALL BE 10 mm THICK U.N.O.
 - (v) ALL BASE PLATES SHALL BE 10 mm THICK U.N.O.
- S4. BOLT DESIGNATION:
- (i) 4.6/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.6 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION.
 - (ii) 8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION.
 - (iii) 8.8/1B REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A BEARING JOINT.
 - (iv) 8.8/1F REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A FRICTION JOINT.
- S5. HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE "PART TURN" METHOD OF TIGHTENING.
- S6. ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.
- S7. SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER.
- S8. ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE ENCASED IN 75mm MIN. CONCRETE ALL ROUND.
- S9. ALL STEELWORK, EXCEPT THAT WHICH IS TO BE CONCRETE ENCASED, FIRE SPRAYED OR CONTACT SURFACES OF FRICTION TYPE JOINTS, SHALL BE SURFACE CLEANED AND PAINTED IN ACCORDANCE WITH THE SPECIFICATION.
- S10. STEELWORK THAT IS CONCRETE ENCASED, FIRE SPRAYED OR FACING SURFACES OF FRICTION TYPE JOINTS SHALL BE LEFT UNPAINTED AND FREE FROM SCALE.
- S11. THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND DRILL ALL HOLES NECESSARY FOR FIXING STEEL, TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS.
- S12. THE FABRICATION AND ERECTION OF THE STRUCTURAL STEELWORK SHALL BE SUPERVISED BY QUALIFIED PERSONNEL EXPERIENCED IN SUCH SUPERVISION TO ENSURE THAT ALL REQUIREMENTS OF THE DESIGN ARE MET. DETAILS OF ERECTION SEQUENCE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ERECTION.
- S13. COLUMNS AND MULLIONS SHALL HAVE THEIR BASE PLATES FULLY GROUTED IN ACCORDANCE WITH THE SPECIFICATIONS AFTER PLUMBING AND LEVELLING ON STEEL PACKERS.
- S14. THREE (3) SETS OF STEELWORK SHOP DETAIL DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ANY FABRICATION. THE CHECK SHALL NOT COVER LAYOUT AND MEMBER DIMENSIONS.
- S15. CONCRETE ENCASED STRUCTURAL STEELWORK TO BE ENCLOSED BY F41 MESH PLACED CLEAR OF STEELWORK, ENCASING TO PROVIDE 50mm MIN. COVER TO STEELWORK U.N.O. ON THE DRAWINGS. COVER TO MESH TO BE 20mm MIN. MAXIMUM AGGREGATE SIZE = 10mm, CONCRETE f_c = 20 MPa.
- S16. UNLESS SPECIFIED OTHERWISE, STEELWORK SHALL BE PREPARED TO CLASS 2.5 FINISH IN ACCORDANCE WITH AS1627.4 AND GIVEN TWO (2) COATS OF ZINC PHOSPHATE TO A TOTAL DRY FILM THICKNESS OF 70 MICRONS.
- S17. ALL BUILT INTO MASONRY OR EXPOSED TO THE WEATHER STEEL WORK SHALL BE HOT DIPPED GALVANISED. U.N.O.
- S18. ALL STEEL WORK SHALL BE FIRE RATED IN ACCORDANCE WITH BCA REQUIREMENTS.

TYPICAL BACKPROPPING ARRANGEMENT

- BA1 THE DESIGN, CERTIFICATION AND CONSTRUCTION OF THE FALSEWORK AND BACKPROPPING SHALL BE UNDERTAKEN TO AS3610 AND IS THE RESPONSIBILITY OF THE CONTRACTORS OR FORMWORK SUBCONTRACTOR'S FORMWORK ENGINEER.
- BA2 BACKPROPPING ARRANGEMENT IS A MINIMUM ONLY. THE NUMBER OF SUPPORTING LEVELS IS TO BE CONFIRMED BY THE FORMWORK ENGINEER.
- BA3 UNLESS MORE DETAILED INFORMATION IS AVAILABLE, THE FOLLOWING SHALL BE USED FOR DETERMINING THE CAPACITY OF SUPPORTING LEVELS.
- 70% CAPACITY @ 7 DAYS
 - 95% CAPACITY @ 14 DAYS
 - 98% CAPACITY @ 21 DAYS
 - 100% CAPACITY @ 28 DAYS
- BA4 BACKPROPPING ARRANGEMENT RELIES ON ALL LEVELS BELOW MET CONCRETE HAVING ACHIEVED FULL STRENGTH AFTER 28 DAYS FOR R.C. SLABS AND FULLY STRESSED AND GROUTED IN P.T. SLABS. IF ANY OF THE SLABS HAVE NOT ACHIEVED FULL STRENGTH OR HAVE NOT BEEN FULLY STRESSED, THEN EXTRA LEVELS OF PROPPING WILL BE REQUIRED AND A DETAILED ANALYSIS OF THE PROPPING SHALL BE UNDERTAKEN BY THE FORMWORK ENGINEER.
- BA5 BACKPROPPING ARRANGEMENT BASED ON SLABS BEING OF SIMILAR AVERAGE THICKNESS AND LOADING. IF THE AVERAGE SLAB/BEAM THICKNESS FOR THE SLAB BEING POURED EXCEEDS 180mm FOR RESIDENTIAL SLABS AND 270mm FOR OTHER SLABS THEN A DETAILED ANALYSIS OF THE PROPPING SHALL BE UNDERTAKEN BY THE FORMWORK ENGINEER.
- BA6 CAREFUL ATTENTION SHALL BE GIVEN TO AREAS OF INCREASED THICKNESS AND STIFFNESS, WHICH INCLUDES, BUT IS NOT LIMITED TO, BEAMS, FOLDS, UPSTANDS, PLINTHS, FALLS, WALLS, TOPPINGS AND STEPS. EXTRA LEVELS OF PROPPING WILL BE REQUIRED.
- BA7 BACKPROPPING ARRANGEMENT ASSUMES CONNECTION TO THE FINAL SUPPORTING ELEMENTS. AREAS WHERE THIS CONNECTION HAS NOT YET BEEN ESTABLISHED WILL REQUIRE ADDITIONAL PROPPING.
- BA8 BACKPROPPING ARRANGEMENT MAKES NO ALLOWANCE FOR MATERIAL STACKING AREAS. THE ADDITIONAL BACKPROPPING REQUIREMENTS SHALL BE DETERMINED BY THE FORMWORK ENGINEER.
- BA9 50% BACKPROPPING DENOTES PROPS AT NO GREATER THAN 3.0m.
- BA10 ENSURE ANY SLABS THAT HAVE NOT ACHIEVED FULL STRENGTH OR HAVE NOT BEEN FULLY STRESSED ARE 100% PROPPED AND SUPPORTED BY 2 LEVELS OF FULL STRENGTH R.C. SLABS OR FULLY STRESSED P.T. SLABS.

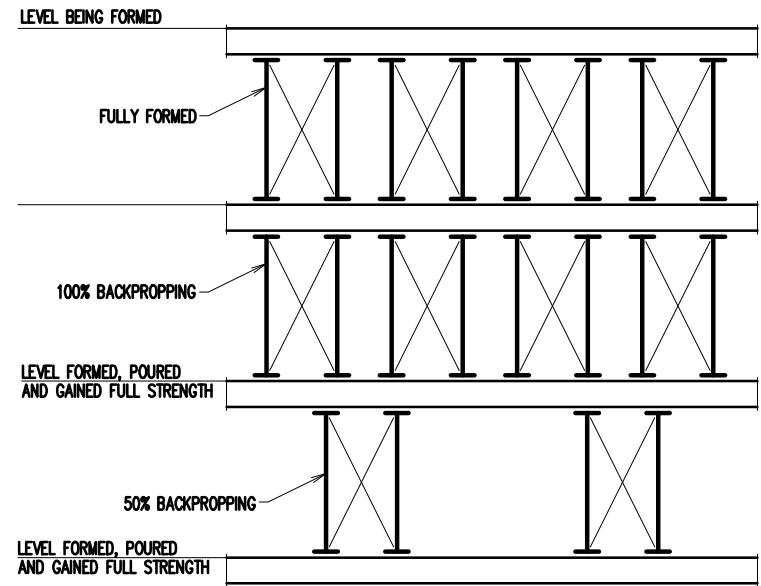

TYPICAL BACK PROPPING SEQUENCE FOR REINFORCED CONCRETE SLABS

1. 50% BACKPROPPING DENOTES PROPS AT NO GREATER THAN 3M CENTERS FOR 200MM SLABS.
2. ANY UNSTRESSED DECK NEEDS TO BE SUPPORTED BY TWO FULLY STRESSED CONCRETE DECKS.
3. ALL FORMWORK TO BE CERTIFIED BY STRUCTURAL ENGINEER BEFORE EACH CONCRETE POUR.
4. ALL CANTILEVERED SLABS ARE TO BE FULLY BACK-PROPPED THROUGH THE ENTIRE COURSE OF CONSTRUCTION

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
28 405 969 790 /m

CLIENT

Beyond Certification Pty Ltd
Reference: 3125176DC
Date: 17/12/2024

STRUCTURAL LINK Pty Ltd

OFFICE. 02 8021 2626
ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS. PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046


PROJECT

DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT

GENERAL NOTES
SHEET 3/3

DESIGNED K.T.	DRAWN L.N.	AUTHORISED T.N.
CHECKED T.N.	SCALE : A2	DATE FEB 2025
JOB NO. SLY25-S008	DRAWING NO. S0002	

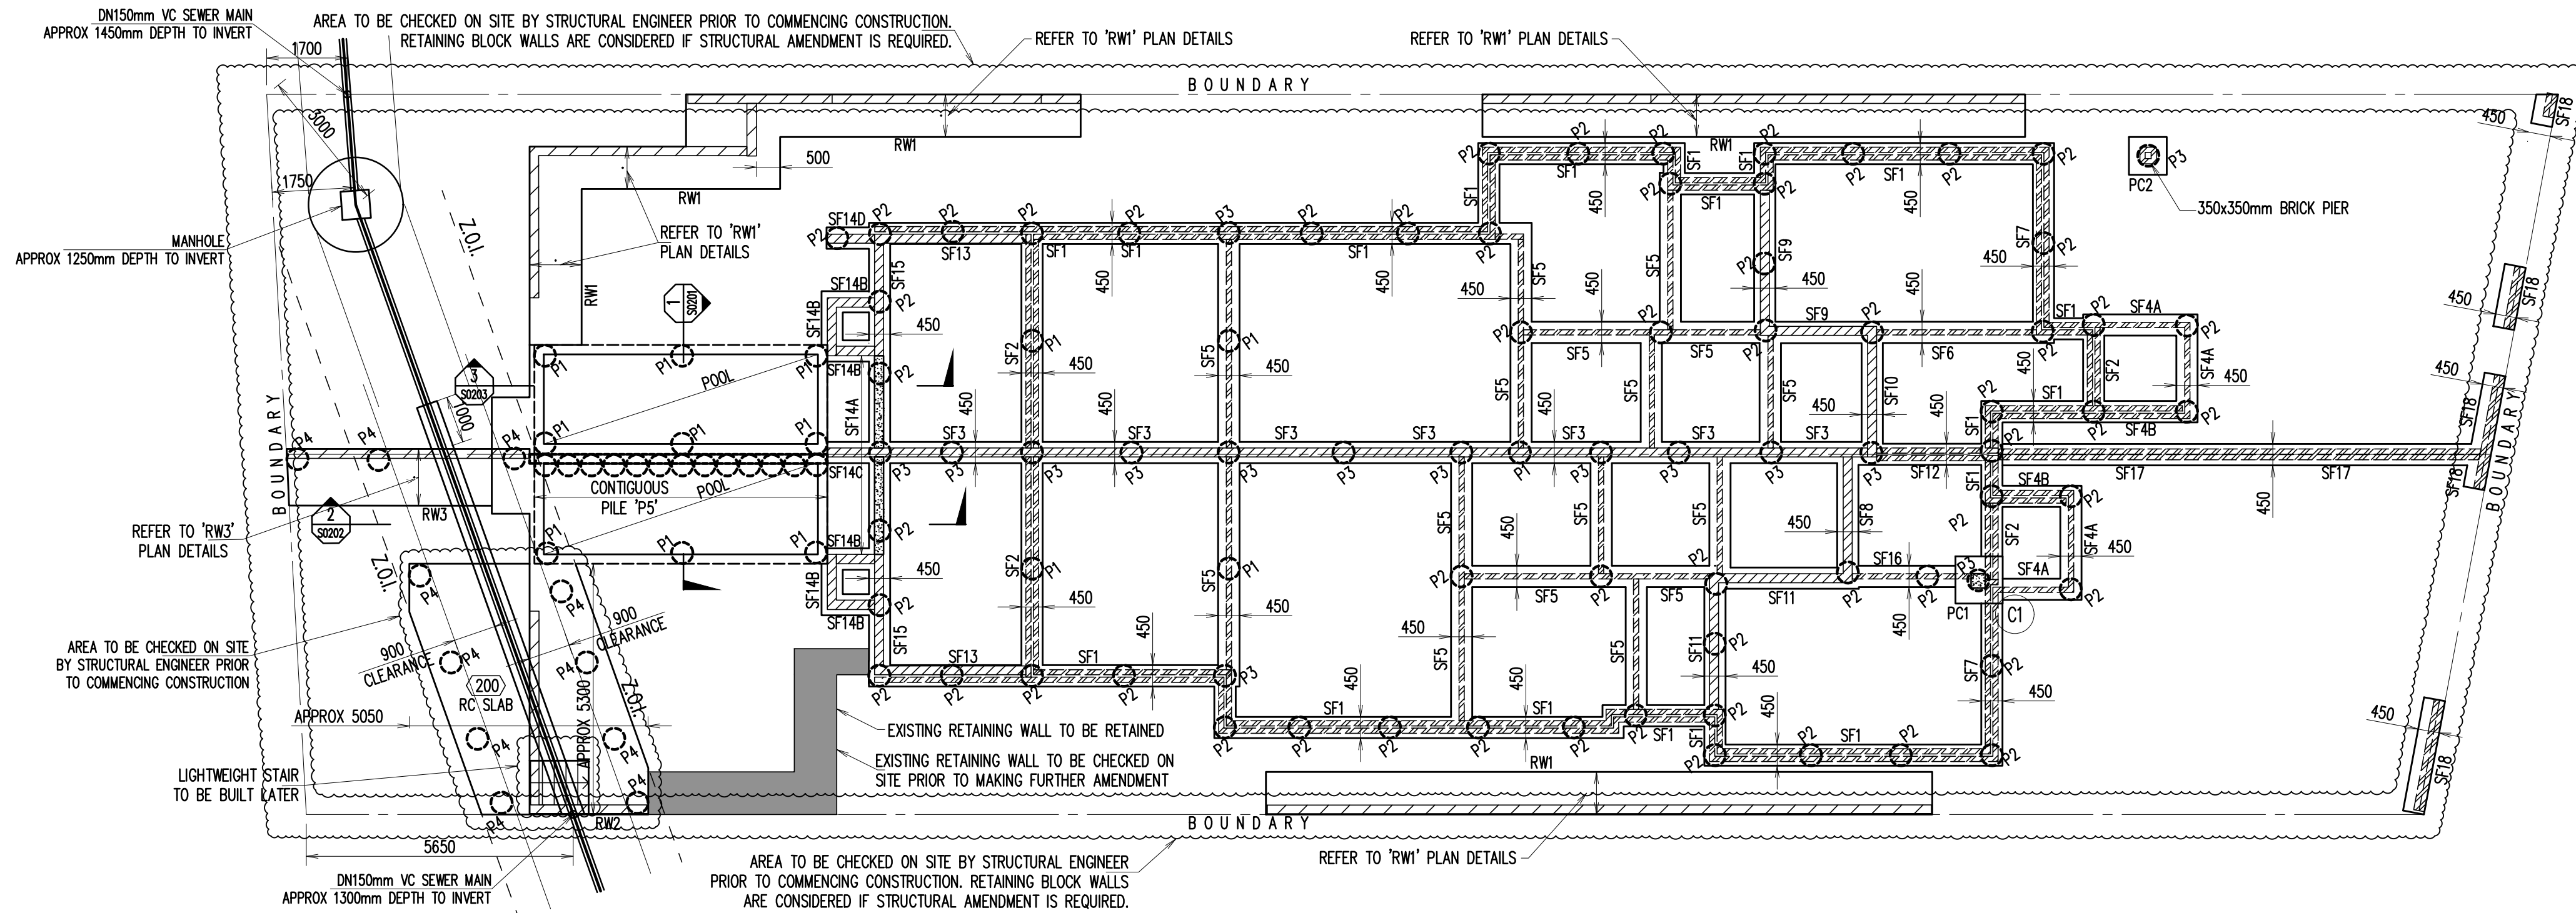

FOOTING PLAN-OPTION 1


SCALE 1:100
NOTES:

- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
- REFER TO ARCHITECTURAL DRAWINGS FOR ALL SETOUT, LEVELS, FALLS ETC.
- DURING CONSTRUCTION, FOUNDATION MATERIAL HAS TO BE CHECKED AND VERIFIED BY GEOTECHNICAL ENGINEER TO ENSURE THE REQUIRED SAFE BEARING CAPACITY IS REACHED AS DESIGNED FOR.
- 'P1': DENOTES Ø450mm MASS CONCRETE PIERS, DEPTH = 1800mm
- 'P2': DENOTES Ø450mm CONCRETE PILES, 5N16+R10-300 TIES, MINIMUM 1000mm SOCKET INTO SHALE (700KPa) GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE.
- 'P3': DENOTES Ø450mm CONCRETE PILES, 5N16+R10-300 TIES, MINIMUM 2000mm SOCKET INTO SHALE (700KPa) GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE.
- 'P4': DENOTES Ø450mm CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3000mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE
- 'P5': DENOTES Ø450mm CONTIGUOUS CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3500mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE

PILE CAP SCHEDULE		
MARK	SIZE (LxWxD mm)	REINFORCEMENT (LB&WB)
PC1	1000 x 1000 x 400	6N12 TIES EACH WAY
PC2	800 x 800 x 400	5N12 TIES EACH WAY

NOTE:
FULLY PLASTIC CHAIRS TO BE USED FOR STEEL REINFORCEMENT INSTALLATION.

SITE CLASSIFICATION		'P'
WIND CLASSIFICATION		N2
SITE LOCATION CLASSIFICATION		SL2
SL1: LESS THAN 1KM FROM BREAKING SURF OR LESS THAN 100M FROM SALT WATER NOT SUBJECT TO BREAKING SURF OR WITHIN HEAVY INDUSTRIAL AREAS.		
SL2: 1KM OR MORE BUT LESS THAN 10KM FROM BREAKING SURF OR 100M OR MORE BUT LESS THAN 1KM FROM SALT WATER NOT SUBJECT TO BREAKING SURF.		
SL3: 10KM OR MORE FROM BREAKING SURF OR 1KM OR MORE FROM SALT WATER NOT SUBJECT TO BREAKING SURF.		

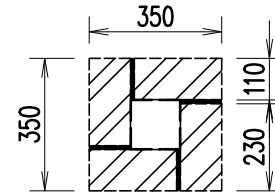

TYPICAL 350x350 BRICK PIER

SCALE 1:20

LEGEND :

- DENOTES BRICK WALL OVER ONLY
- DENOTES RC COLUMN UNDER ONLY
- DENOTES BLOCK WALL OVER ONLY
- DENOTES BLOCK WALL UNDER ONLY

FOR STRUCTURAL NOTES REFER TO DRAWING S000

NOTES:

- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
 - REFER TO ARCHITECTURAL DRAWINGS FOR ALL FALLS AND LEVELS AND SETOUT DIMENSIONS TO COLUMNS, WALLS ETC.
- DO NOT SCALE FROM STRUCTURAL DRAWINGS.

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f _c (28 DAYS)
FOOTINGS	80mm	20mm	GP	40MPa
PILES/PIERS	80mm	20mm	GP	40MPa

REINFORCEMENT COVER SCHEDULE			
ELEMENT	COVER (mm)		
	TOP	BOTTOM	SIDES
FOOTINGS	70mm	70mm	70mm
PILES	-	-	75mm

NOTE:
REFER TO PLAN 'S0100' AND 'S0200' FOR ALL TYPES AND LOCATION OF PIERS/PILES

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL


ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
26 495 969 790 / a

CLIENT
Beyond Certification Pty Ltd
Address: Level 3, Suite 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
FOOTING PLAN & DETAILS
OPTION 1


DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0100

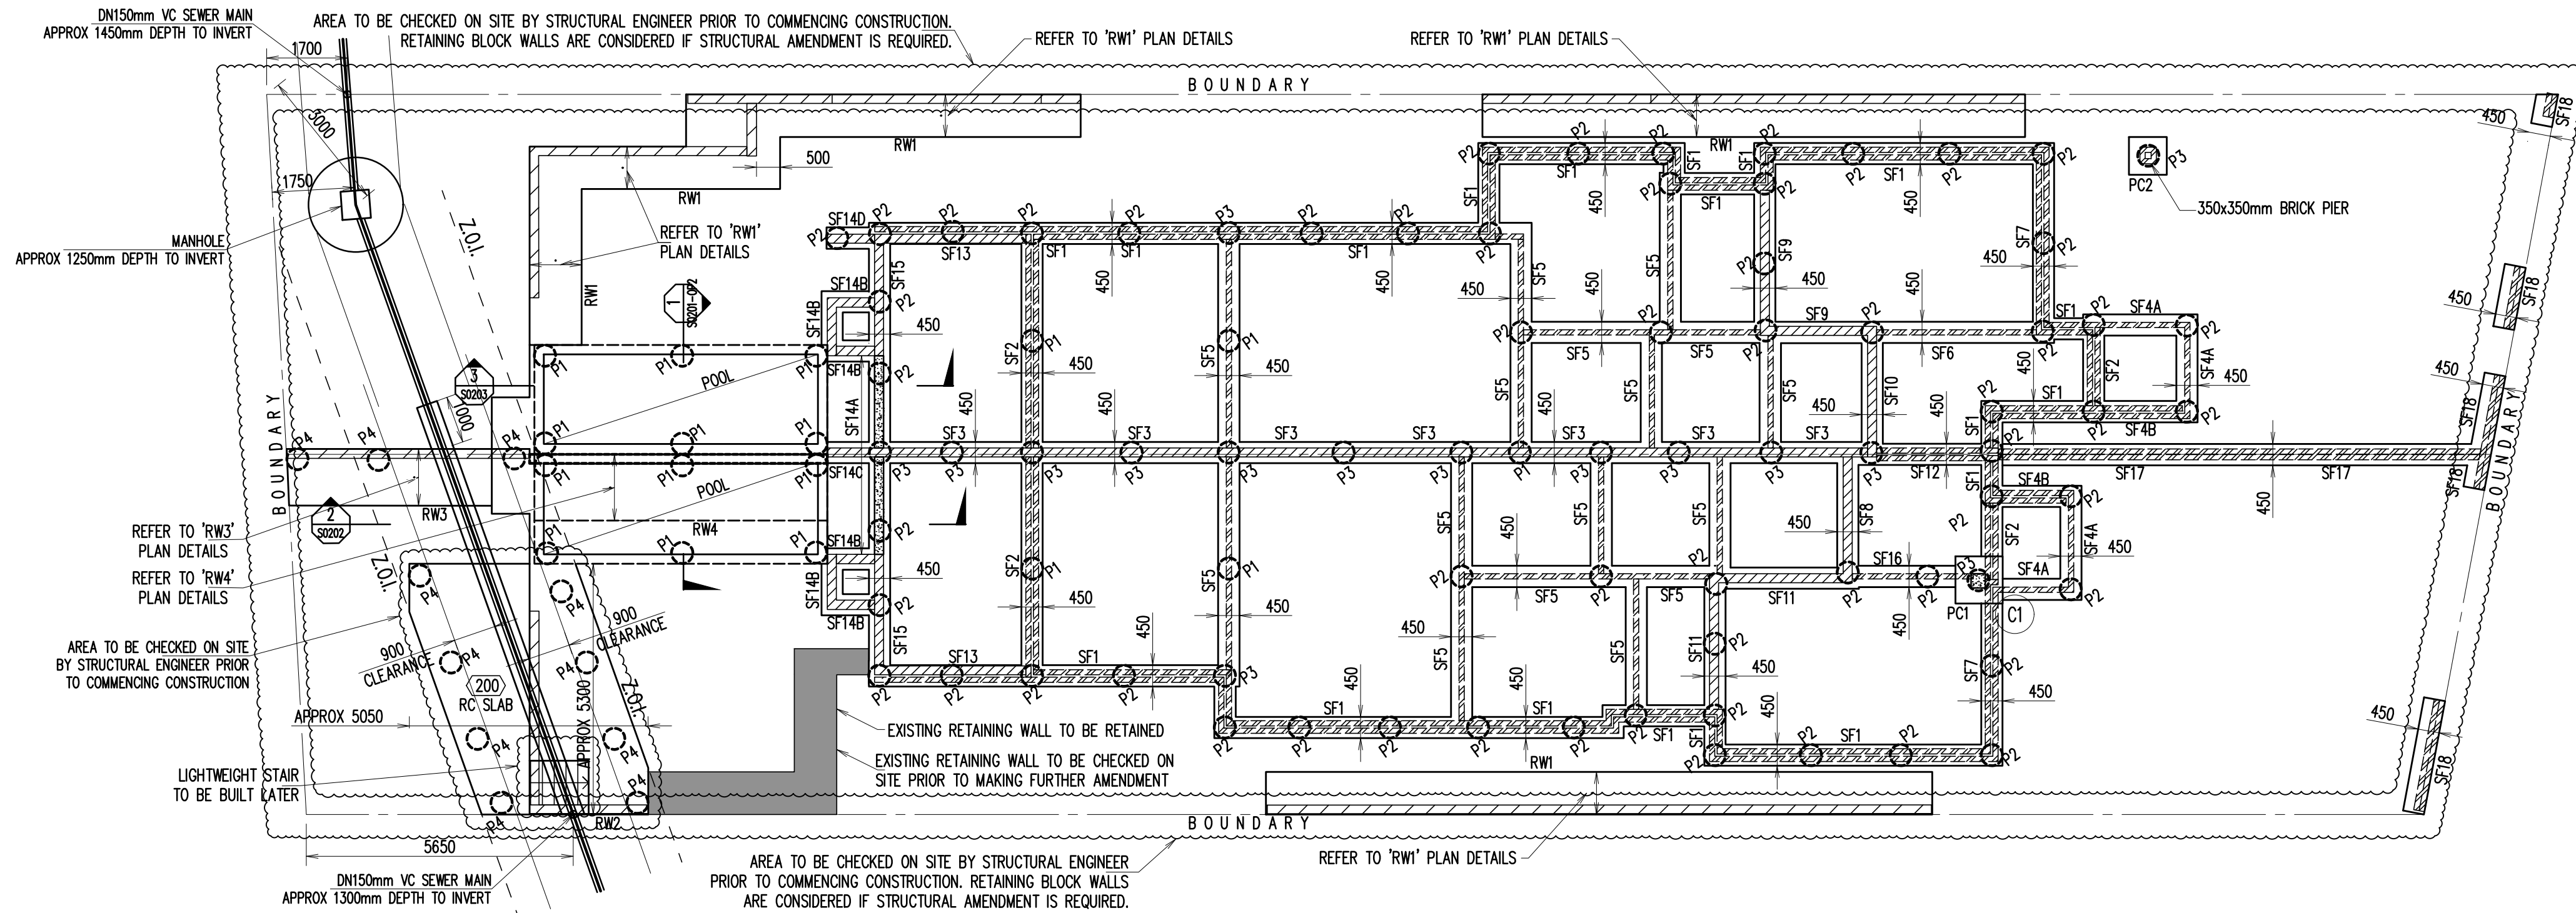

FOOTING PLAN-OPTION 2


SCALE 1:100
NOTES:

- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
- REFER TO ARCHITECTURAL DRAWINGS FOR ALL SETOUT, LEVELS, FALLS ETC.
- DURING CONSTRUCTION, FOUNDATION MATERIAL HAS TO BE CHECKED AND VERIFIED BY GEOTECHNICAL ENGINEER TO ENSURE THE REQUIRED SAFE BEARING CAPACITY IS REACHED AS DESIGNED FOR.
- 'P1': DENOTES Ø450mm MASS CONCRETE PIERS, DEPTH = 1800mm
- 'P2': DENOTES Ø450mm CONCRETE PILES, 5N16+R10-300 TIES, MINIMUM 1000mm SOCKET INTO SHALE (700KPa) GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE.
- 'P3': DENOTES Ø450mm CONCRETE PILES, 5N16+R10-300 TIES, MINIMUM 2000mm SOCKET INTO SHALE (700KPa) GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE.
- 'P4': DENOTES Ø450mm CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3000mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE

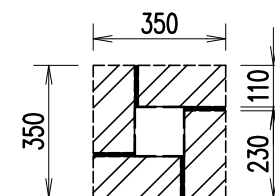


TYPICAL 350x350 BRICK PIER

SCALE 1:20

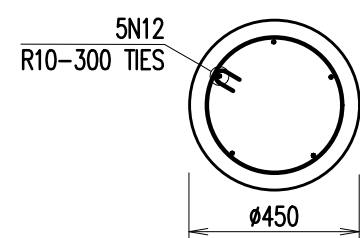


PILE TYPE 'P4' DETAILS

SCALE 1:20

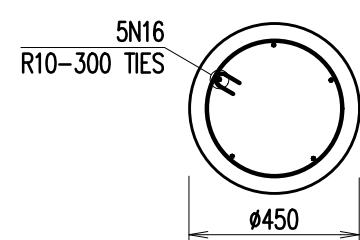

PILE TYPE 'P2, P3' DETAILS

SCALE 1:20



PIER TYPE 'P1' DETAILS

SCALE 1:20

PILE CAP SCHEDULE		
MARK	SIZE (LxWxD mm)	REINFORCEMENT (LB&WB)
PC1	1000 x 1000 x 400	6N12 TIES EACH WAY
PC2	800 x 800 x 400	5N12 TIES EACH WAY

NOTE:
FULLY PLASTIC CHAIRS TO BE USED FOR STEEL REINFORCEMENT INSTALLATION.

SITE CLASSIFICATION	'P'
WIND CLASSIFICATION	N2
SITE LOCATION CLASSIFICATION	SL2

• **SL1:** LESS THAN 1KM FROM BREAKING SURF OR LESS THAN 100M FROM SALT WATER NOT SUBJECT TO BREAKING SURF OR WITHIN HEAVY INDUSTRIAL AREAS.

• **SL2:** 1KM OR MORE BUT LESS THAN 10KM FROM BREAKING SURF OR 100M OR MORE BUT LESS THAN 1KM FROM SALT WATER NOT SUBJECT TO BREAKING SURF.

• **SL3:** 10KM OR MORE FROM BREAKING SURF OR 1KM OR MORE FROM SALT WATER NOT SUBJECT TO BREAKING SURF.

LEGEND :

- DENOTES BRICK WALL OVER ONLY
- DENOTES RC COLUMN UNDER ONLY
- DENOTES BLOCK WALL OVER ONLY
- DENOTES BLOCK WALL UNDER ONLY

FOR STRUCTURAL NOTES REFER TO DRAWING S000

NOTES:

- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
 - REFER TO ARCHITECTURAL DRAWINGS FOR ALL FALLS AND LEVELS AND SETOUT DIMENSIONS TO COLUMNS, WALLS ETC.
- DO NOT SCALE FROM STRUCTURAL DRAWINGS.

CONCRETE QUALITY			
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE
FOOTINGS	80mm	20mm	GP
PILES/PIERS	80mm	20mm	GP

REINFORCEMENT COVER SCHEDULE			
ELEMENT	COVER (mm)		
	TOP	BOTTOM	SIDES
FOOTINGS	70mm	70mm	70mm
PILES	-	-	75mm

NOTE:
REFER TO PLAN 'S0100' AND 'S0200' FOR ALL TYPES AND LOCATION OF PIERS/PILES

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8868 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
26 465 969 790 / a


CLIENT
Beyond Certification Pty Ltd
Project No: 3125176DC
Date: 27/11/2025

STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046


PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
FOOTING PLAN & DETAILS
OPTION 2


DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO. S0100-OP2		

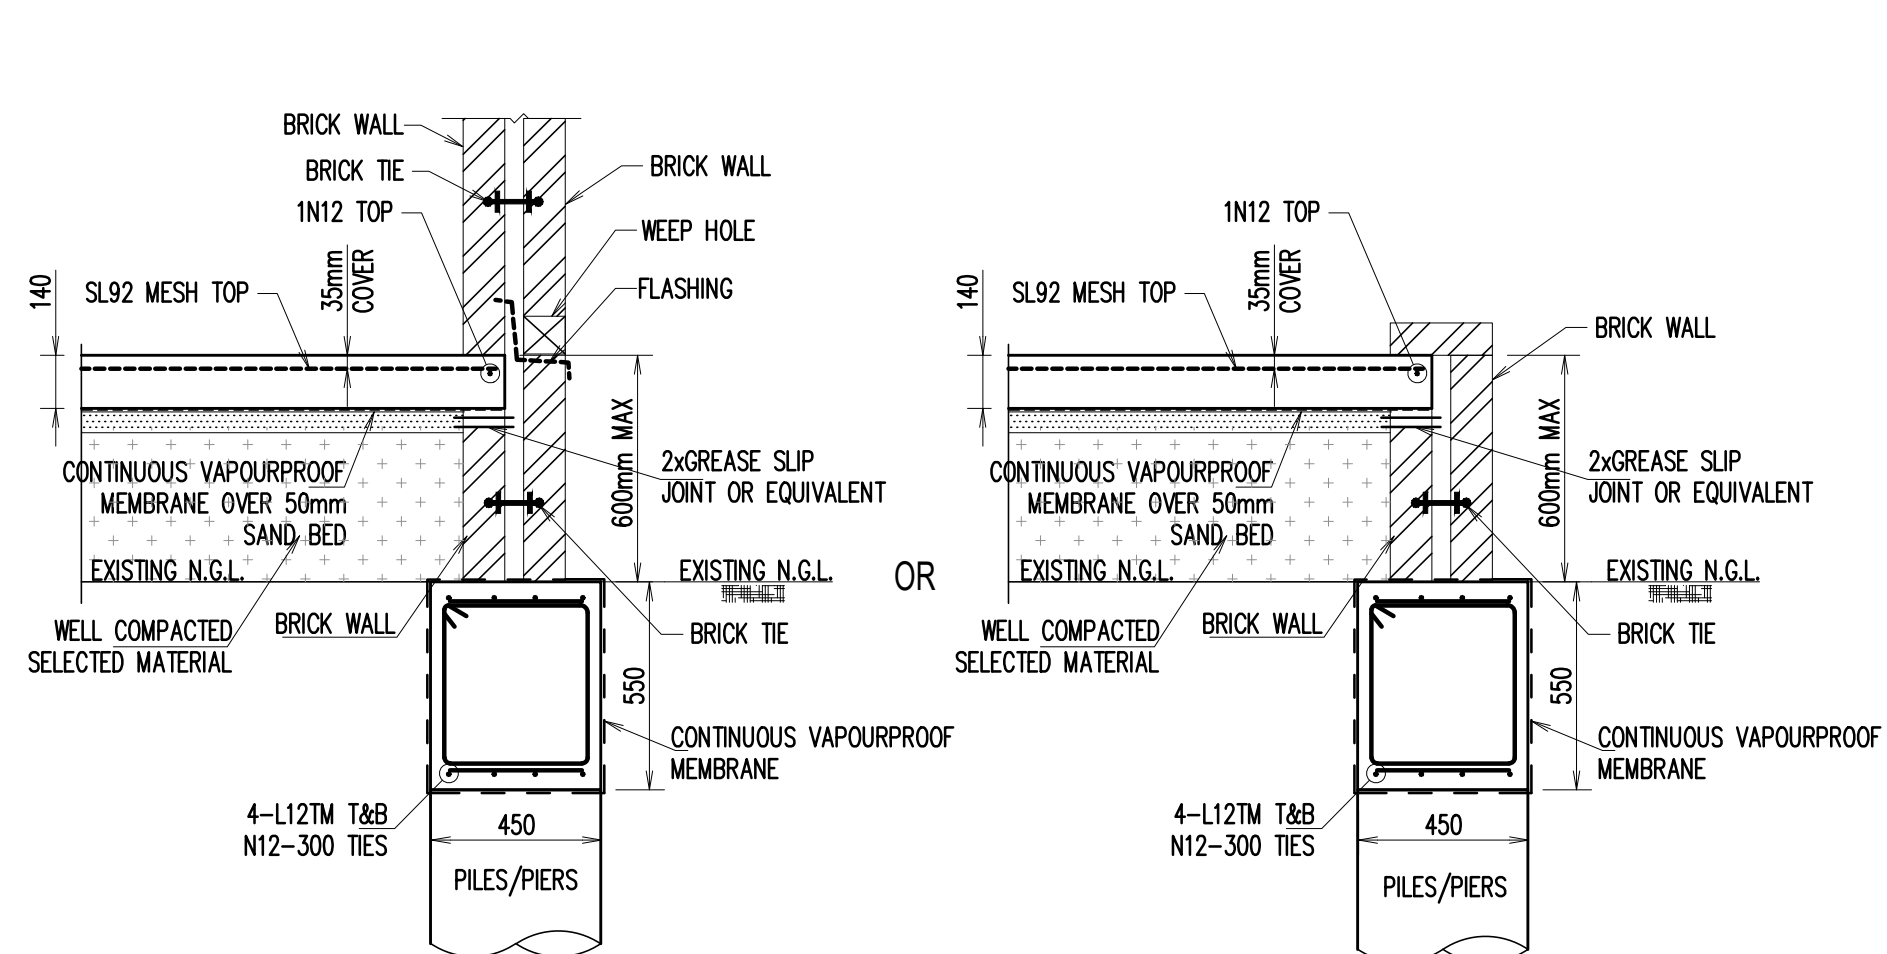


SF1 - STRIP FOOTING DETAIL
SCALE: 1:20

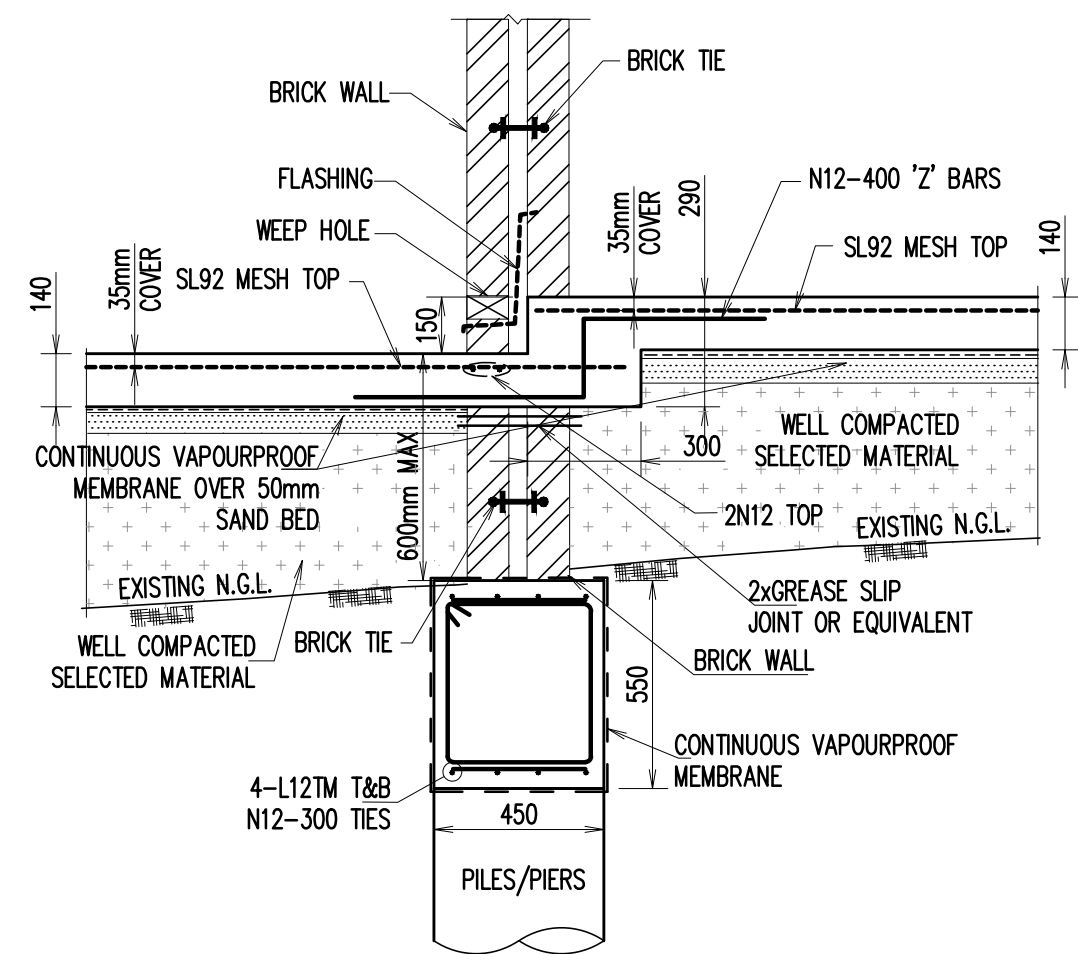


SF2 - STRIP FOOTING DETAIL
SCALE: 1:20

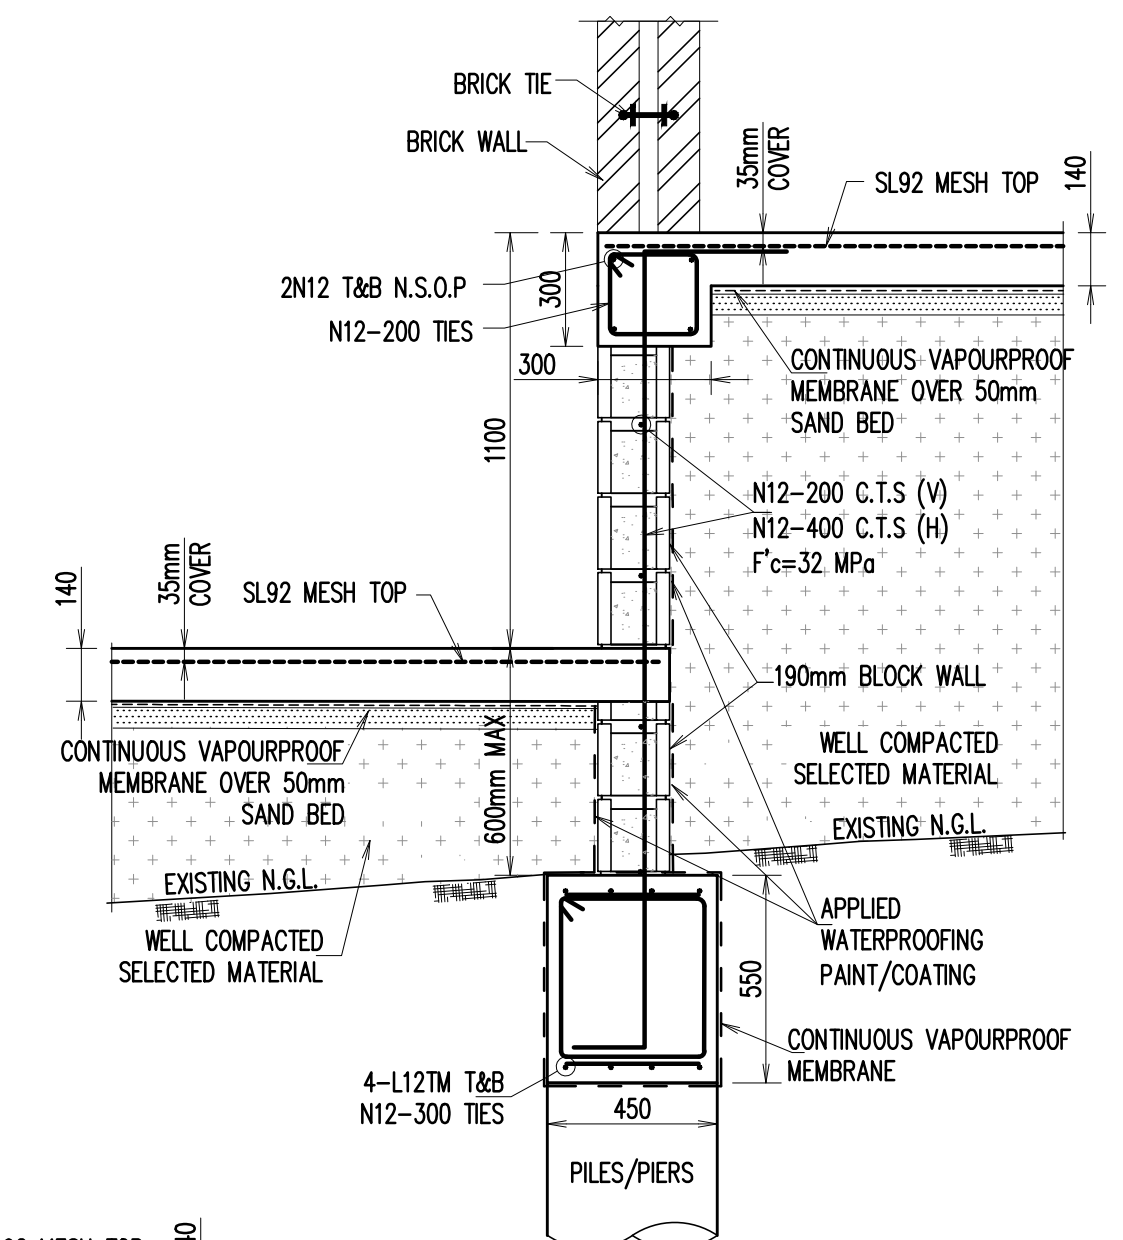


SF3 - STRIP FOOTING DETAIL
SCALE: 1:20

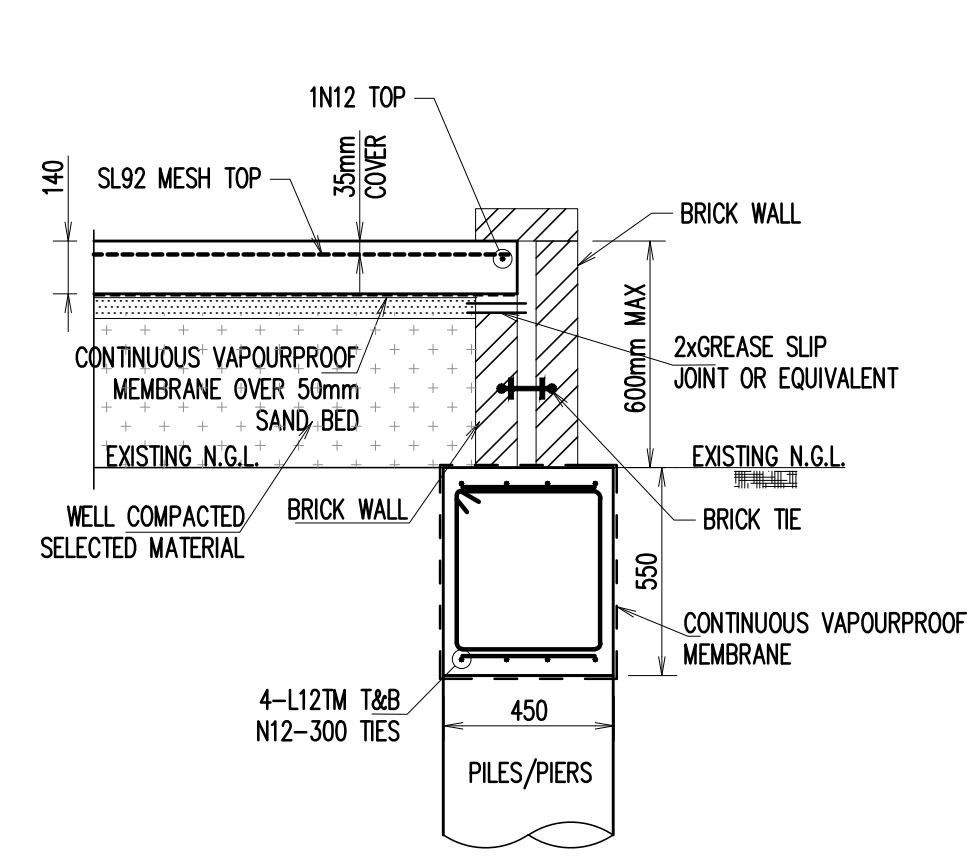


SF4A - STRIP FOOTING DETAIL
SCALE: 1:20

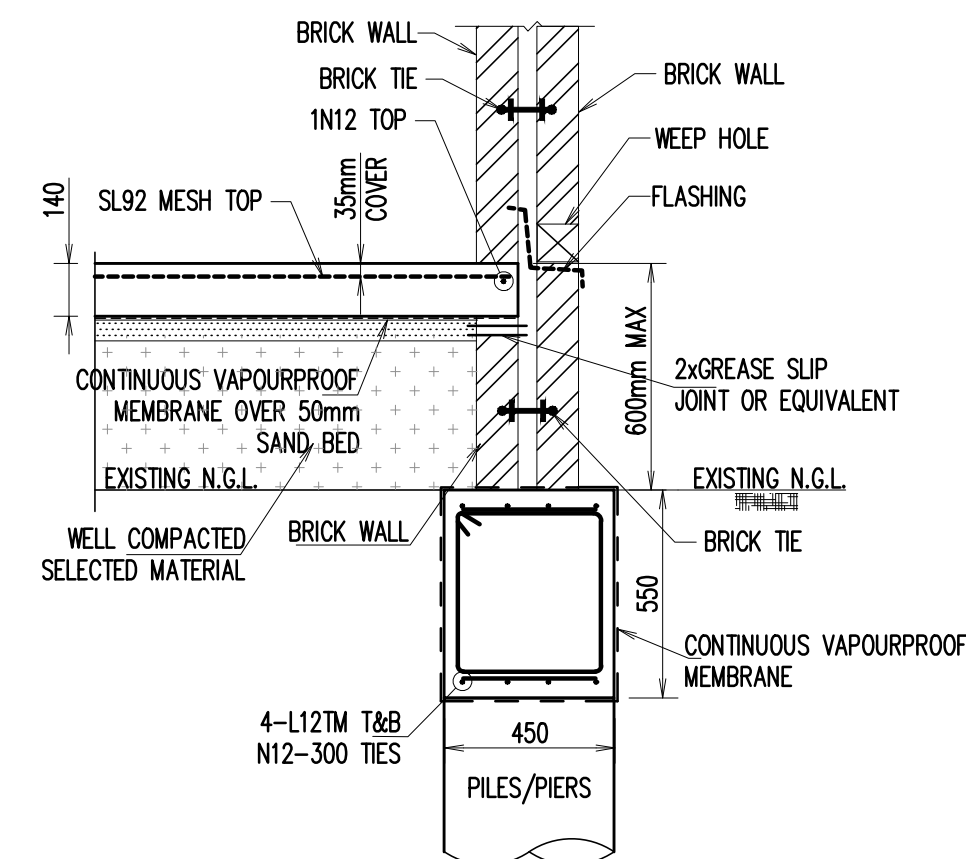



SF4B - STRIP FOOTING DETAIL
SCALE: 1:20

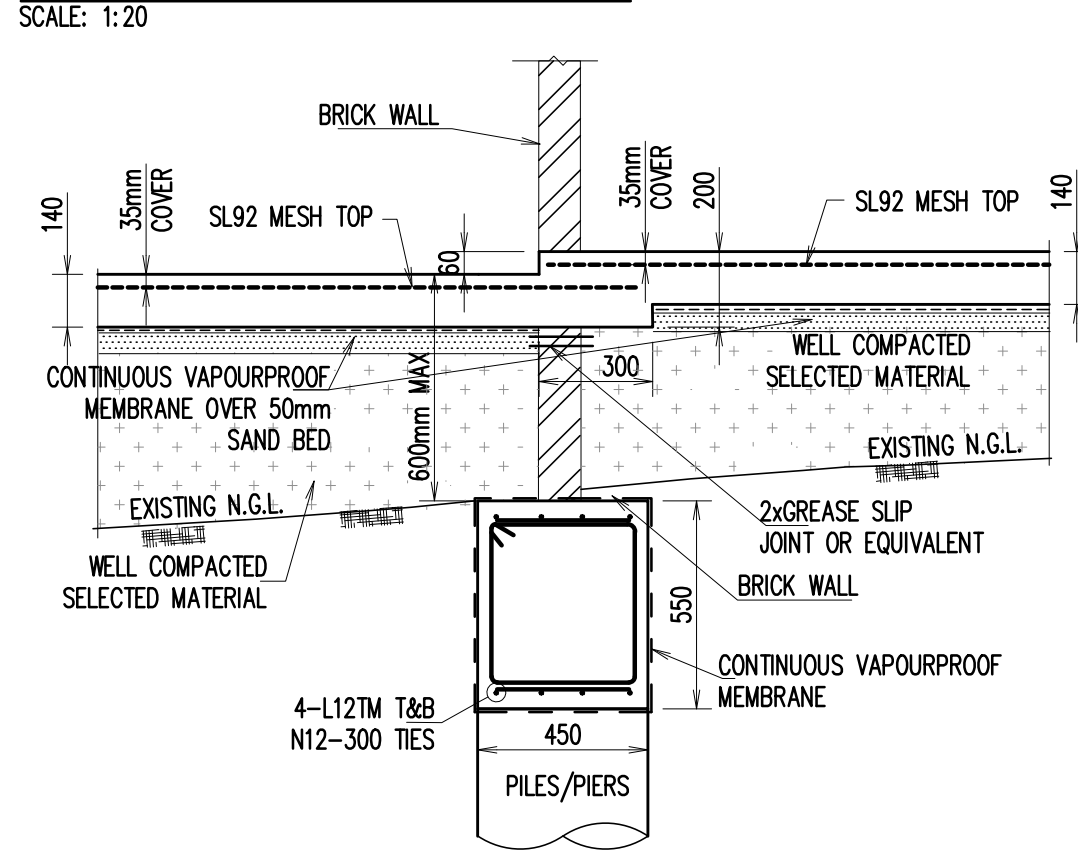

SF6 - STRIP FOOTING DETAIL
SCALE: 1:20

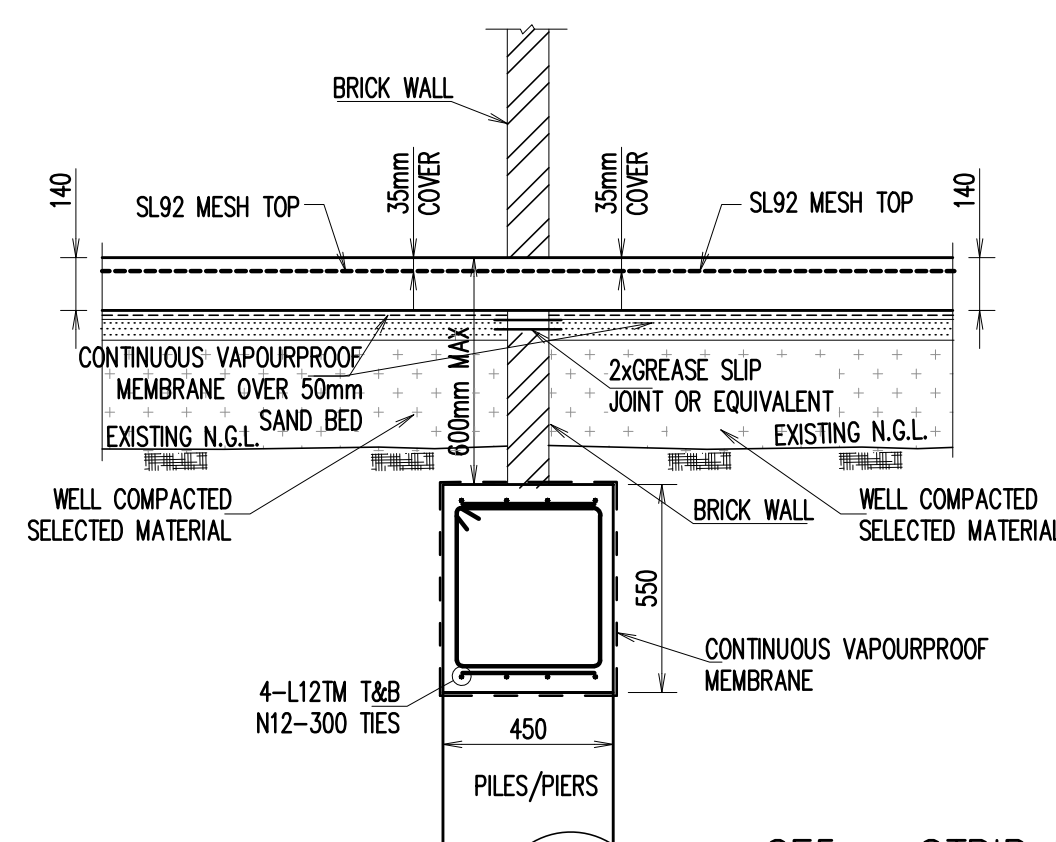

SF5 - STRIP FOOTING DETAIL
SCALE: 1:20

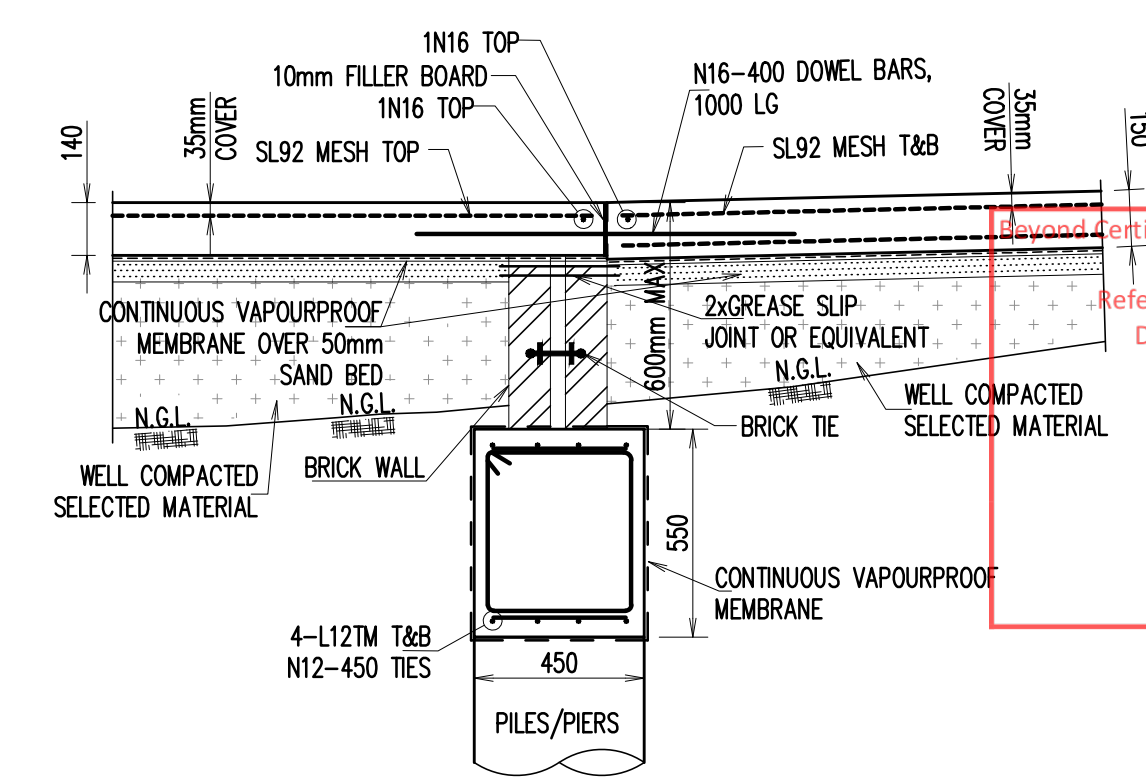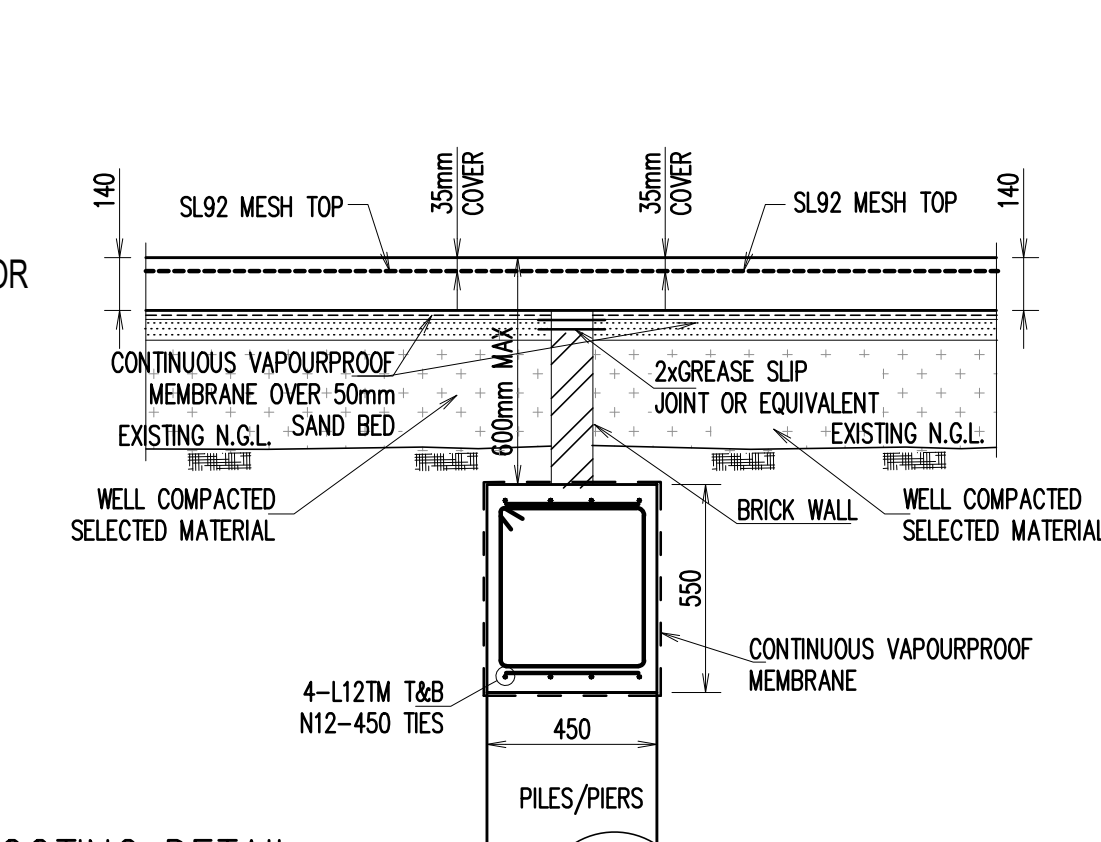

SF7 - STRIP FOOTING DETAIL
SCALE: 1:20

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8893 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
28 485 969 790 / m

CLIENT

Beyond Certification Projects Pty Ltd

Reference: 3125176CDC
Date: 17/11/2025

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046


PROJECT

DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT

FOOTING DETAILS
SHEET 1


DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE: A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO. S0101	

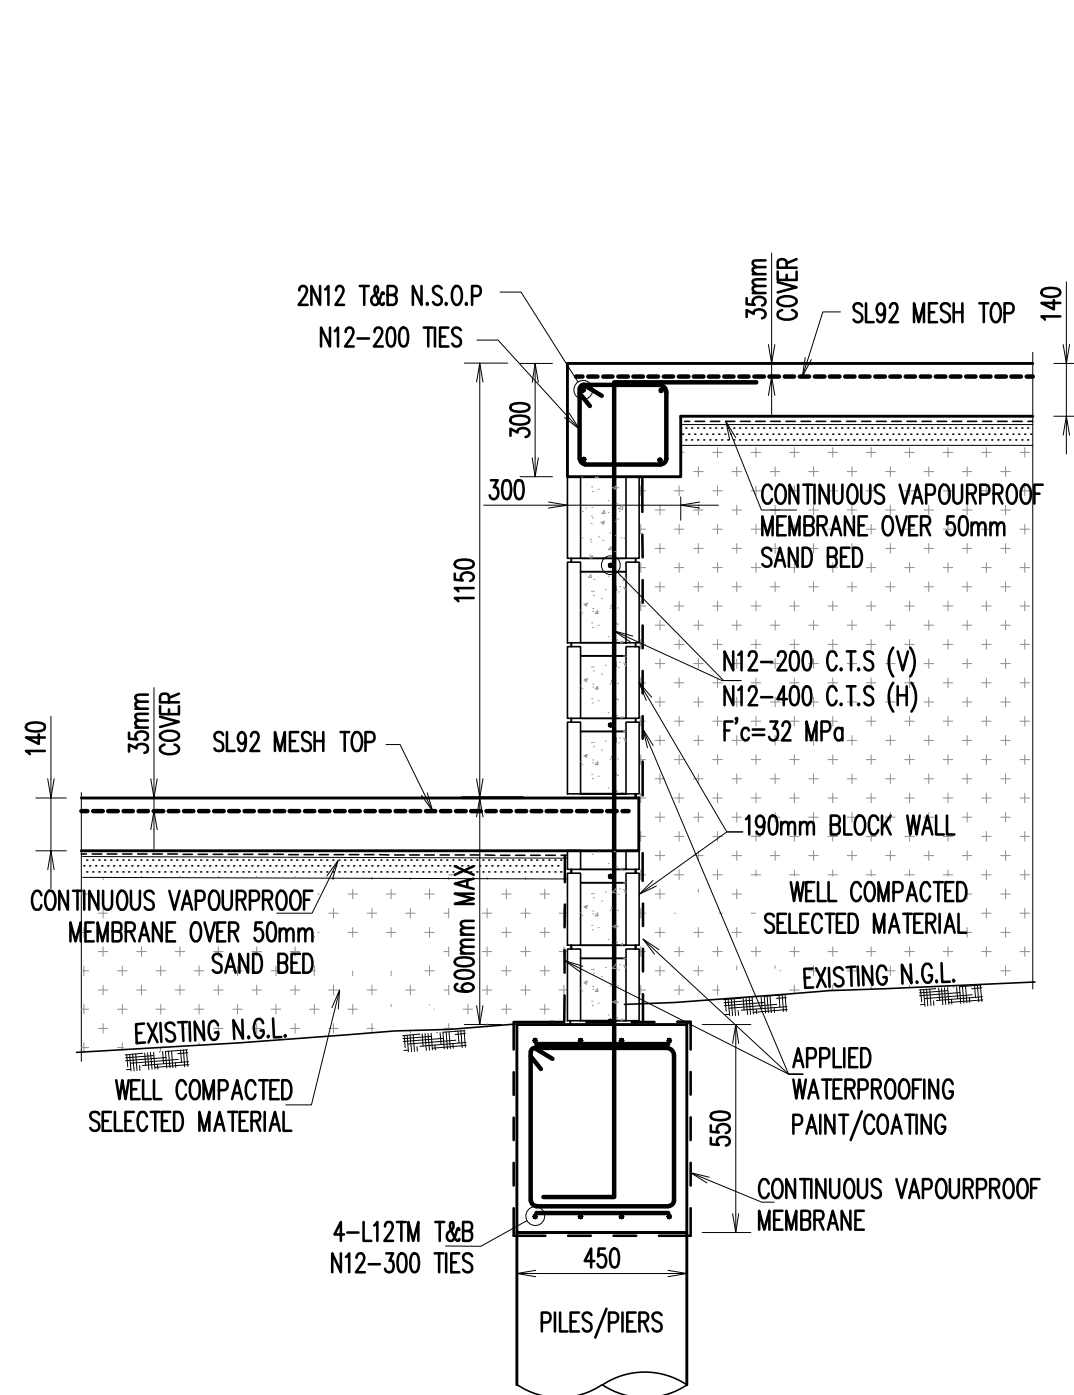


SF8 - STRIP FOOTING DETAIL
SCALE: 1:20

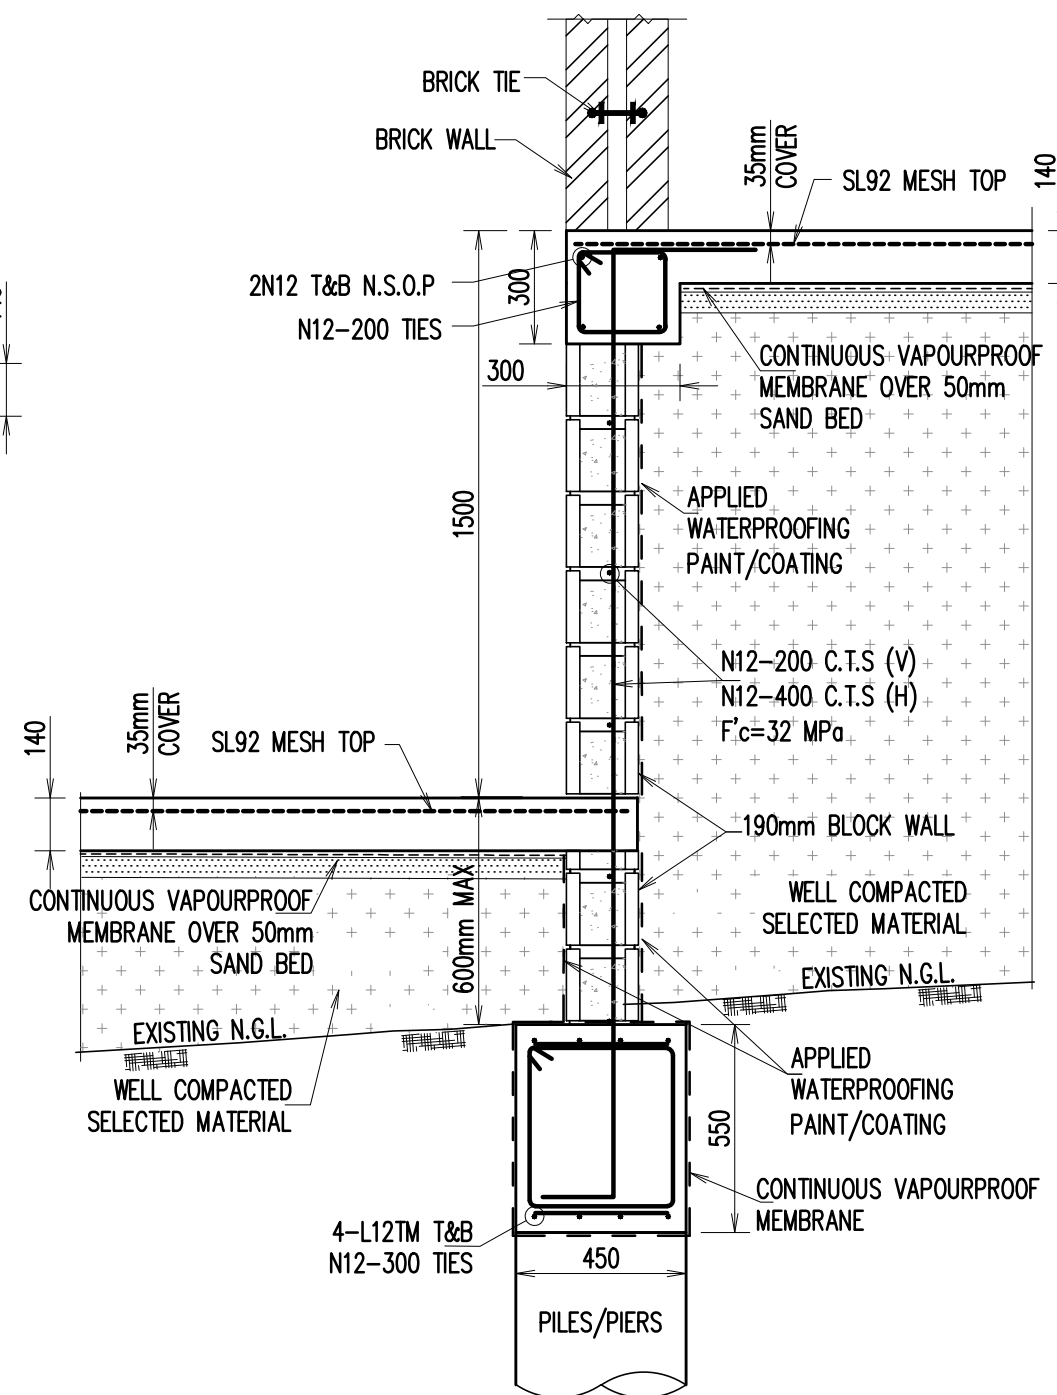


SF9 - STRIP FOOTING DETAIL
SCALE: 1:20

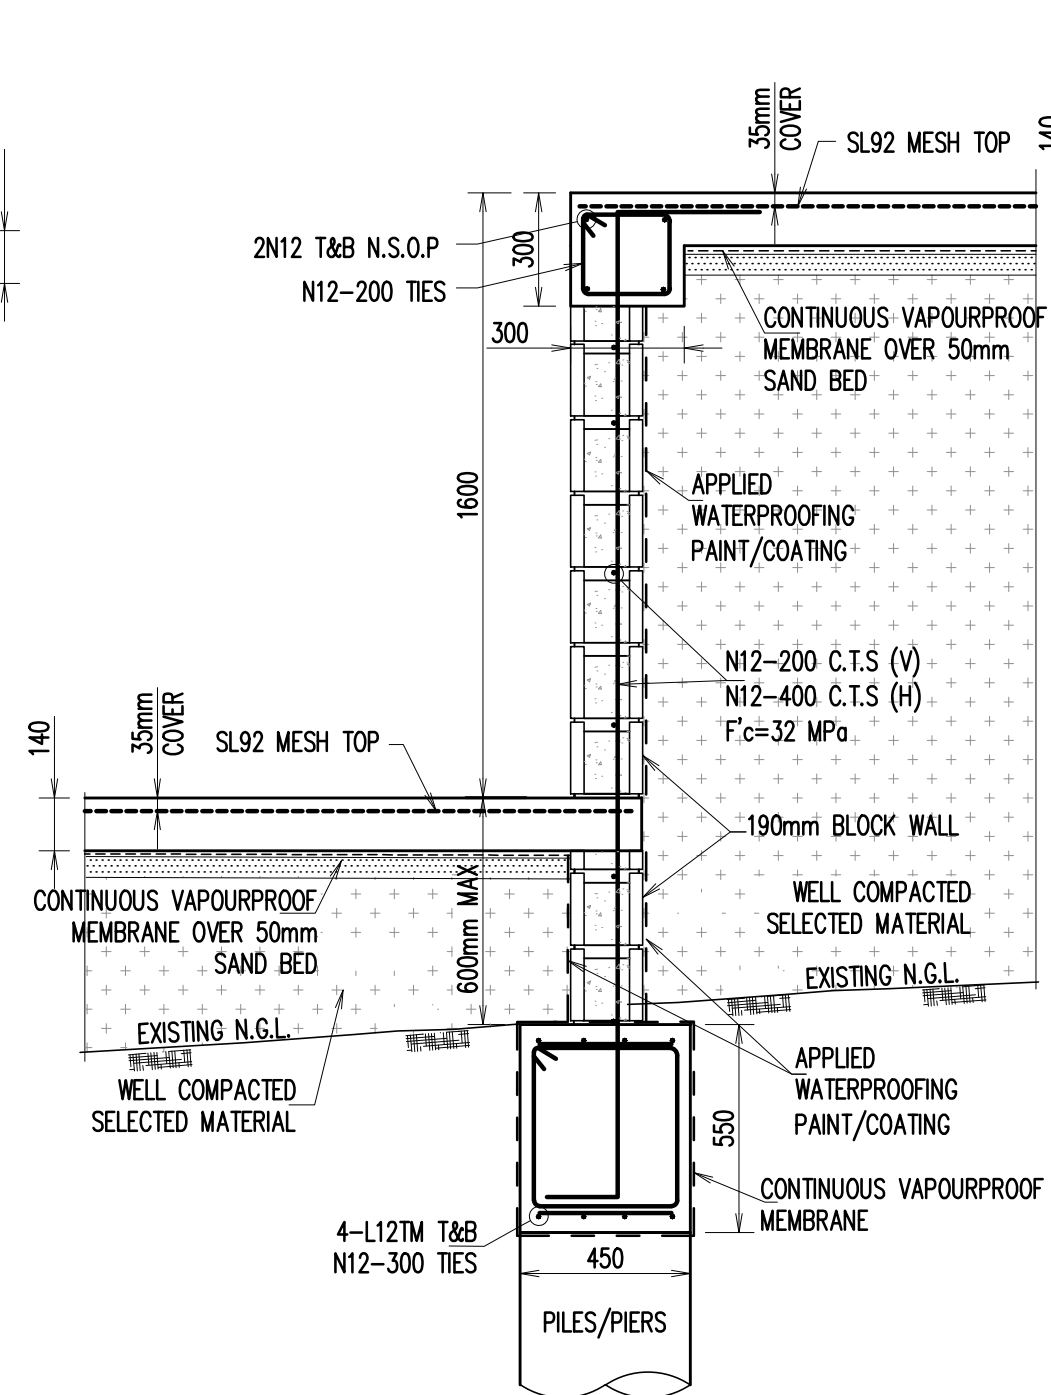


SF10 - STRIP FOOTING DETAIL
SCALE: 1:20

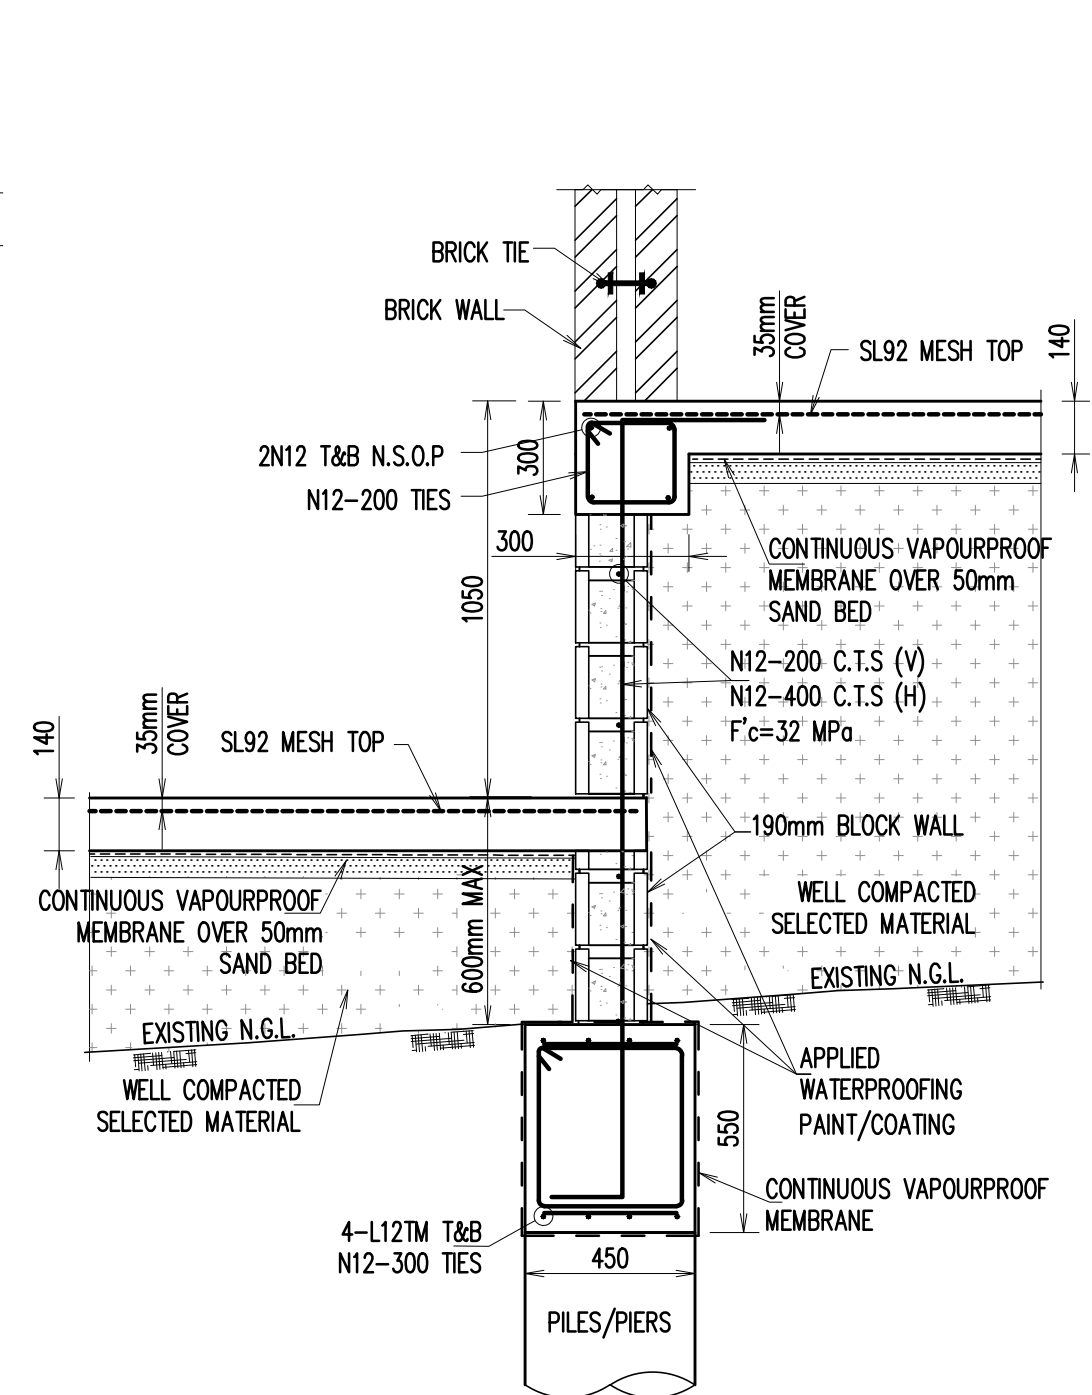


SF11 - STRIP FOOTING DETAIL
SCALE: 1:20

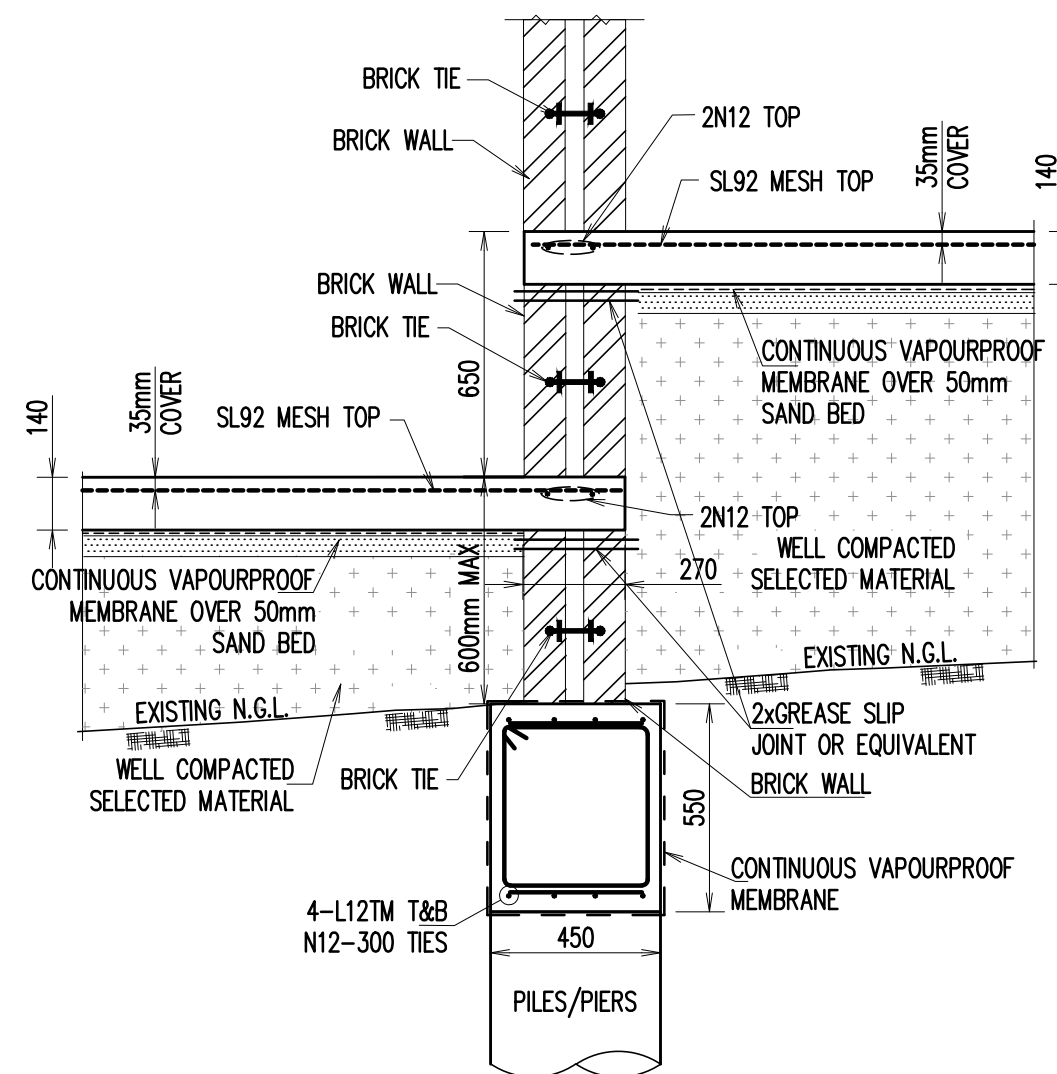

SF12 - STRIP FOOTING DETAIL
SCALE: 1:20

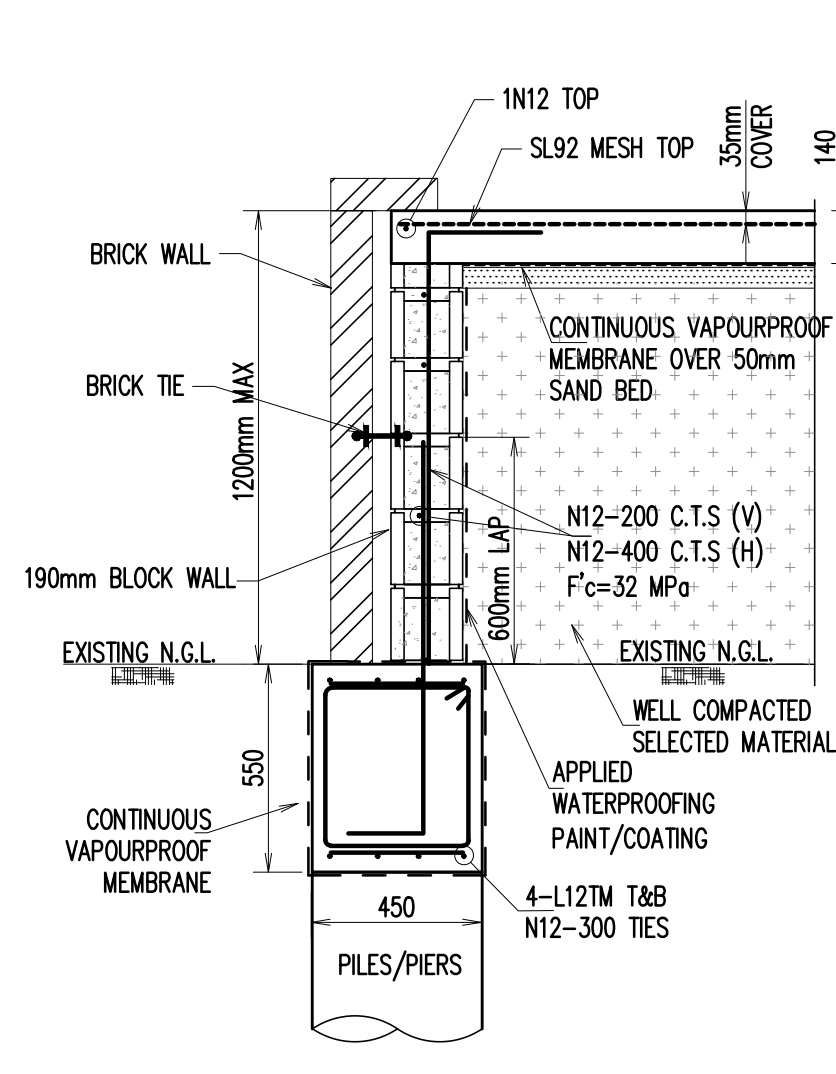

SF13 - STRIP FOOTING DETAIL
SCALE: 1:20

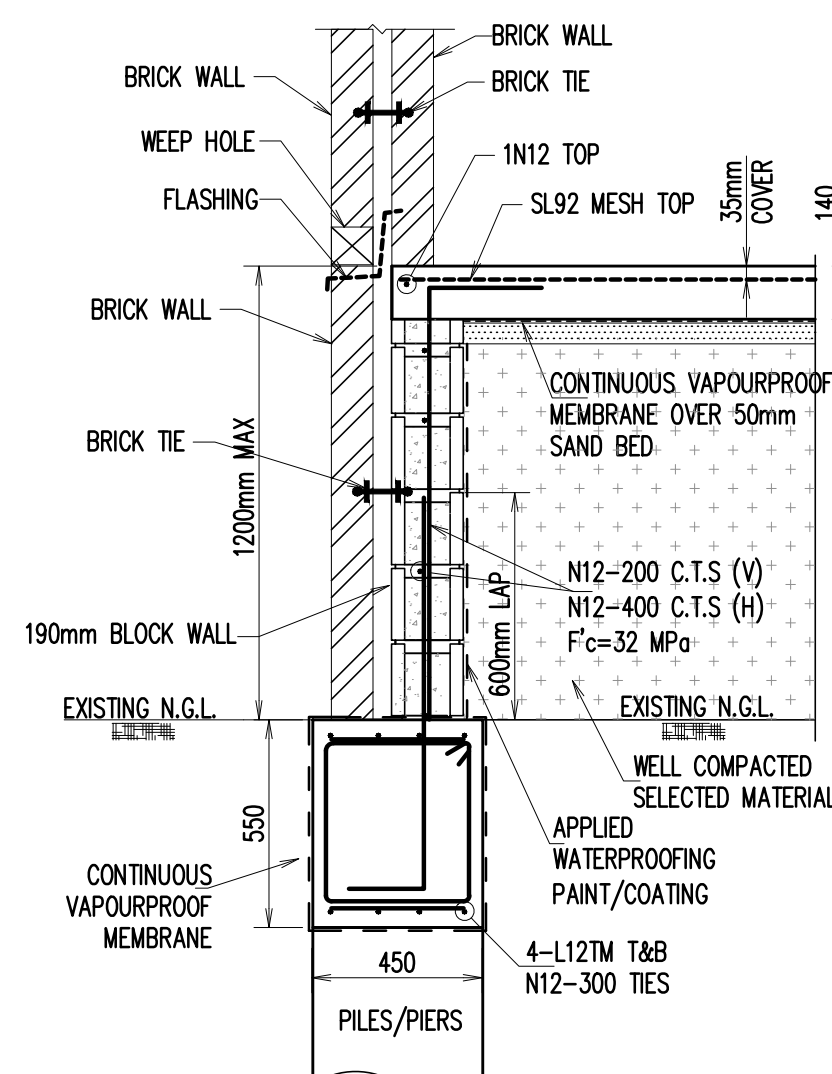

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rose Street
Eastwood, NSW 2122
+61 2 8983 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT
Beyond Certification
Sonder Projects Pty Ltd

Reference: 31251760DC
Date: 17/11/2024

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY


3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
**FOOTING DETAILS
SHEET 2**


DESIGNED K.T. DRAWN L.N. AUTHORISED T.N.

CHECKED T.N. SCALE: A2 DATE FEB 2025


JOB NO. **SLY25-S008** DRAWING NO. **S0102**

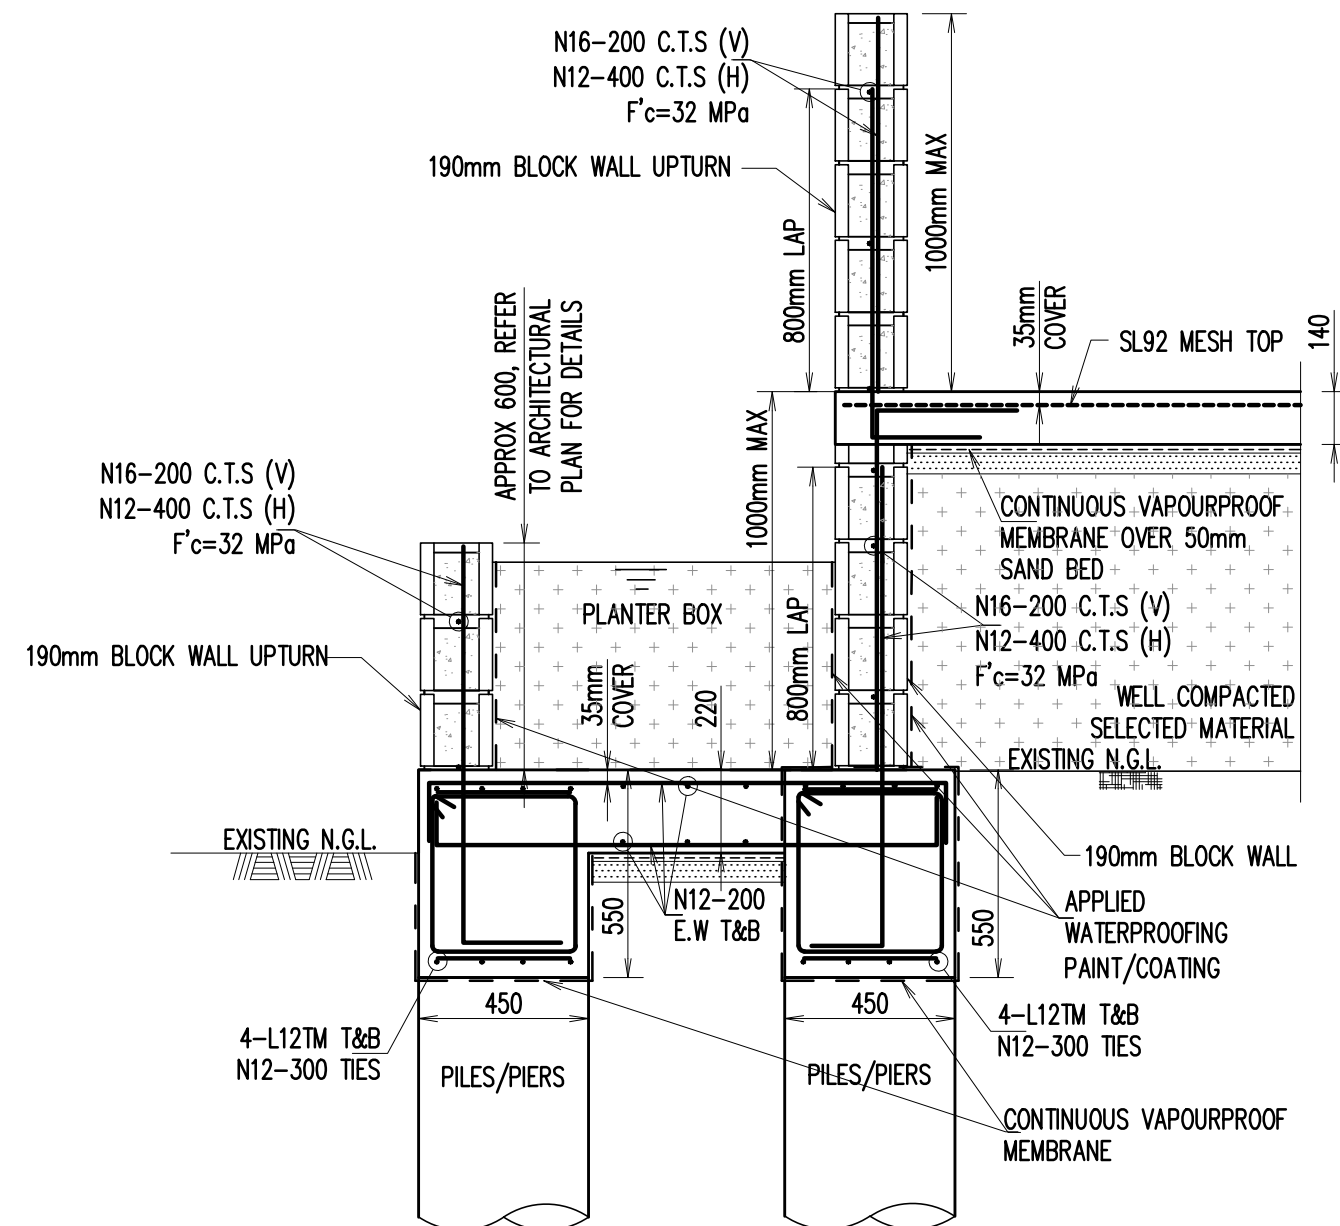


SF14B - STRIP FOOTING DETAIL
SCALE: 1:20

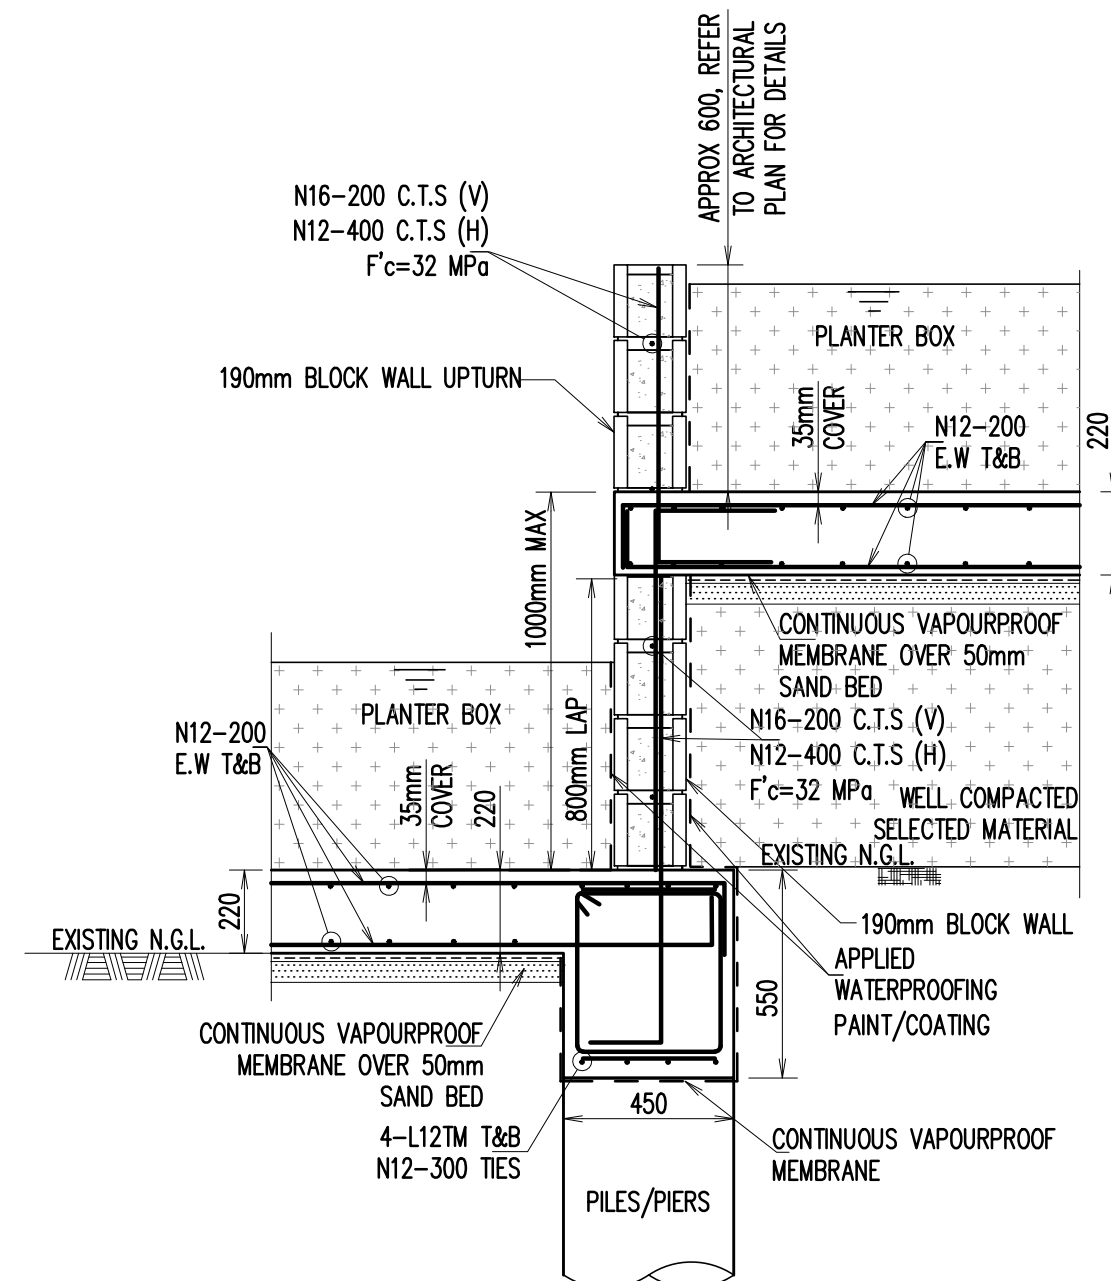


SF14C - STRIP FOOTING DETAIL
SCALE: 1:20

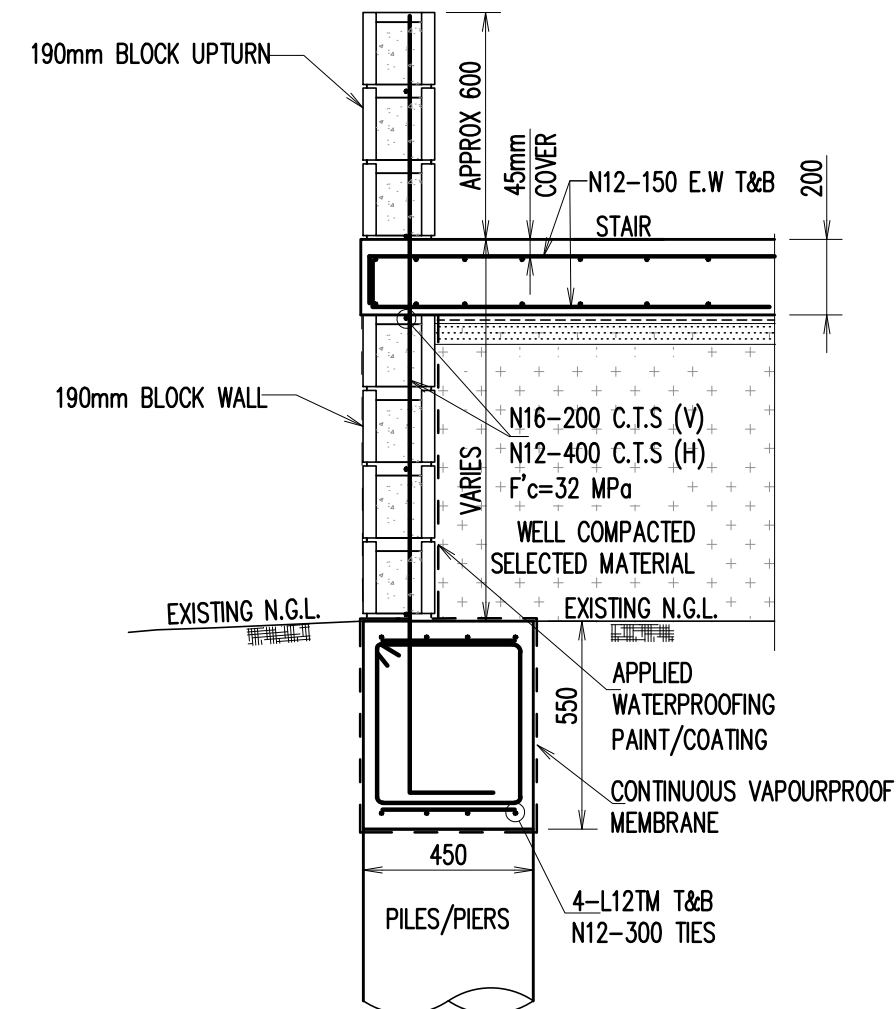

SF14D - STRIP FOOTING DETAIL
SCALE: 1:20

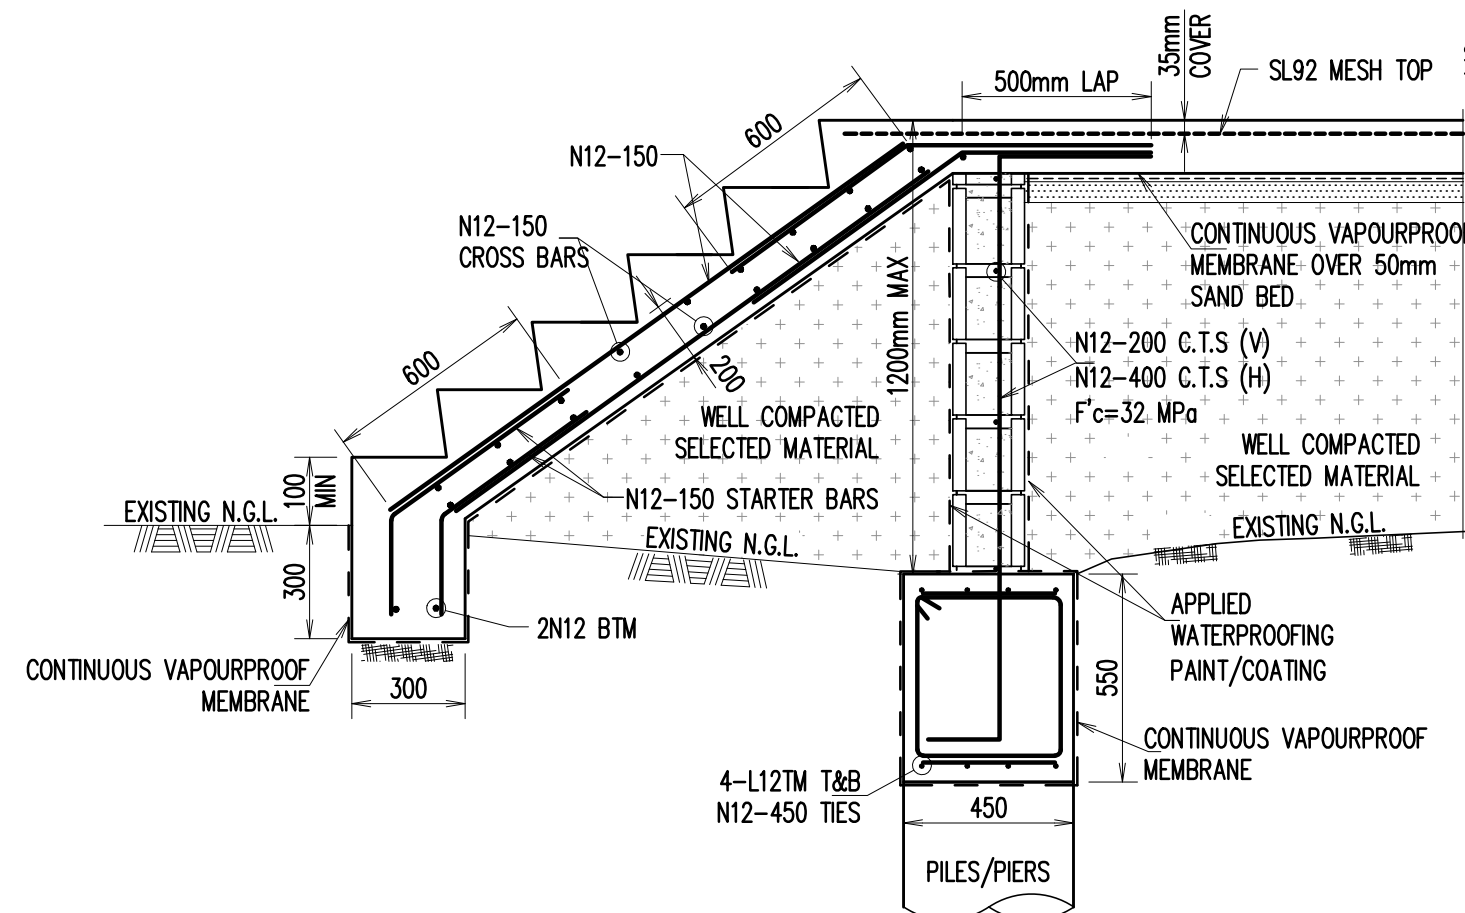

SF15 - STRIP FOOTING DETAIL
SCALE: N.T.S

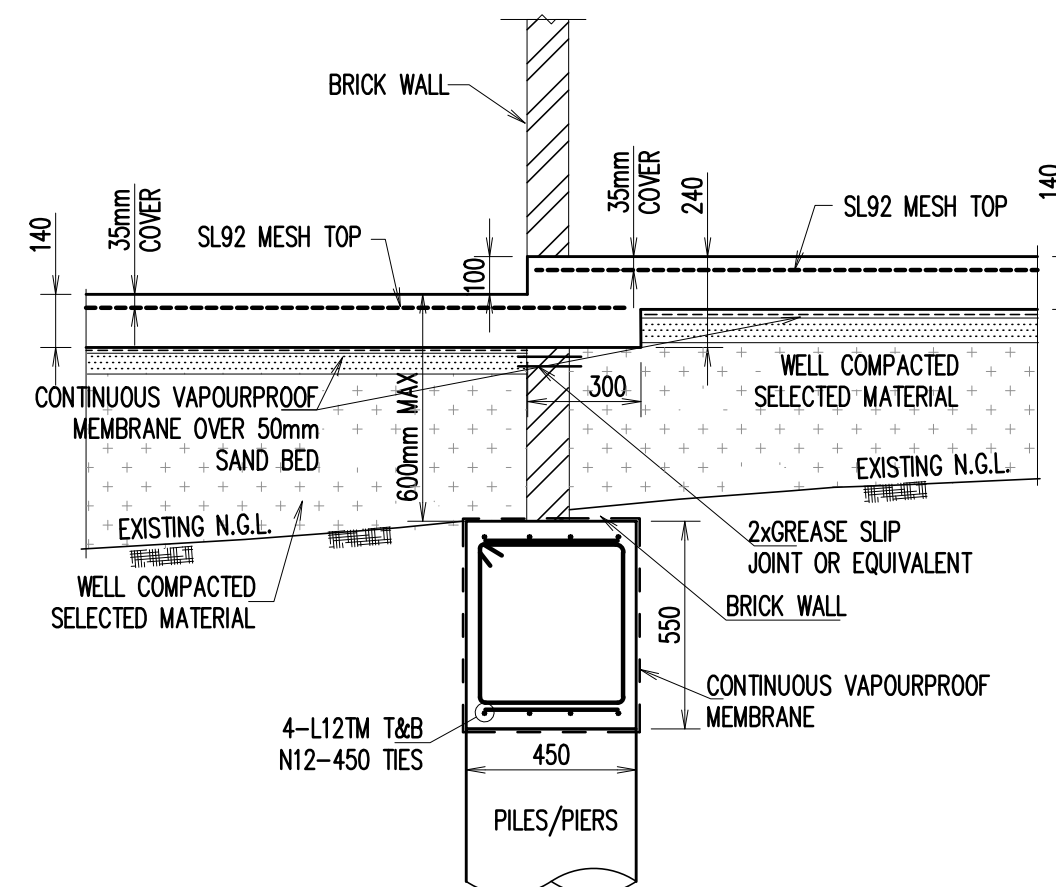

SF16 - STRIP FOOTING DETAIL
SCALE: 1:20

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL






ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT
Beyond Certification Sonder Projects Pty Ltd
Reference: 3125176DC
Date: 17/11/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
FOOTING DETAILS
SHEET 3

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE: A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO. S0103	

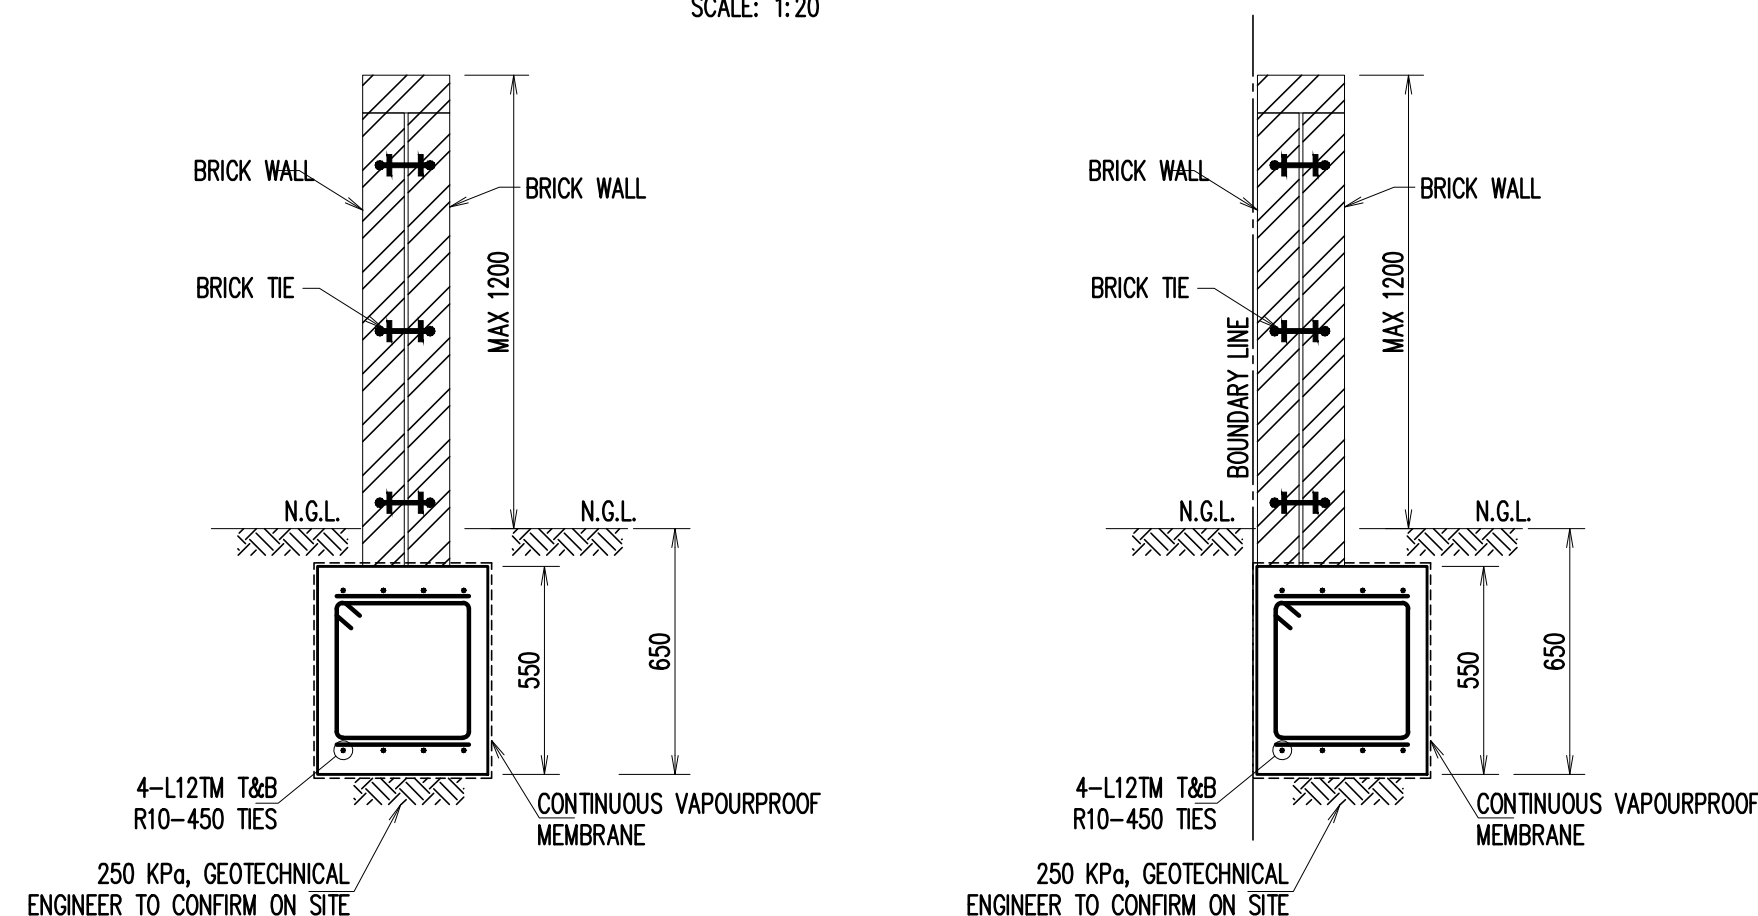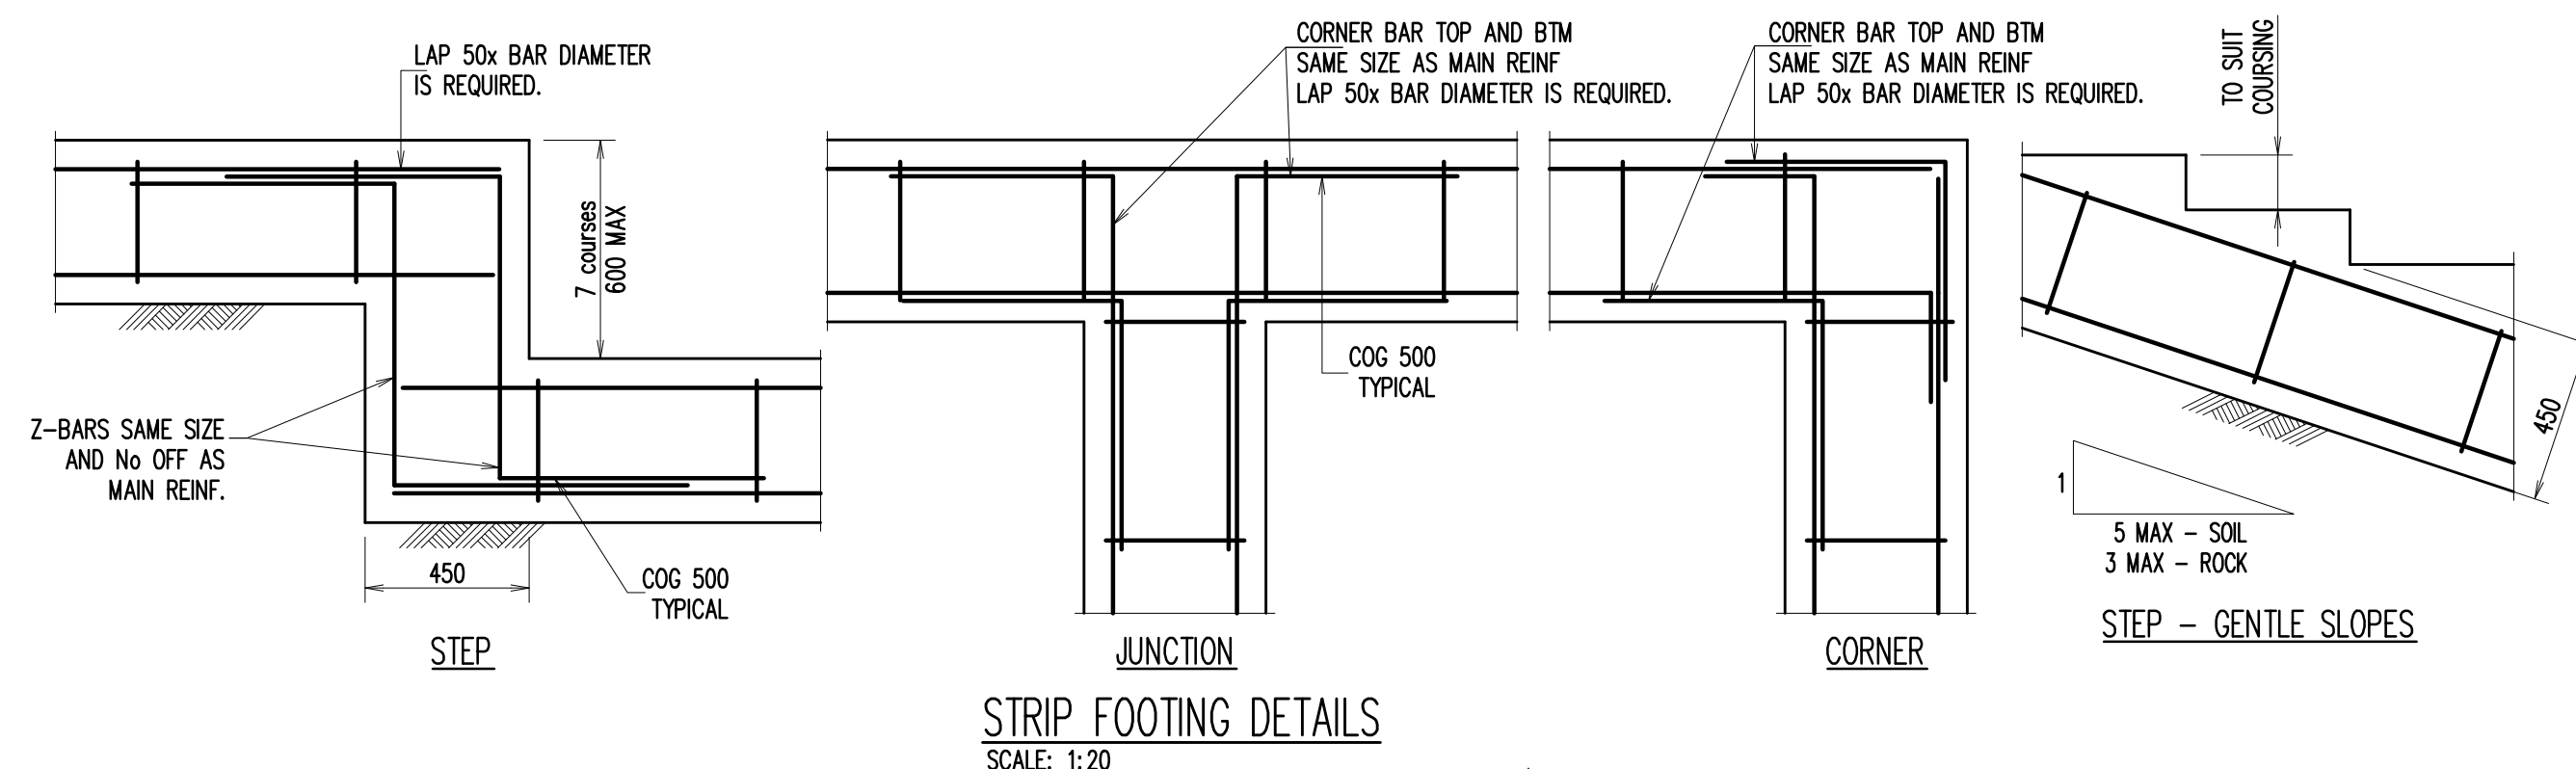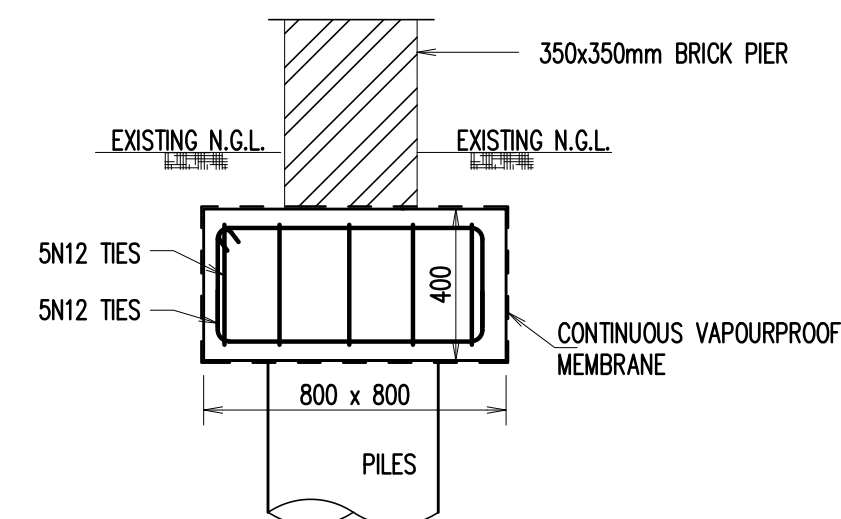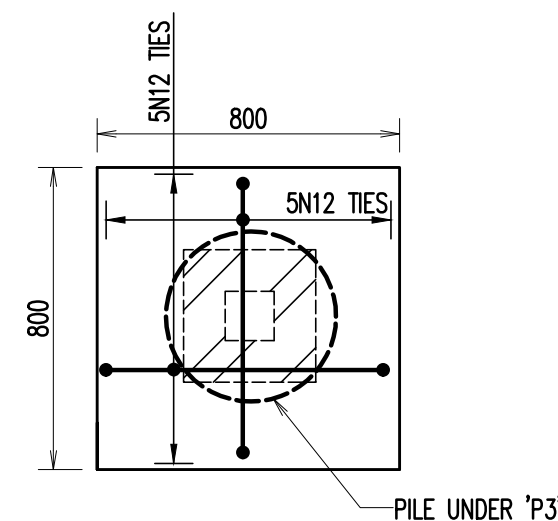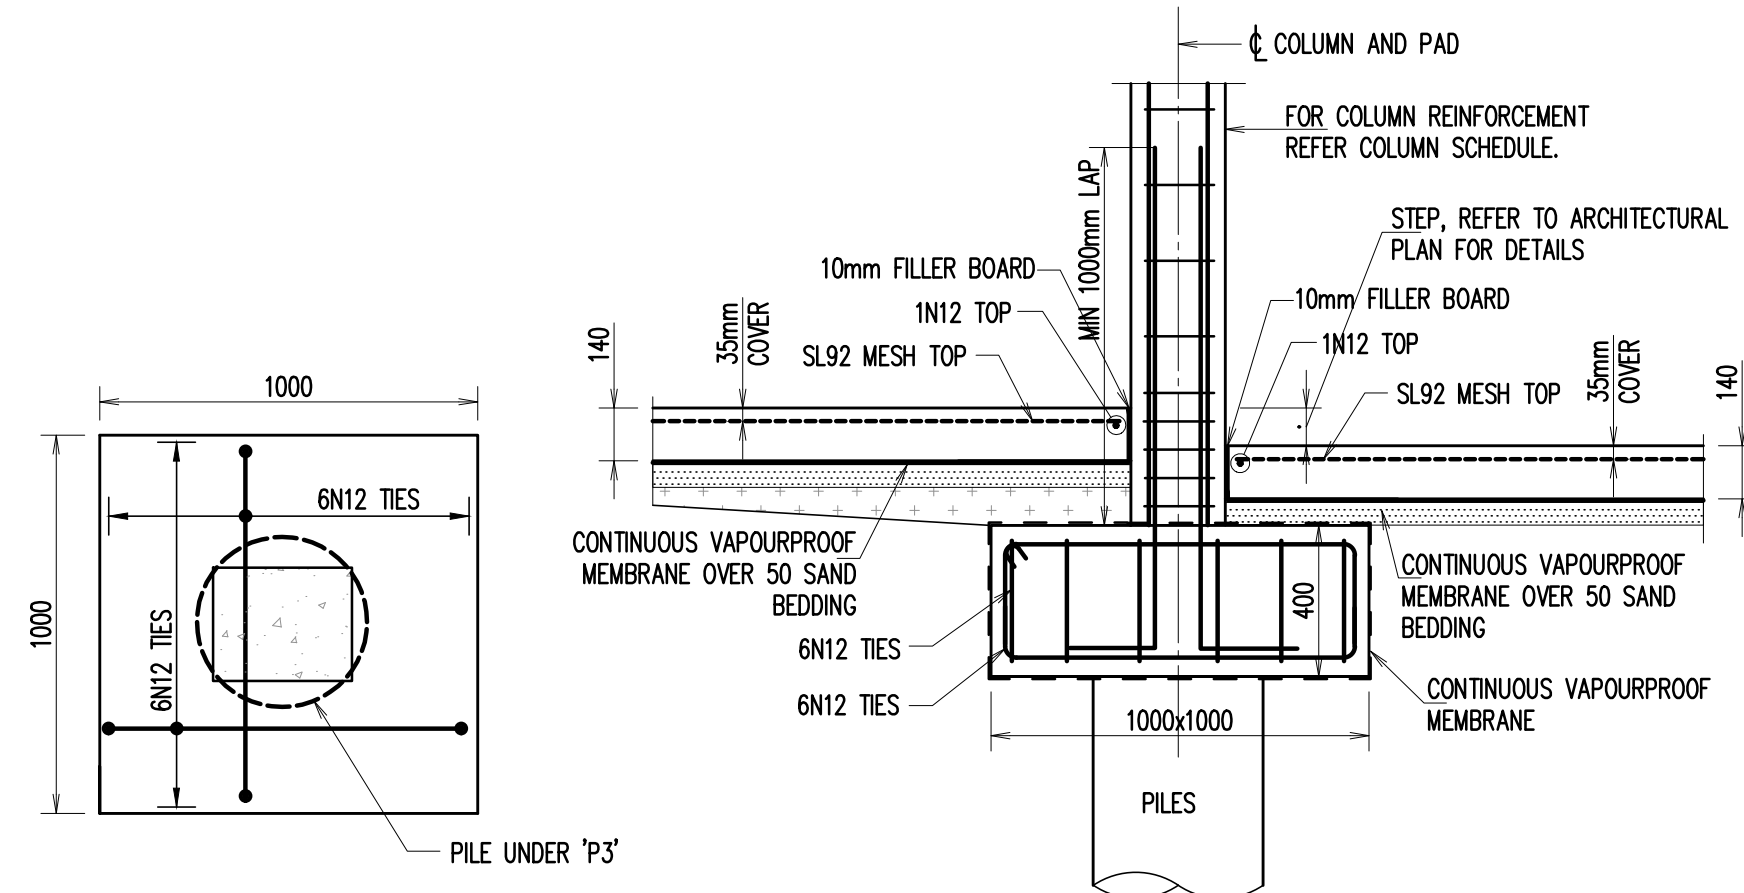

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

ISSUE	AMENDMENT	ENG.	DRA.	DATE
-------	-----------	------	------	------

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 Thane Street
Eastwood, NSW 2122
+61 2 8893 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
28 485 989 790 / a

CLIENT


Beyond Certification Pty Ltd
Reference: 312517310
Date: 17/11/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY
3 JOHNSTON AVE, KIRRAWEE, NSW 2232

SUBJECT
FOOTING DETAILS


SHEET 4

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE: A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0104

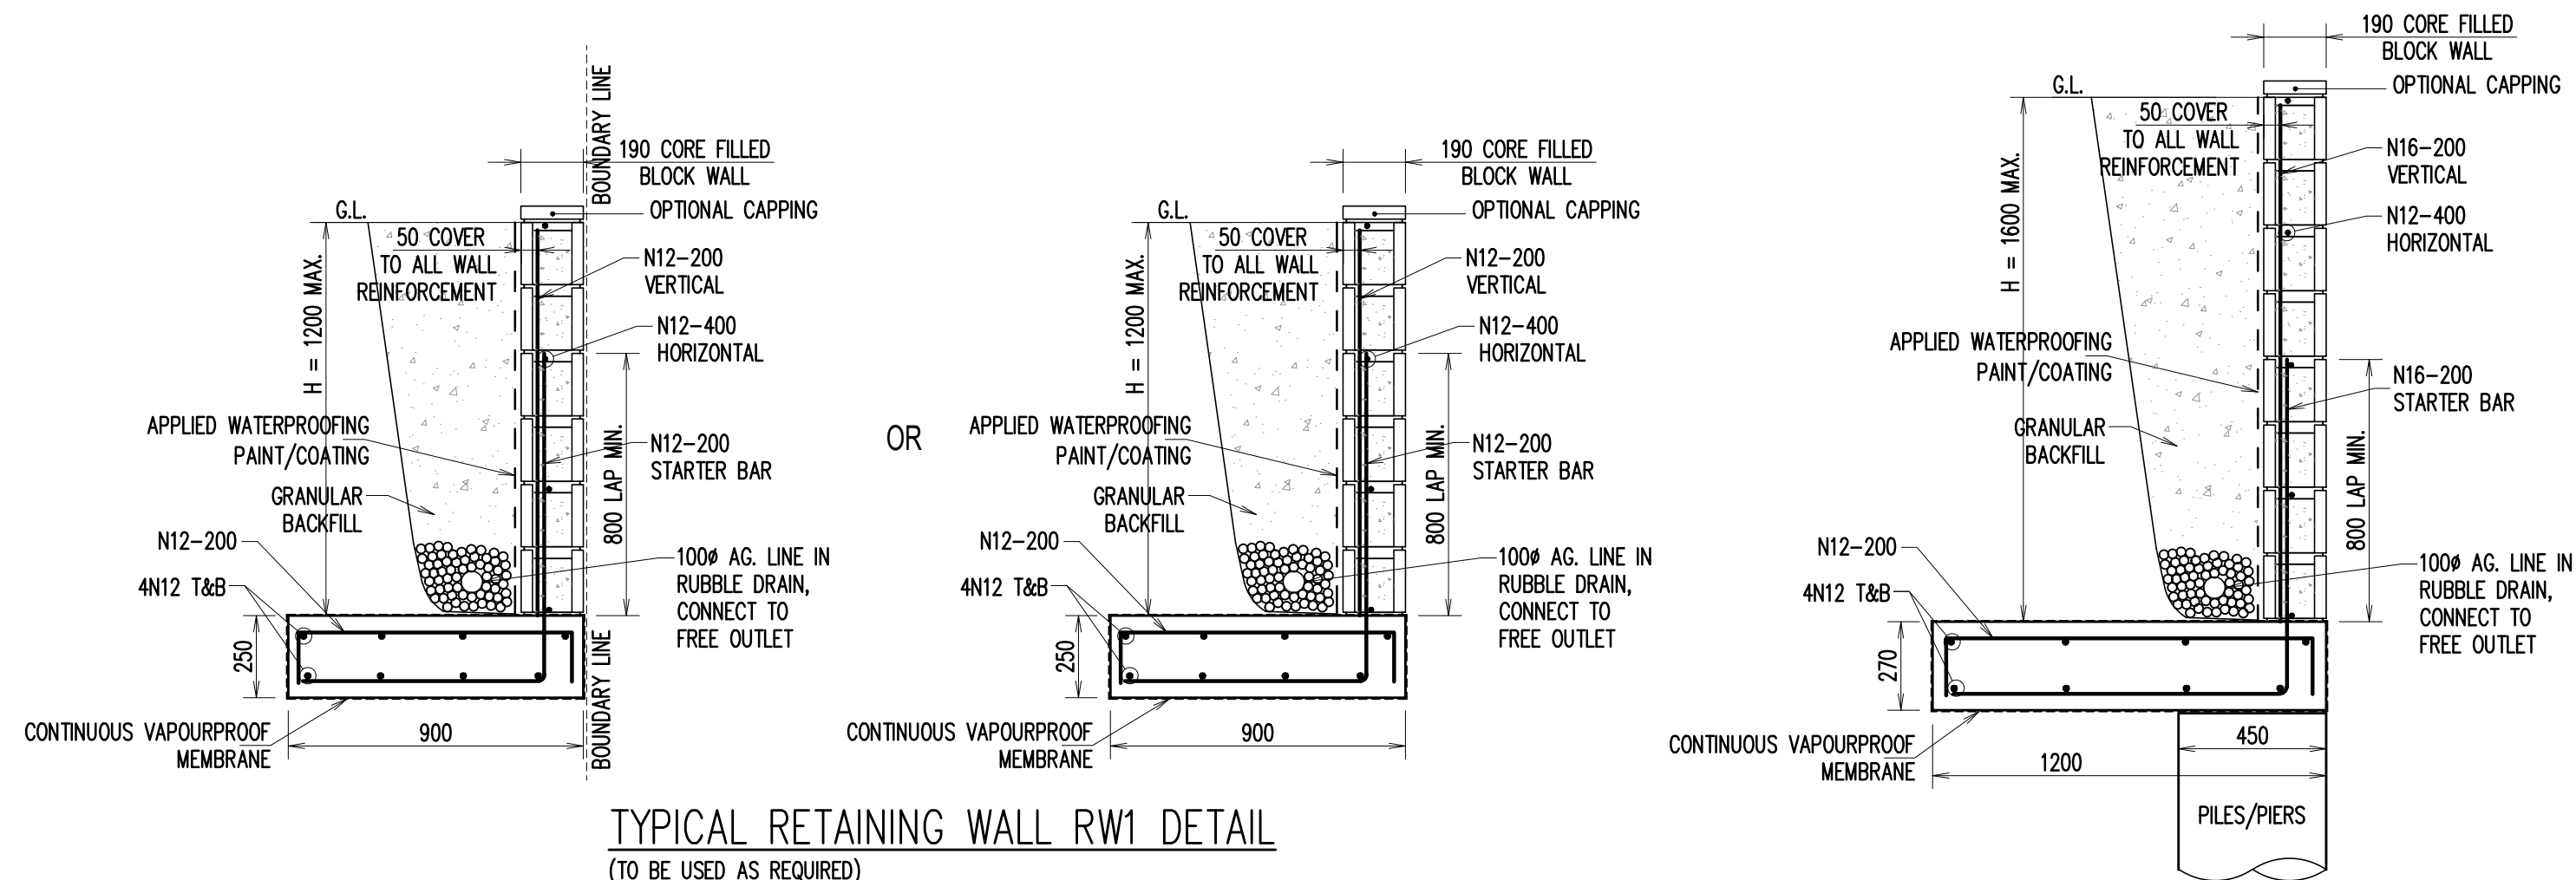

TYPICAL RETAINING WALL RW1 DETAIL
(TO BE USED AS REQUIRED)
SCALE: C.T.S

TYPICAL RETAINING WALL RW3 DETAIL
(TO BE USED AS REQUIRED)
SCALE: C.T.S

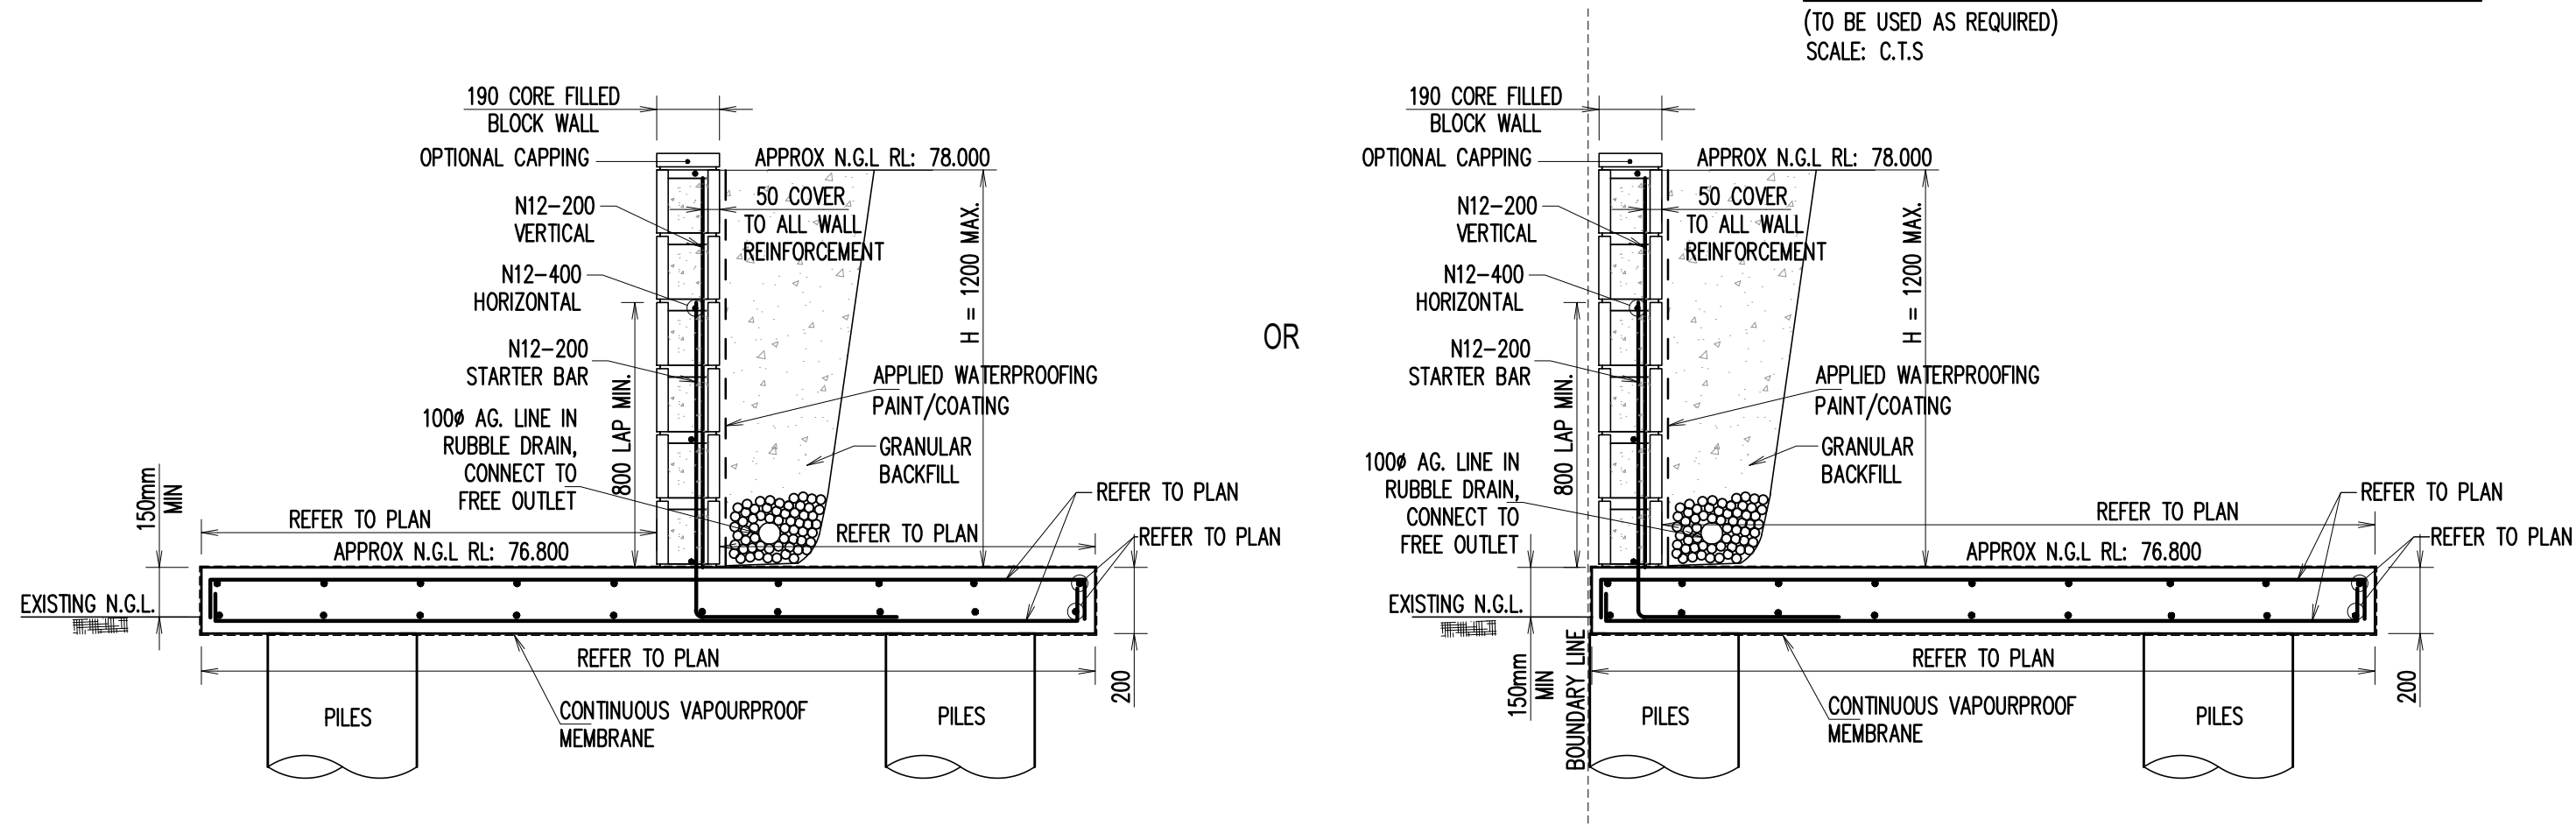

TYPICAL RETAINING WALL RW2 DETAIL
(TO BE USED AS REQUIRED)
SCALE: C.T.S

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /a

CLIENT
Beyond Certification
Sonder Projects Pty
Ltd
Reference: 3125176DC
Date: 17/12/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD,
FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
FOOTING DETAILS
SHEET 4

DESIGNED K.T.	DRAWN L.N.	AUTHORISED T.N.
CHECKED T.N.	SCALE: A2	DATE FEB 2025
JOB NO. SLY25-S008	DRAWING NO. S0105	

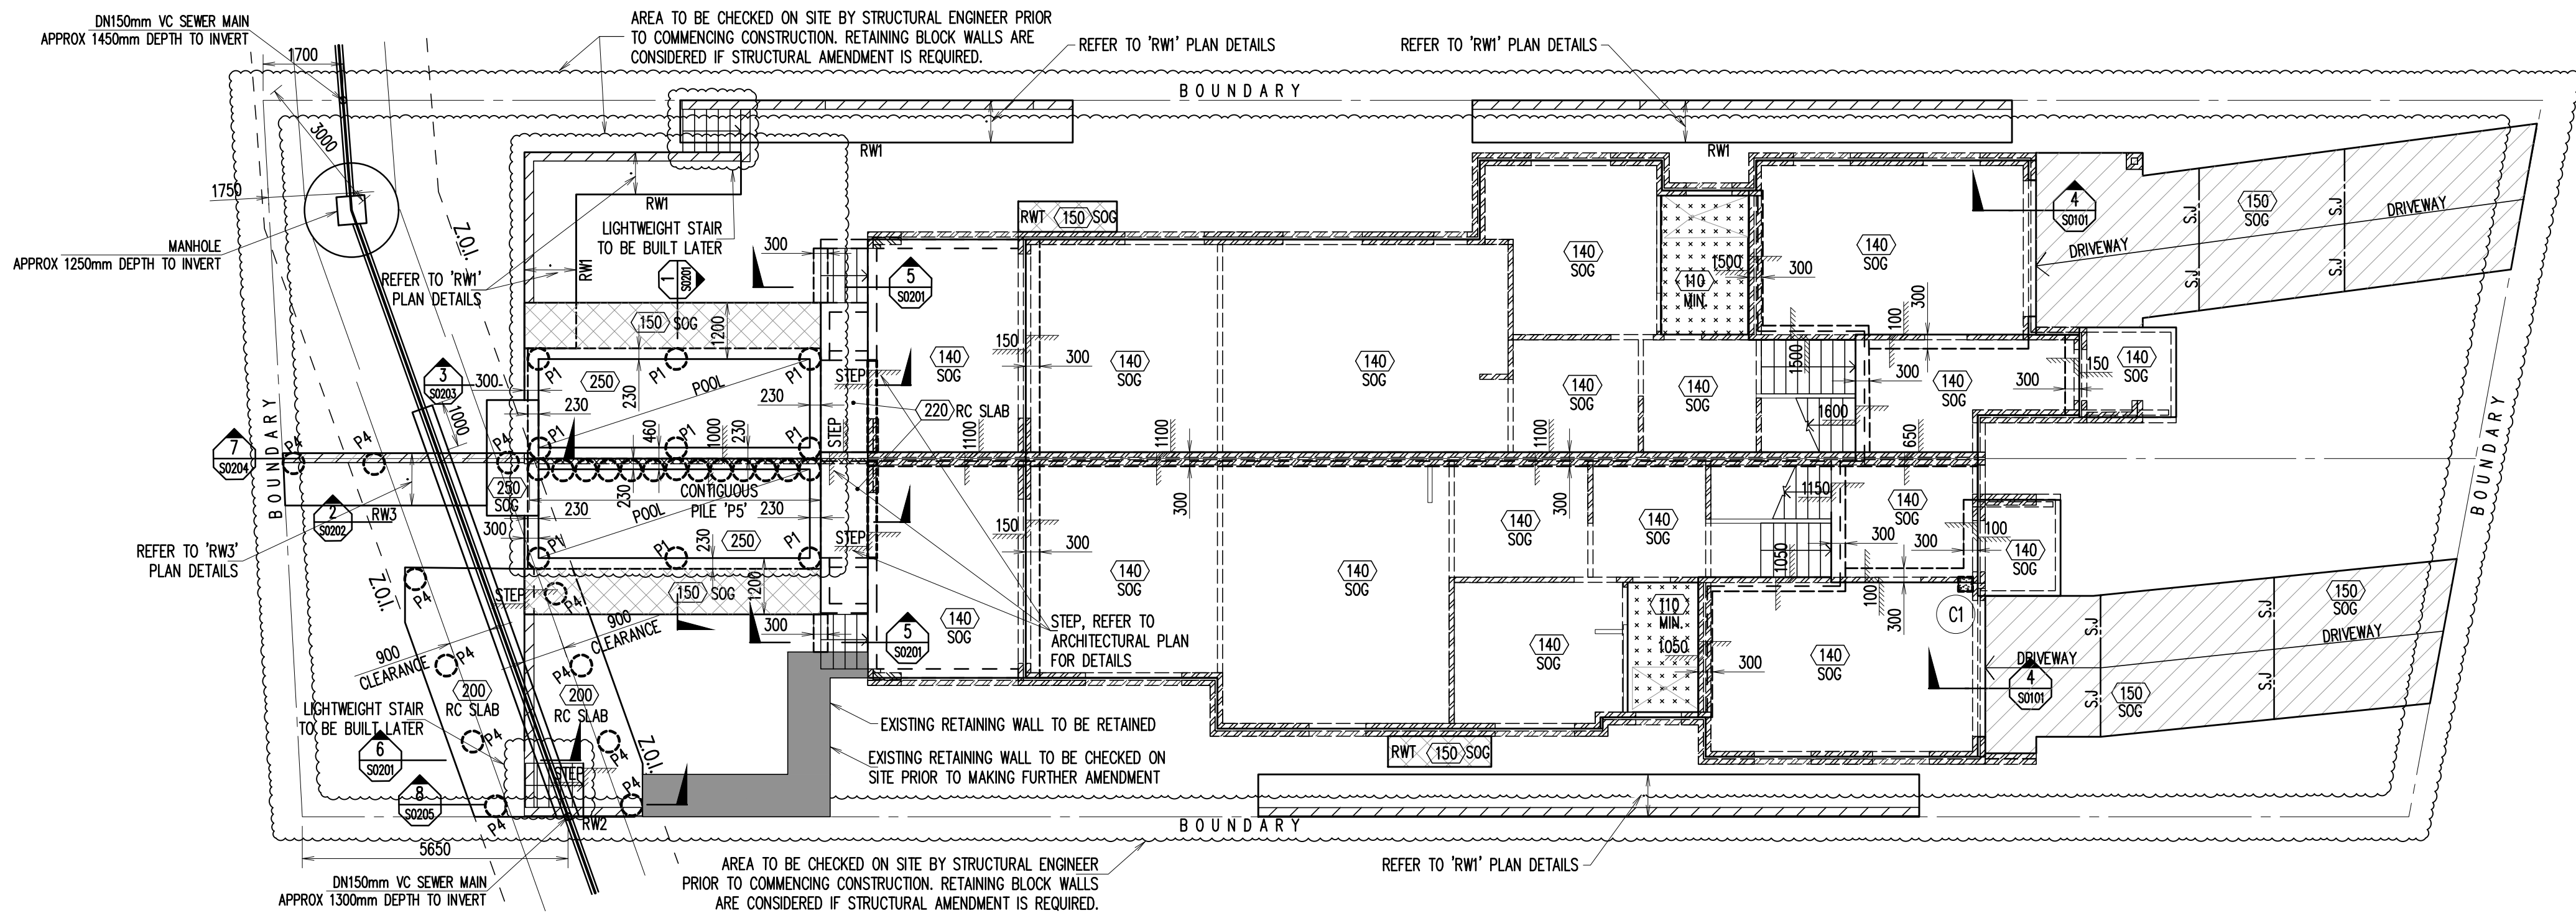


GROUND FLOOR SLAB PLAN – 140/150mm SLAB ON GROUND U.N.O. – 200mm THICK SLAB U.N.O – OPTION 1


SCALE: 1:100

NOTES:


1. PROVIDE SL92 MESH TOP THROUGHOUT FOR ALL 140mm SLAB ON GROUND U.N.O.
2. PROVIDE SL82 MESH T&B THROUGHOUT FOR ALL 150mm DRIVEWAY 'SOG' AND 150mm S.O.G 'SOG'.
3. REFER TO ARCHITECTURAL DRAWINGS FOR LEVELS, STEPS AND FOLDS.
4. GEOTECHNICAL ENGINEER TO CONFIRM SALINITY AND SITE CLASSIFICATION & SOIL BEARING CAPACITY.
5. 'P1': DENOTES Ø450mm MASS CONCRETE PIERS, DEPTH = 1800mm
6. 'P4': DENOTES Ø450mm CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3000mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE
7. 'P5': DENOTES Ø450mm CONTIGUOUS CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3500mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE




PIER TYPE 'P1' DETAILS
SCALE 1:20

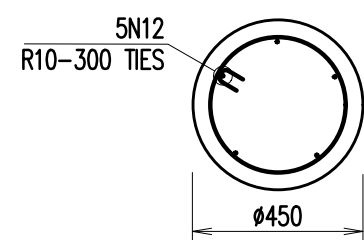


PILE TYPE 'P4, P5' DETAILS
SCALE 1:20

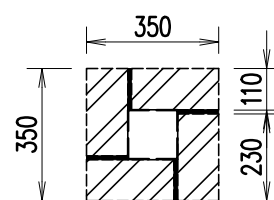

TYPICAL 350x350 BRICK PIER DETAIL
SCALE 1:20

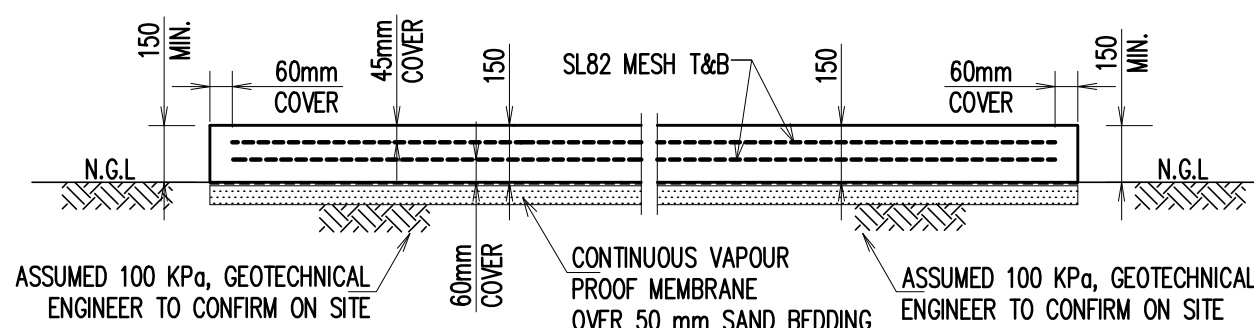

TYPICAL DRIVEWAY SECTION DETAIL
SCALE – 1:20

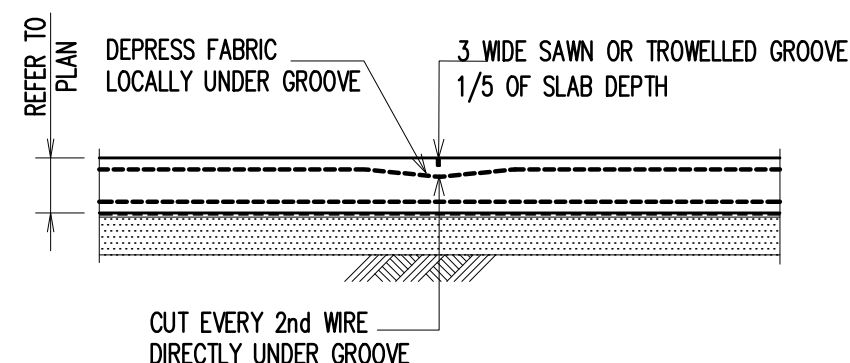

S.J. – SAWN CONTROL JOINT

SCALE 1:20
NOTE: SAWCUT TO BE MADE WITHIN 16 HOURS OF CASTING SLAB

LEGEND :

- /// DENOTES BRICK WALL OVER ONLY
- - - DENOTES BRICK WALL UNDER ONLY
- DENOTES RC COLUMN UNDER ONLY
- DENOTES TIMBER WALL OVER ONLY
- - - DENOTES BLOCK WALL UNDER ONLY
- /// DENOTES BLOCK WALL OVER ONLY
- DENOTES WET AREA SETDOWN (MAX 30mm)

FOR STRUCTURAL NOTES REFER TO DRAWING S000

NOTES:

1. DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR ALL FALLS AND LEVELS AND SETOUT DIMENSIONS TO COLUMNS, WALLS ETC. DO NOT SCALE FROM STRUCTURAL DRAWINGS.

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f _c
PIERS	80mm	20mm	GP	40MPa
SLAB ON GROUND	80mm	20mm	GP	40MPa
200mm RC SUSPENDED SLAB	80mm	20mm	GP	40MPa

REINFORCEMENT COVER SCHEDULE			
MEMBER	COVER (mm)		
	TOP	BOTTOM	SIDES
SLAB ON GROUND	35mm	'o' OR 60mm FOR DRIVEWAY & 150mm SOG	60mm
200mm RC SUSPENDED SLAB	35mm	60mm	60mm

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rose Street
Eastwood, NSW 2122
+61 2 8868 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
28 485 969 790 / m

CLIENT

Structural Link Pty Ltd

Office: 02 8021 2626
Address: Level 3, Suite 313, 49-51 Queens Road, Five Dock NSW 2046
Postal Address: PO Box Suite 313, 49-51 Queens Road, Five Dock NSW 2046

PROJECT




DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT

GROUND FLOOR SLAB PLAN & DETAILS
OPTION 1

DESIGNED K.T. DRAWN L.N. AUTHORISED T.N.
CHECKED T.N. SCALE: A2 N.T.S. DATE FEB 2025
JOB NO. DRAWING NO. S0200

SLY25-S008

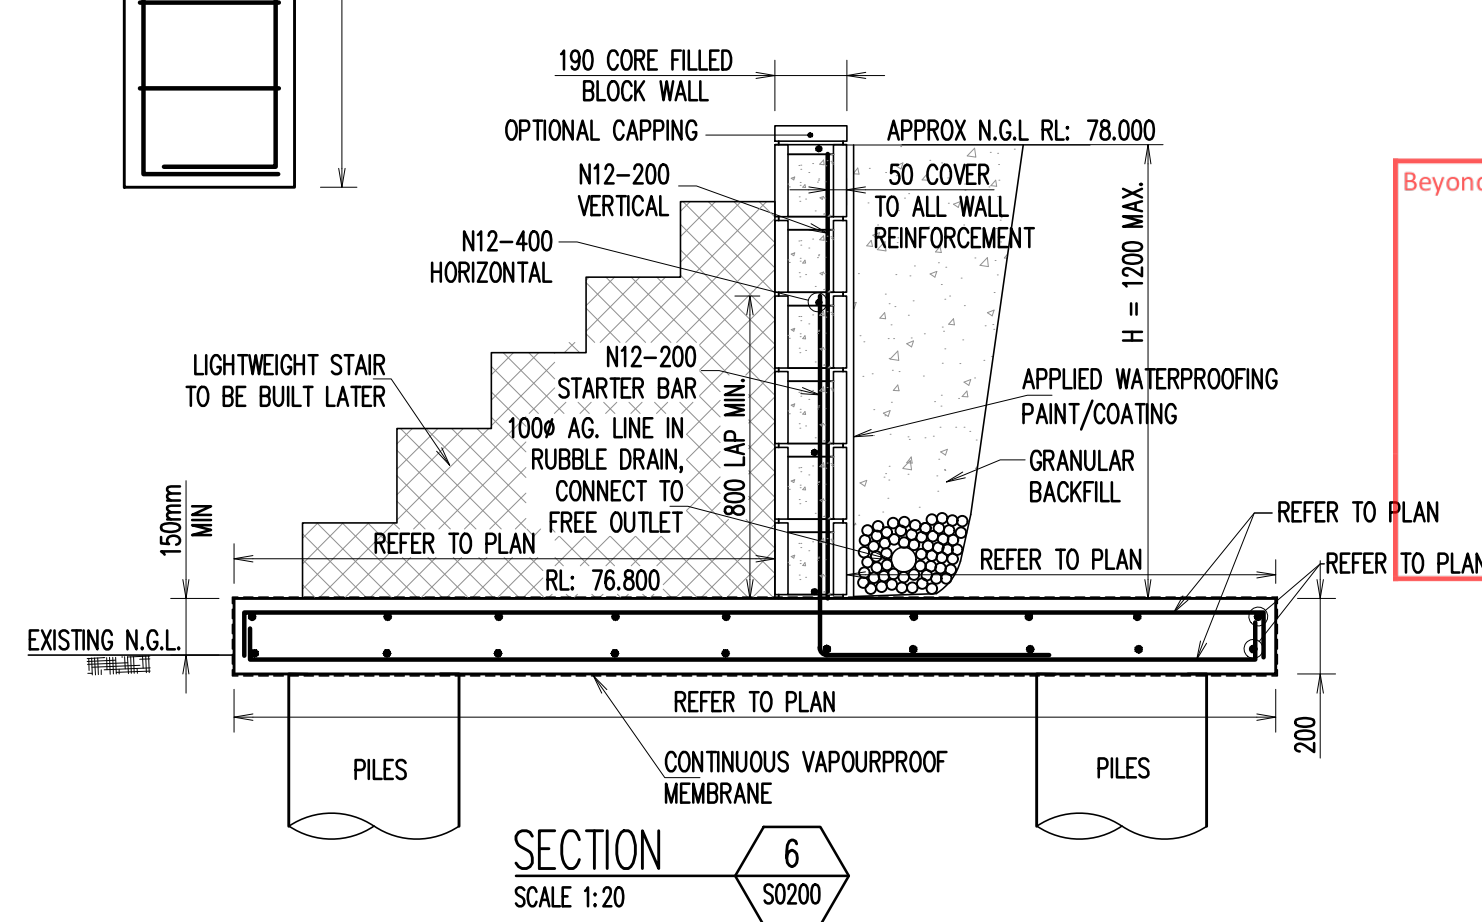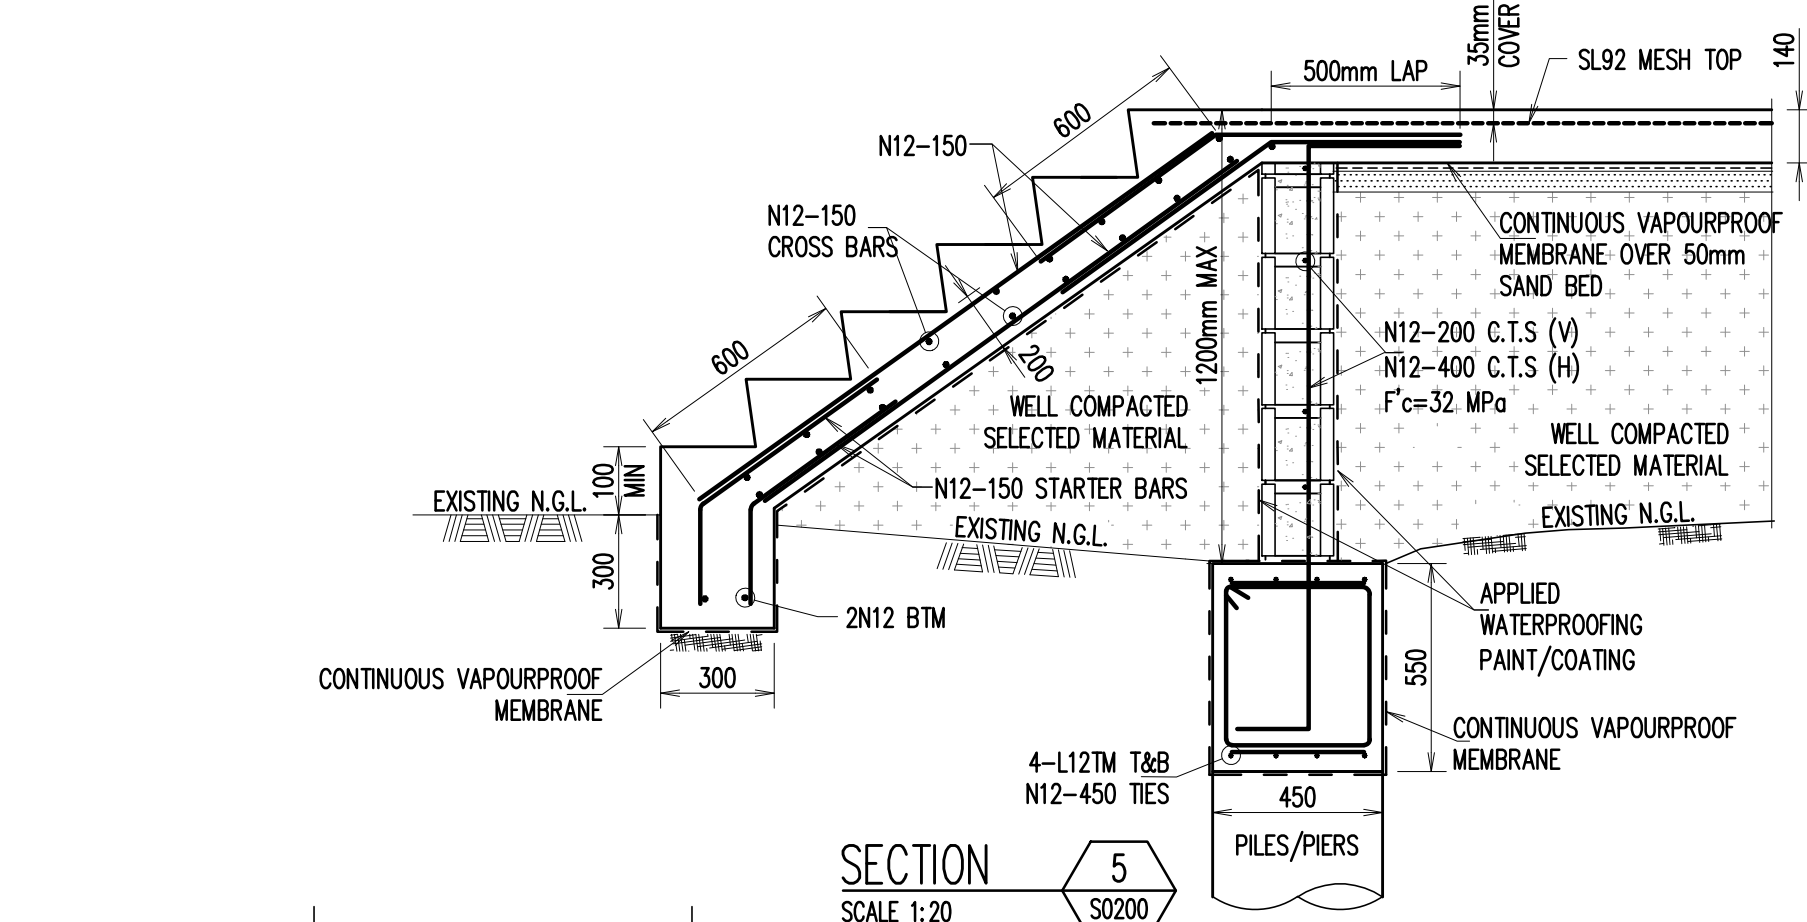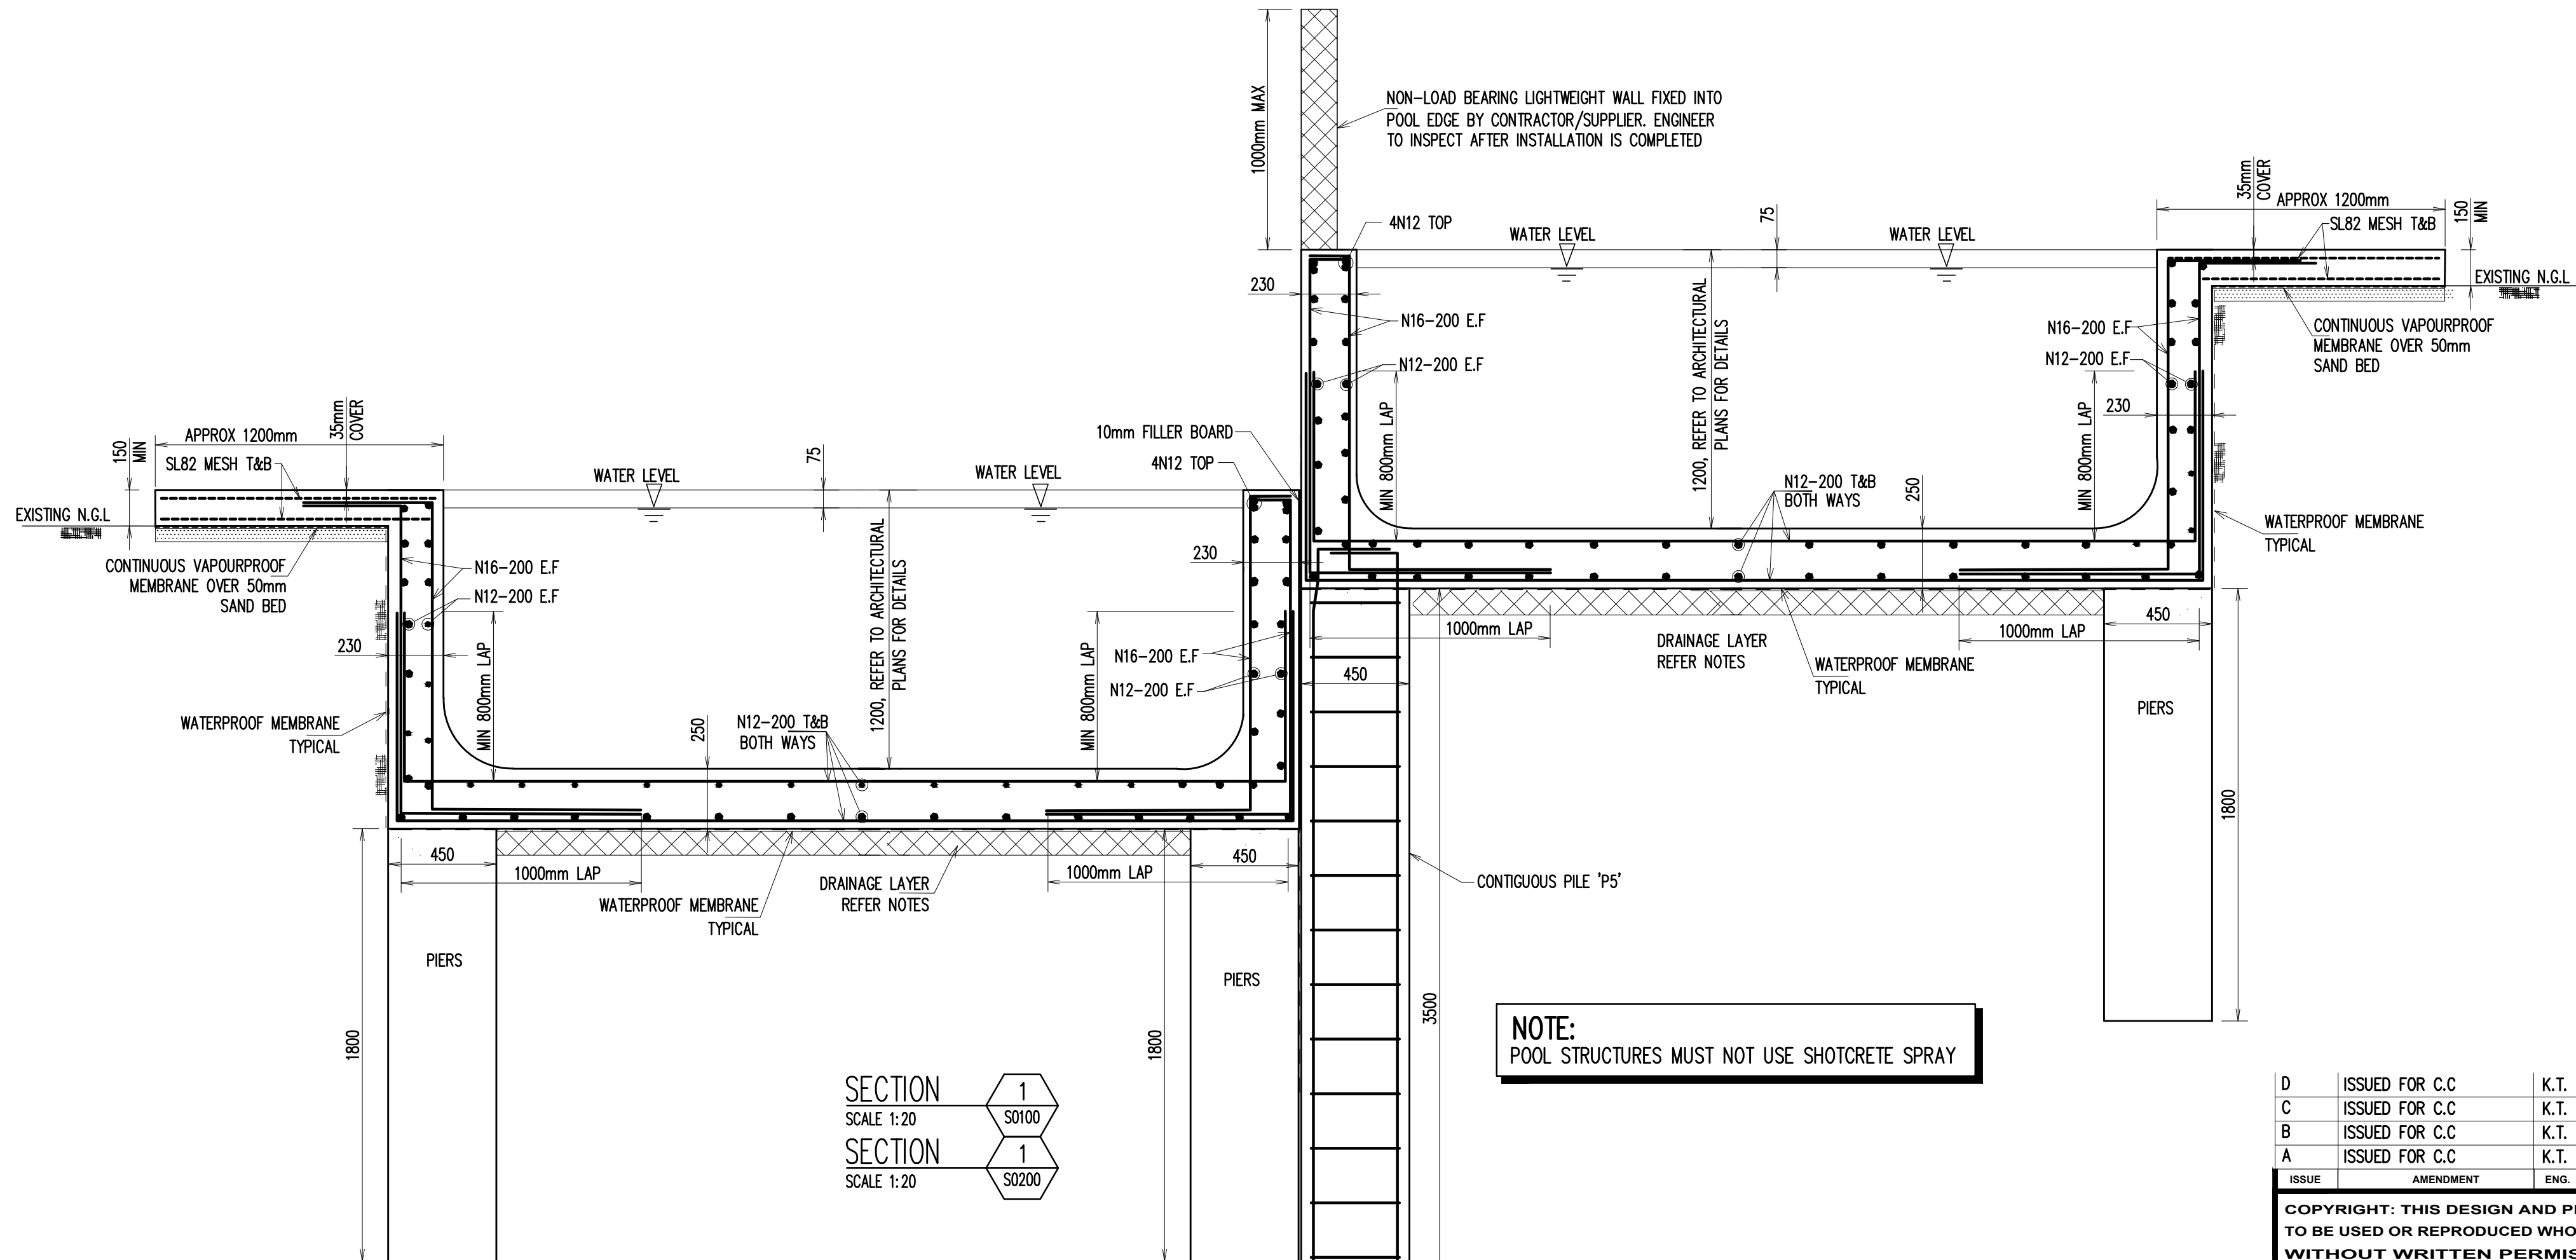

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL


ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8863 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT
Beyond Certification Sonder Projects Pty Ltd
Reference: 31251760DC
Date: 17/11/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
GROUND FLOOR DETAILS
SHEET 1 - OPTION 1


DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE: A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0201

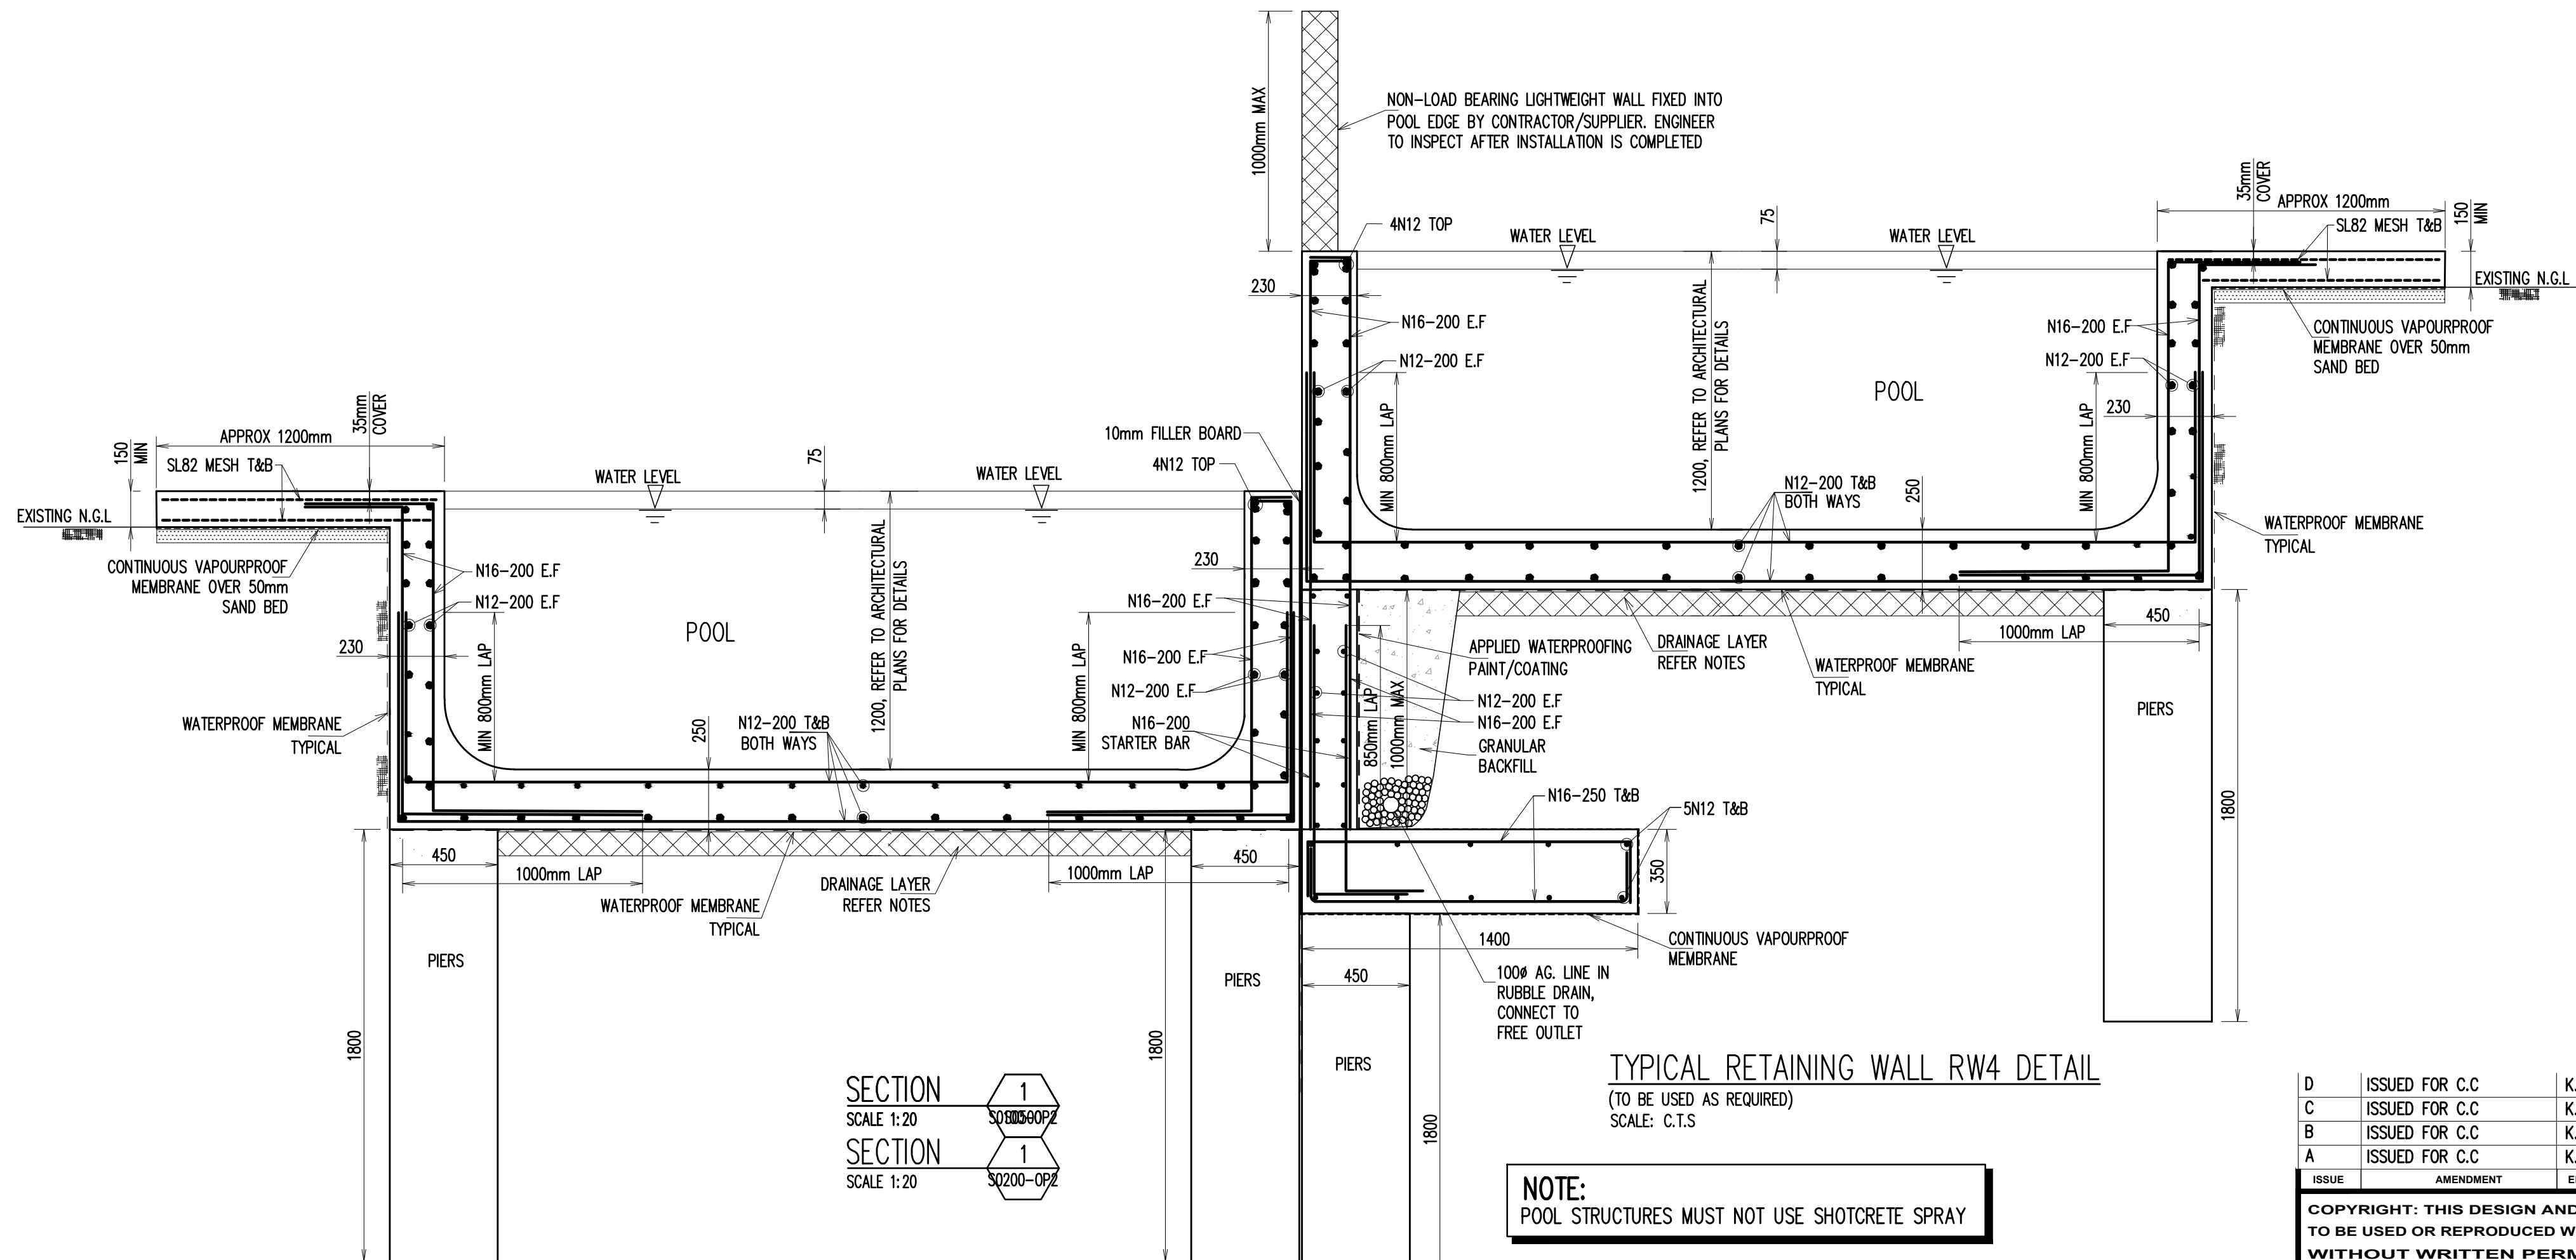


SECTION 1
SCALE 1:20
S0200-OP2

TYPICAL RETAINING WALL RW4 DETAIL
(TO BE USED AS REQUIRED)
SCALE: C.T.S.

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

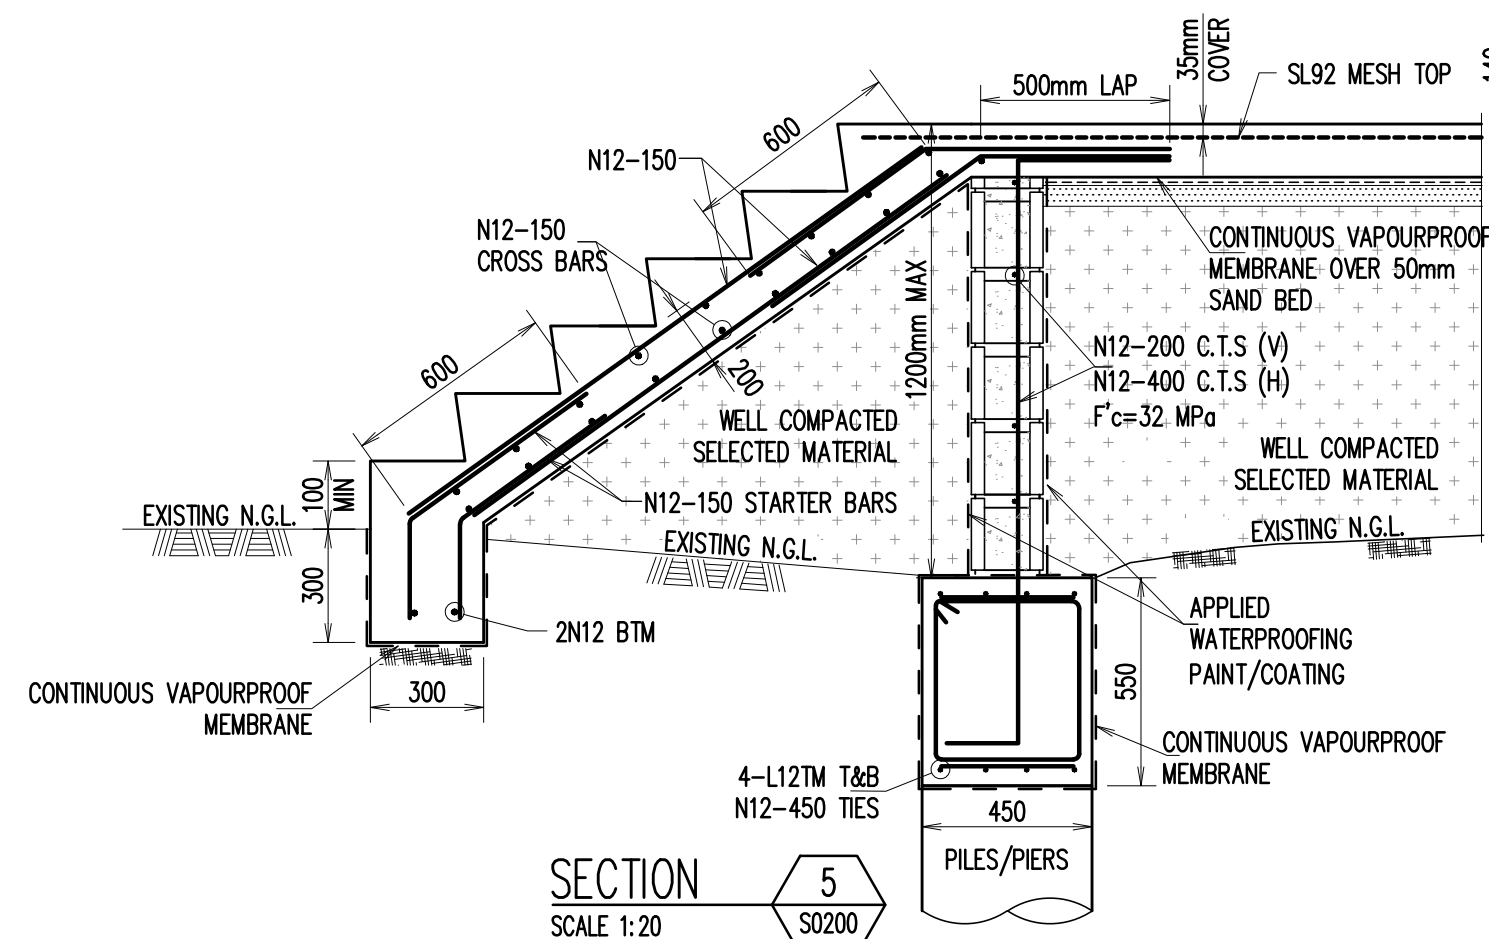

SECTION 5
SCALE 1:20
S0200

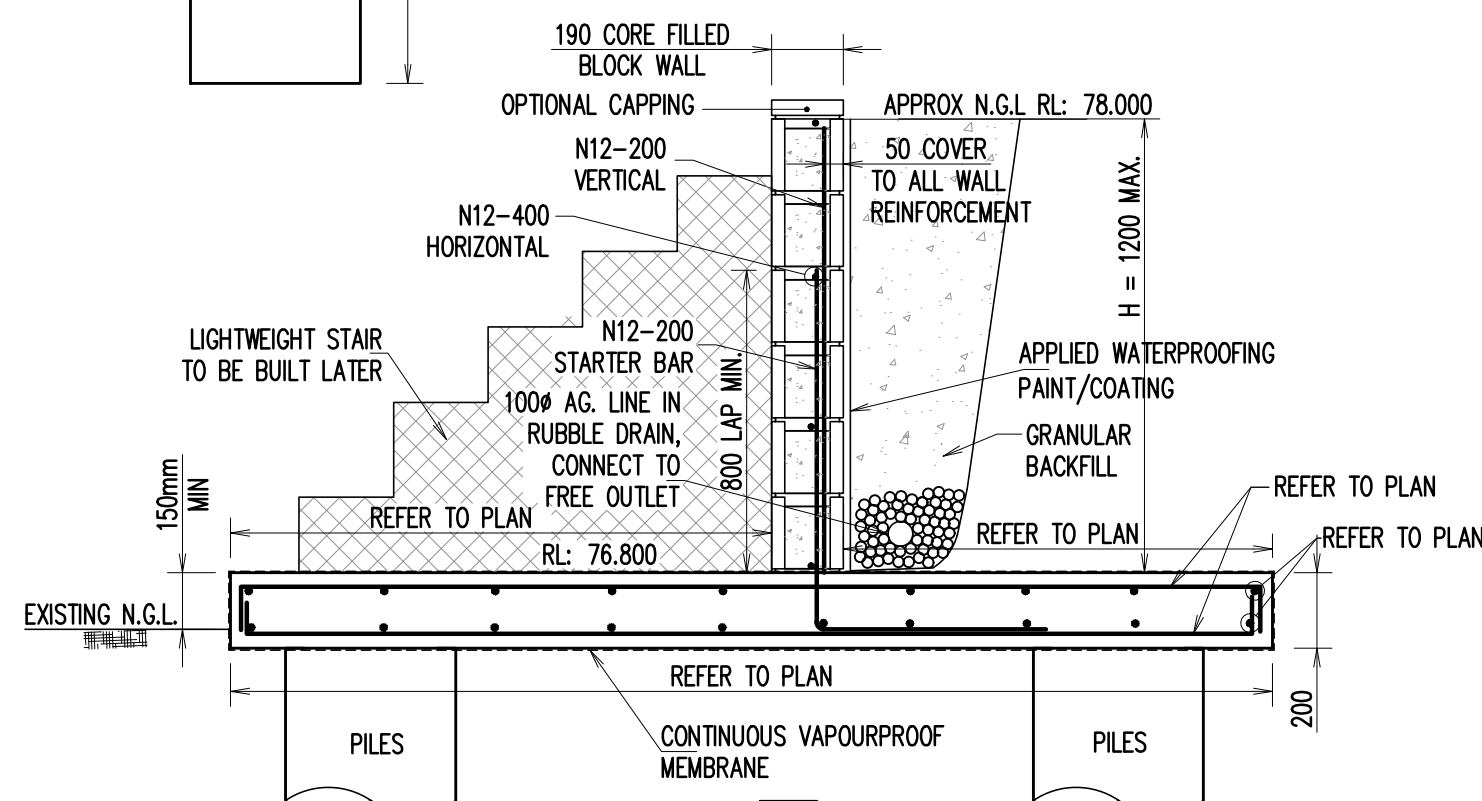

SECTION 6
SCALE 1:20
S0200

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
26 495 969 790 / a

CLIENT
Beyond Certification Pty Ltd
Reference: 3125176DC
Date: 17/11/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
GROUND FLOOR DETAILS
SHEET 1 - OPTION 2

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO. S0201-OP2	

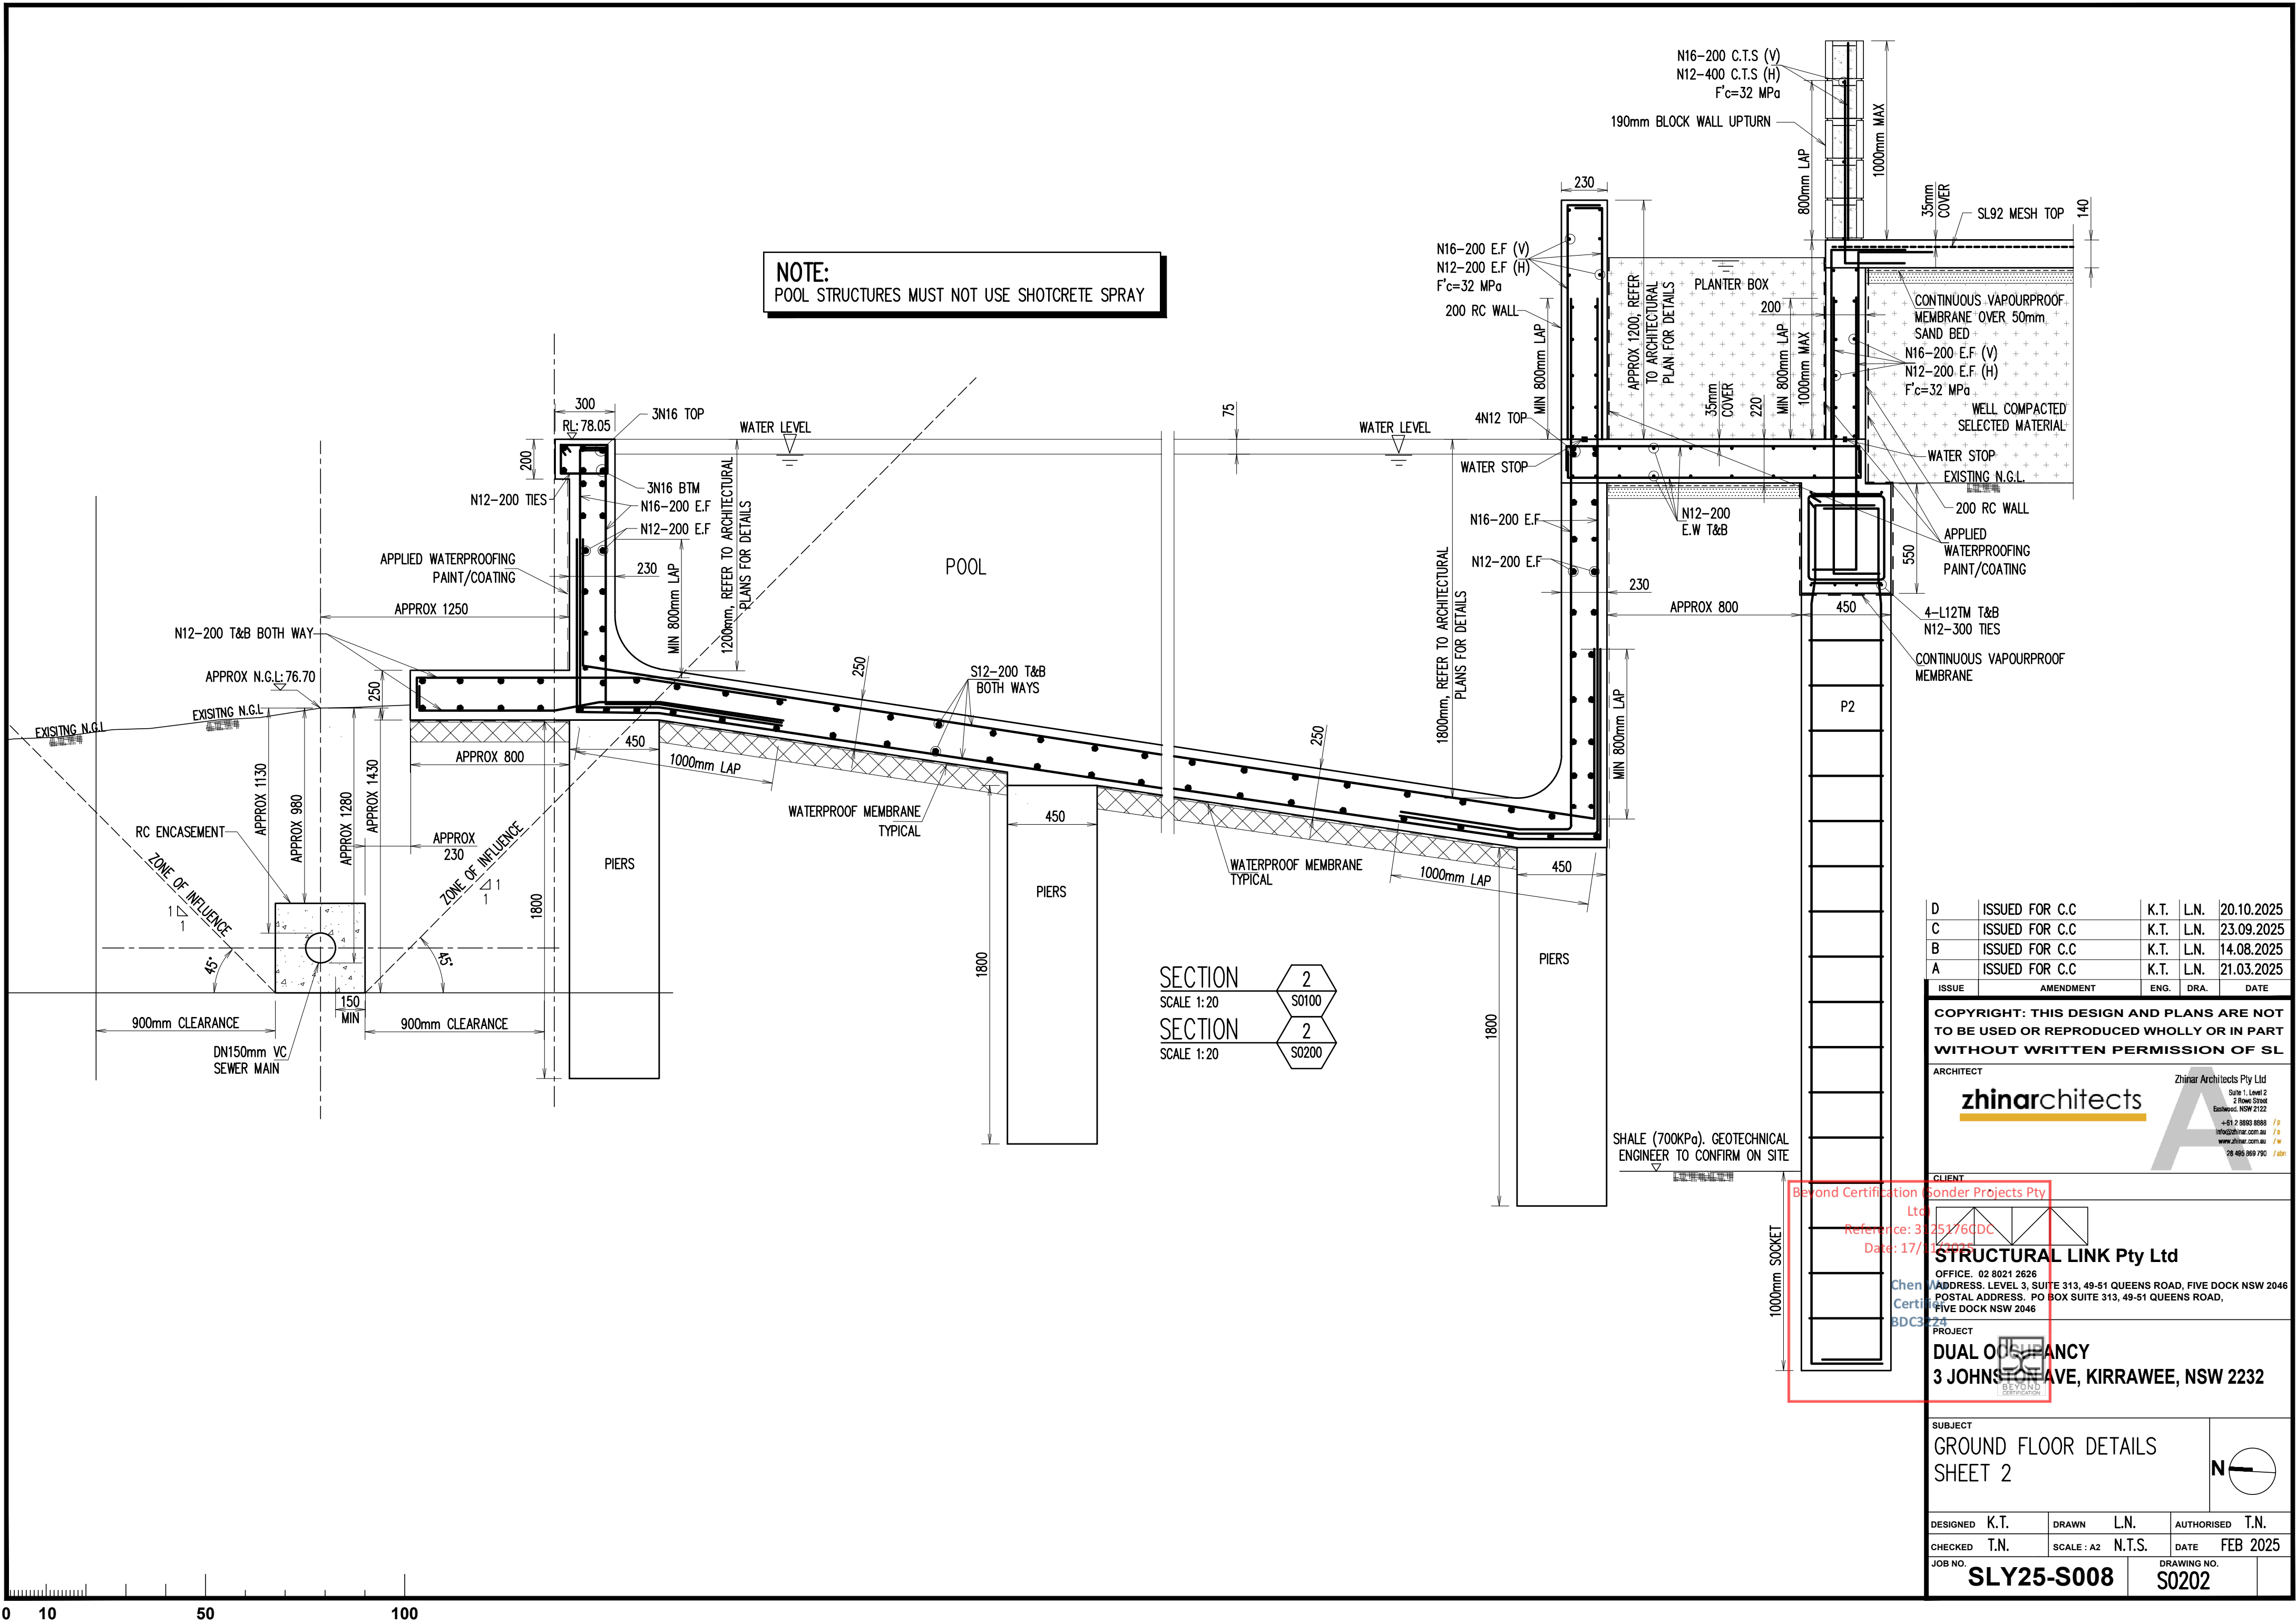

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

SECTION
SCALE 1:20
SECTION
SCALE 1:20

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

ISSUE	AMENDMENT	ENG.	DRA.	DATE
-------	-----------	------	------	------

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT

Beyond Certification Pty Ltd
Reference: 3125176CDC
Date: 17/11/2024

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT


DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT

GROUND FLOOR DETAILS
SHEET 2

N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0202

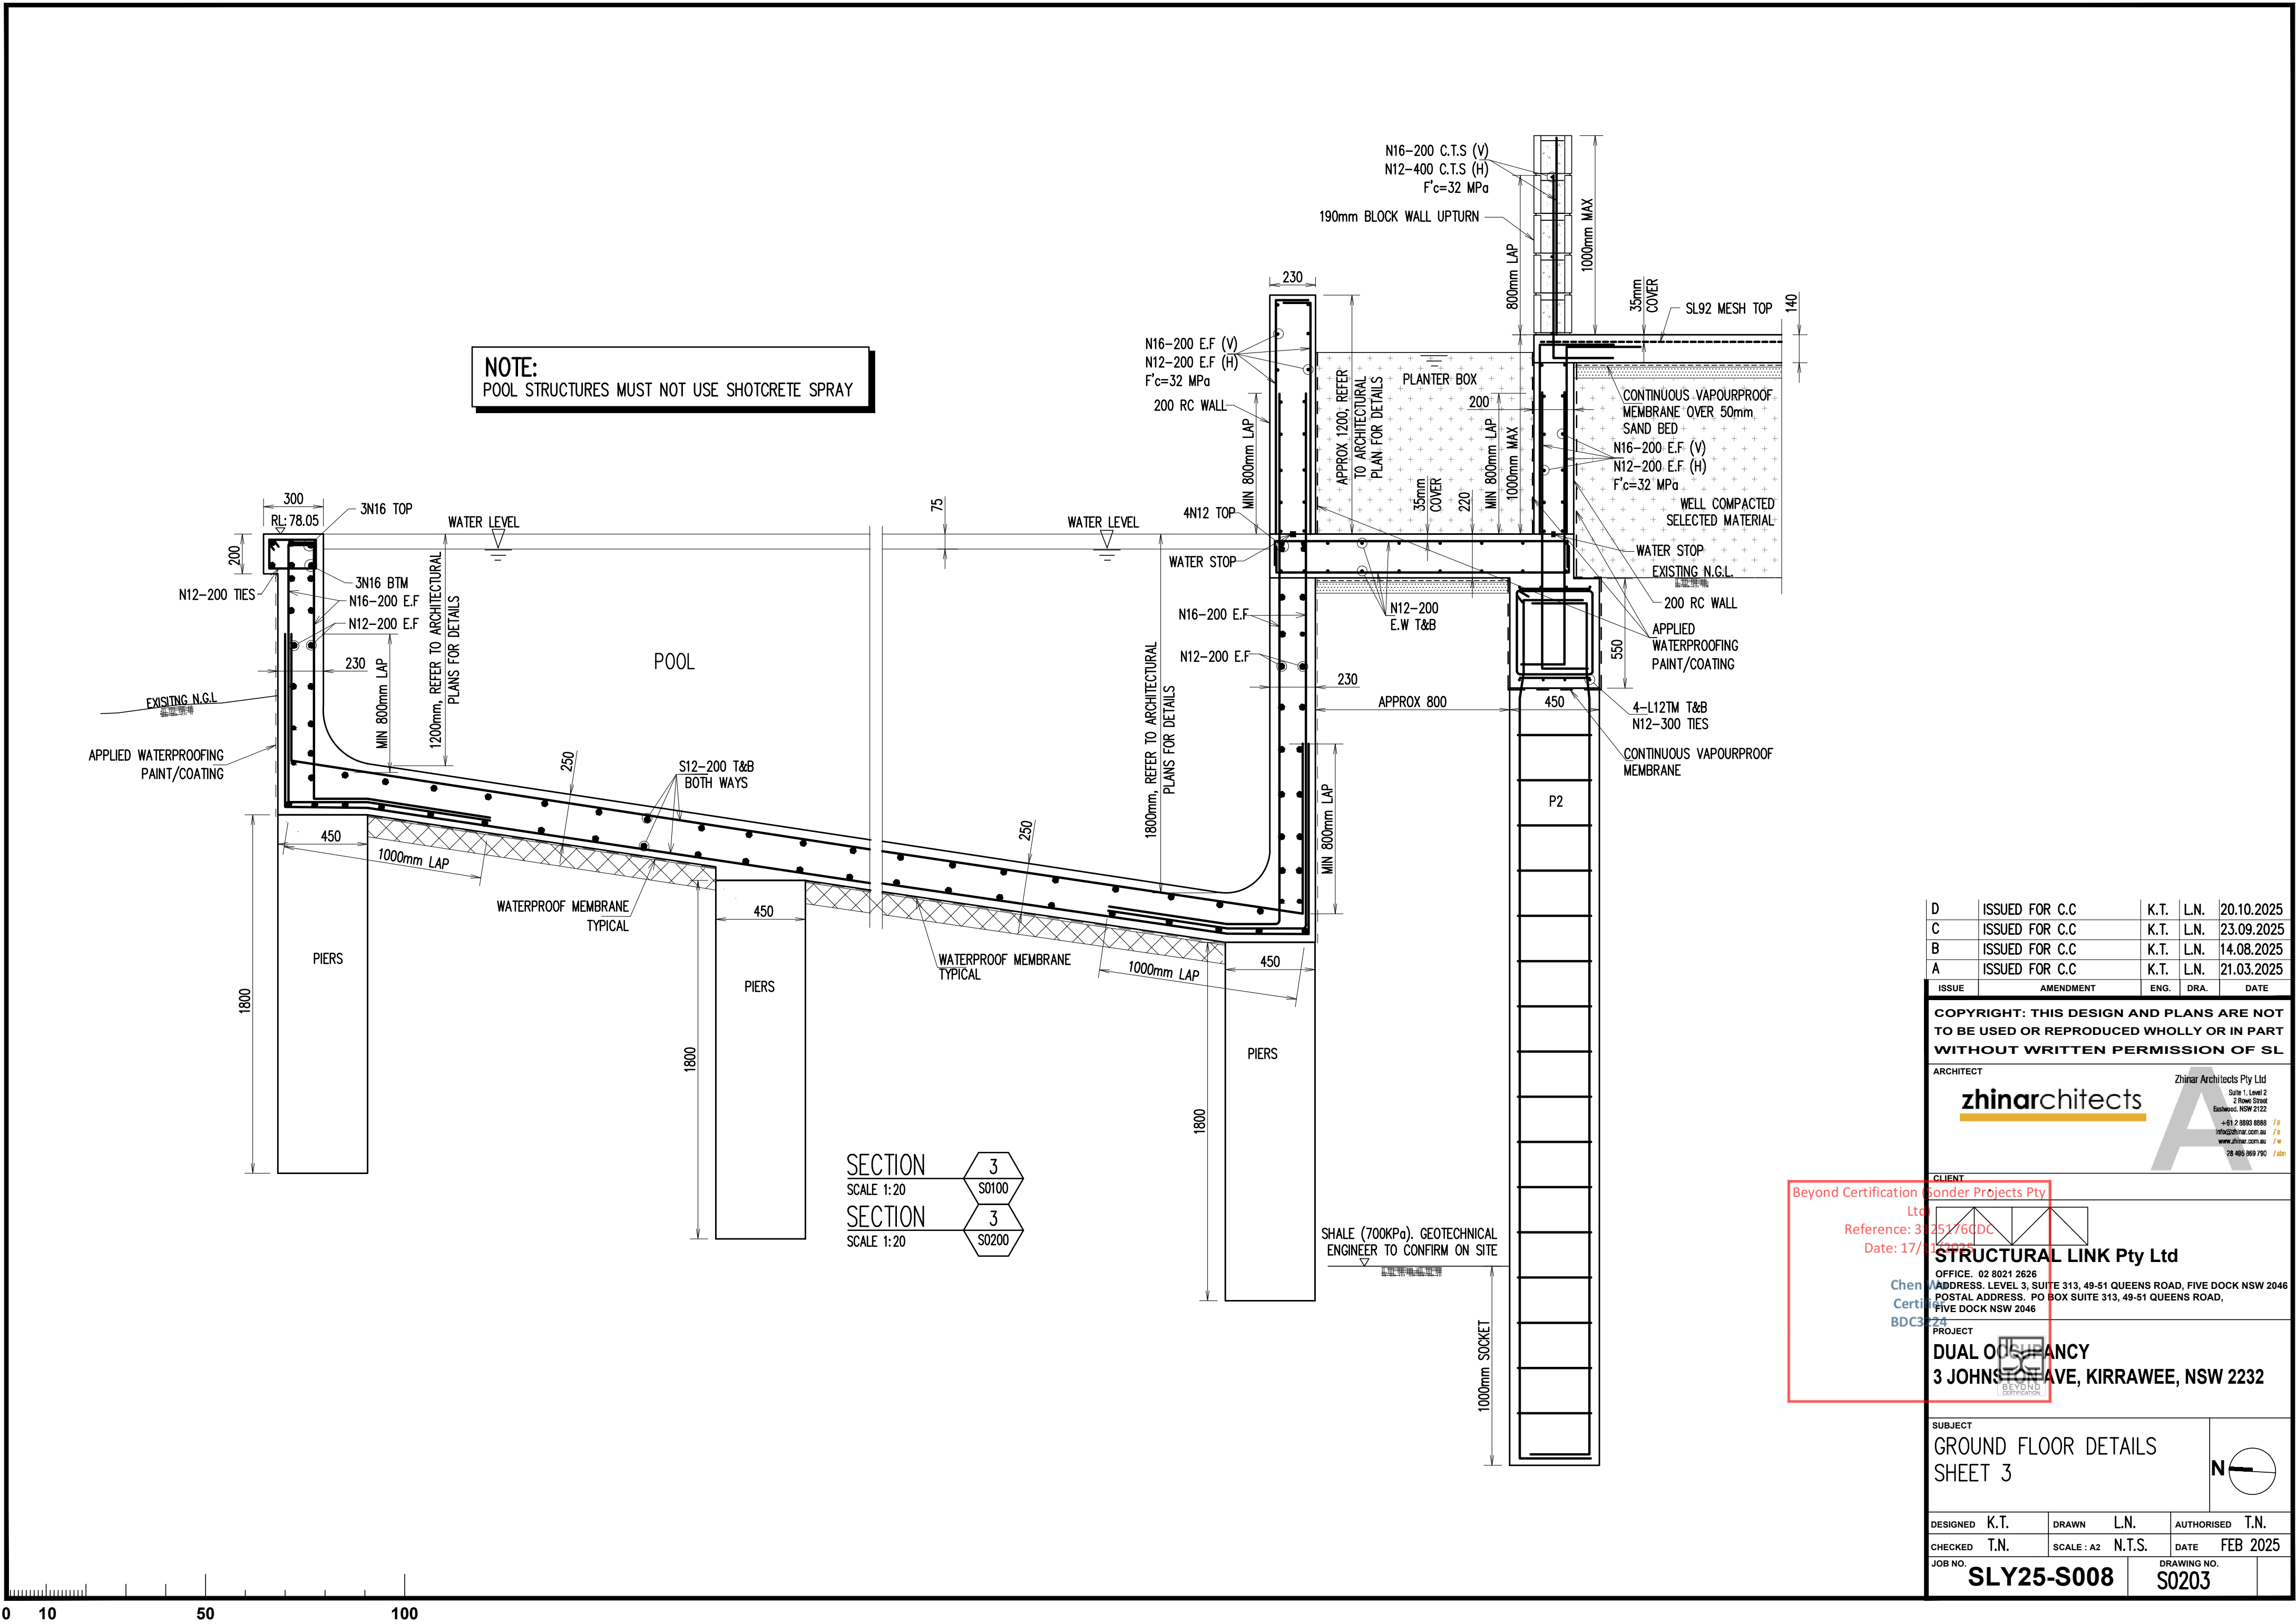

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

SECTION 3
SCALE 1:20
SECTION 3
SCALE 1:20

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8863 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 465 969 790 /a


Beyond Certification
Reference: 3125176DC
Date: 17/12/2025

CLIENT
STRUCTURAL LINK Pty Ltd
Office: 02 8021 2626
Address: Level 3, Suite 313, 49-51 Queens Road, Five Dock NSW 2046
Postal Address: PO Box Suite 313, 49-51 Queens Road, Five Dock NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
GROUND FLOOR DETAILS
SHEET 3

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE	A2	DATE	FEB 2025
JOB NO.	SLY25-S008	DRAWING NO.	S0203		

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

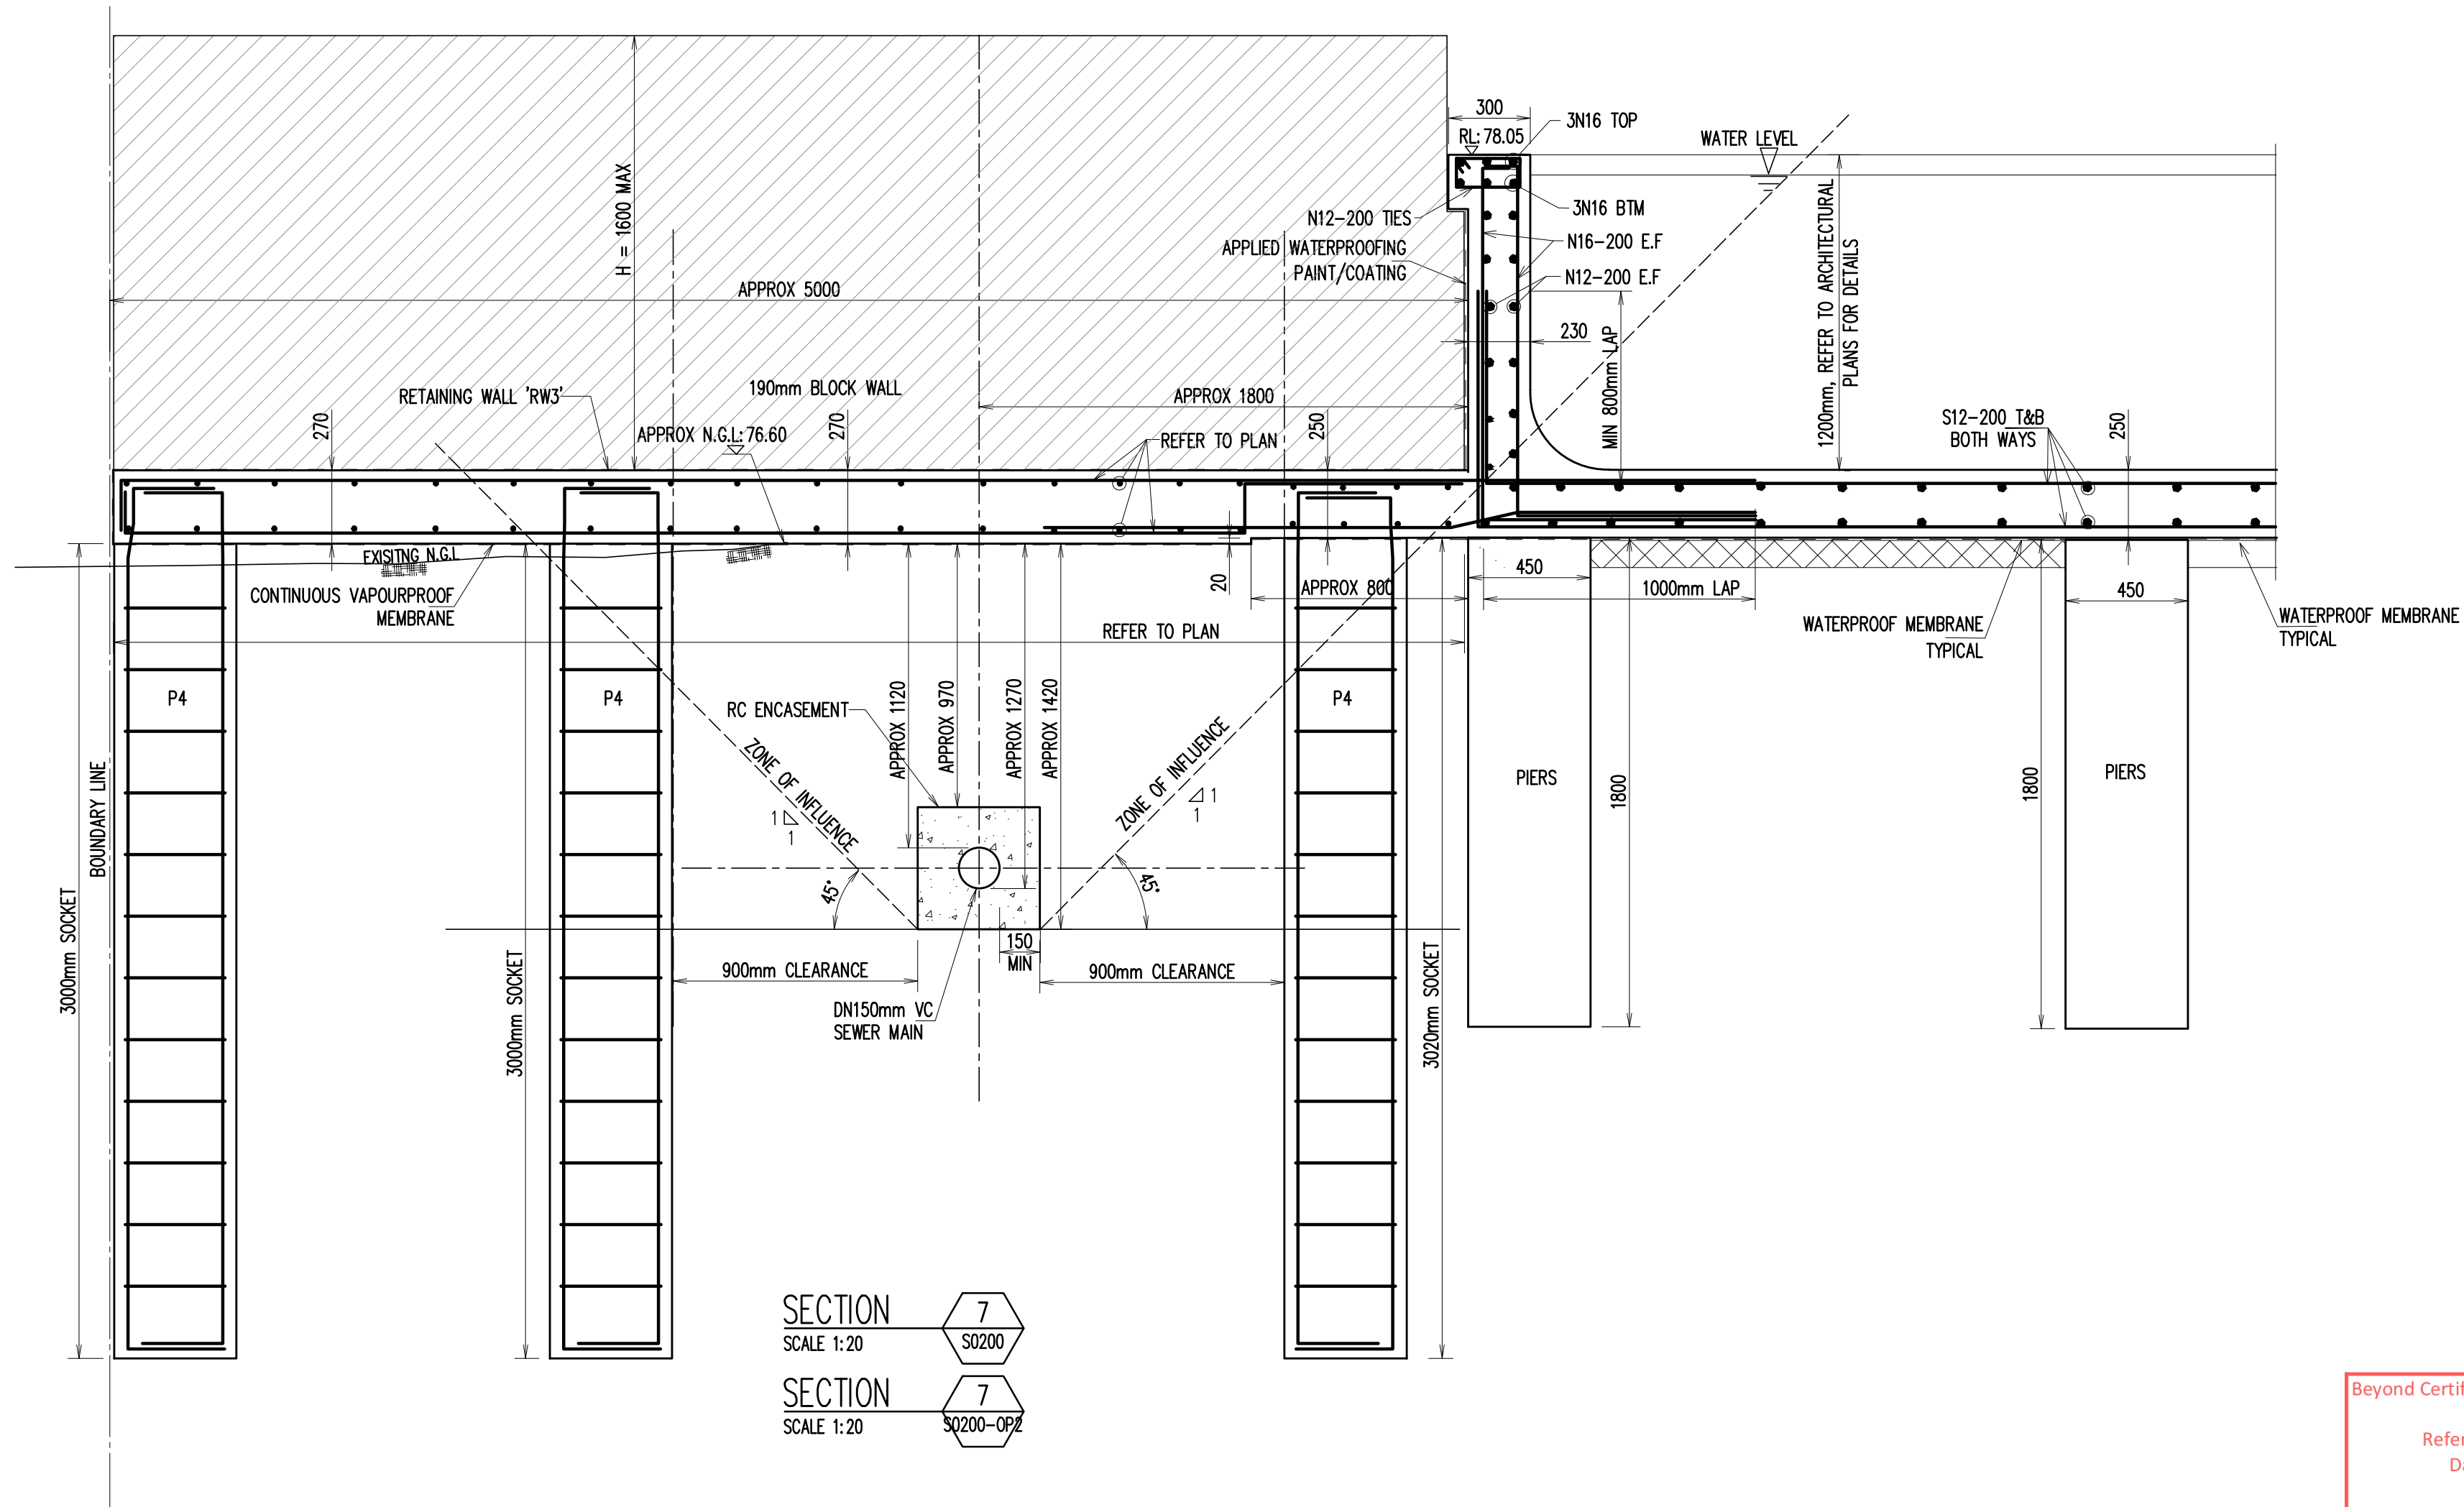

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd

Suite 1, Level 2
2 Howe Street
Bachwood, NSW 2122

+61 2 8903 8600 / p
info@zhinarch.com.au / o
www.zhinarch.com.au / w
08 495 869 790 / abn

CLIENT
n (Sonder Projects Pty

3125176CDC

7/11/2025

STRUCTURAL LINK Pty Ltd

OFFICE. 02 8021 2626
ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS. PO BOX SUITE 313 49-51 QUEENS ROAD.

PROJECT	FOUR NEW BUILDINGS FOR DOCKSIDE ONE, 15 OF QUEENSLAND ROAD, FIVE DOCK NSW 2046
---------	---

DUAL OCCUPANCY

3 JOHNSTON AVE, KIRRAWEE, NSW 2232

SUBJECT	
---------	--


GROUND FLOOR DETAILS
SHEET 4

SHEET 4

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
----------	------	-------	------	------------	------

CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.			DRAWING NO.		

SLY25-S008	S0204	
------------	-------	--

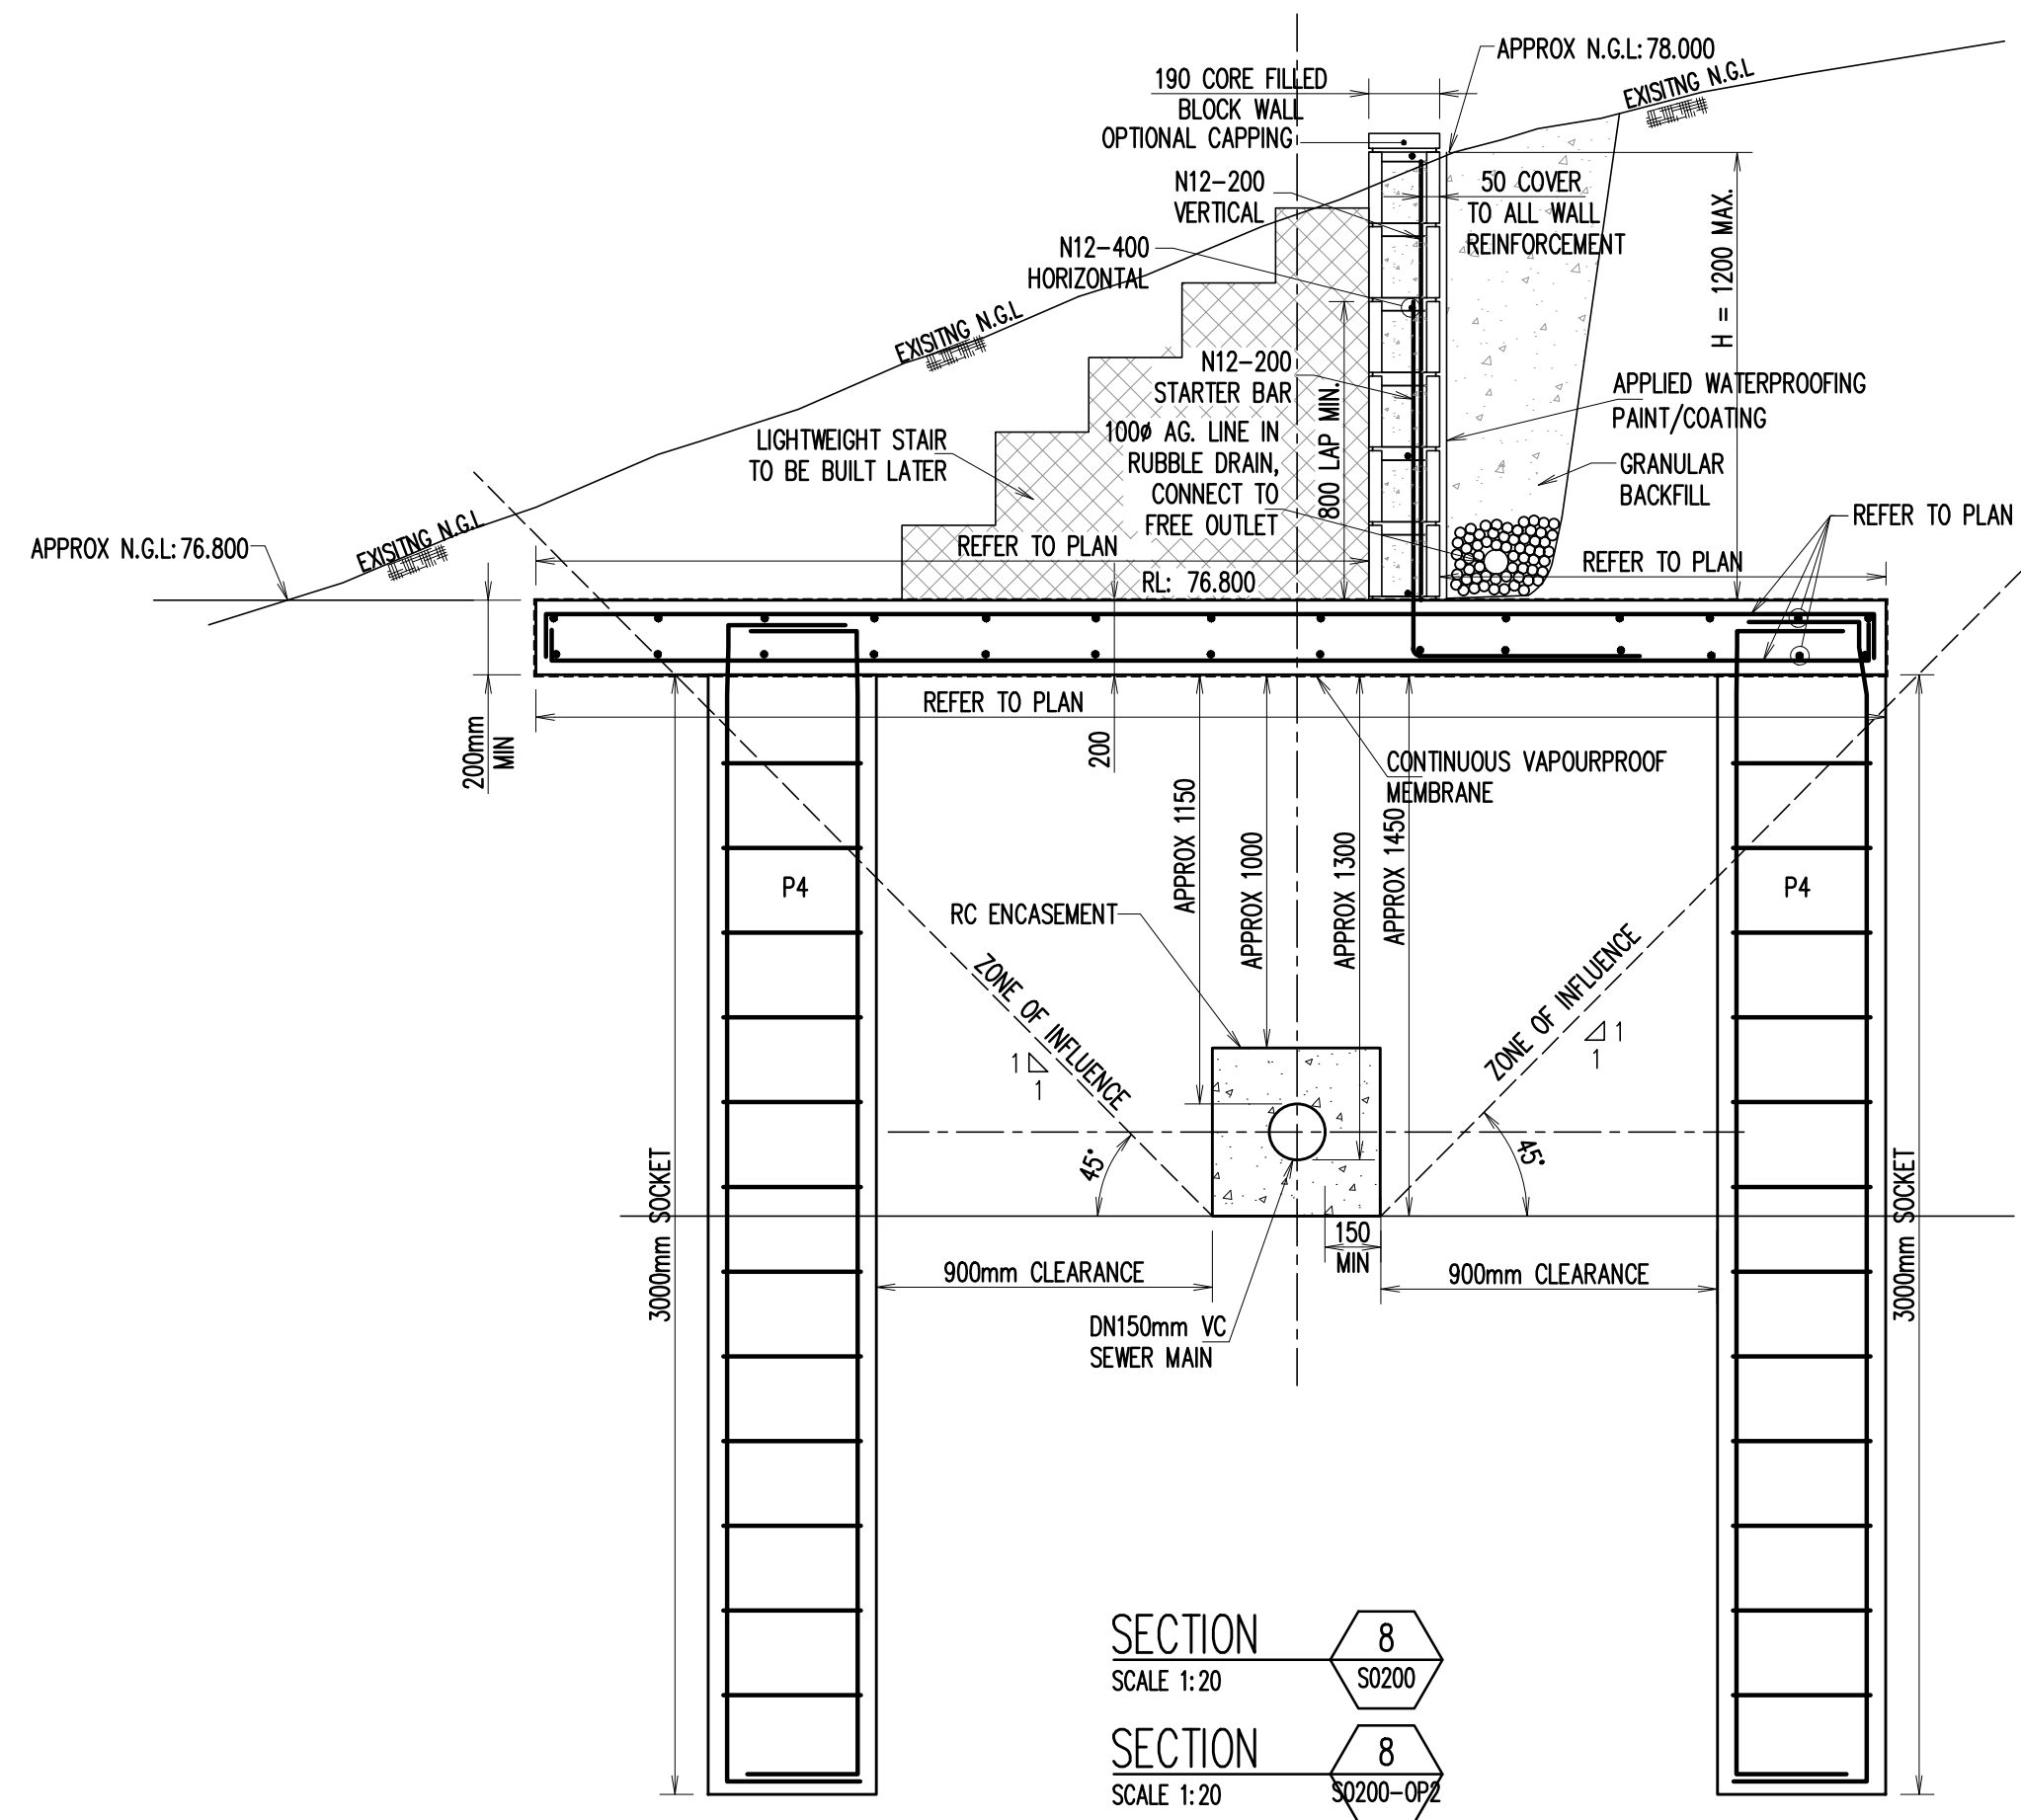

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8863 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 465 969 790 /m

CLIENT
Beyond Certification Pty Ltd
Reference: 3025176DC
Date: 17/10/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
GROUND FLOOR DETAILS
SHEET 5
N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0205




-
- 1000 TYP.
- 2N16-100, TOP & BTM.

- 2N16-100 (1200 LONG)
TOP AND BOTTOM EXTRA.
TYPICAL ALL
RE-ENTRANT CORNERS
-


- | LENGTH OF
OPENING (m) | BOTTOM BAR | TOP BAR |
|--------------------------|------------|---------|
| 1.0 – 1.8 | 2N16 | 2N16 |
| 1.8 – 2.5 | 2N20 | 2N20 |
| 2.5 – 3.5 | 2N24 | 2N24 |

- | | DIRECTION | LAYING ORDER |
|--------|------------------|--------------|
| BOTTOM | HORIZONTAL ' ← ' | 1ST |
| | VERTICAL ' ' | 2ND |
| TOP | HORIZONTAL ' → ' | 4TH |
| | VERTICAL ' ' | 3RD |

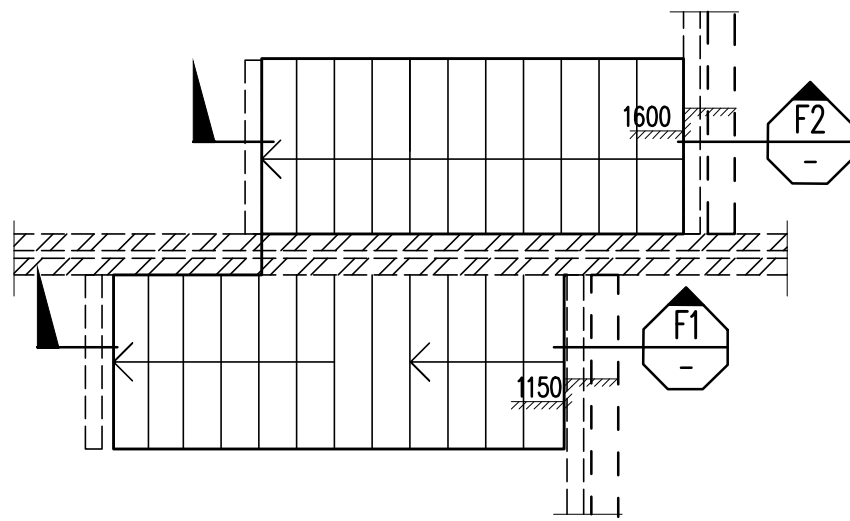

RC STAIR PLAN FROM GROUND FLOOR TO LEVEL 1 DETAIL
SCALE: 1:50

NOTE: NUMBER OF RISERS MAY VARY – REFER TO ARCHITECTS DRAWINGS FOR SETOUT OF STAIRS

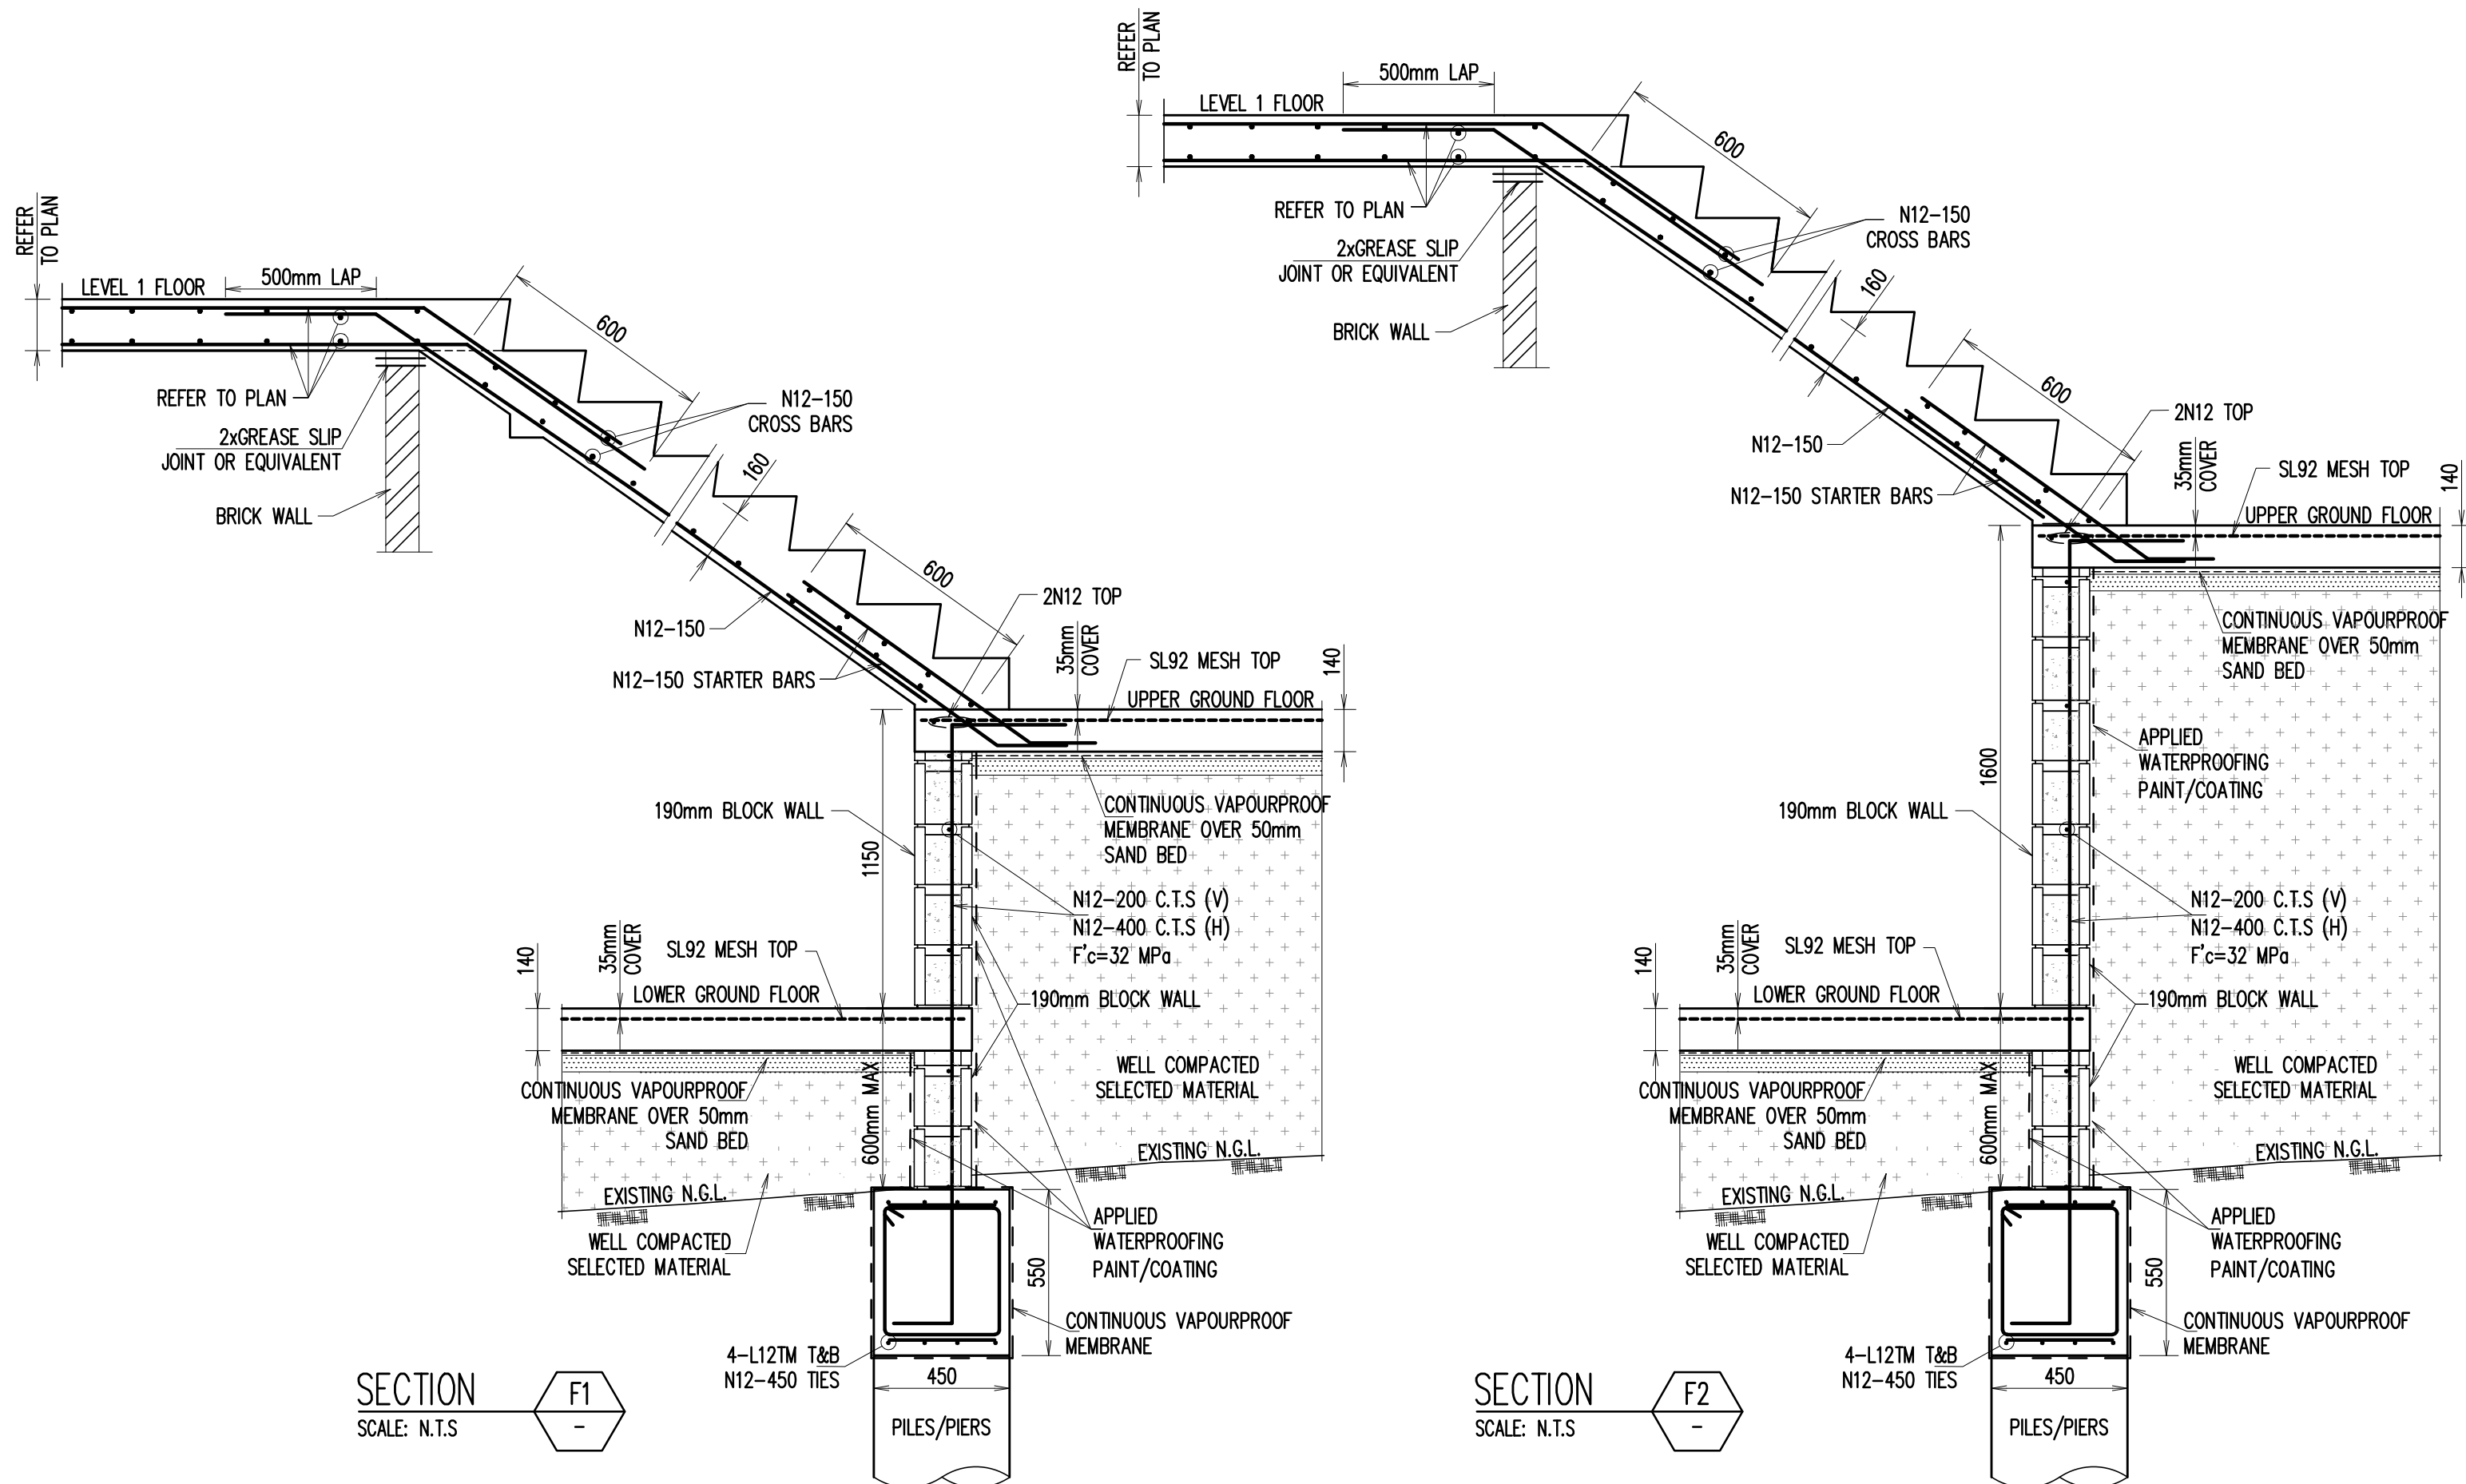

FOR STRUCTURAL NOTES REFER TO DRAWING S000

- NOTES:
- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
 - REFER TO ARCHITECTURAL DRAWINGS FOR ALL FALLS AND LEVELS AND SETOUT DIMENSIONS TO COLUMNS, WALLS ETC. DO NOT SCALE FROM STRUCTURAL DRAWINGS.

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f _c
STAIRS	80mm	20mm	GP	32 MPa

REINFORCEMENT COVER SCHEDULE			
MEMBER	COVER (mm)		
	TOP	BOTTOM	SIDES
STAIRS INTERNAL	35mm	35mm	35mm
STAIRS EXTERNAL	45mm	45mm	45mm

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 465 969 790 /m


CLIENT
Beyond Certification & Sonder Projects Pty Ltd
Reference: 3125176DC
Date: 17/11/2025
PROJECT
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
STAIR DETAILS
SHEET 1


DESIGNED K.T.	DRAWN L.N.	AUTHORISED T.N.
CHECKED T.N.	SCALE: A2	DATE FEB 2025
JOB NO. SLY25-S008	DRAWING NO. S0220	

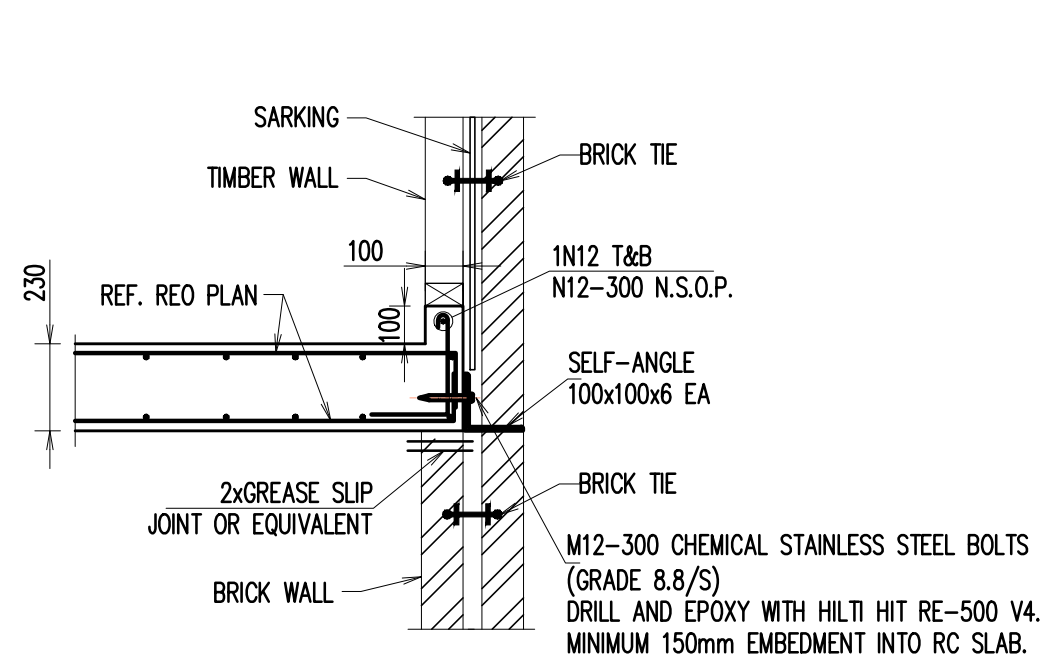


SECTION 1
SCALE 1:20

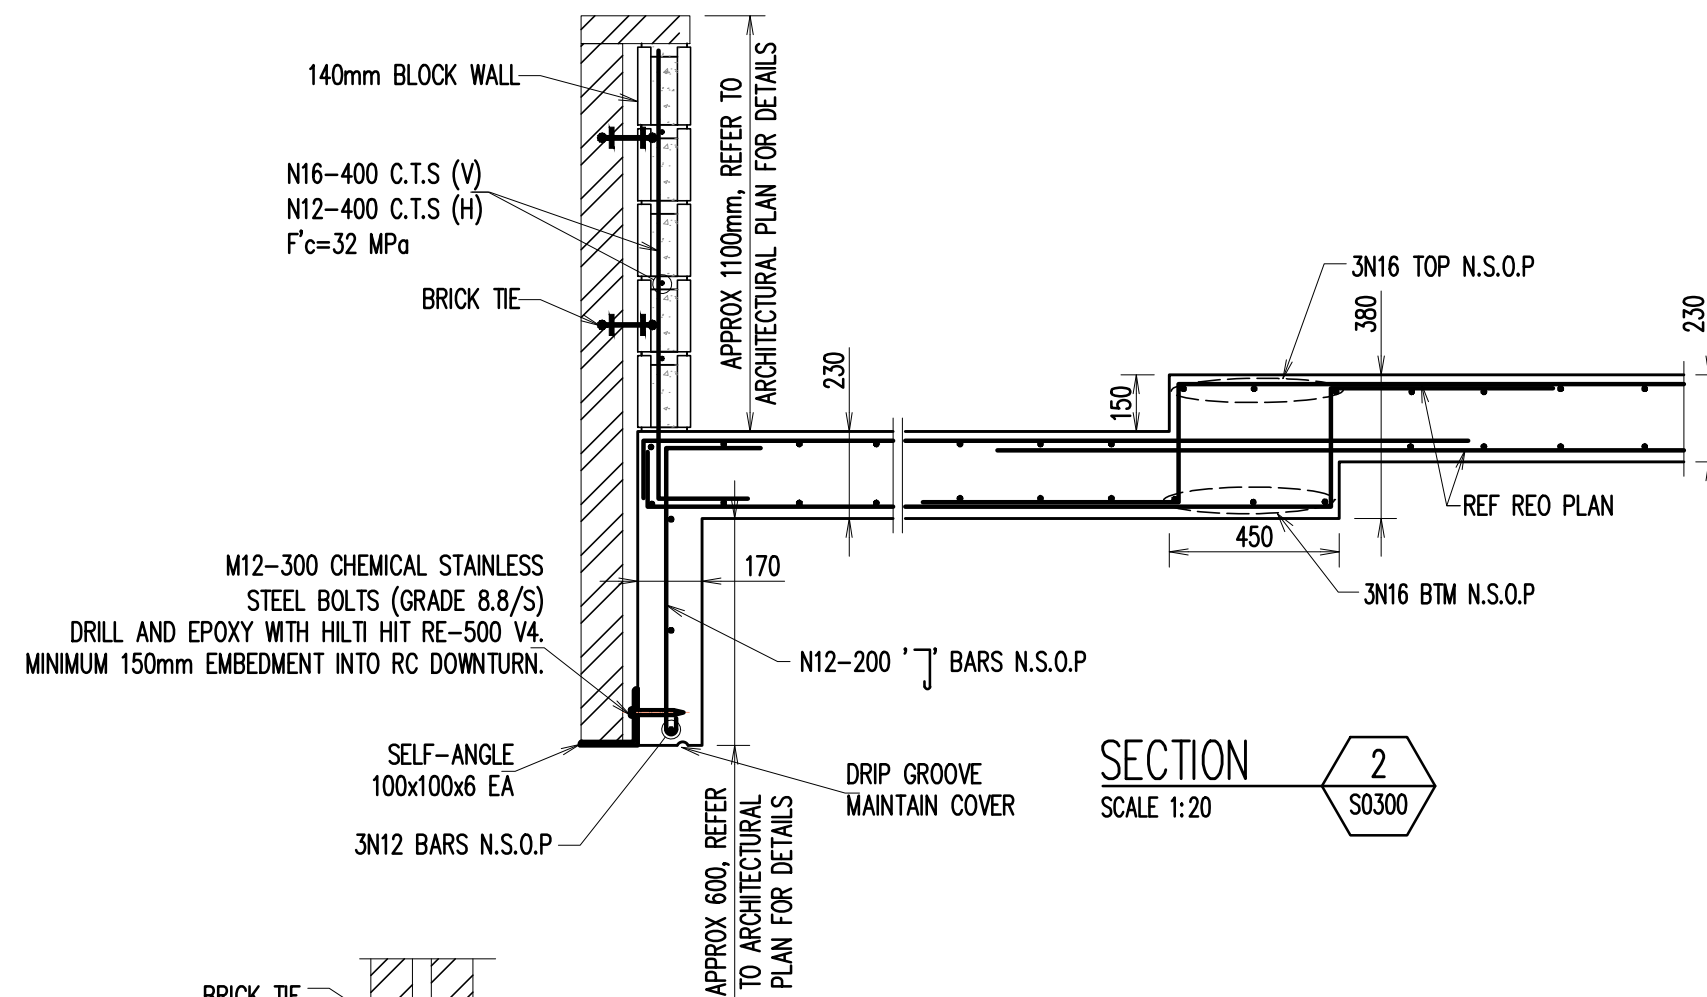


SECTION 2
SCALE 1:20

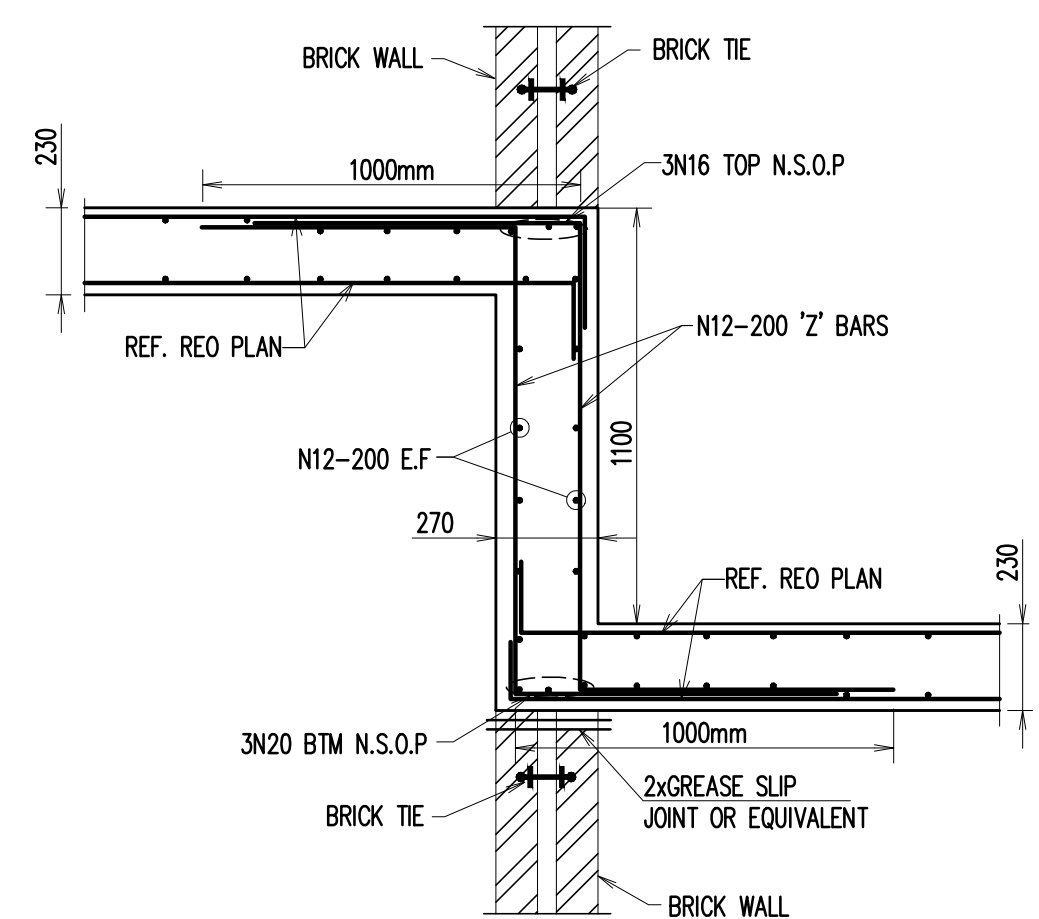


SECTION 3
SCALE 1:20

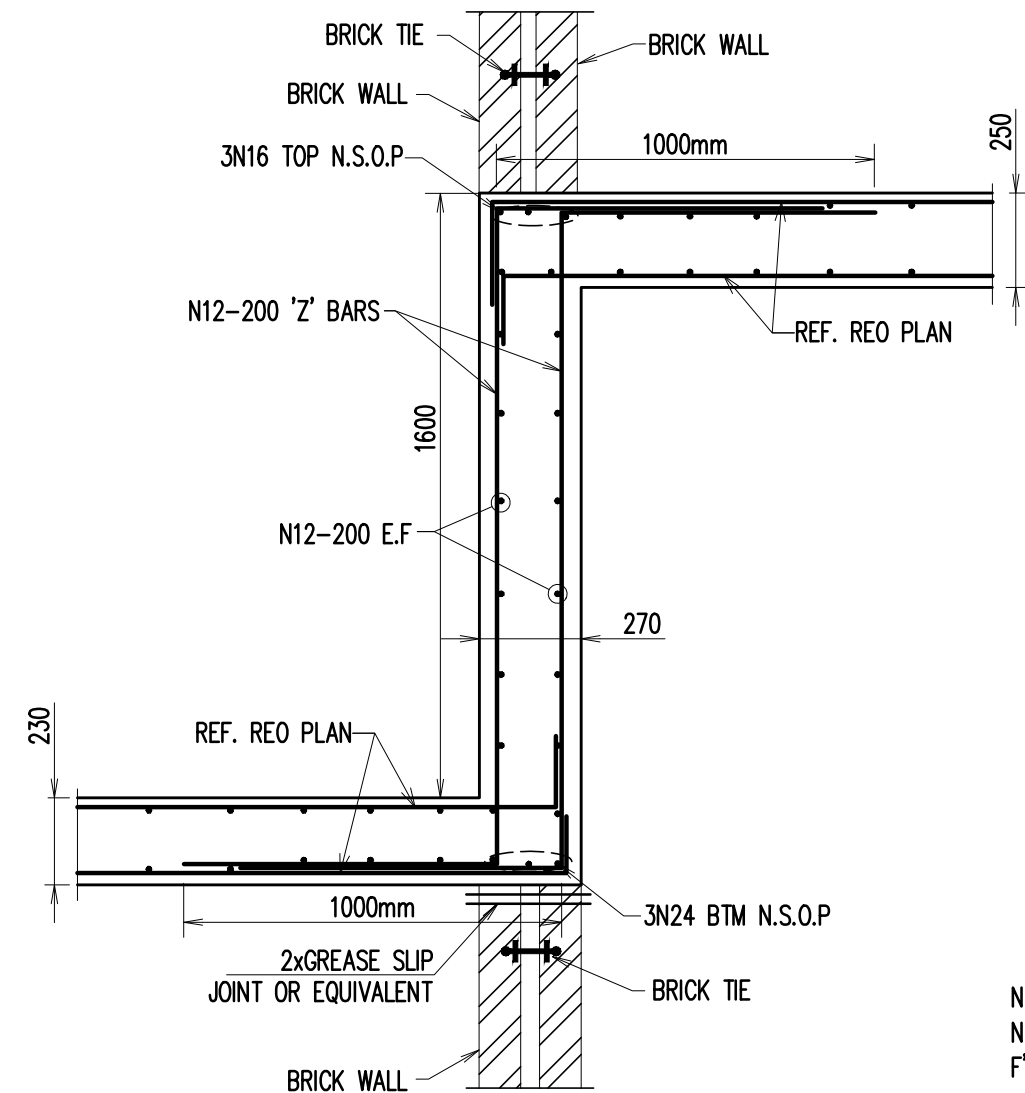


SECTION 4
SCALE 1:20

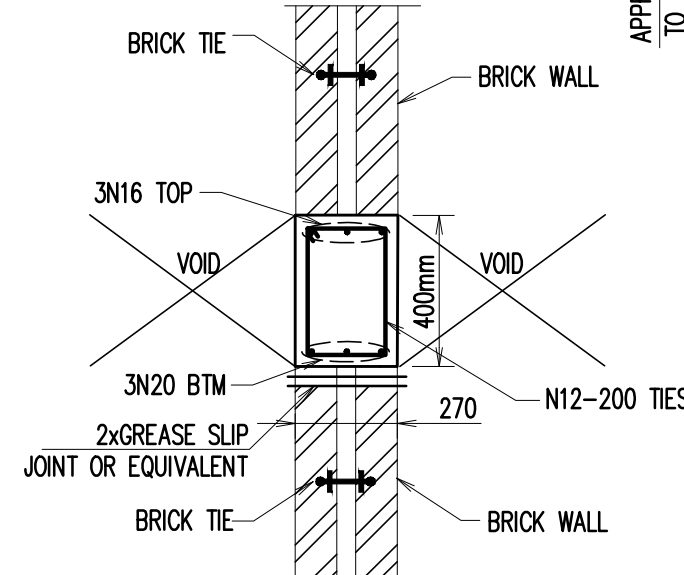

SECTION 5
SCALE 1:20

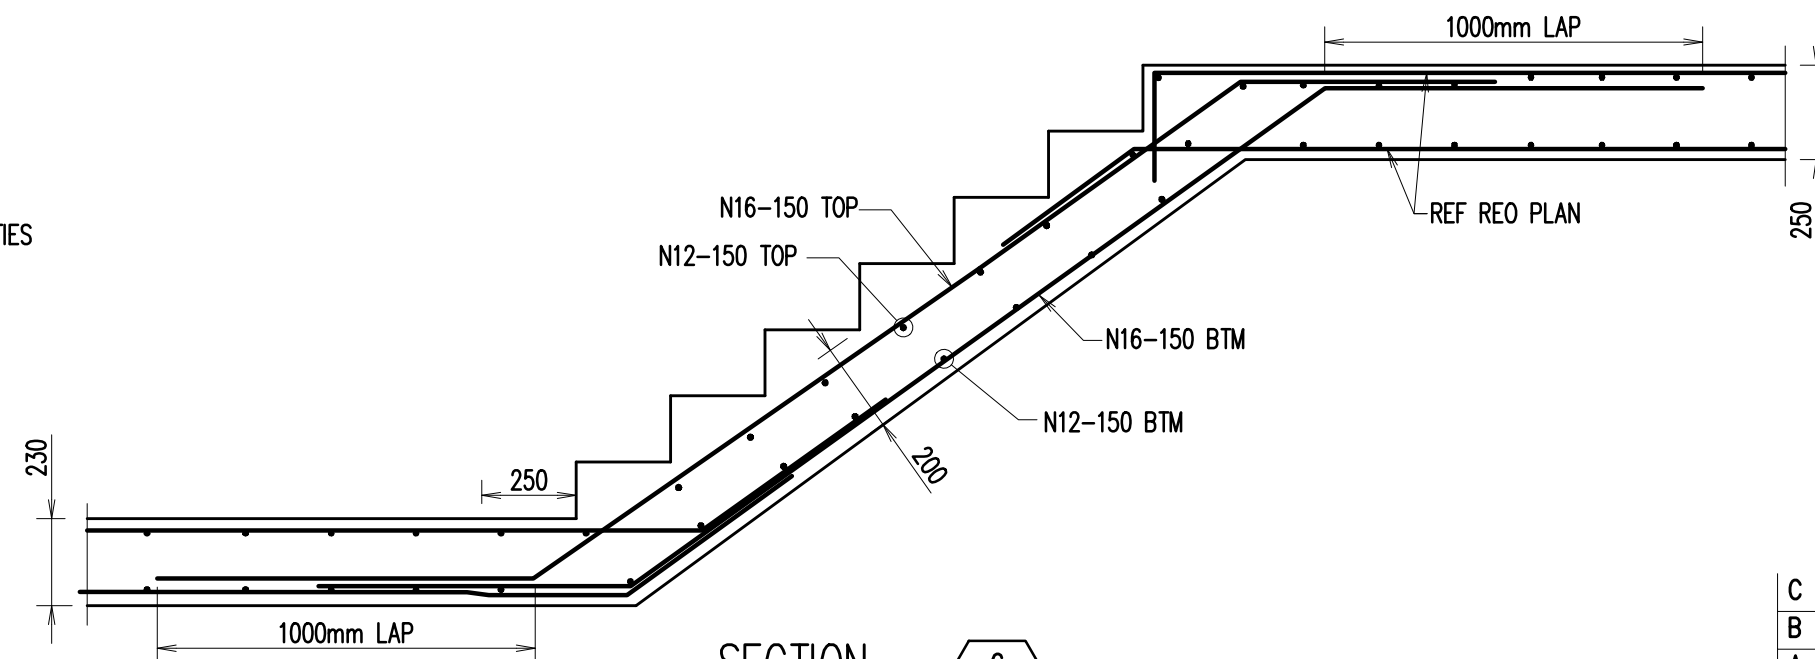

SECTION 6
SCALE 1:20

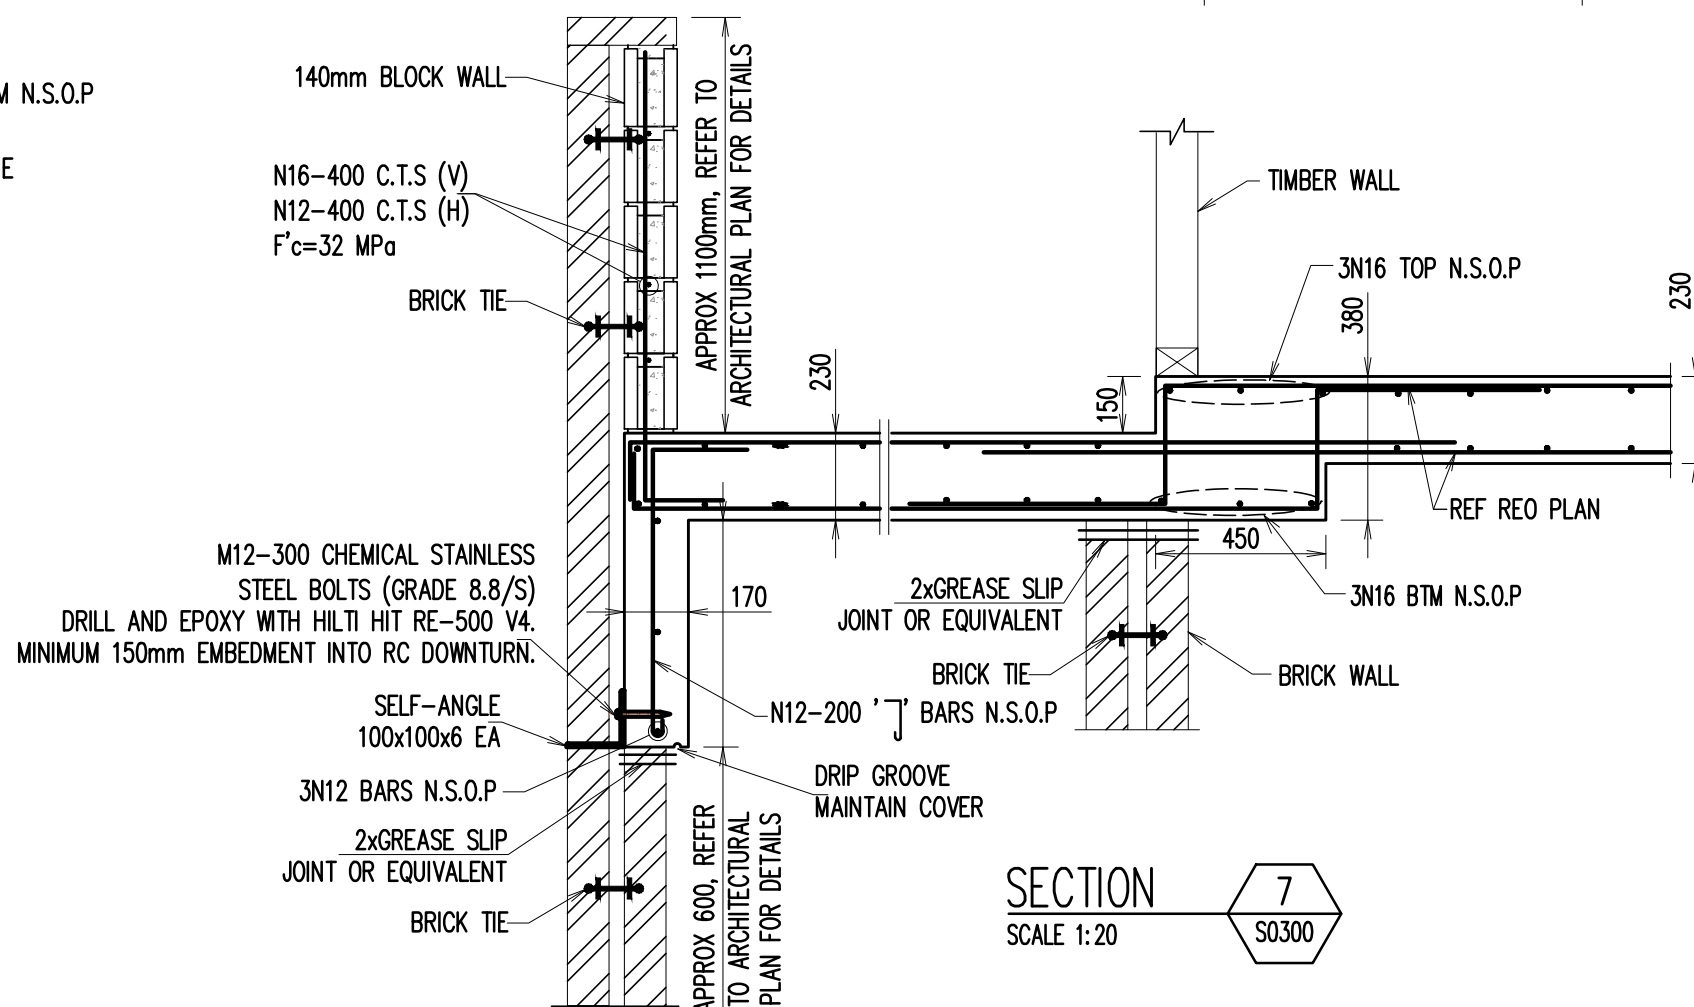

SECTION 7
SCALE 1:20

C	ISSUED FOR C.C	K.T.	L.N.	11.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE





COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /a

CLIENT
Beyond Certification & Sonder Projects Pty Ltd
Reference: 3125176DC
Date: 17/11/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
LEVEL 1 FLOOR SECTIONS
SHEET 1

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE	A2	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO.	S0301	
					A

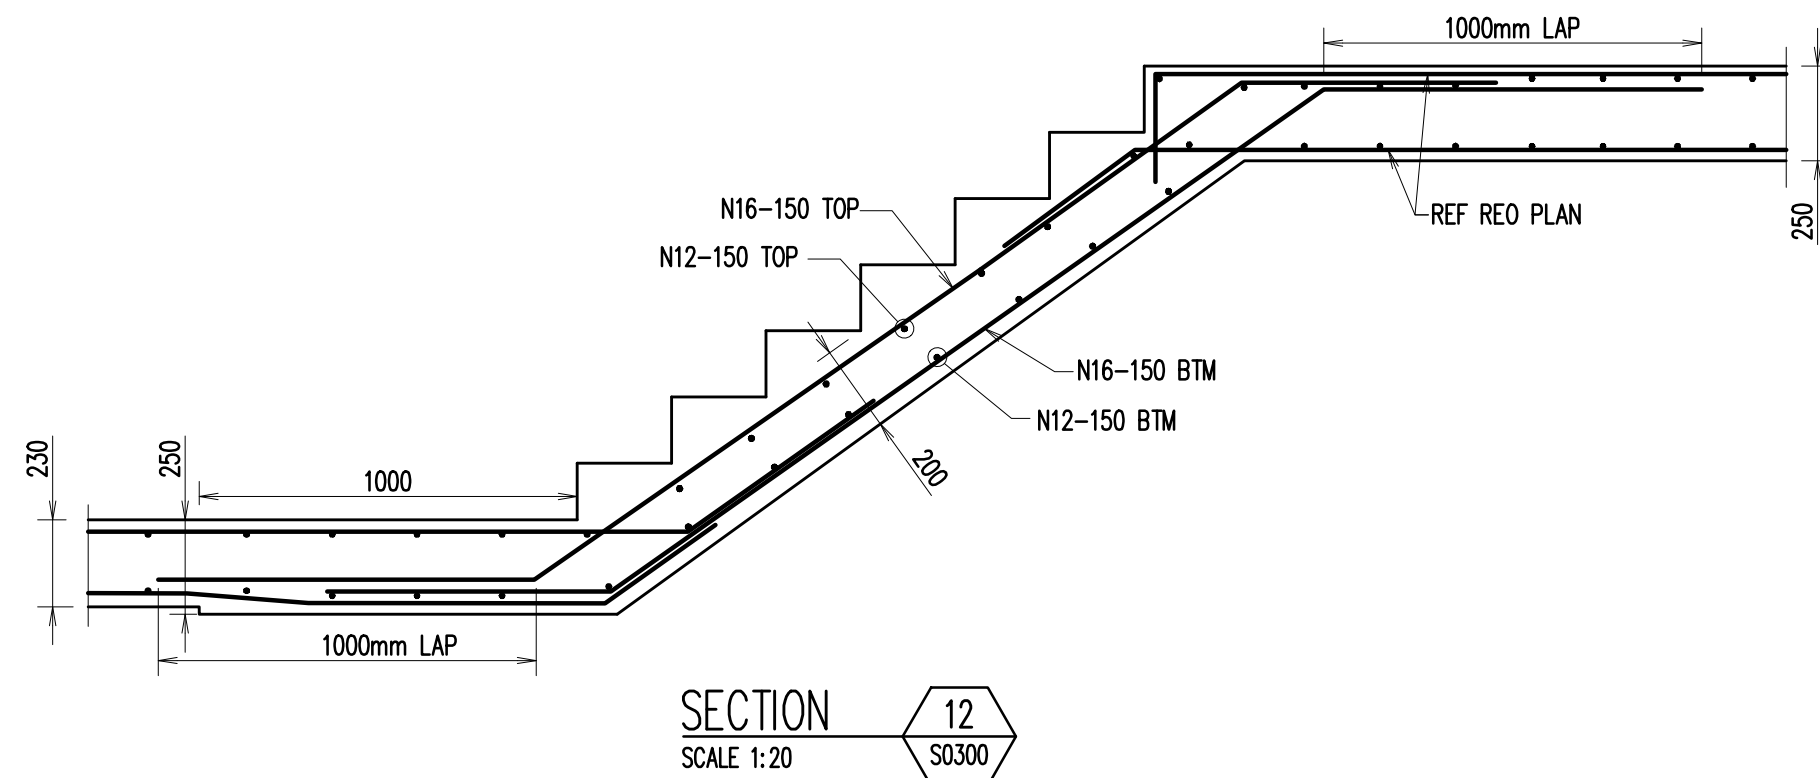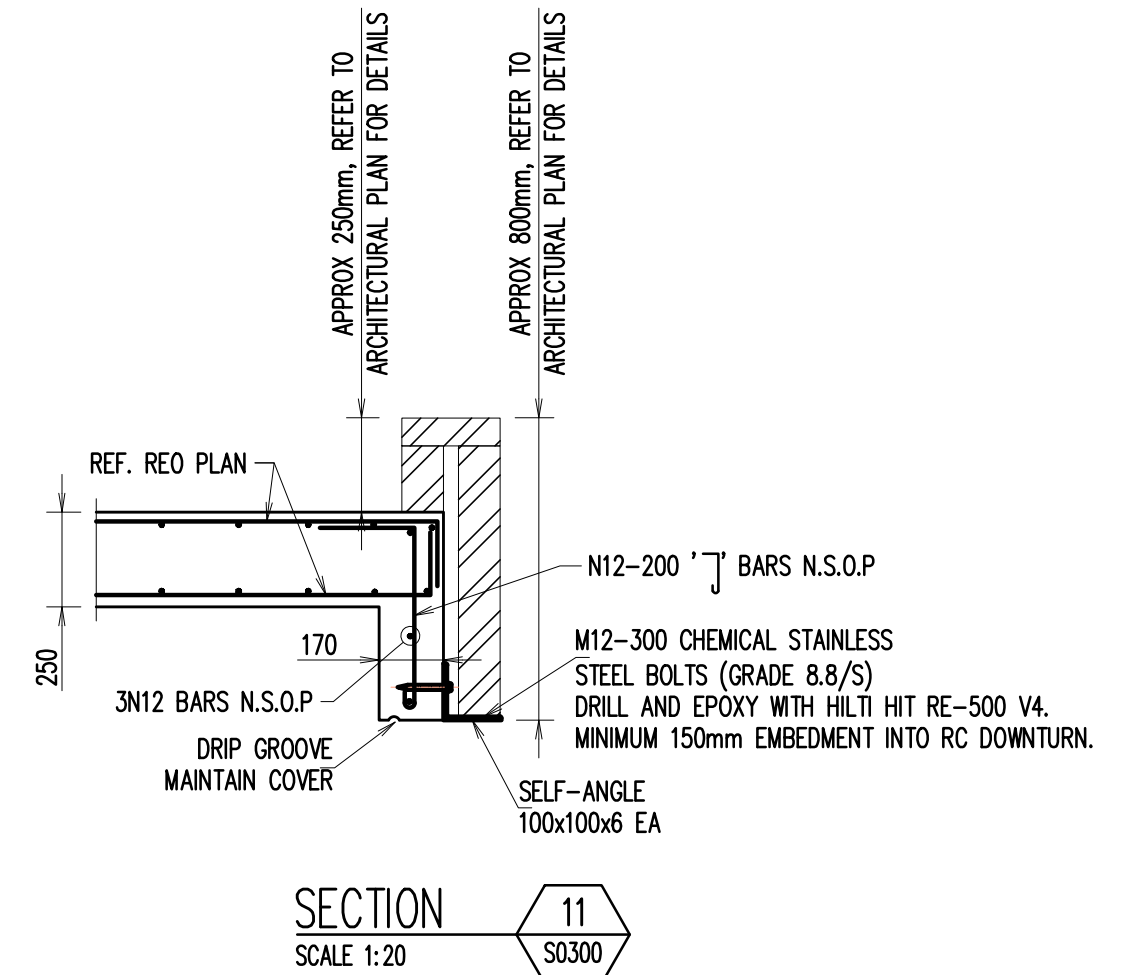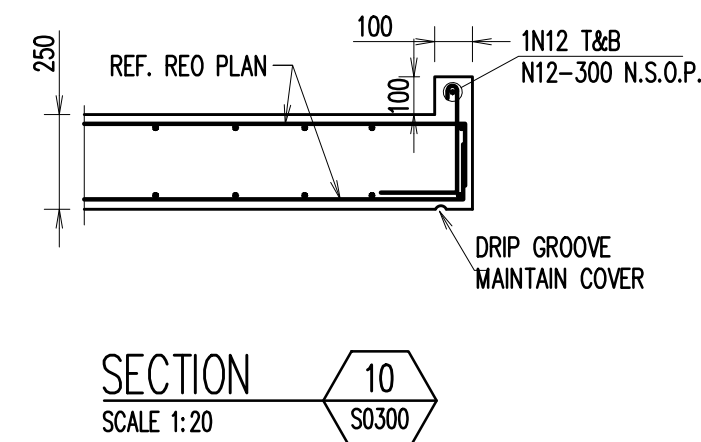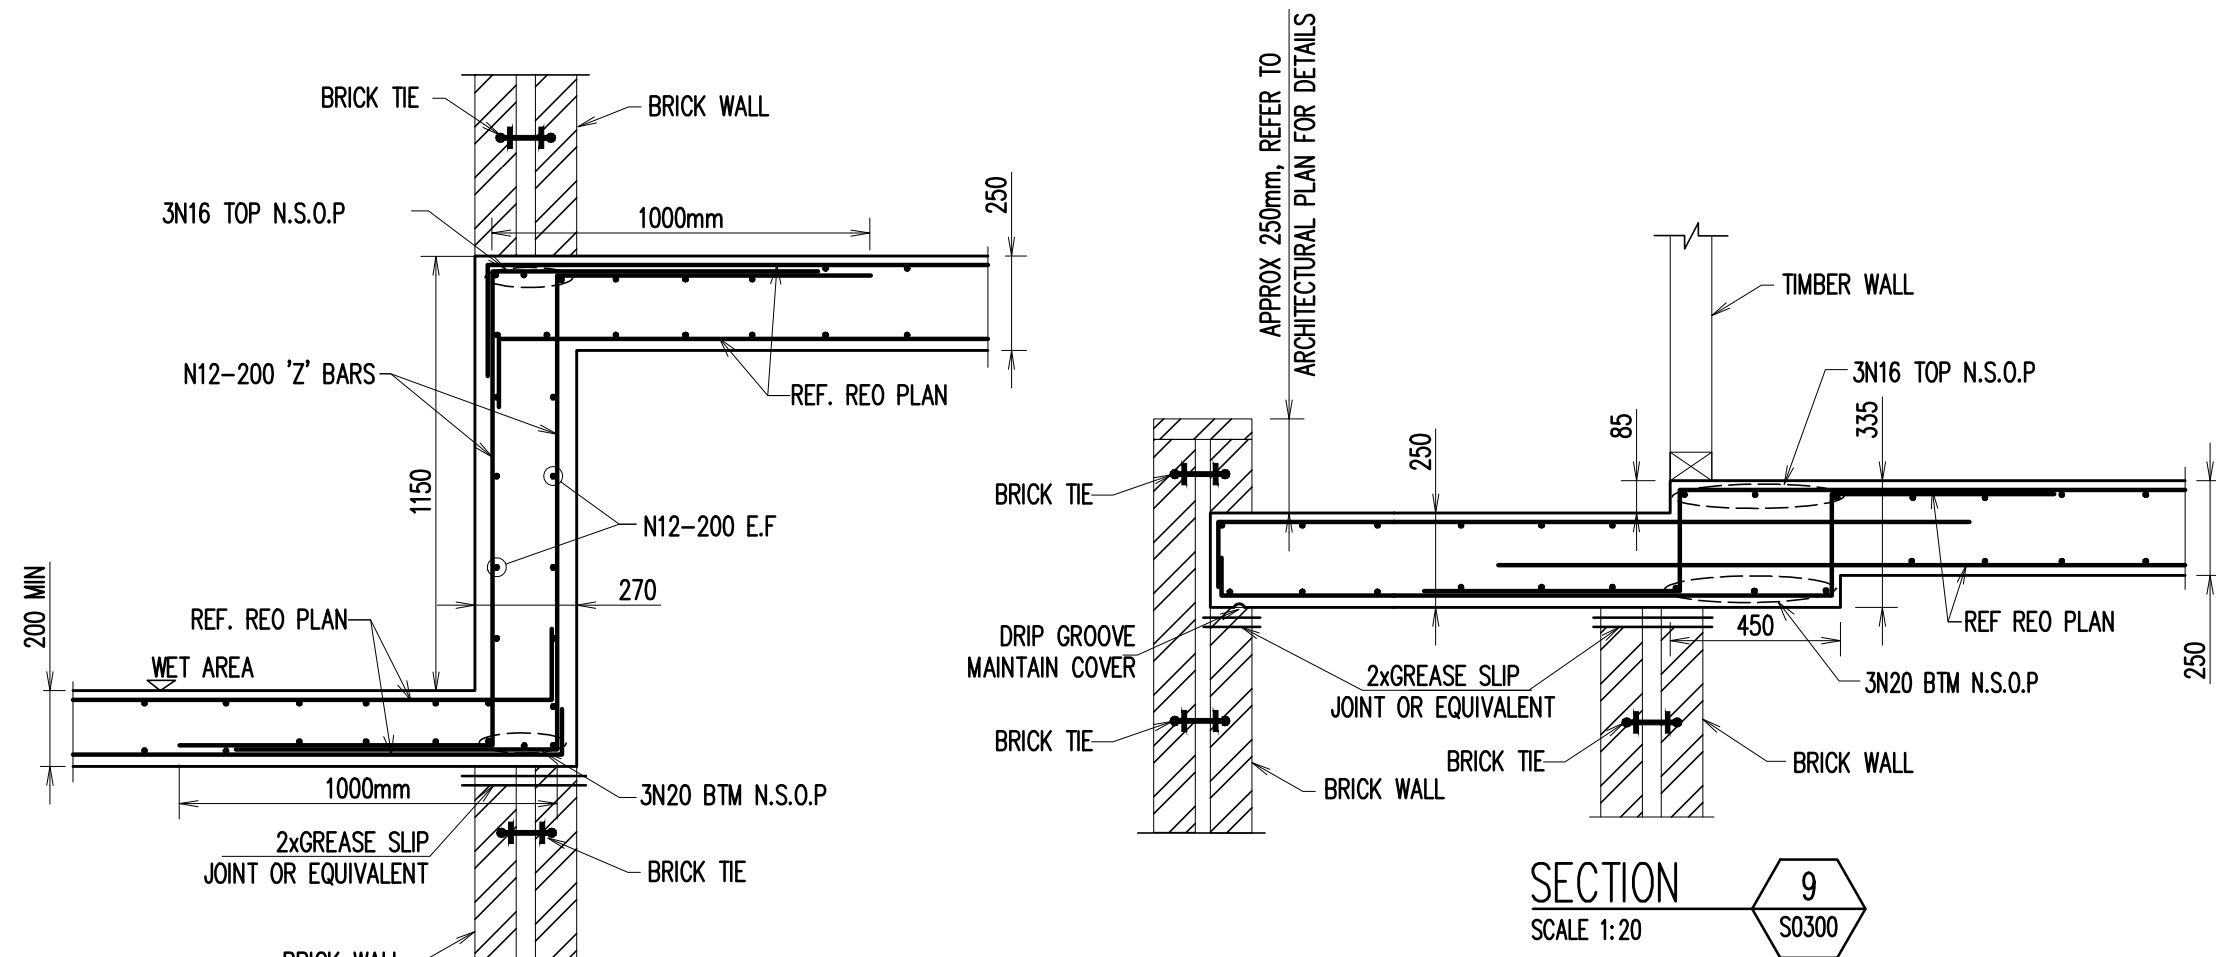

C	ISSUED FOR C.C	K.T.	L.N.	11.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /a

CLIENT

Beyond Certification
Sonder Projects Pty
Ltd
Reference: 3125176DC
Date: 17/11/2024


STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT

DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT		LEVEL 1 FLOOR SECTIONS SHEET 2		
DESIGNED	K.T.	DRAWN	L.N.	
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE
JOB NO.	SLY25-S008		DRAWING NO.	S0302
				A

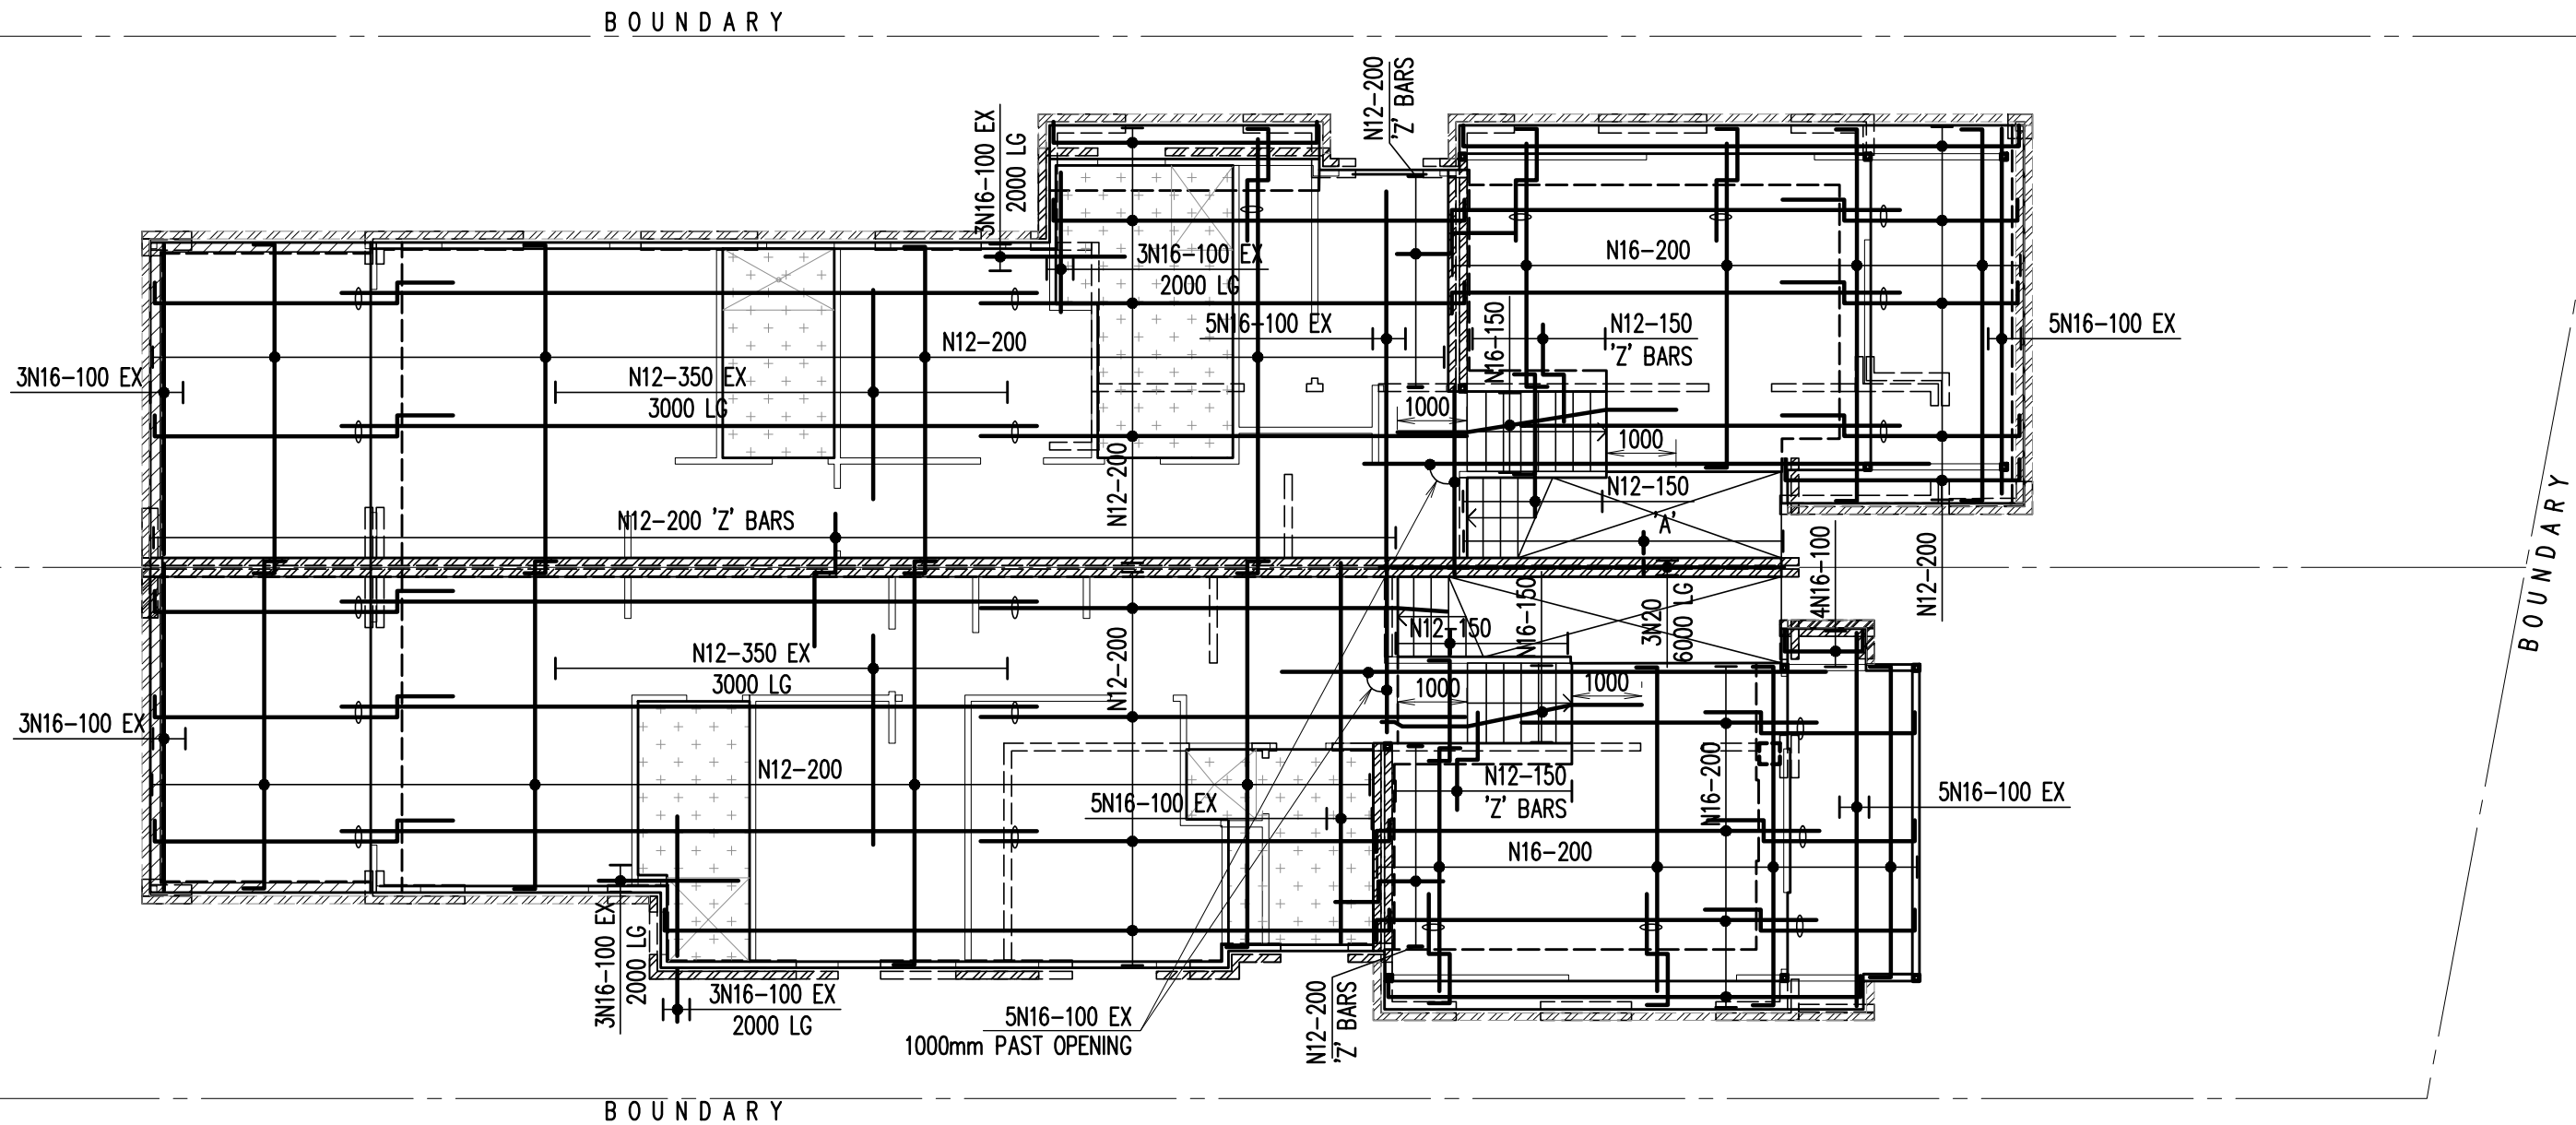


LEVEL 1 FLOOR SLAB - BOTTOM REINFORCEMENT PLAN

SCALE 1:100

NOTES:

1. ENSURE 50 x BAR DIAMETER MINIMUM LAP IS MAINTAINED FOR ALL REINFORCEMENT BARS.

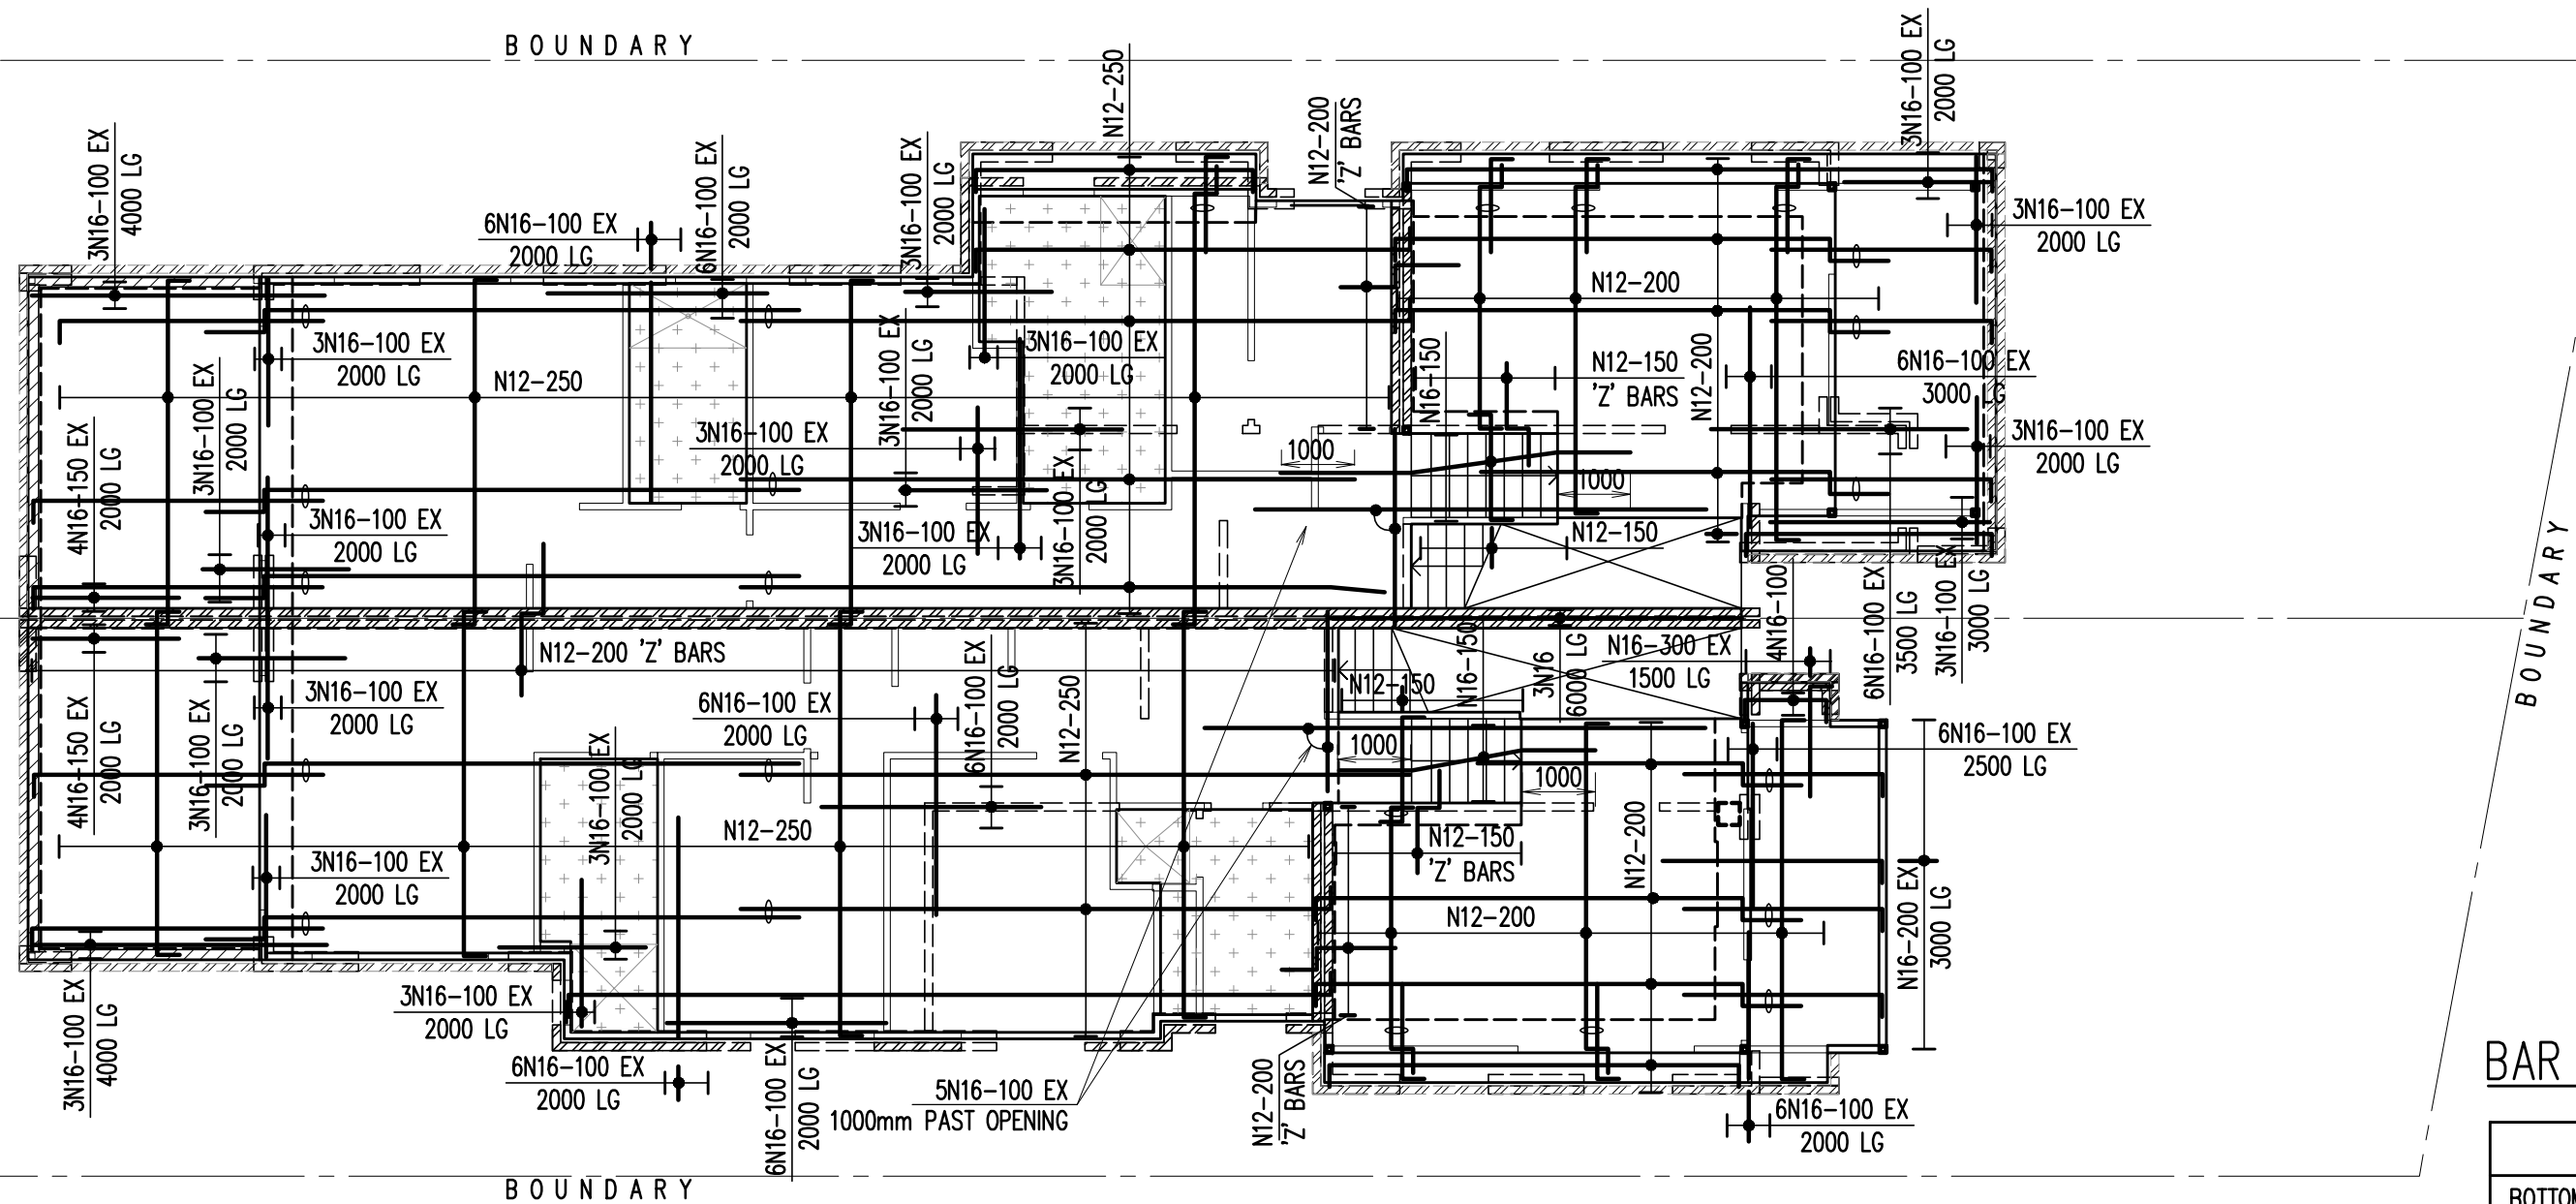

LEVEL 1 FLOOR SLAB - TOP REINFORCEMENT PLAN


SCALE 1:100

NOTES:


1. ENSURE 50 x BAR DIAMETER MINIMUM LAP IS MAINTAINED FOR ALL REINFORCEMENT BARS.

REINFORCEMENT NOTES:

1. TYPICAL TRIMMERS AT PENETRATION DETAIL:

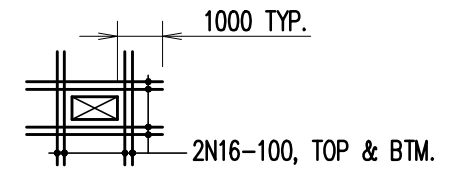

2. TYPICAL TRIMMERS AT RE-ENTRANT CORNERS

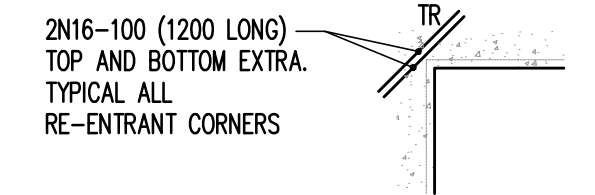

3. PROVIDE TOP & BOTTOM BARS ON ALL WALL OPENINGS AS PER THE SCHEDULE BELOW:

LENGTH OF OPENING (m)	BOTTOM BAR	TOP BAR
1.0 - 1.8	2N16	2N16
1.8 - 2.5	2N20	2N20
2.5 - 3.5	2N24	2N24

TIE SCHEDULE		
TYPE		TIE TOTAL & TIE ARRANGEMENT
A	N12-200 TIES CLOSED TOP & BOTTOM BARS AS SHOWN ON REQ PLAN	

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT
Beyond Certification Pty Ltd
Reference: 3025176DC
Date: 17/10/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT
LEVEL 1 FLOOR SLAB, T&B REINFORCEMENT PLAN

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO.	S0303	

A

BAR LAYING SEQUENCE

	DIRECTION	LAYING ORDER
BOTTOM	HORIZONTAL '←'	2ND
	VERTICAL '↑'	1ST
TOP	HORIZONTAL '→'	3RD
	VERTICAL '↓'	4TH

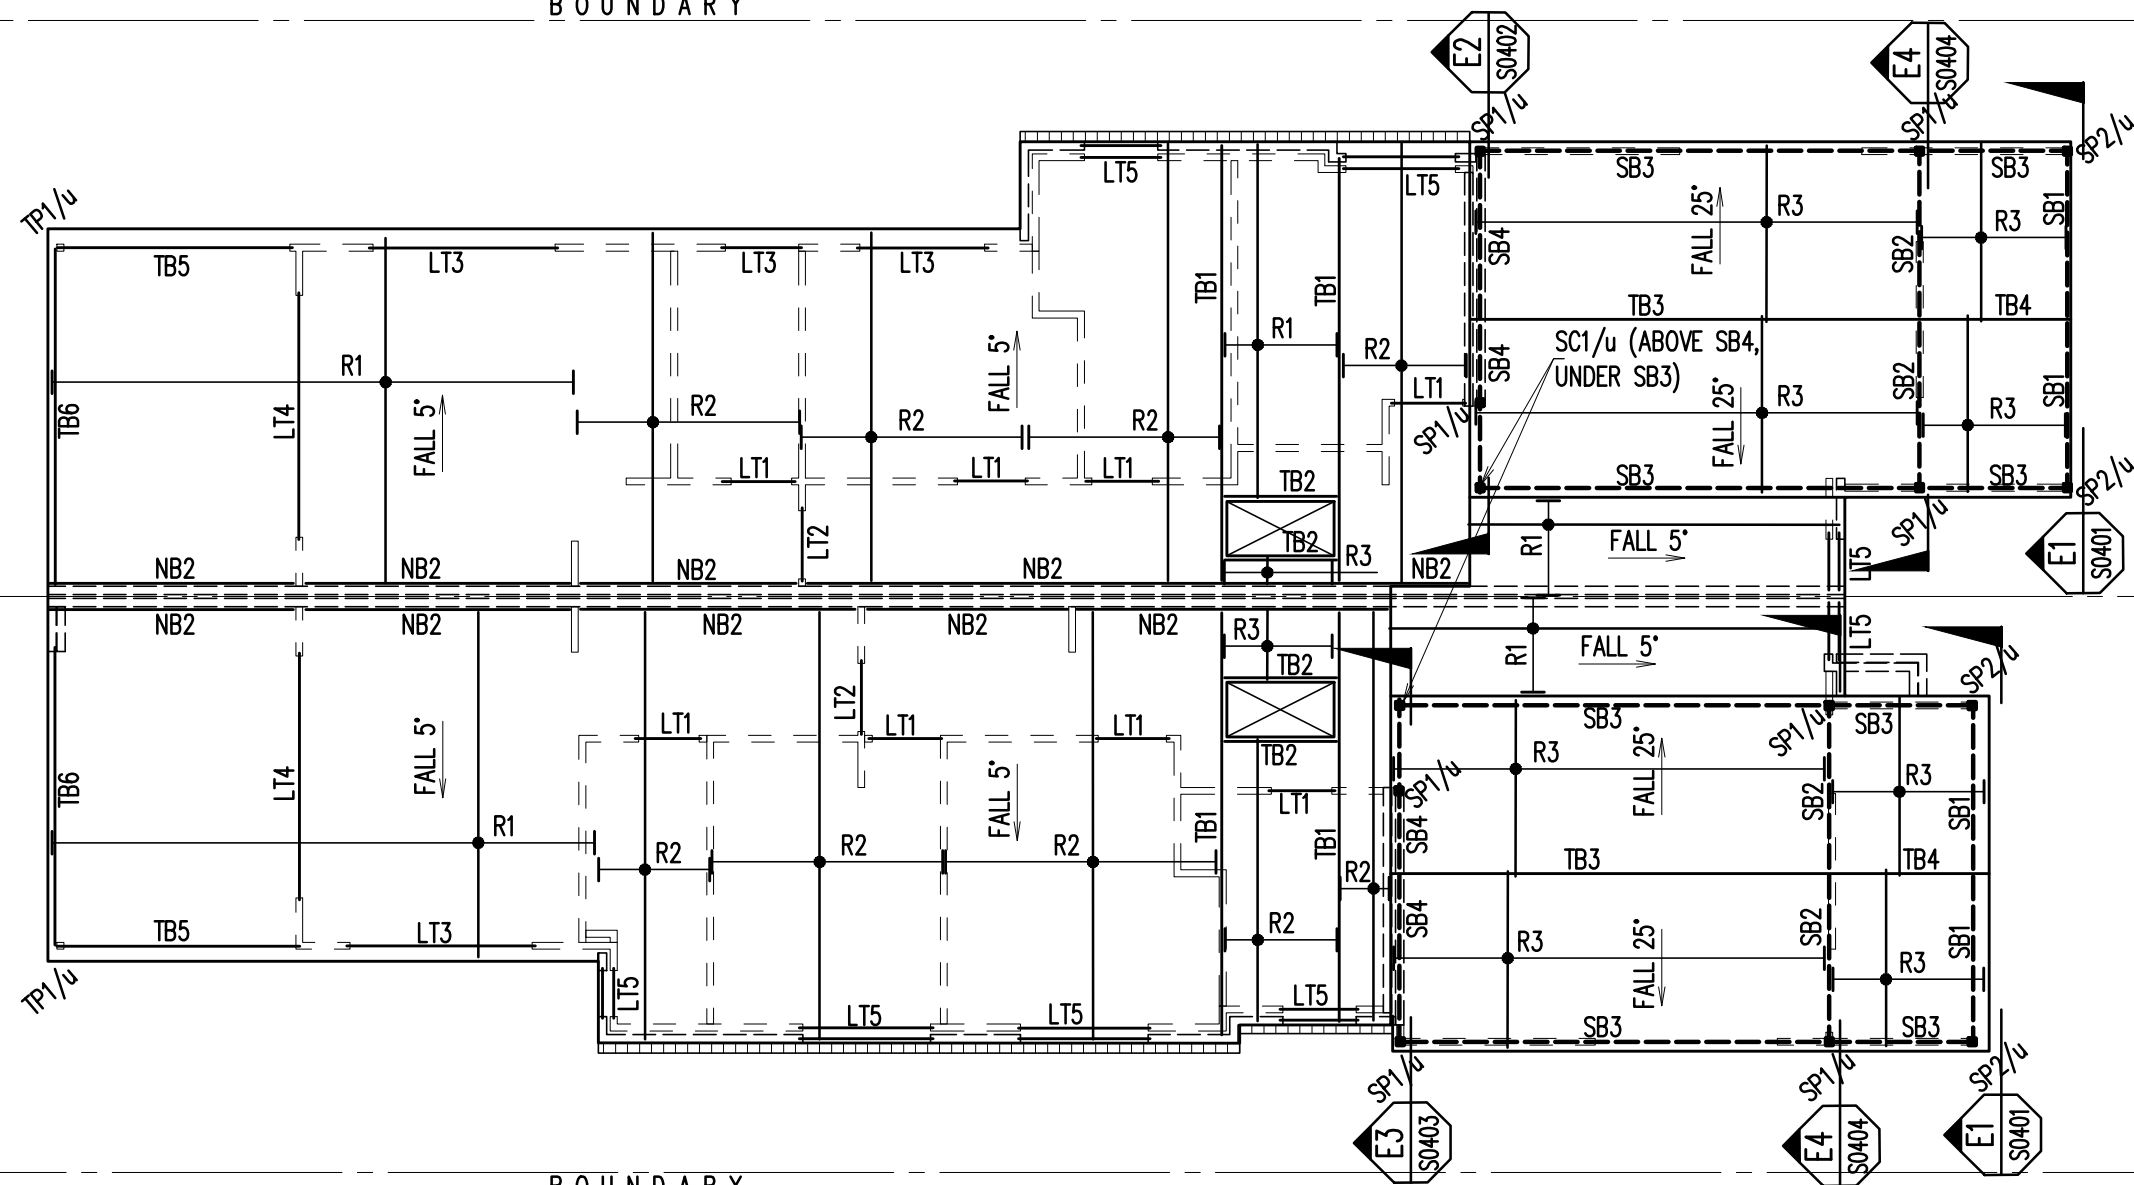

ROOF TIMBER LAYOUT PLAN TO BE BUILT BASED ON AS 1684.2 AND AS1720.1

SCALE 1:100

NOTES:

1. DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURALS.
2. REFER TO ARCHITECTURAL DRAWINGS FOR ALL SETOUT, LEVELS, FALLS ETC.
3. ASSUME ROOFING MATERIAL IS METAL STEEL COLORBOND.
4. INTERNAL WALLS ARE CONTINUOUS TO SUPPORT ROOF STRUCTURE.

NOTE:

ASSUME MAXIMUM 8mm
DEFLECTIONS FOR WINDOW/DOOR
OPENING

NOTE:

ALL WEATHER EXPOSED
TIMBER MEMBERS MUST BE H3
LEVEL OF TREATMENT.

NOTE:

EXTERNAL STUD WALLS TO BE SPACED AT 450mm C/C
USING LVL HYSpan (1x TIMBER STUD WALL) (FROM
LEVEL 1 FLOOR LEVEL TO ROOF LEVEL TO BE ADOPTED)

NOTE:

INTERNAL STUD WALLS TO BE SPACED AT 450mm C/C
FOR SINGLE STUD WALL OR 600mm FOR DOUBLE STUD
WALL (USING LVL HYSpan) (FROM LEVEL 1 FLOOR LEVEL
TO ROOF LEVEL TO BE ADOPTED)

MEMBERS SCHEDULE

MARK	TYPE	SIZE
R1	TIMBER RAFTER	240 x 63 HYSpan LVL @450 C/C
R2	CONTINUOUS TIMBER RAFTER	190 x 45 MGP10 @450 C/C
R3	TIMBER RAFTER	140 x 45 MGP10 @450 C/C
SB1	STEEL BEAM	200 PFC
SB2	STEEL BEAM	REFER TO PLAN S0404, DETAIL 'E4'
SB3	CONTINUOUS STEEL BEAM	200 PFC
SB4	CONTINUOUS CANTILEVERED STEEL BEAM	REFER TO PLAN S0402, S0403 DETAIL 'E2, E2A, E3, E3A'
TB1	TIMBER BEAM WITHIN ROOF SPACE	2/200 x 45 HYSpan LVL
TB2	TIMBER BEAM WITHIN ROOF SPACE	200 x 45 HYSpan LVL
TB3	TIMBER BEAM WITHIN ROOF SPACE	2/300 x 63 HYSpan LVL
TB4	TIMBER BEAM WITHIN ROOF SPACE	300 x 45 HYSpan LVL
TB5	TIMBER BEAM WITHIN ROOF SPACE	2/240 x 45 HYSpan LVL
TB6	TIMBER BEAM WITHIN ROOF SPACE	2/240 x 45 HYSpan LVL
LT1	TIMBER LINTEL BEAM	2/90 x 45 HYSpan LVL
LT2	TIMBER LINTEL BEAM	90 x 45 HYSpan LVL
LT3	TIMBER LINTEL BEAM	2/200 x 45 HYSpan LVL
LT4	TIMBER LINTEL BEAM	200 x 45 HYSpan LVL
LT5	STEEL LINTEL BEAM	GALINTEL TRADITIONAL-T- BAR 250x10 WEB 200x10 FLANGE
NB1	TIMBER NAILING BEAM	240 x 45 HYSpan LVL WITH M12-300 STAINLESS STEEL ANCHOR BOLTS (GRADE 8.8/S). MINIMUM 80mm EMBEDMENT INTO BRICK WALL
NB2	TIMBER NAILING BEAM	200 x 45 HYSpan LVL WITH M12-300 STAINLESS STEEL ANCHOR BOLTS (GRADE 8.8/S). MINIMUM 80mm EMBEDMENT INTO BRICK WALL
SP1	STEEL POST	100 x 100 x 9 S.H.S
SP2	HOT DIPPED GALVANISED STEEL POST	100 x 100 x 9 S.H.S
SC1	STUB COLUMN	100 x 100 x 9 S.H.S
TP1	TIMBER POST	115 x 115 F17 SEASONED HARDWOOD WITH LEVEL H3 OF TREATMENT

STRUCTURAL STEEL NOTES:

GENERAL

- S1 ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AUSTRALIAN STANDARDS.
ERECTOR BRACING AND STABILITY SHALL BE IN ACCORDANCE WITH AS 1998 AND IS THE RESPONSIBILITY OF THE CONTRACTOR.

COMPONENT	AUS. STAND.	GRADE
HOT ROLLED SECTIONS (UB, UC, BT, CT, PFC, TFB, EA, UA)	AS 3679.1:2010	300 PLUS
PLATE AND FLOORPLATE	AS 3678:2011	250
HOT ROLLED BARS: (FLATS, SQUARES AND ROUNDS)	AS 3679.1:2010	300 PLUS

BOLTING

- S1 BOLTS SHALL COMPLY WITH THE FOLLOW

CATEGORY	AUS. STAND	BOLT GRADE	METHOD OF INSTALLATION (IN ACCORD. WITH AS 4100:2020)
8.8/S	AS 1252:2016	8.8	SNUGTIGHT

WELDING

- S1 ALL WELDING SHALL BE IN ACCORDANCE WITH AS 1554.1:2014 AND AS1554.5:2004
UNLESS NOTED OTHERWISE:
+ ALL WELDS SHALL BE 10mm CONTINUOUS FILLET WELDS
+ ALL BUTT WELDS SHALL BE COMPLETE PENETRATION BUTT WELDS
+ ALL WELDS SHALL BE CATEGORY SP
+ ELECTRODES SHALL BE E48XXW50X
S3 ALL WELDS SHALL BE MADE IN THE SHOP OR OTHERWISE APPROVED BY THE ENGINEER.
S4 ALL WELDS SHALL BE SUBJECTED TO INSPECTION AND TESTING IN ACCORDANCE WITH AS 1554.1:2014 AND AS1554.5:2004 THE EXTENT OF NON-DESTRUCTIVE EXAMINATION SHALL NOT BE LESS THAN THE FOLLOWING.

WELD CAT	WELD TYPE	EXTENT OF NON-DESTRUCTIVE EXAMINATION		
		VISUAL SCANNING	VISUAL EXAMINATION	OTHER METHODS
SP	FILLET WELD	100%	25%	NIL
SP	BUTT WELD	100%	50%	NIL

LEGEND :

- DENOTES BRICK WALL UNDER ONLY
--- DENOTES TIMBER WALL OVER ONLY

TIMBER NOTES

- T1 ALL TIMBER DESIGN AND CONSTRUCTION TO BE AS1720 U.N.O.
- T2 AS 1684 IS RELEVANT TO DOMESTIC CONSTRUCTION IN SHELTERED LOCATIONS.
- T3 SOFTWOOD MINIMUM GRADE F7 U.N.O.
HARDWOOD MINIMUM GRADE F11 U.N.O.
- T4 EXTERNAL TIMBER TO BE EITHER HARDWOOD DURABILITY CLASS I OR II OR IMPREGNATED GRADE F7. PRESSURE TREATED TO AS1684 AND RE-DRILLED PRIOR TO USE. SUPPLEMENTARY TREATMENT SHALL BE APPLIED TO ALL CUT SURFACES. PROVIDE DOCUMENTATION.
- T5 ALL BOLTS IN TIMBER CONSTRUCTION TO BE MIN. M16 U.N.O. BOLT HOLES TO BE DRILLED EXACT SIZE. WASHERS UNDER HEADS AND NUTS TO BE AT LEAST 2.5 TIMES BOLT DIAMETER.
- T6 FINISHED TIMBER SIZES:
SEASONED SOFTWOOD +5,-0mm
UNSEASONED SOFTWOOD F7+3,-3mm
SEASONED HARDWOOD +2,-0mm
UNSEASONED HARDWOOD -3,-3mm
(SEE ALSO CLAUSE 1.6.2 IN AS 2082)
- T7 ALL TIMBER JOINTS AND NOTCHES TO BE 100mm MINIMUM FROM LOOSE KNOTS. SEVERE SLOPING GRAIN, GUM VEINS OR OTHER MINOR DEFECTS.
- T8 BLOCKING IS NOT REQUIRED FOR JOISTS SPANNING LESS THAN 3m. FOR JOISTS SPANNING GREATER THAN 3m AND LESS THAN 4.2m PROVIDE ONE ROW OF BLOCKING MID-SPAN. FOR JOISTS SPANNING GREATER THAN 4.2m AND UP TO 6.0m PROVIDE TWO ROWS OF BLOCKING AT 1/3 POINTS. FOR DEEP JOISTED FLOORS WHERE A CONTINUOUS TRIMMING JOIST IS NOT PROVIDED AT END OF JOISTS. BLOCKING IS REQUIRED AT 1800 MAXIMUM CENTERS. (REFER TO AS 1684)

PROTECTIVE COATINGS

- S1 ALL STEELWORK SHALL BE GIVEN A PROTECTIVE COATING IN ACCORDANCE WITH AS 2312.1:2014
S2 EXTERIOR ATMOSPHERIC CORROSION CATEGORY
S3 UNLESS OTHERWISE APPROVED COATING SYSTEMS FOR NON-DECORATIVE STEELWORK SHALL BE AS FOLLOWS:

EXTERIOR STEELWORK SURFACE PREPARATION: PRIMER:	ABRASIVE BLAST CLEAN CLASS 2 1/2 125 µm DULUX DUREZINC 190
---	---

COMPLY WITH ALL MANUFACTURERS RECOMMENDATIONS AND REQUIREMENTS AND CONFIRM COMPATIBILITY OF PRIMER WITH ANY TOP COATS PROPOSED BY THE ARCHITECT.

STRUCTURAL STEELWORK NOTES

1. UNLESS NOTED OTHERWISE
(A) ALL FILLET WELDS TO BE CATEGORY GP.

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL


ARCHITECT	Zhin Architects Pty Ltd Suite 1, Level 2 2 Rowe Street Eastwood, NSW 2122 +61 2 8969 8888 /p info@zhinarchitects.com.au /e www.zhinarchitects.com.au /w 26 495 969 790 /m
-----------	--

CLIENT	Beyond Certification Ltd Reference: 3125176C Date: 17/11/2025
--------	--


PROJECT	STRUCTURAL LINK Pty Ltd OFFICE: 02 8021 2626 ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046 POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
---------	---

DUAL OCCUPANCY 3 JOHNSON AVE, KIRRAWEE, NSW 2232
--


SUBJECT			ROOF SLAB PLAN AND SECTIONS		N
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.			DRAWING NO.		
SLY25-S008			S0400		A

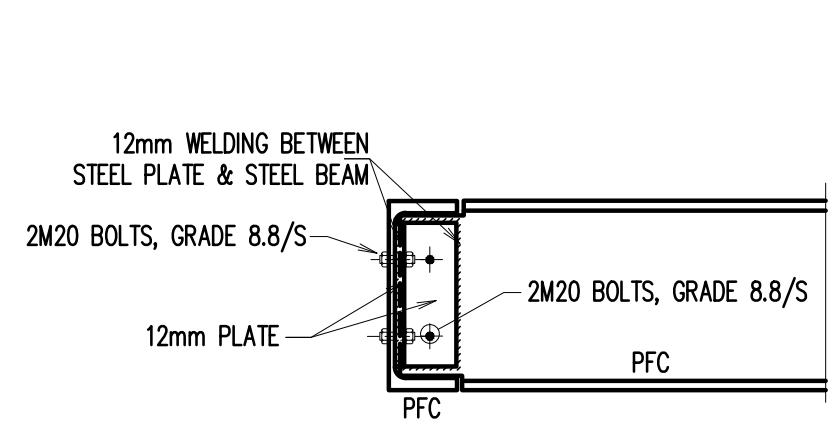


CONNECTION STEEL BEAM 'PFC TO PFC' DETAIL
SCALE: 1:10

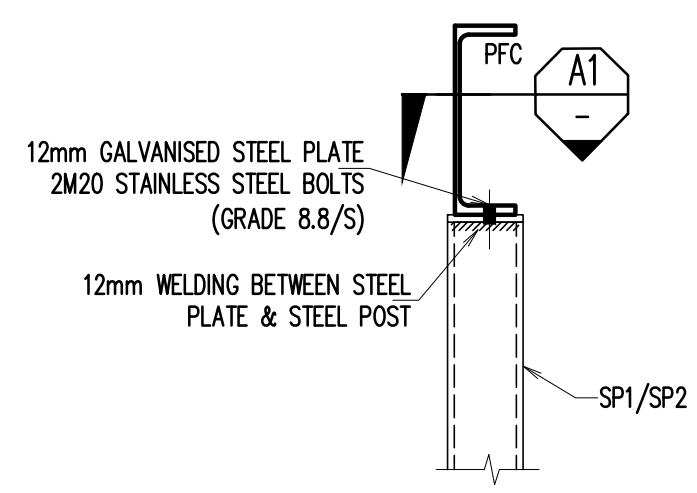


TYPICAL CONNECTION STEEL POST 'SP1'
TO STEEL BEAM 'PFC' DETAIL
N.T.S (NOT TO SCALE)

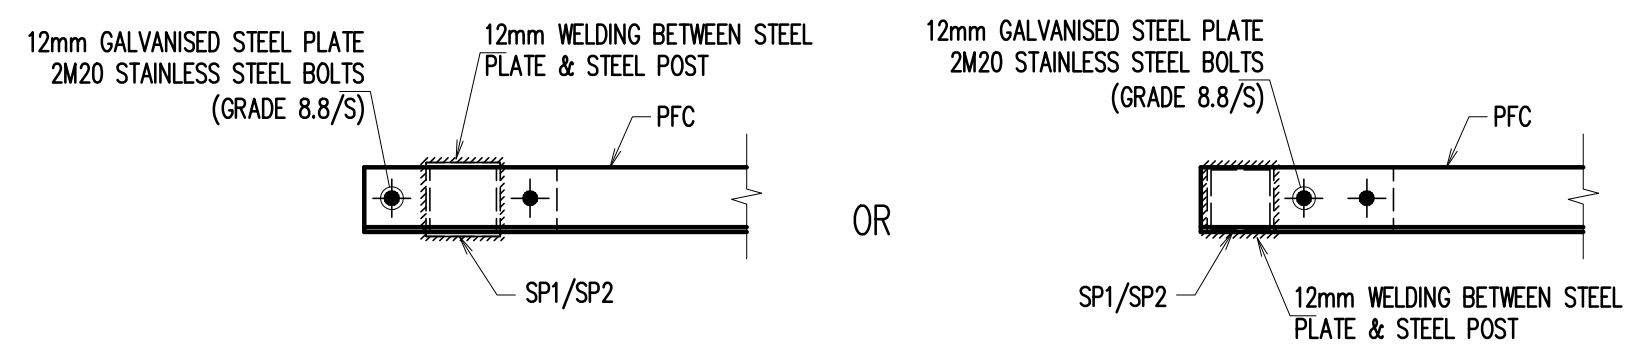

SECTION A1
SCALE: N.T.S

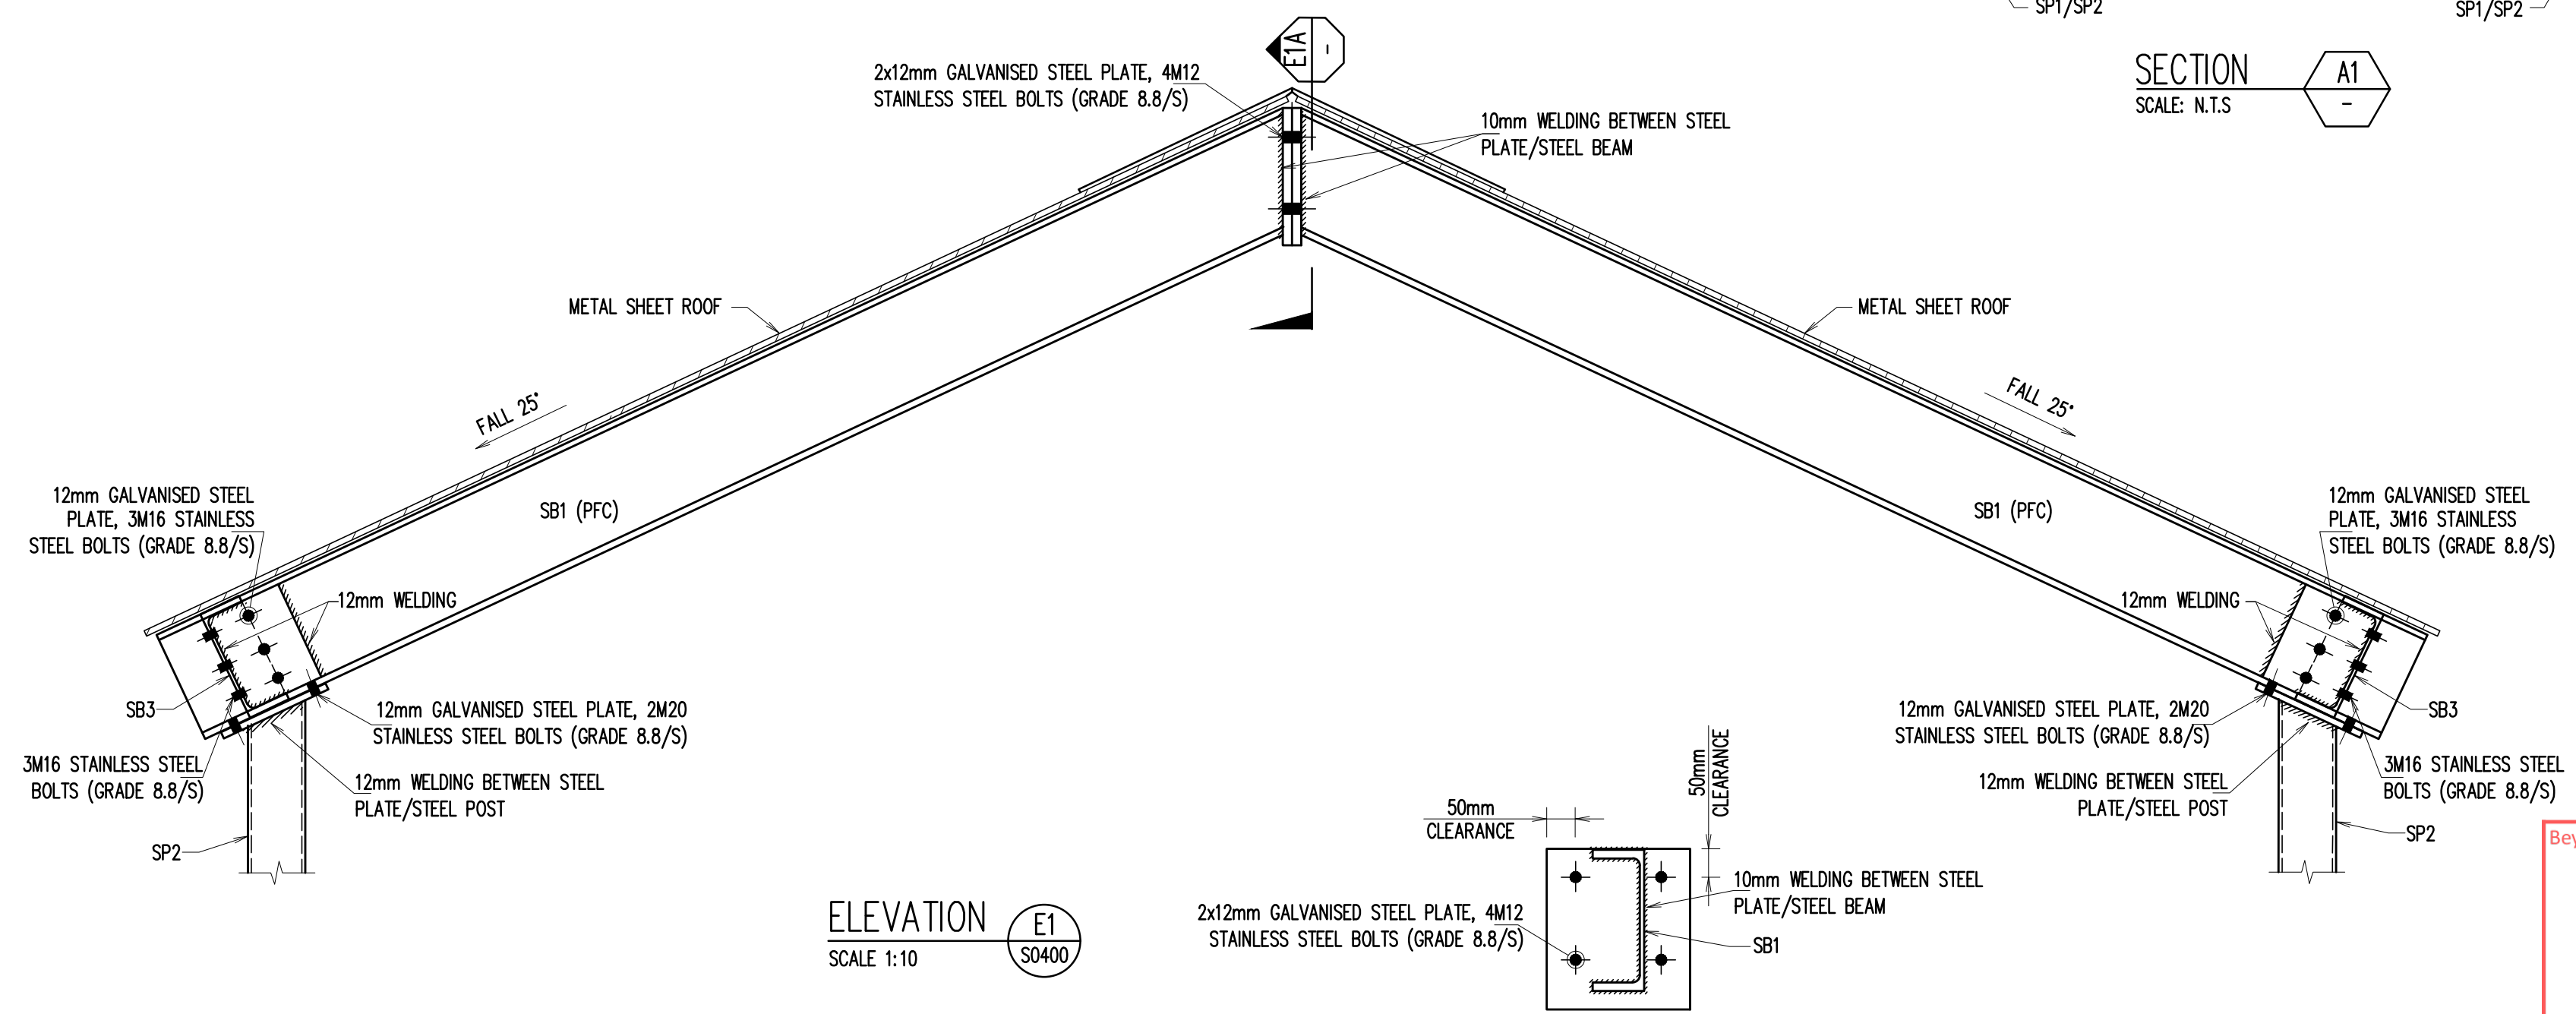

ELEVATION E1
SCALE 1:10

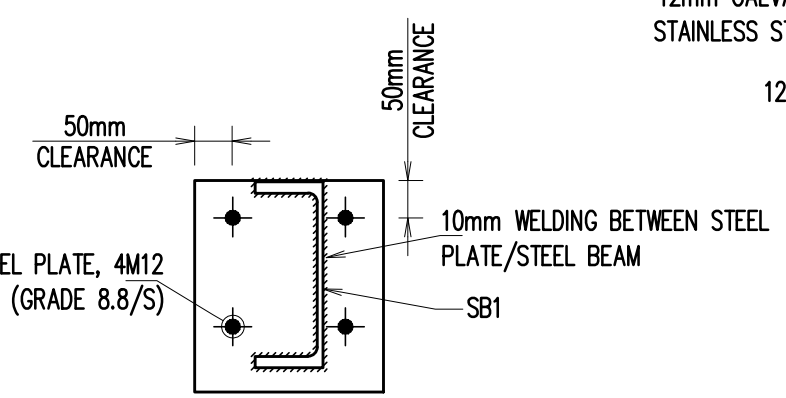

SECTION E1A
SCALE 1:10

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
28 495 969 790 /m

CLIENT
Beyond Certification Sonder Projects Pty Ltd
Reference: 3125176DC
Date: 17/11/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
ROOF SECTIONS
SHEET 1

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0401
					A

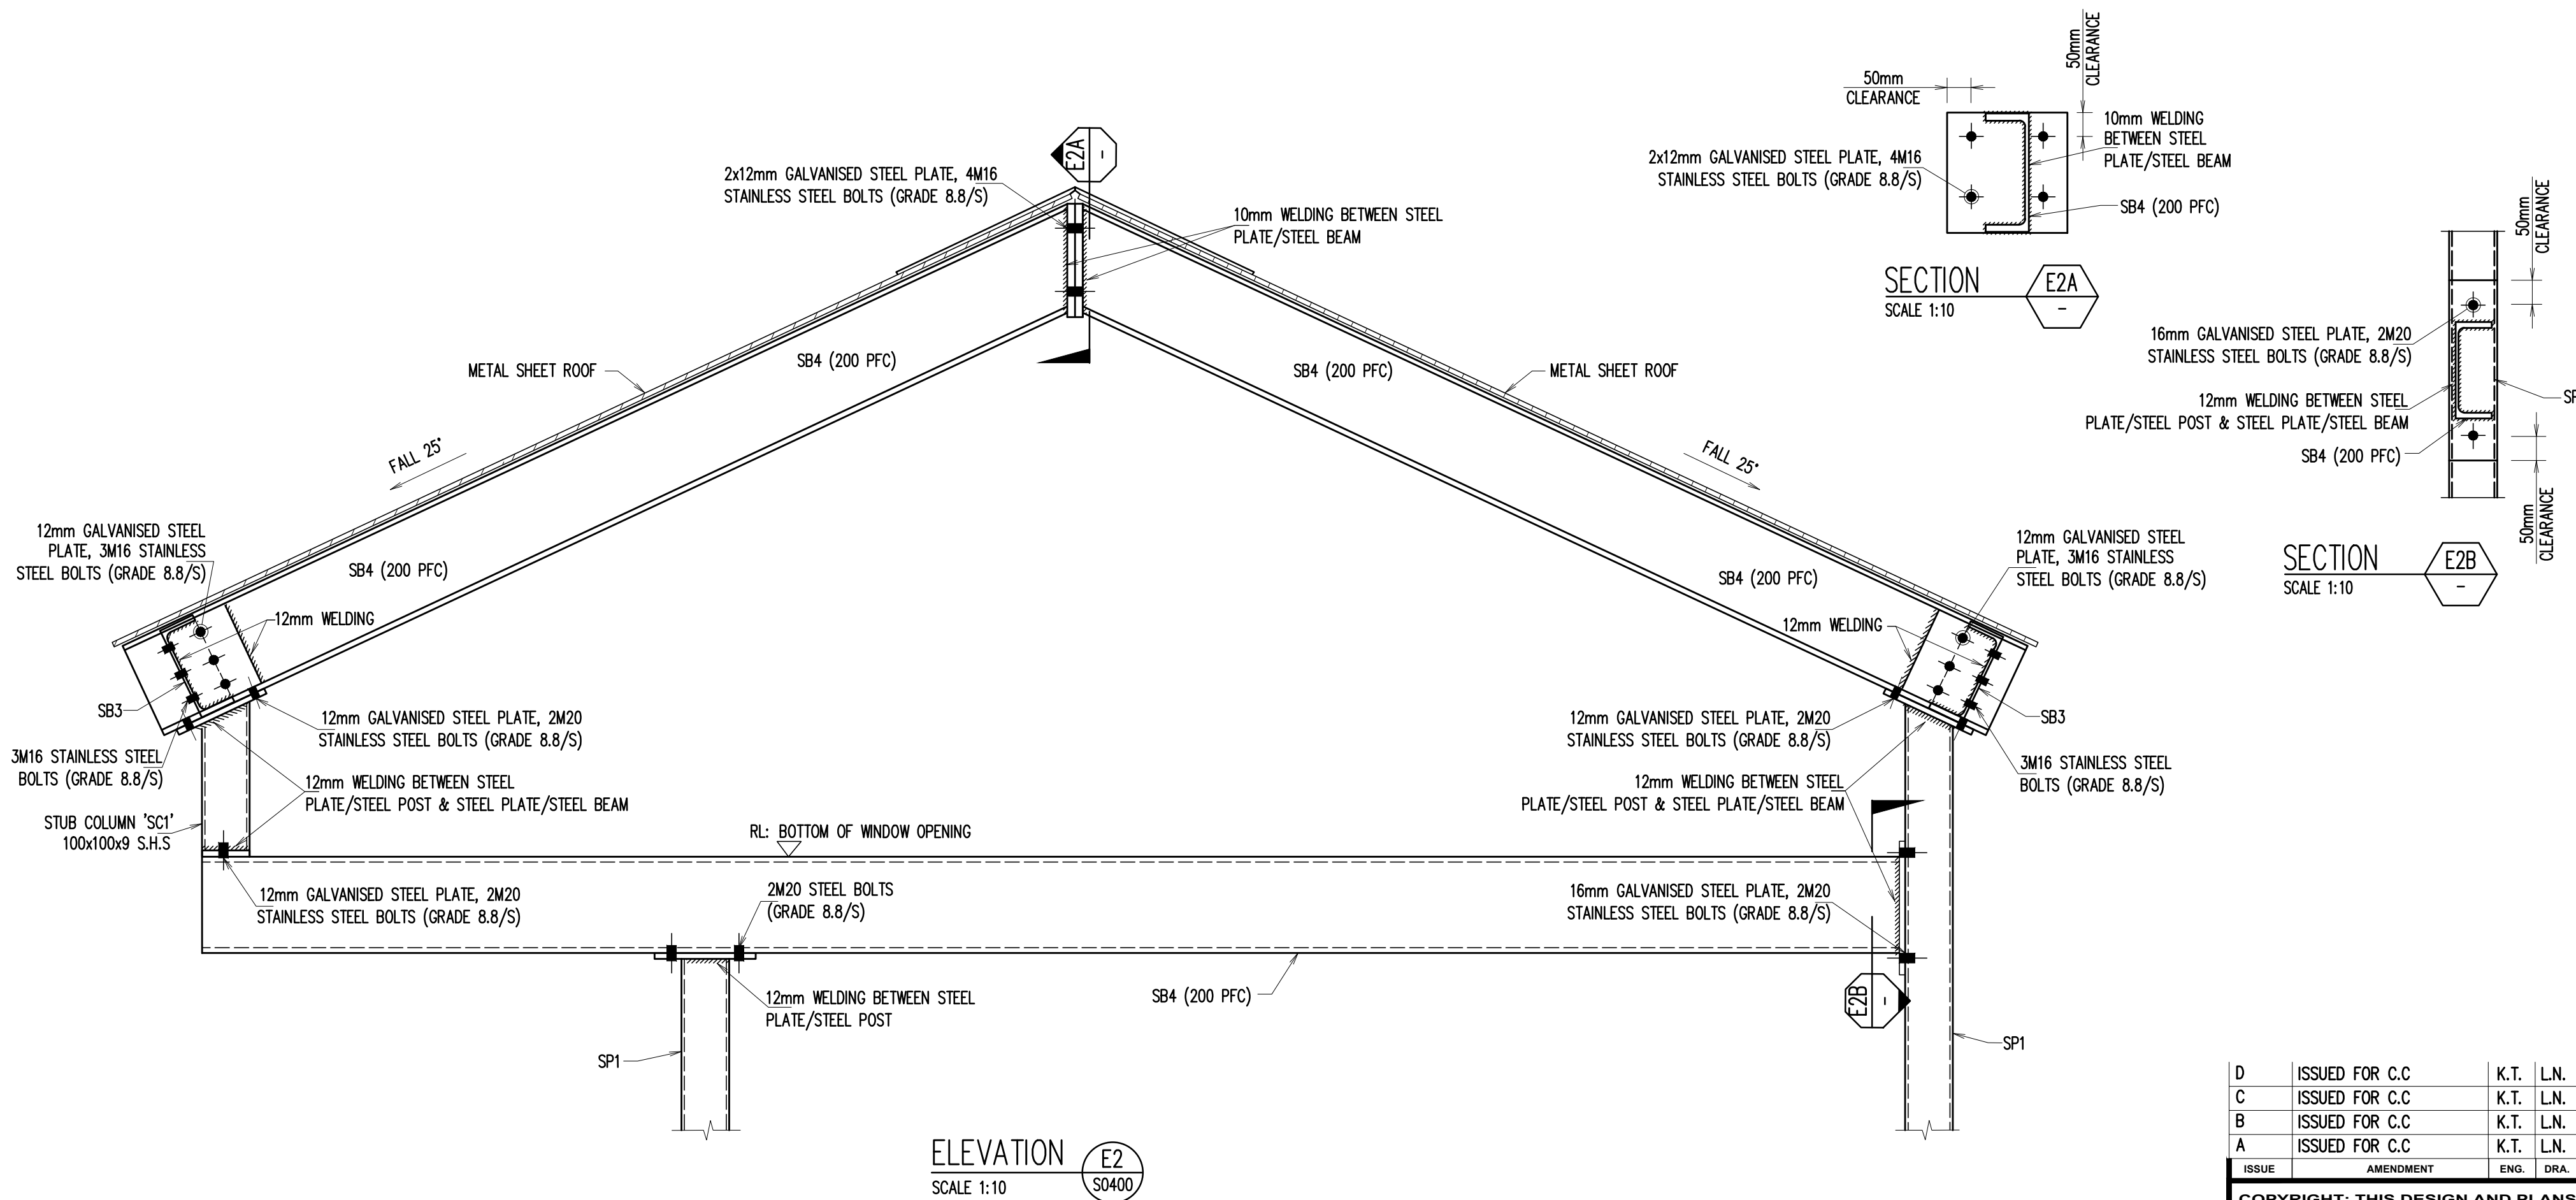

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 485 969 790 /a

CLIENT
Beyond Certification Pty Ltd
Reference: 3125176DC
Date: 17/11/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
ROOF SECTIONS
SHEET 2
N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE	A2	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO.		S0402
					A

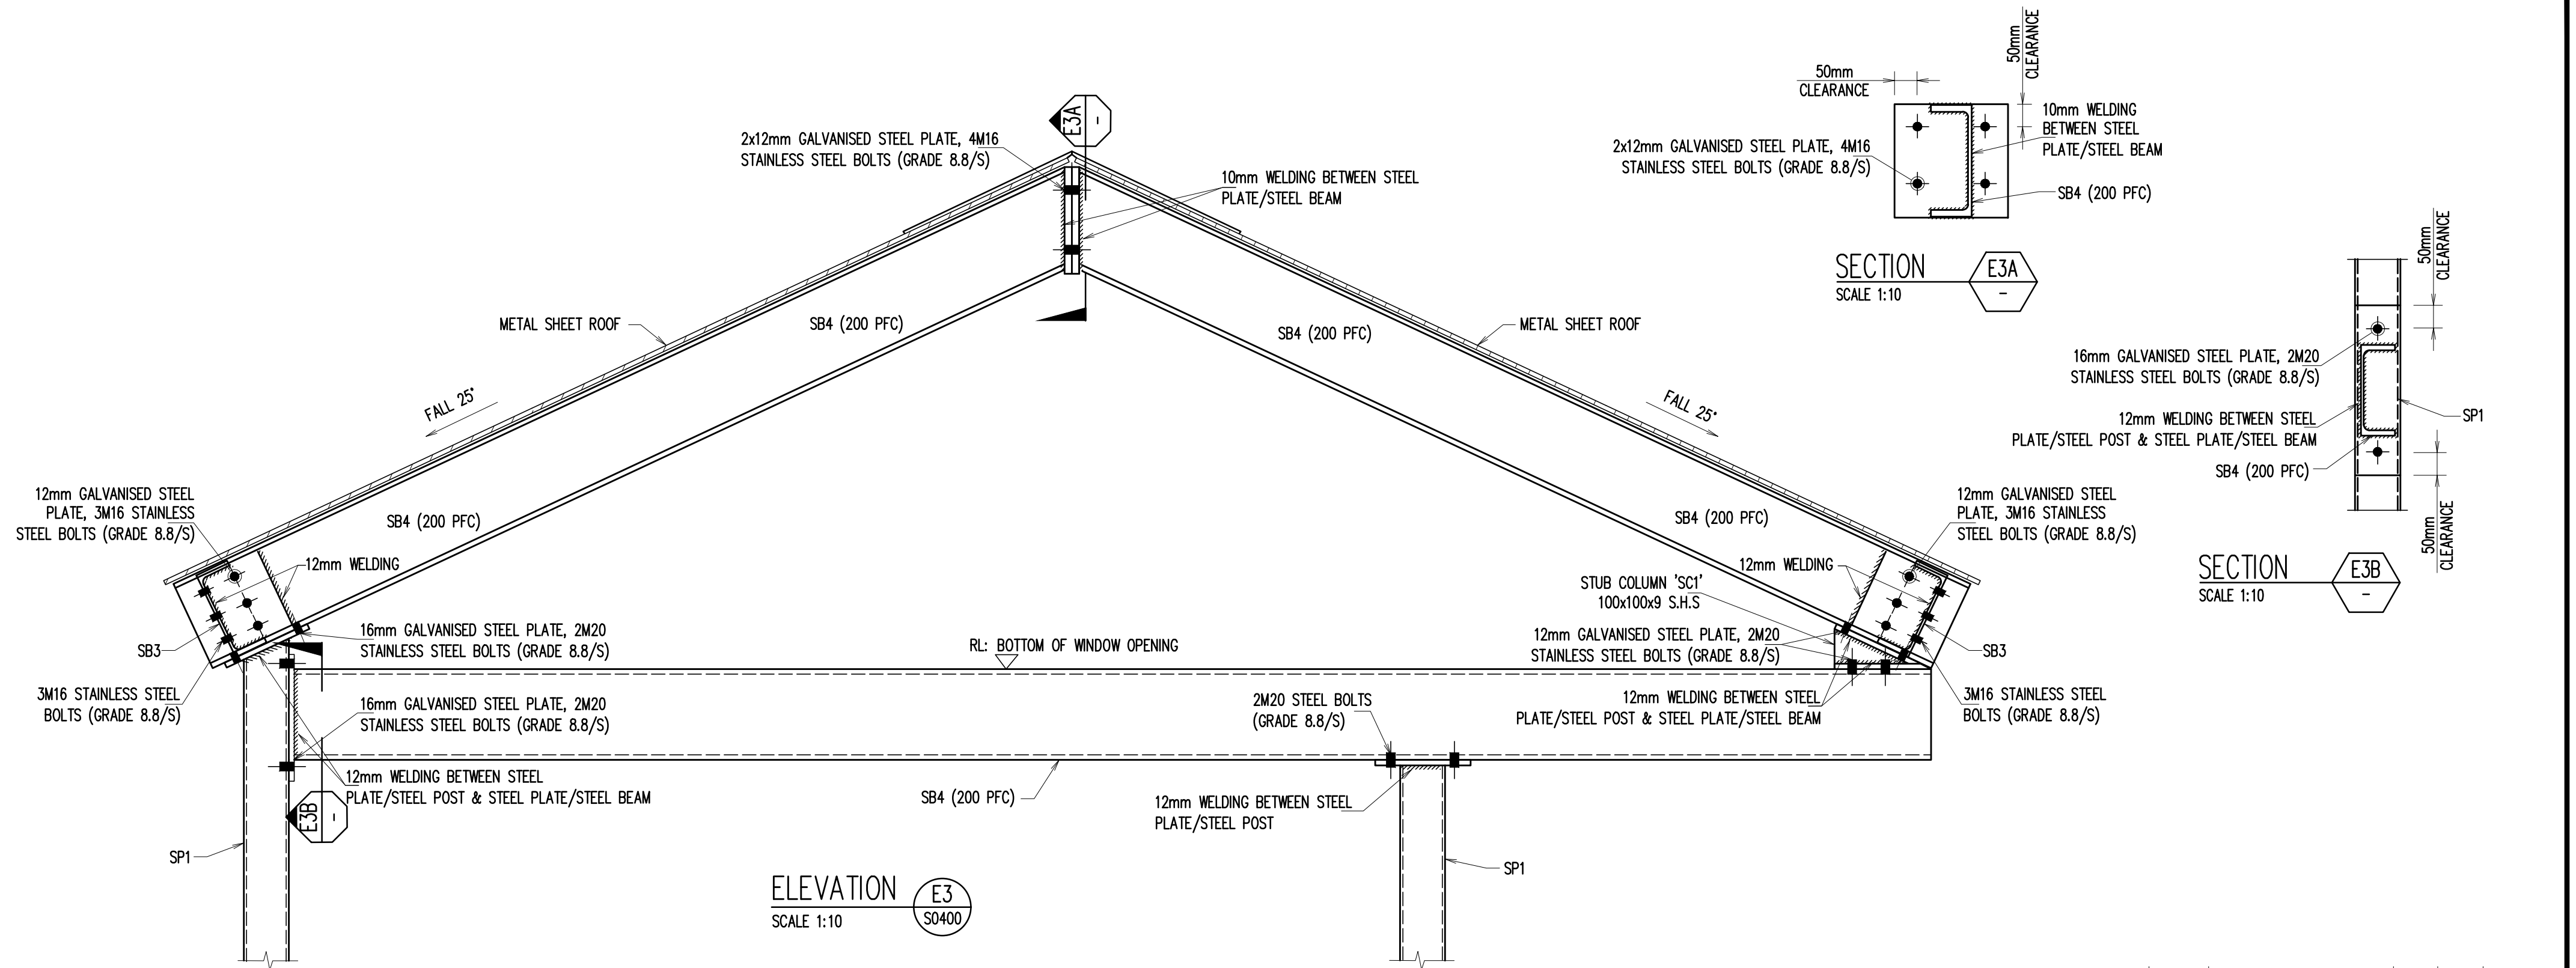

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

CLIENT
Beyond Certification Sonder Projects Pty Ltd
Reference: 3025176CDC
Date: 17/11/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
ROOF SECTIONS
SHEET 3
N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO.		S0403
					A

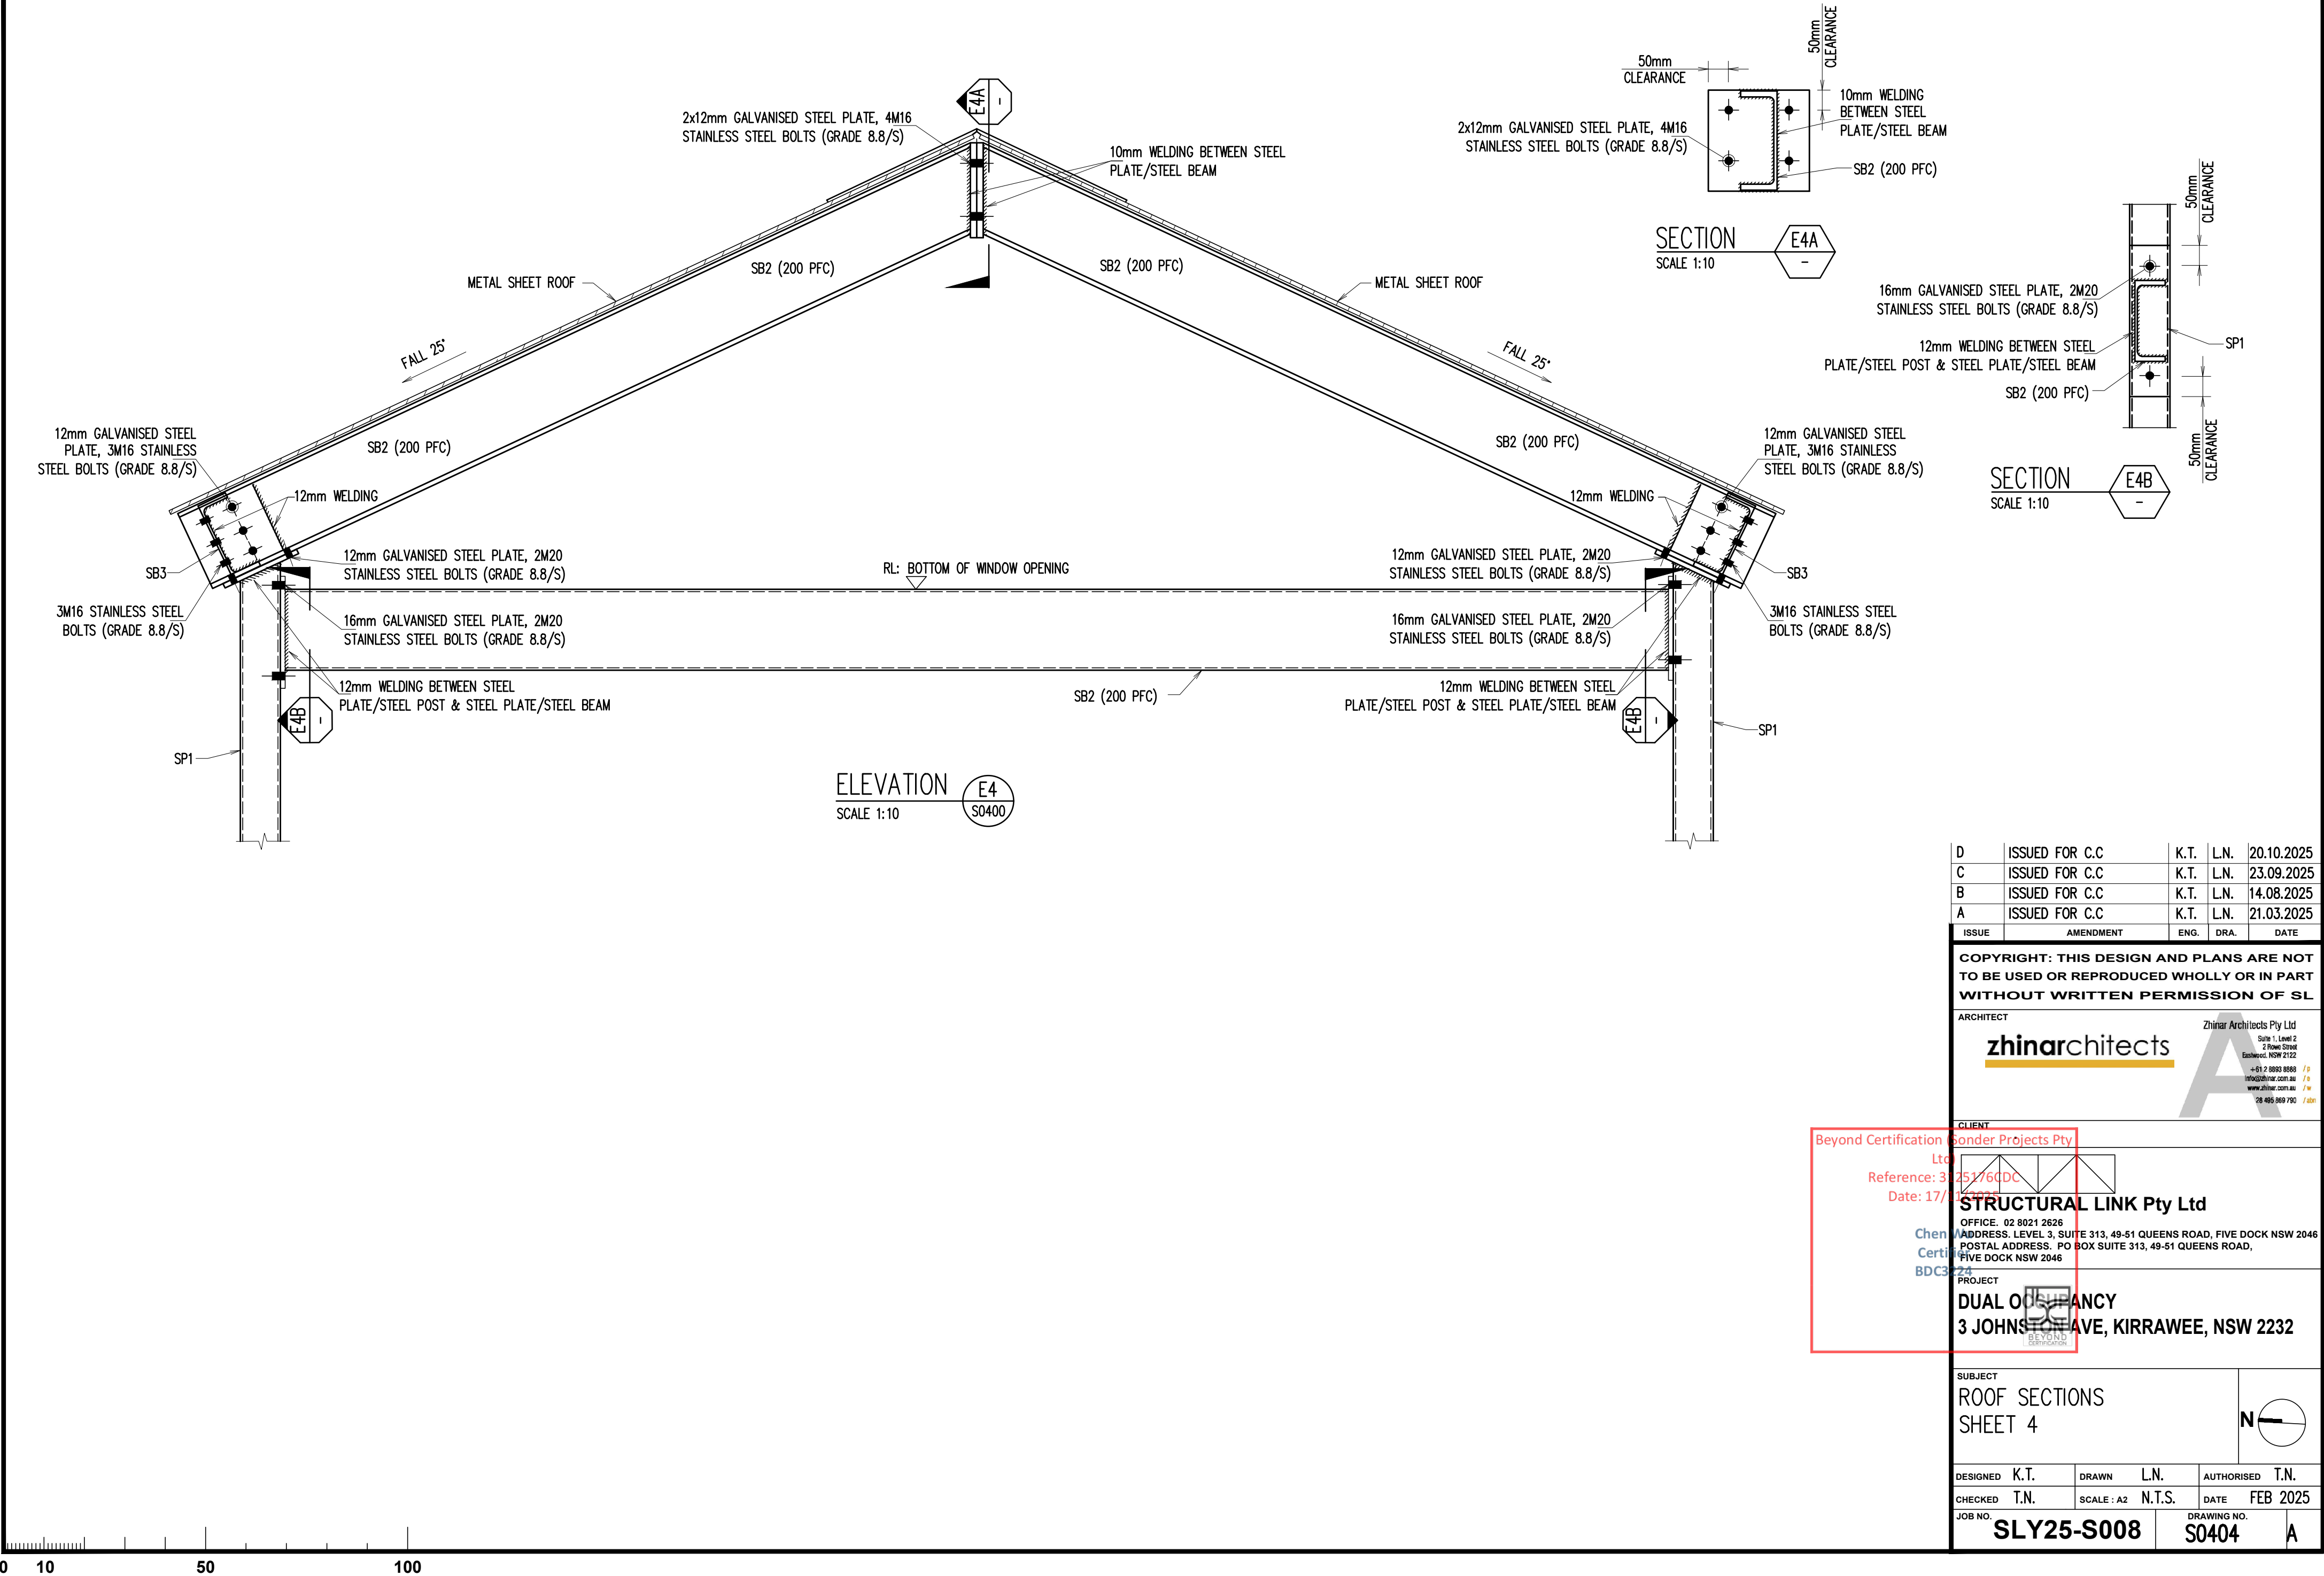

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 465 969 790 /a

CLIENT
Beyond Certification Pty Ltd
Reference: 30251760DC
Date: 17/12/2024
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT
ROOF SECTIONS
SHEET 4
N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		S0404		A

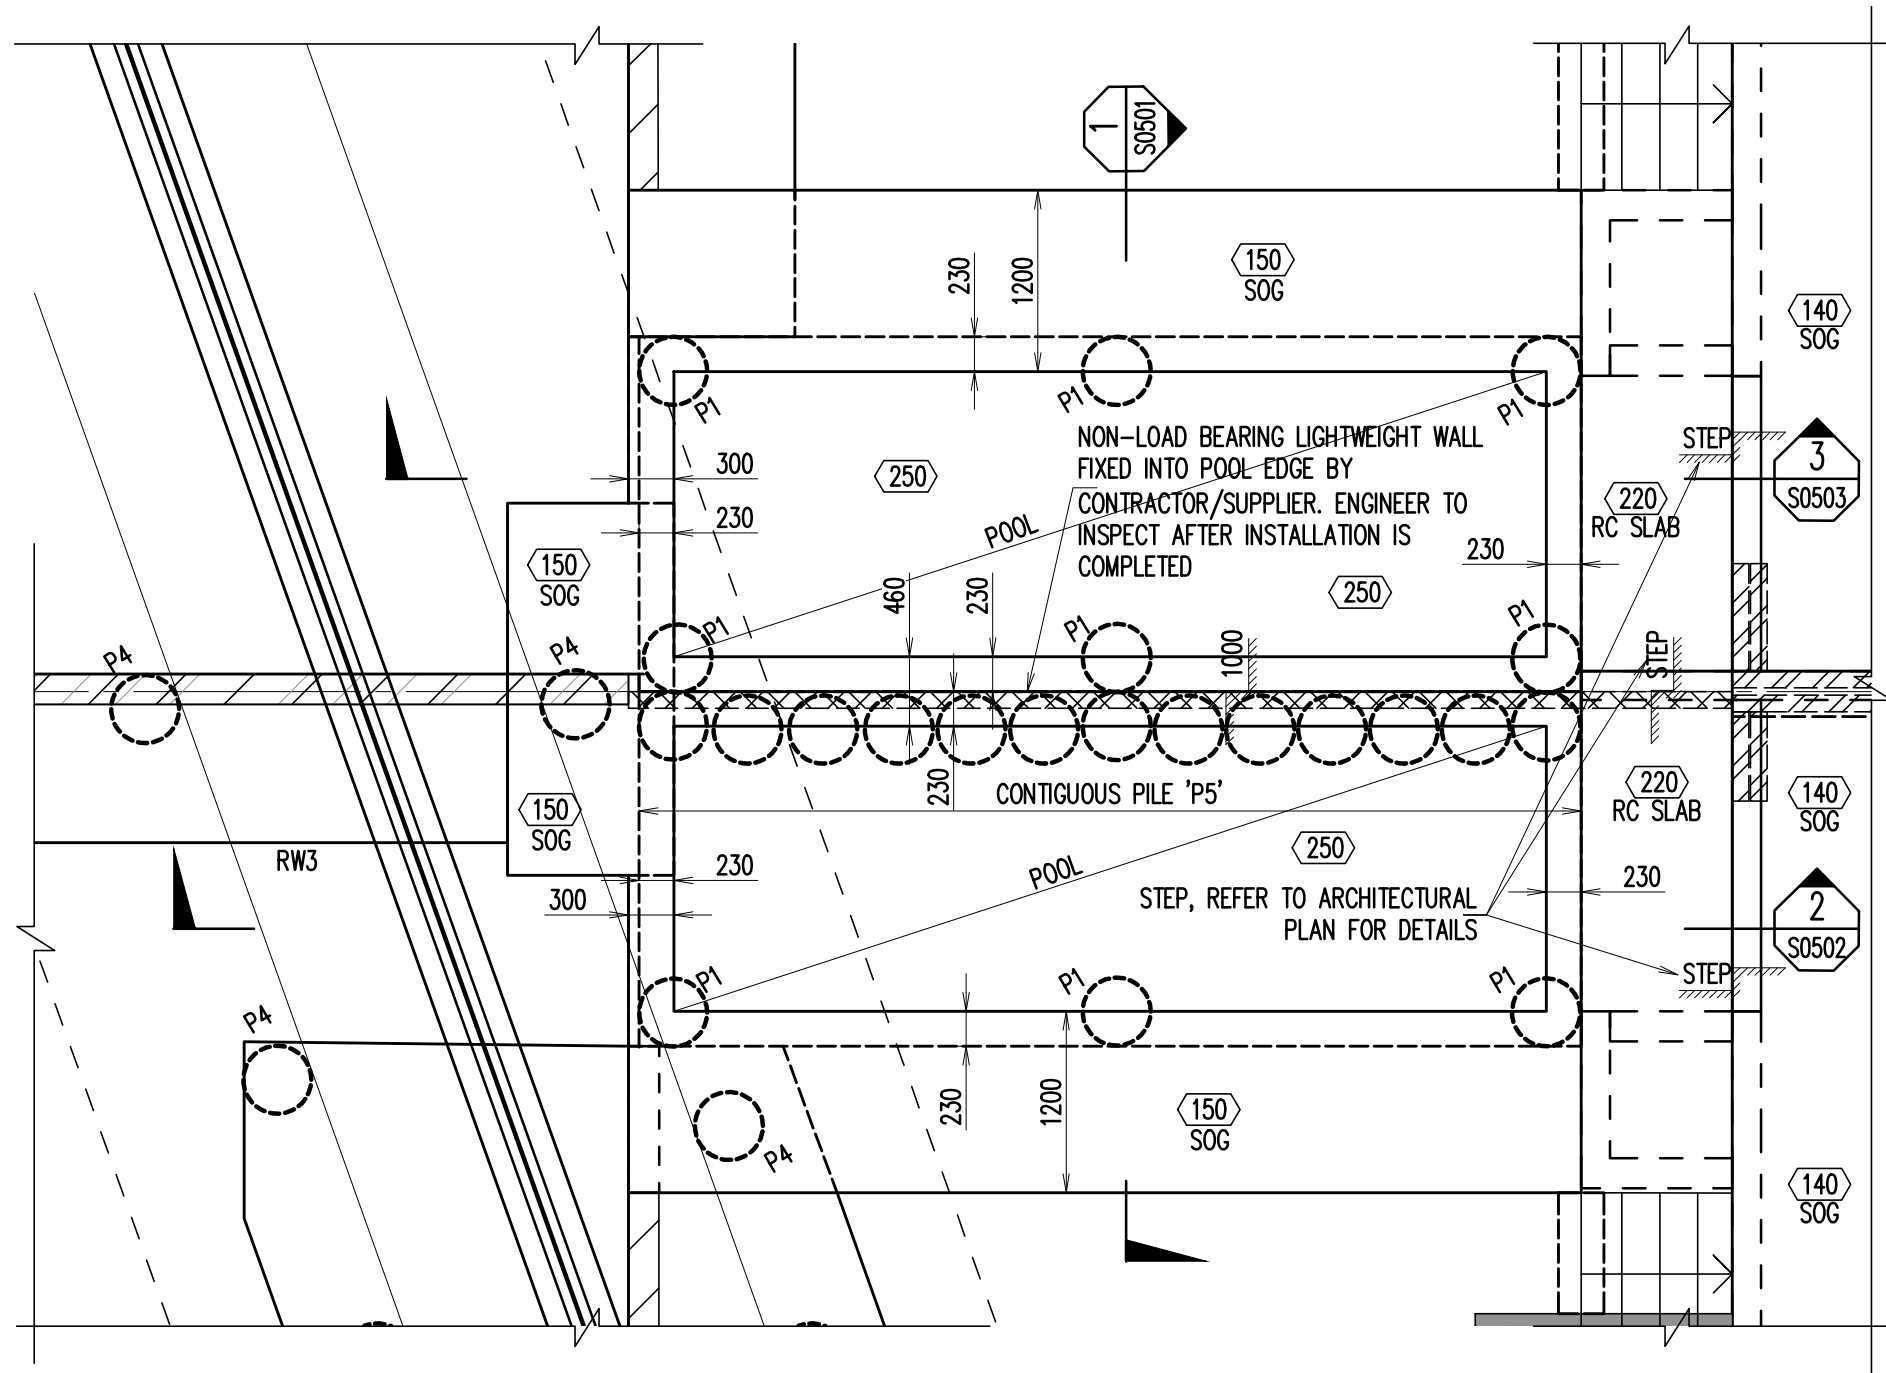

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f _c
POOL	80mm	20mm	SR	32MPa
SLAB ON GROUND	80mm	20mm	GP	40MPa
FOOTING	80mm	20mm	GP	40MPa
PIERS	80mm	20mm	GP	40MPa

REINFORCEMENT COVER SCHEDULE			
MEMBER	COVER (mm)		
	TOP	BOTTOM	SIDES
POOL	35mm	60mm	60mm
SLAB ON GROUND	35mm	60mm	60mm

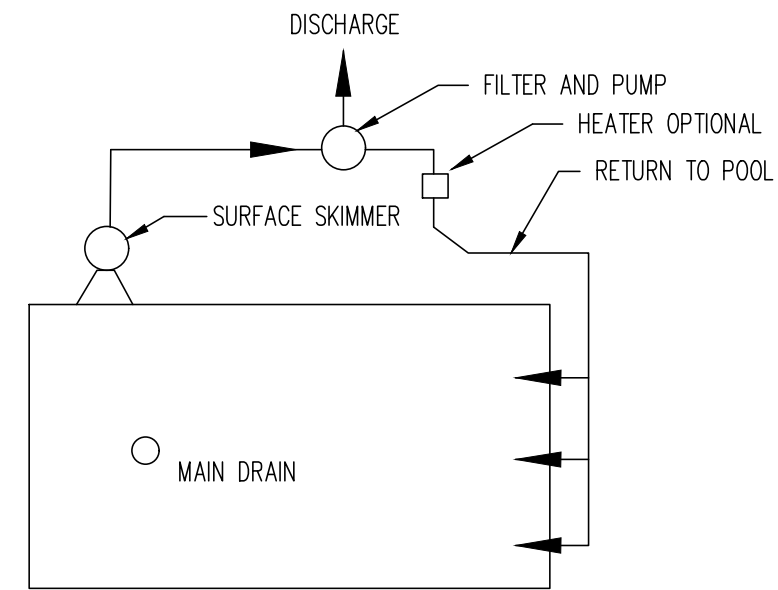

PLUMBING LAYOUT

DIAGRAMATIC ONLY

LEGEND :

- ////// DENOTES BRICK WALL OVER ONLY
- DENOTES BLOCK WALL UNDER ONLY
- DENOTES CONCRETE COLUMN OVER ONLY

SPECIFICATION

1. PLUMBING IS TO BE IN ACCORDANCE WITH WRITTEN RECOMMENDATIONS OF FILTER MANUFACTURER
2. WALKWAYS ARE NOT DESIGNED TO SUPPORT MASONRY WALLS UNLESS OTHERWISE NOTED
3. DESIGN LIVE LOAD FOR WALKWAYS AND CONCOURSES 3 kPa

CONSTRUCTION NOTES

1. ALL DIMENSIONS LOCATING POOL ARE BE TAKEN FROM ARCHITECTURAL DRAWINGS
2. WRITTEN DIMENSIONS TO BE TAKEN IN REFERENCE TO SCALE
3. ENGINEER TO BE ADVISED IF EXCEVATION IS IN FILL OR IF EXCESSIVE GROUND WATER IS ENCOUNTED
4. WHERE IT IS CONSIDERED THAT GROUND WATER CAN BUILD UP TO A LEVEL 500mm ABOVE THE FLOOR OF THE EXCAVATION ADEQUATE DRAINAGE SHAL BE PROVIDED UNDER THE POOL FLOOR
5. UPON COMPLETION OF CONCRETING THE HYDROSTATIC VALVE IS TO BE CHECKED TO ENSURE EFFECTIVE AND SUFFICIENT OPERATION

SWIMMING POOL PLAN – OPTION 1

SCALE: 1:50

NOTES:

1. PROVIDE SL82 MESH T&B THROUGHOUT FOR ALL 150mm SOG.
2. 'P1': DENOTES Ø450mm MASS CONCRETE PIERS, DEPTH = 1800mm
3. 'P4': DENOTES Ø450mm CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3000mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE
4. 'P5': DENOTES Ø450mm CONTIGUOUS CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3500mm. GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE

NOTE:


POOL DEPTH REFER TO ARCHITECTURAL PLANS

NOTE:

GEOTECHNICAL ENGINEER TO CONFIRM
SOIL BEARING CAPACITY ON SITE.


NOTE:

POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY




PIER TYPE 'P1' DETAILS

SCALE 1:20

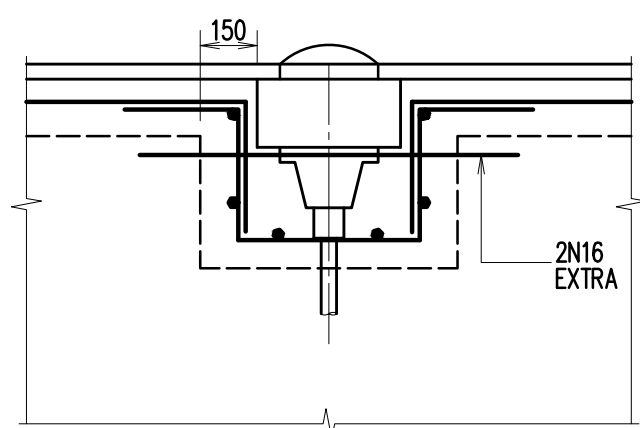


ELEVATION

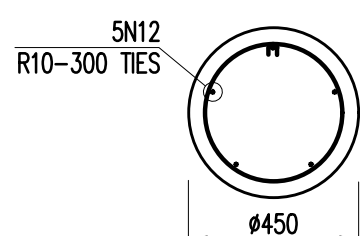


PILE TYPE 'P4, P5' DETAILS

SCALE 1:20

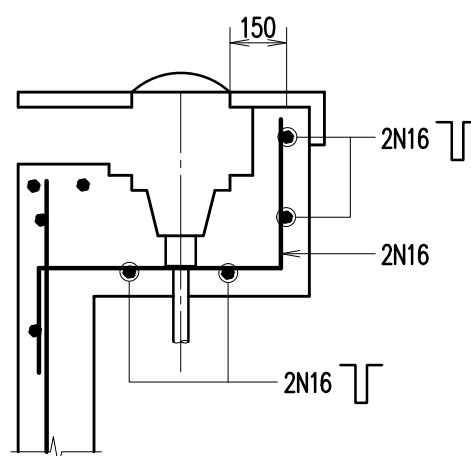


SECTION


POOL SKIMMER DETAILS

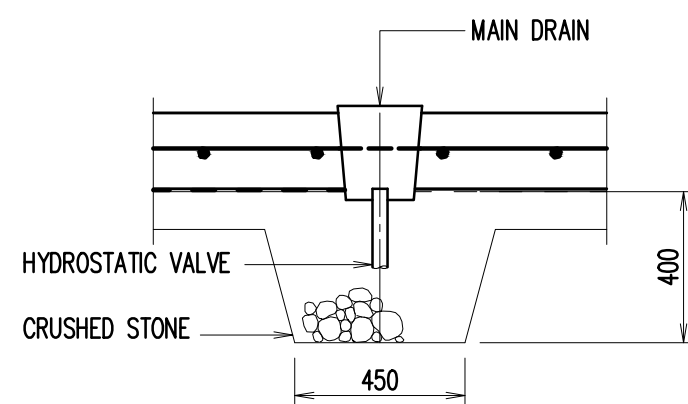

MAIN DRAIN DETAIL

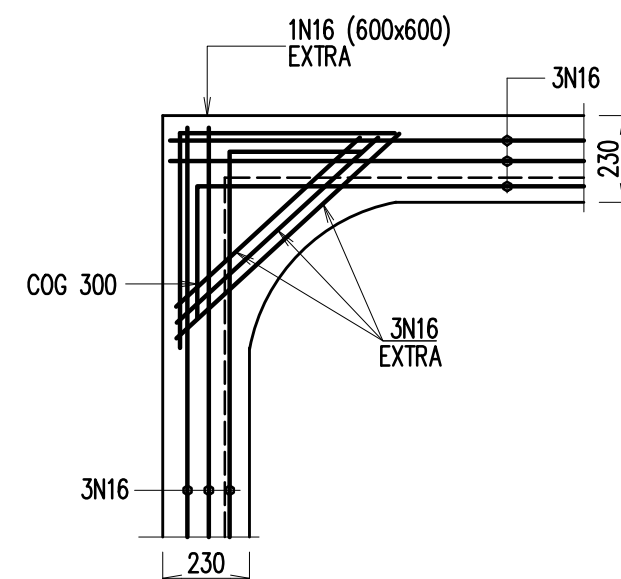

TYPICAL RINGBEAM CORNER DETAIL

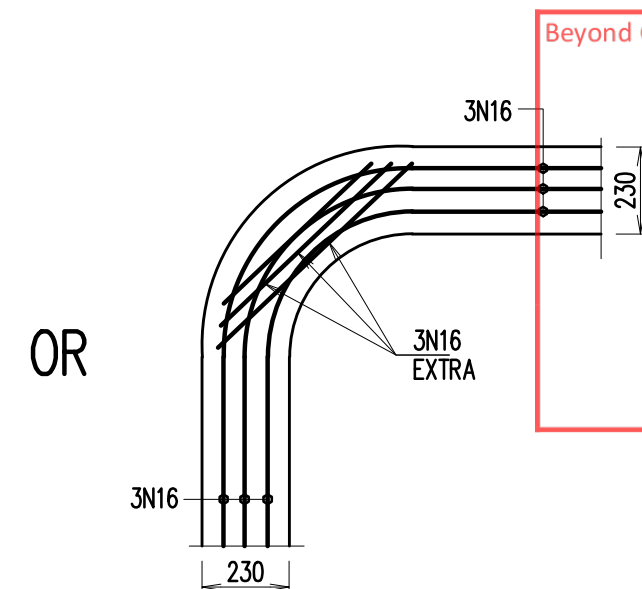

OR

TYPICAL RINGBEAM CORNER DETAIL

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT	Zhin Architects Pty Ltd Suite 1, Level 2 2 Rose Street Eastwood, NSW 2122 +61 2 8868 8888 /p info@zhinarchitects.com.au /e www.zhinarchitects.com.au /w 28 485 969 790 /m
-----------	--


CLIENT	Beyond Certification Sonder Projects Pty Ltd Reference: 3125176CDC Date: 17/11/2025
--------	---

PROJECT	STRUCTURAL LINK Pty Ltd OFFICE: 02 8021 2626 ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046 POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
---------	--

PROJECT	DUAL OCCUPANCY 3 JOHNSON AVE, KIRRAWEE, NSW 2232
---------	--


SUBJECT	POOL PLAN AND DETAILS OPTION 1
---------	-----------------------------------

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO.		S0500
					A

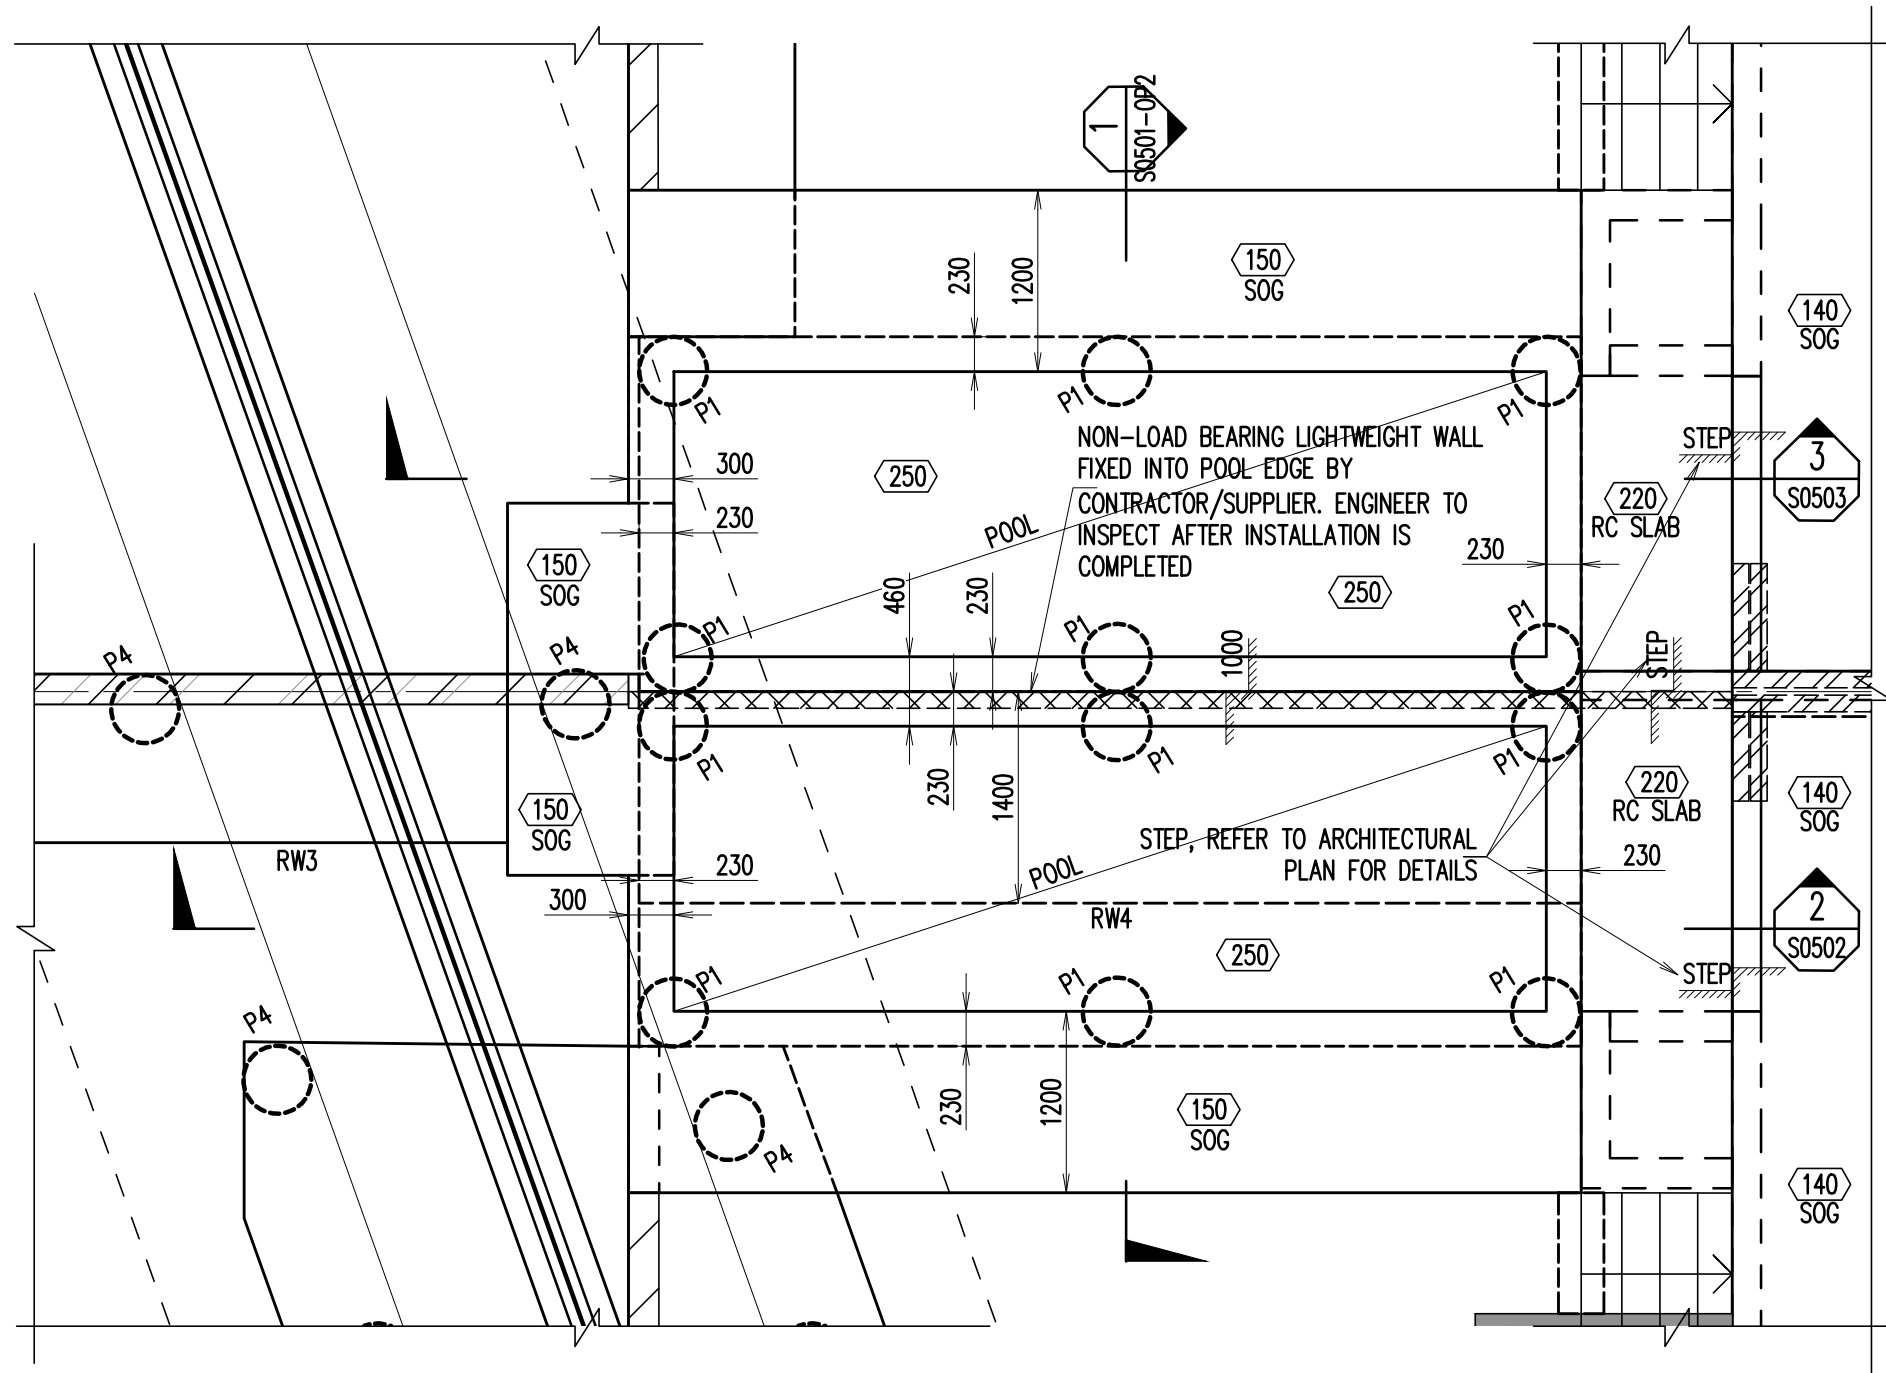

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f _c
POOL	80mm	20mm	SR	32MPa
SLAB ON GROUND	80mm	20mm	GP	40MPa
FOOTING	80mm	20mm	GP	40MPa
PIERS	80mm	20mm	GP	40MPa

REINFORCEMENT COVER SCHEDULE			
MEMBER	COVER (mm)		
	TOP	BOTTOM	SIDES
POOL	35mm	60mm	60mm
SLAB ON GROUND	35mm	60mm	60mm

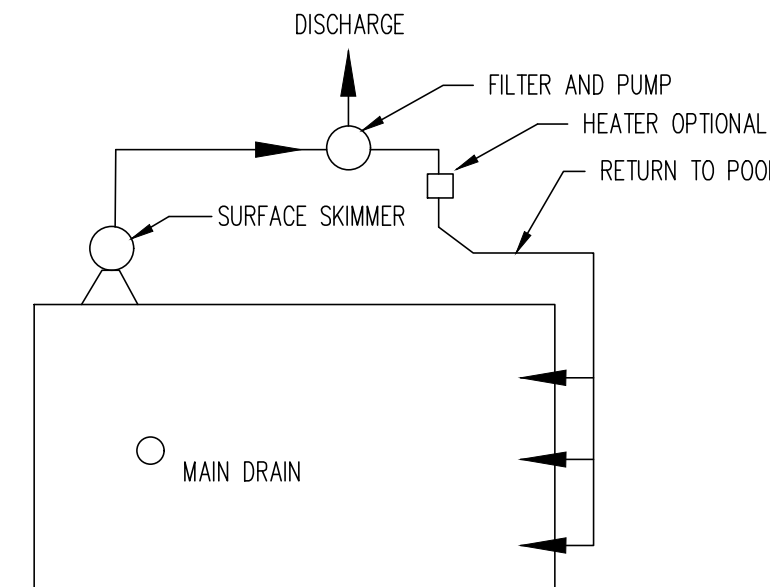

PLUMBING LAYOUT

DIAGRAMATIC ONLY

LEGEND :

- ////// DENOTES BRICK WALL OVER ONLY
- DENOTES BLOCK WALL UNDER ONLY
- DENOTES CONCRETE COLUMN OVER ONLY

SPECIFICATION

1. PLUMBING IS TO BE IN ACCORDANCE WITH WRITTEN RECOMMENDATIONS OF FILTER MANUFACTURER
2. WALKWAYS ARE NOT DESIGNED TO SUPPORT MASONRY WALLS UNLESS OTHERWISE NOTED
3. DESIGN LIVE LOAD FOR WALKWAYS AND CONCOURSES 3 kPa

CONSTRUCTION NOTES

1. ALL DIMENSIONS LOCATING POOL ARE BE TAKEN FROM ARCHITECTURAL DRAWINGS
2. WRITTEN DIMENSIONS TO BE TAKEN IN REFERENCE TO SCALE
3. ENGINEER TO BE ADVISED IF EXCEVATION IS IN FILL OR IF EXCESSIVE GROUND WATER IS ENCOUNTED
4. WHERE IT IS CONSIDERED THAT GROUND WATER CAN BUILD UP TO A LEVEL 500mm ABOVE THE FLOOR OF THE EXCAVATION ADEQUATE DRAINAGE SHAL BE PROVIDED UNDER THE POOL FLOOR
5. UPON COMPLETION OF CONCRETING THE HYDROSTATIC VALVE IS TO BE CHECKED TO ENSURE EFFECTIVE AND SUFFICIENT OPERATION

SWIMMING POOL PLAN – OPTION 2

SCALE: 1:50

NOTES:

1. PROVIDE SL82 MESH T&B THROUGHOUT FOR ALL 150mm SOG.
 2. 'P1': DENOTES Ø450mm MASS CONCRETE PIERS, DEPTH = 1800mm
 3. 'P4': DENOTES Ø450mm CONCRETE PILES, 5N12+R10-300 TIES, DEPTH = 3000mm.
- GEOTECHNICAL ENGINEER TO CONFIRM SOIL BEARING CAPACITY ON SITE

NOTE:


POOL DEPTH REFER TO ARCHITECTURAL PLANS

NOTE:

GEOTECHNICAL ENGINEER TO CONFIRM
SOIL BEARING CAPACITY ON SITE.


NOTE:

POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY




PIER TYPE 'P1' DETAILS

SCALE 1:20

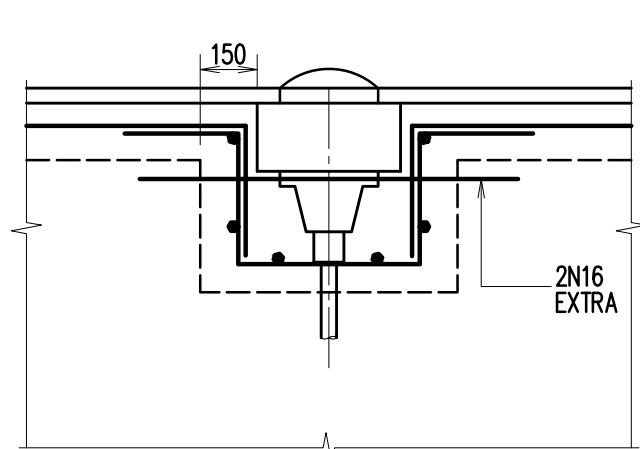


ELEVATION

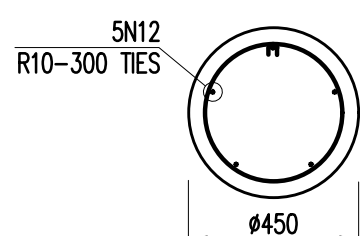


PILE TYPE 'P4' DETAILS

SCALE 1:20

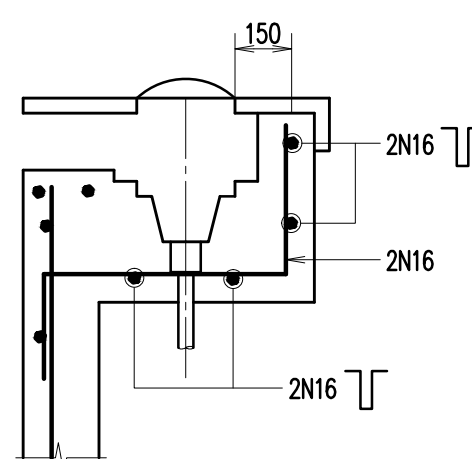


SECTION


POOL SKIMMER DETAILS

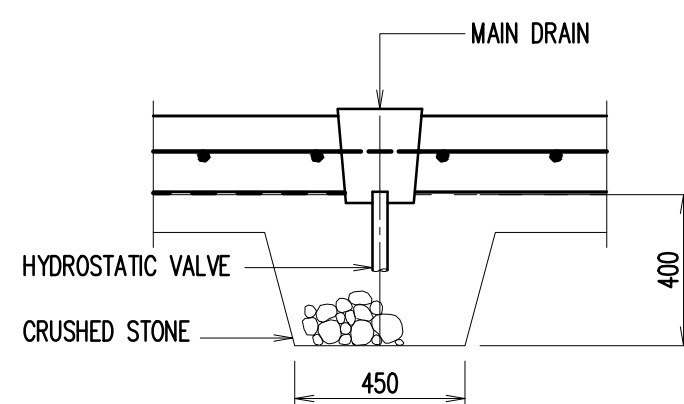

MAIN DRAIN DETAIL

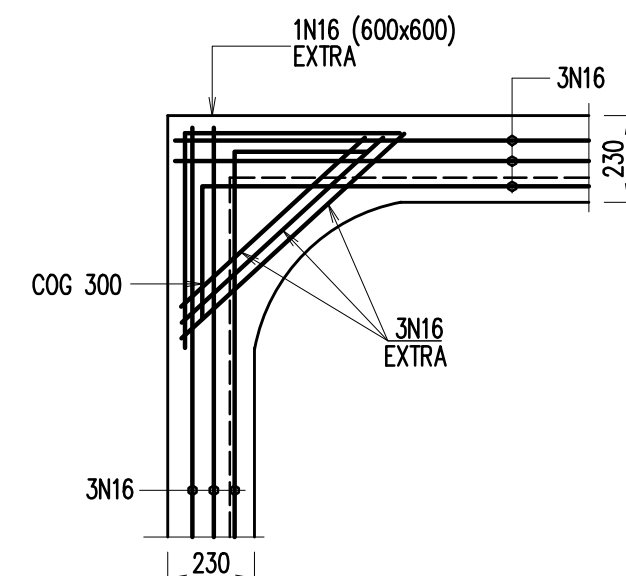

TYPICAL RINGBEAM CORNER DETAIL

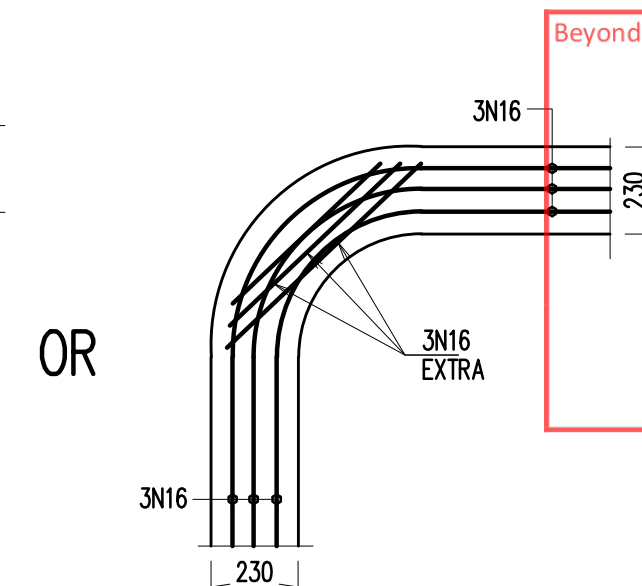

OR

TYPICAL RINGBEAM CORNER DETAIL

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT	Zhin Architects Pty Ltd Suite 1, Level 2 2 Rowe Street Eastwood, NSW 2122 +61 2 8868 8888 /p info@zhinarchitects.com.au /e www.zhinarchitects.com.au /w 28 485 969 790 /m
-----------	--


CLIENT	Beyond Certification Sonder Projects Pty Ltd Reference: 3025176DC Date: 17/11/2025
--------	--

PROJECT	STRUCTURAL LINK Pty Ltd OFFICE: 02 8021 2626 ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046 POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
---------	--

PROJECT	DUAL OCCUPANCY 3 JOHNSON AVE, KIRRAWEE, NSW 2232
---------	--

SUBJECT	POOL PLAN AND DETAILS OPTION 2
---------	-----------------------------------

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO. S0500-OP2A		

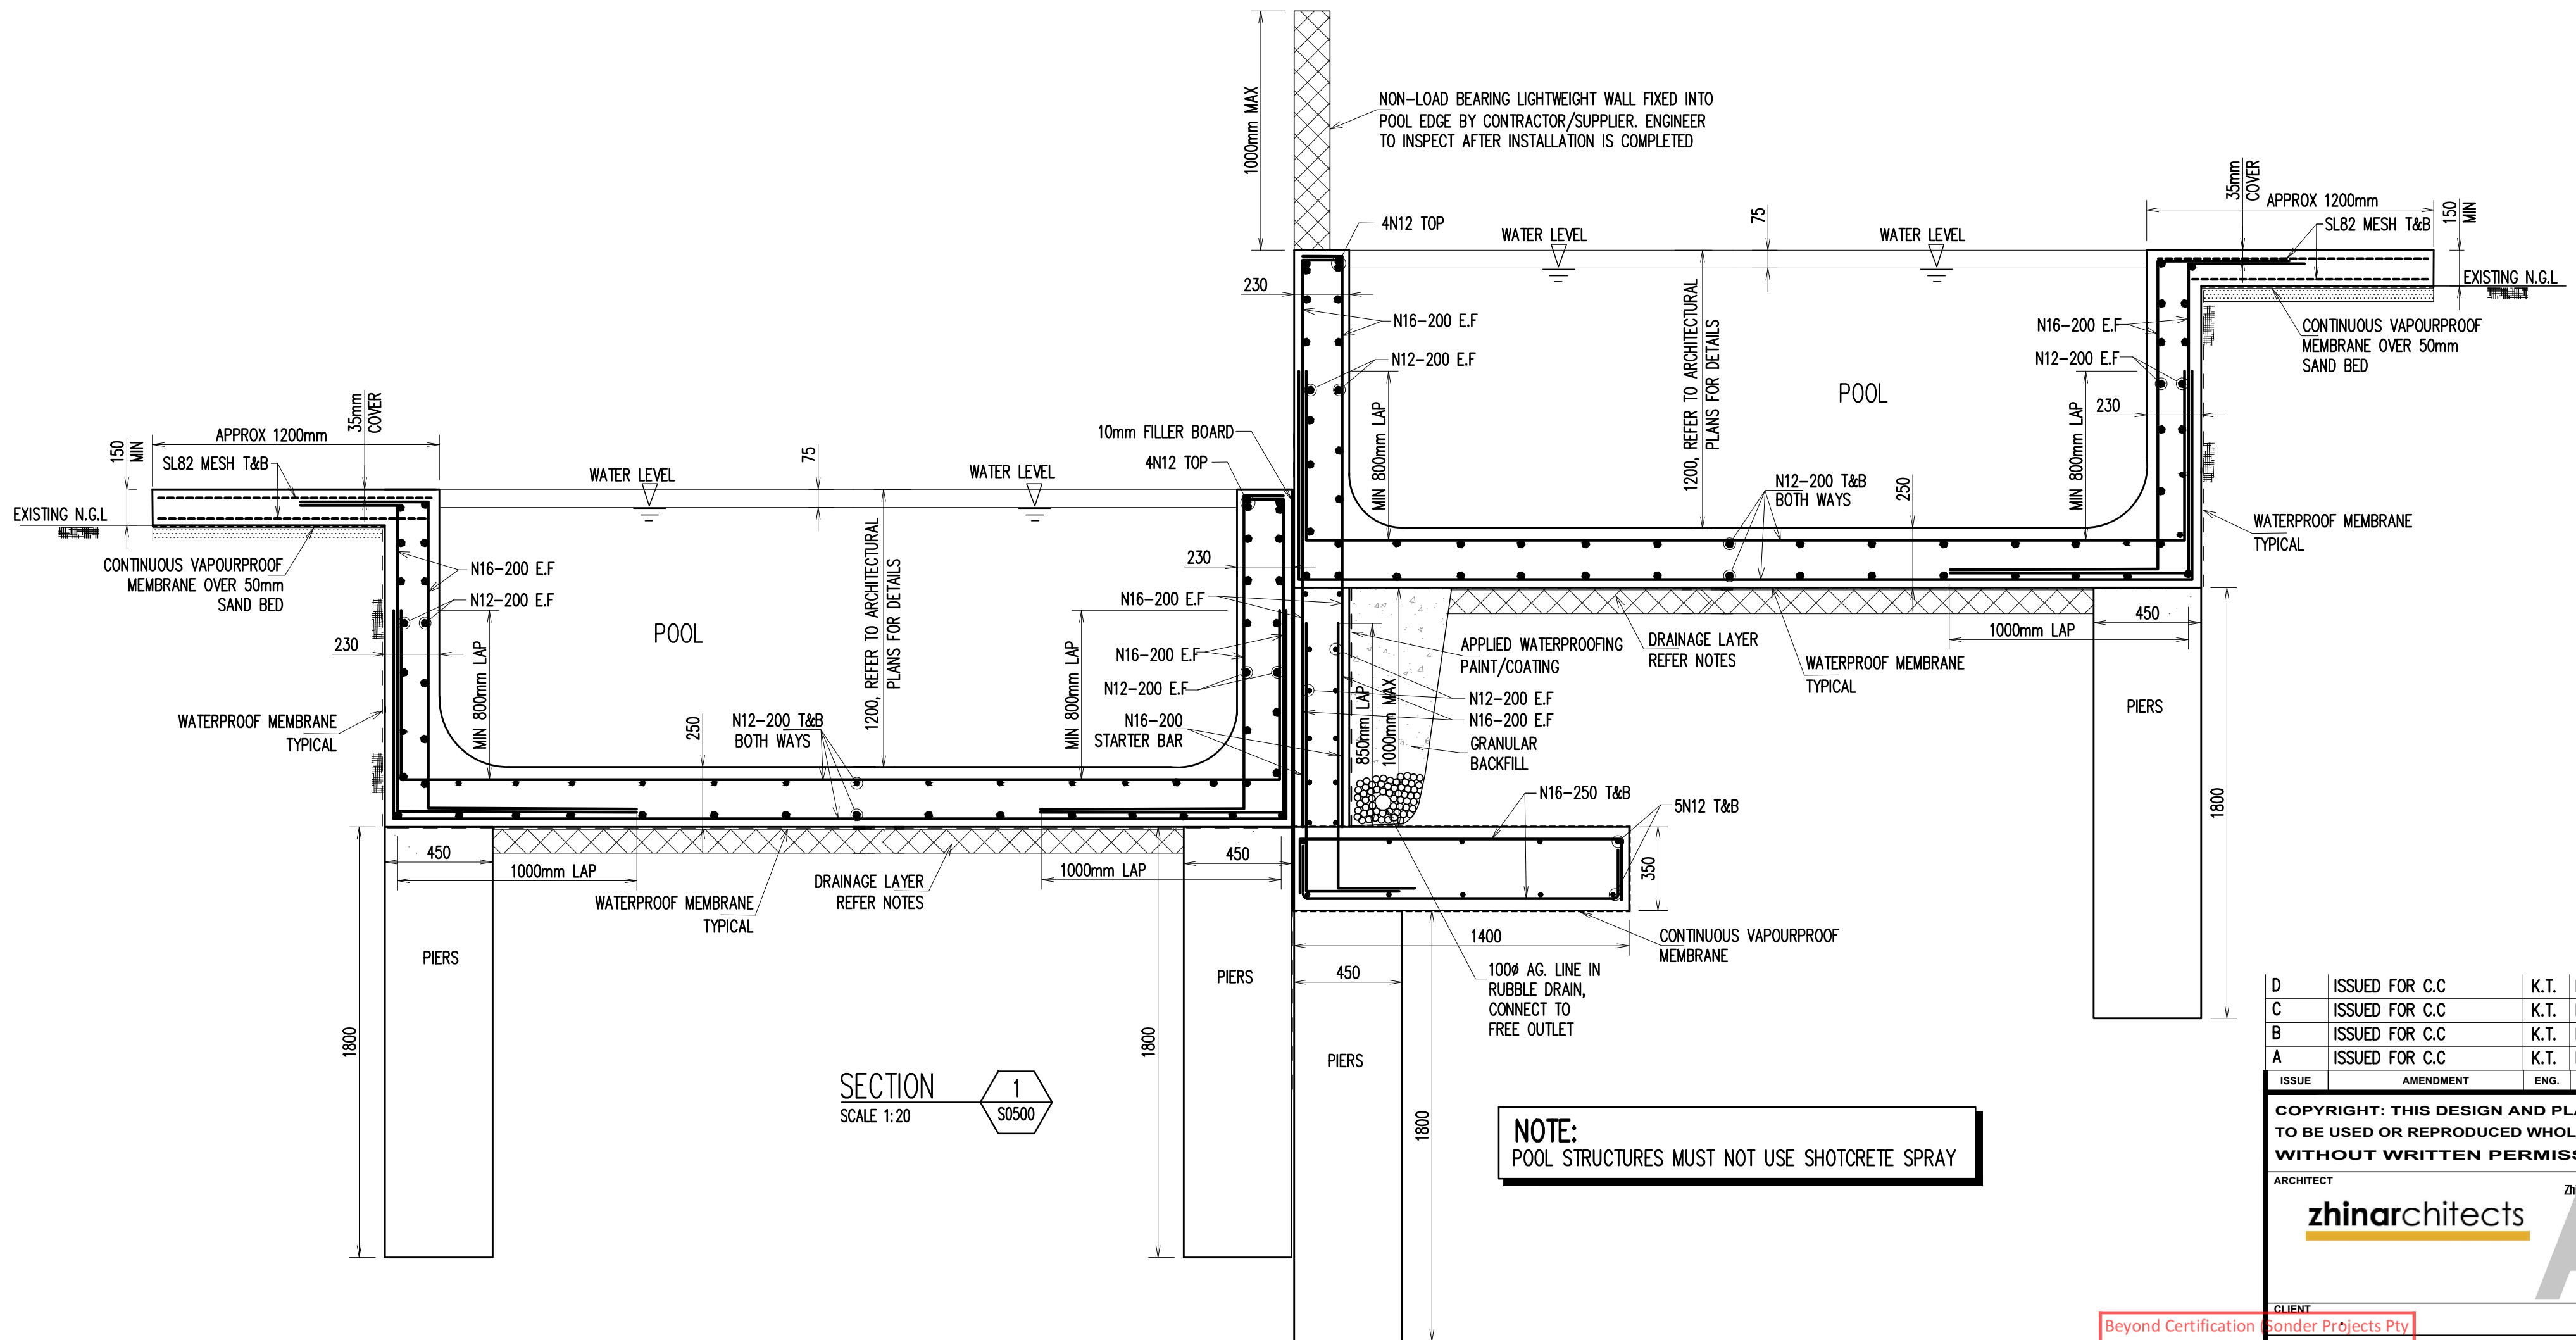

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

zhinarchitects

zhina architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m

Beyond Certification

Sonder Projects Pty Ltd

Reference: 3125176CDC

Date: 17/12/2024

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626


ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

DUAL OCCUPANCY

3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT				N 	
POOL SECTIONS					
SHEET 1 – OPTION 1					
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.			DRAWING NO.		
SLY25-S008			S0501		A

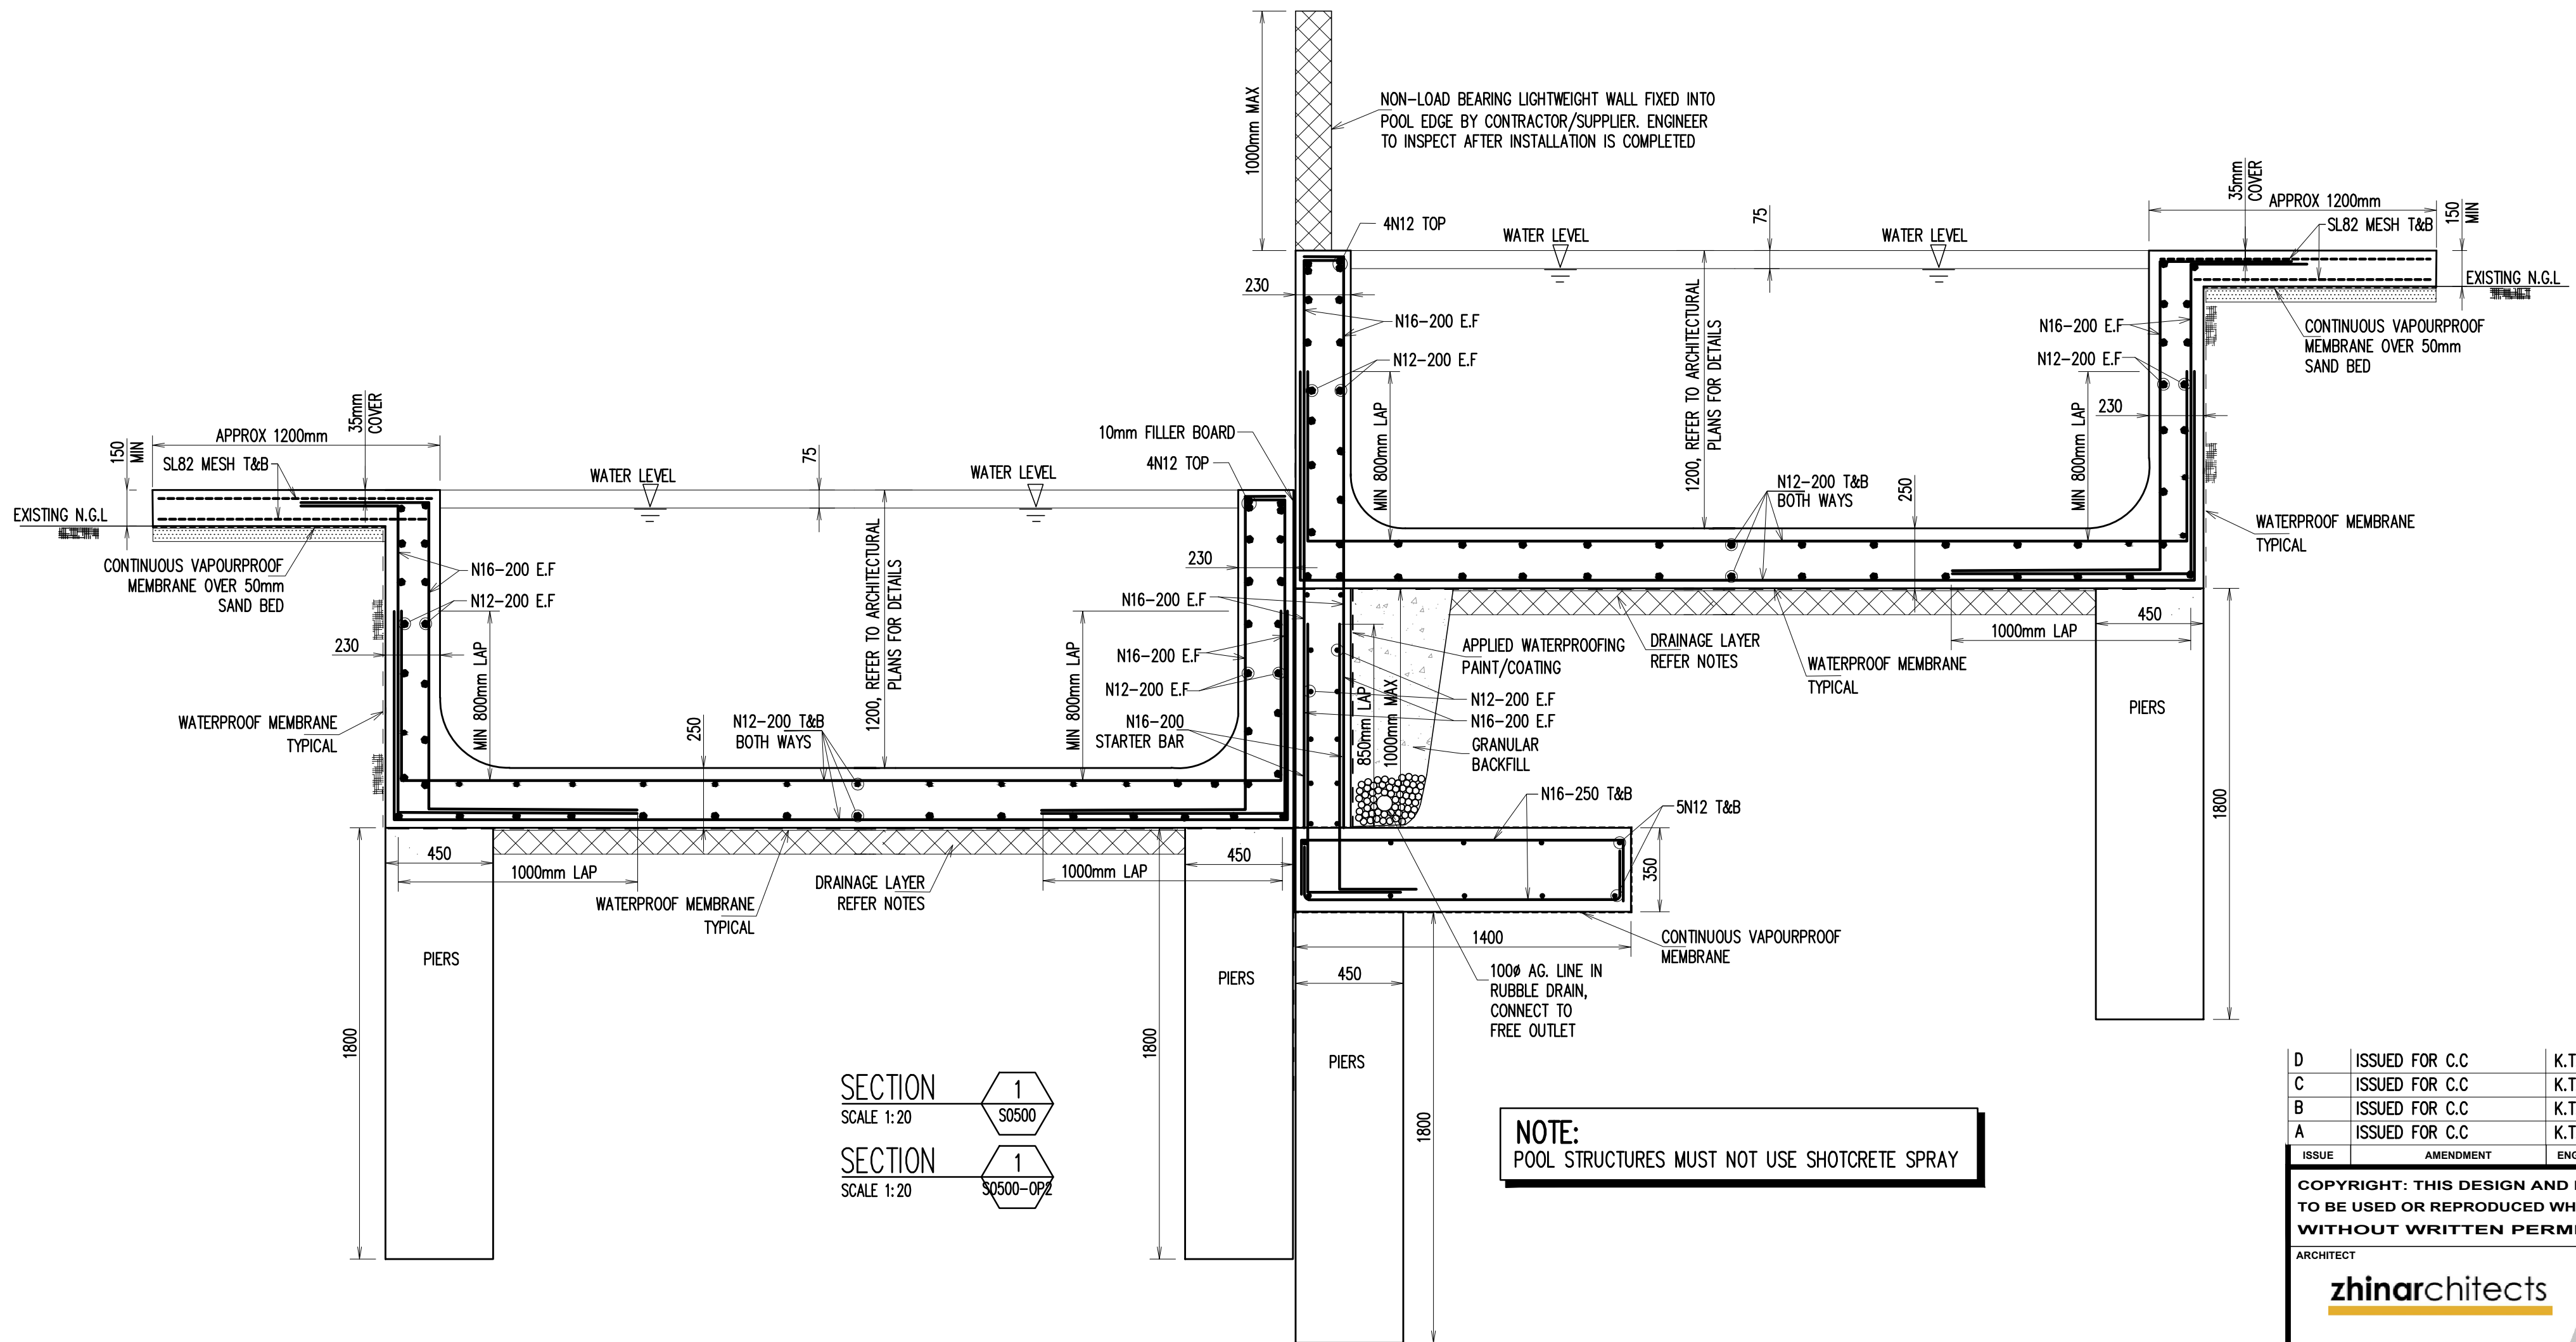

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE


COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8863 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
28 485 865 790 /a

CLIENT
Beyond Certification
Ltd
Reference: 3125176DC
Date: 17/11/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
POOL SECTIONS
SHEET 1 - OPTION 2
N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0501-OP2A

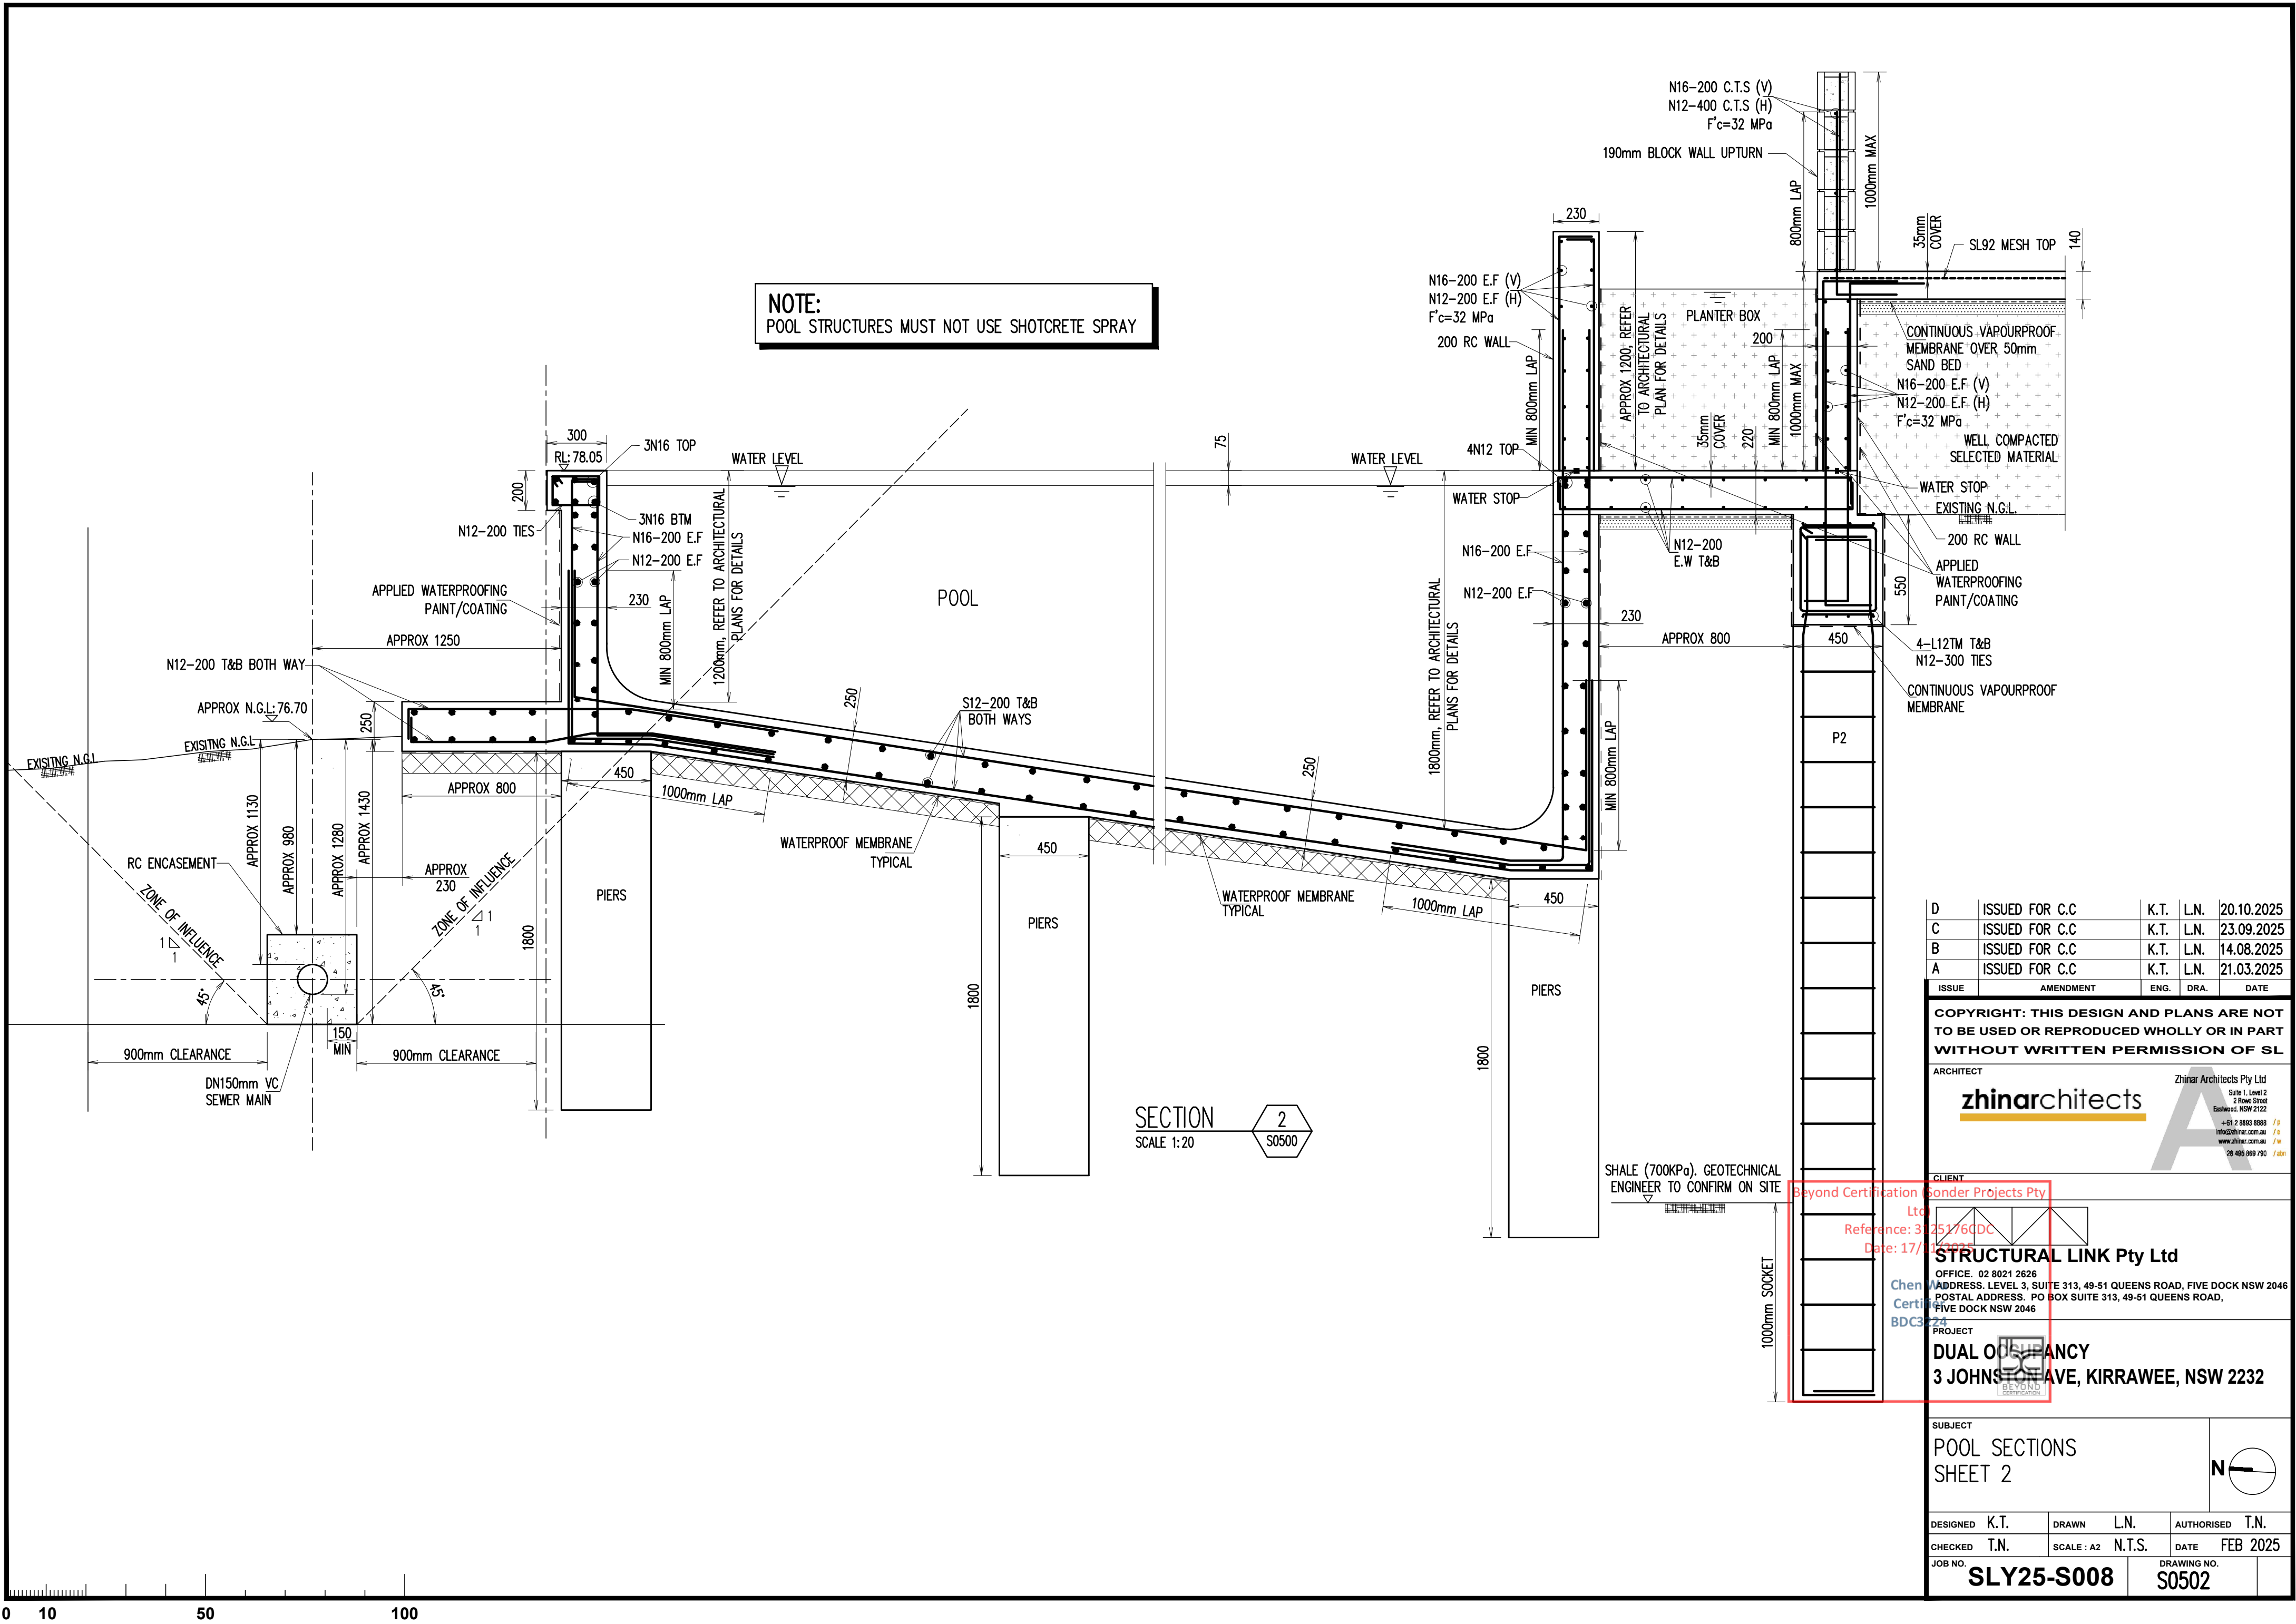

NOTE:
POOL STRUCTURES MUST NOT USE SHOTCRETE SPRAY

SECTION
SCALE 1:20

2
S0500

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhinarchitects Pty Ltd

2/100-102 Street

Eastwood, NSW 2122

+61 2 8868 8888 /p

info@zhinarch.com.au /e

www.zhinarch.com.au /w

26 465 969 790 /a

CLIENT

Beyond Certification Pty Ltd

Reference: 3125176CDC

Date: 17/11/2025

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626

ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT

DUAL OCCUPANCY

3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT

POOL SECTIONS

SHEET 2

N

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO. S0502		

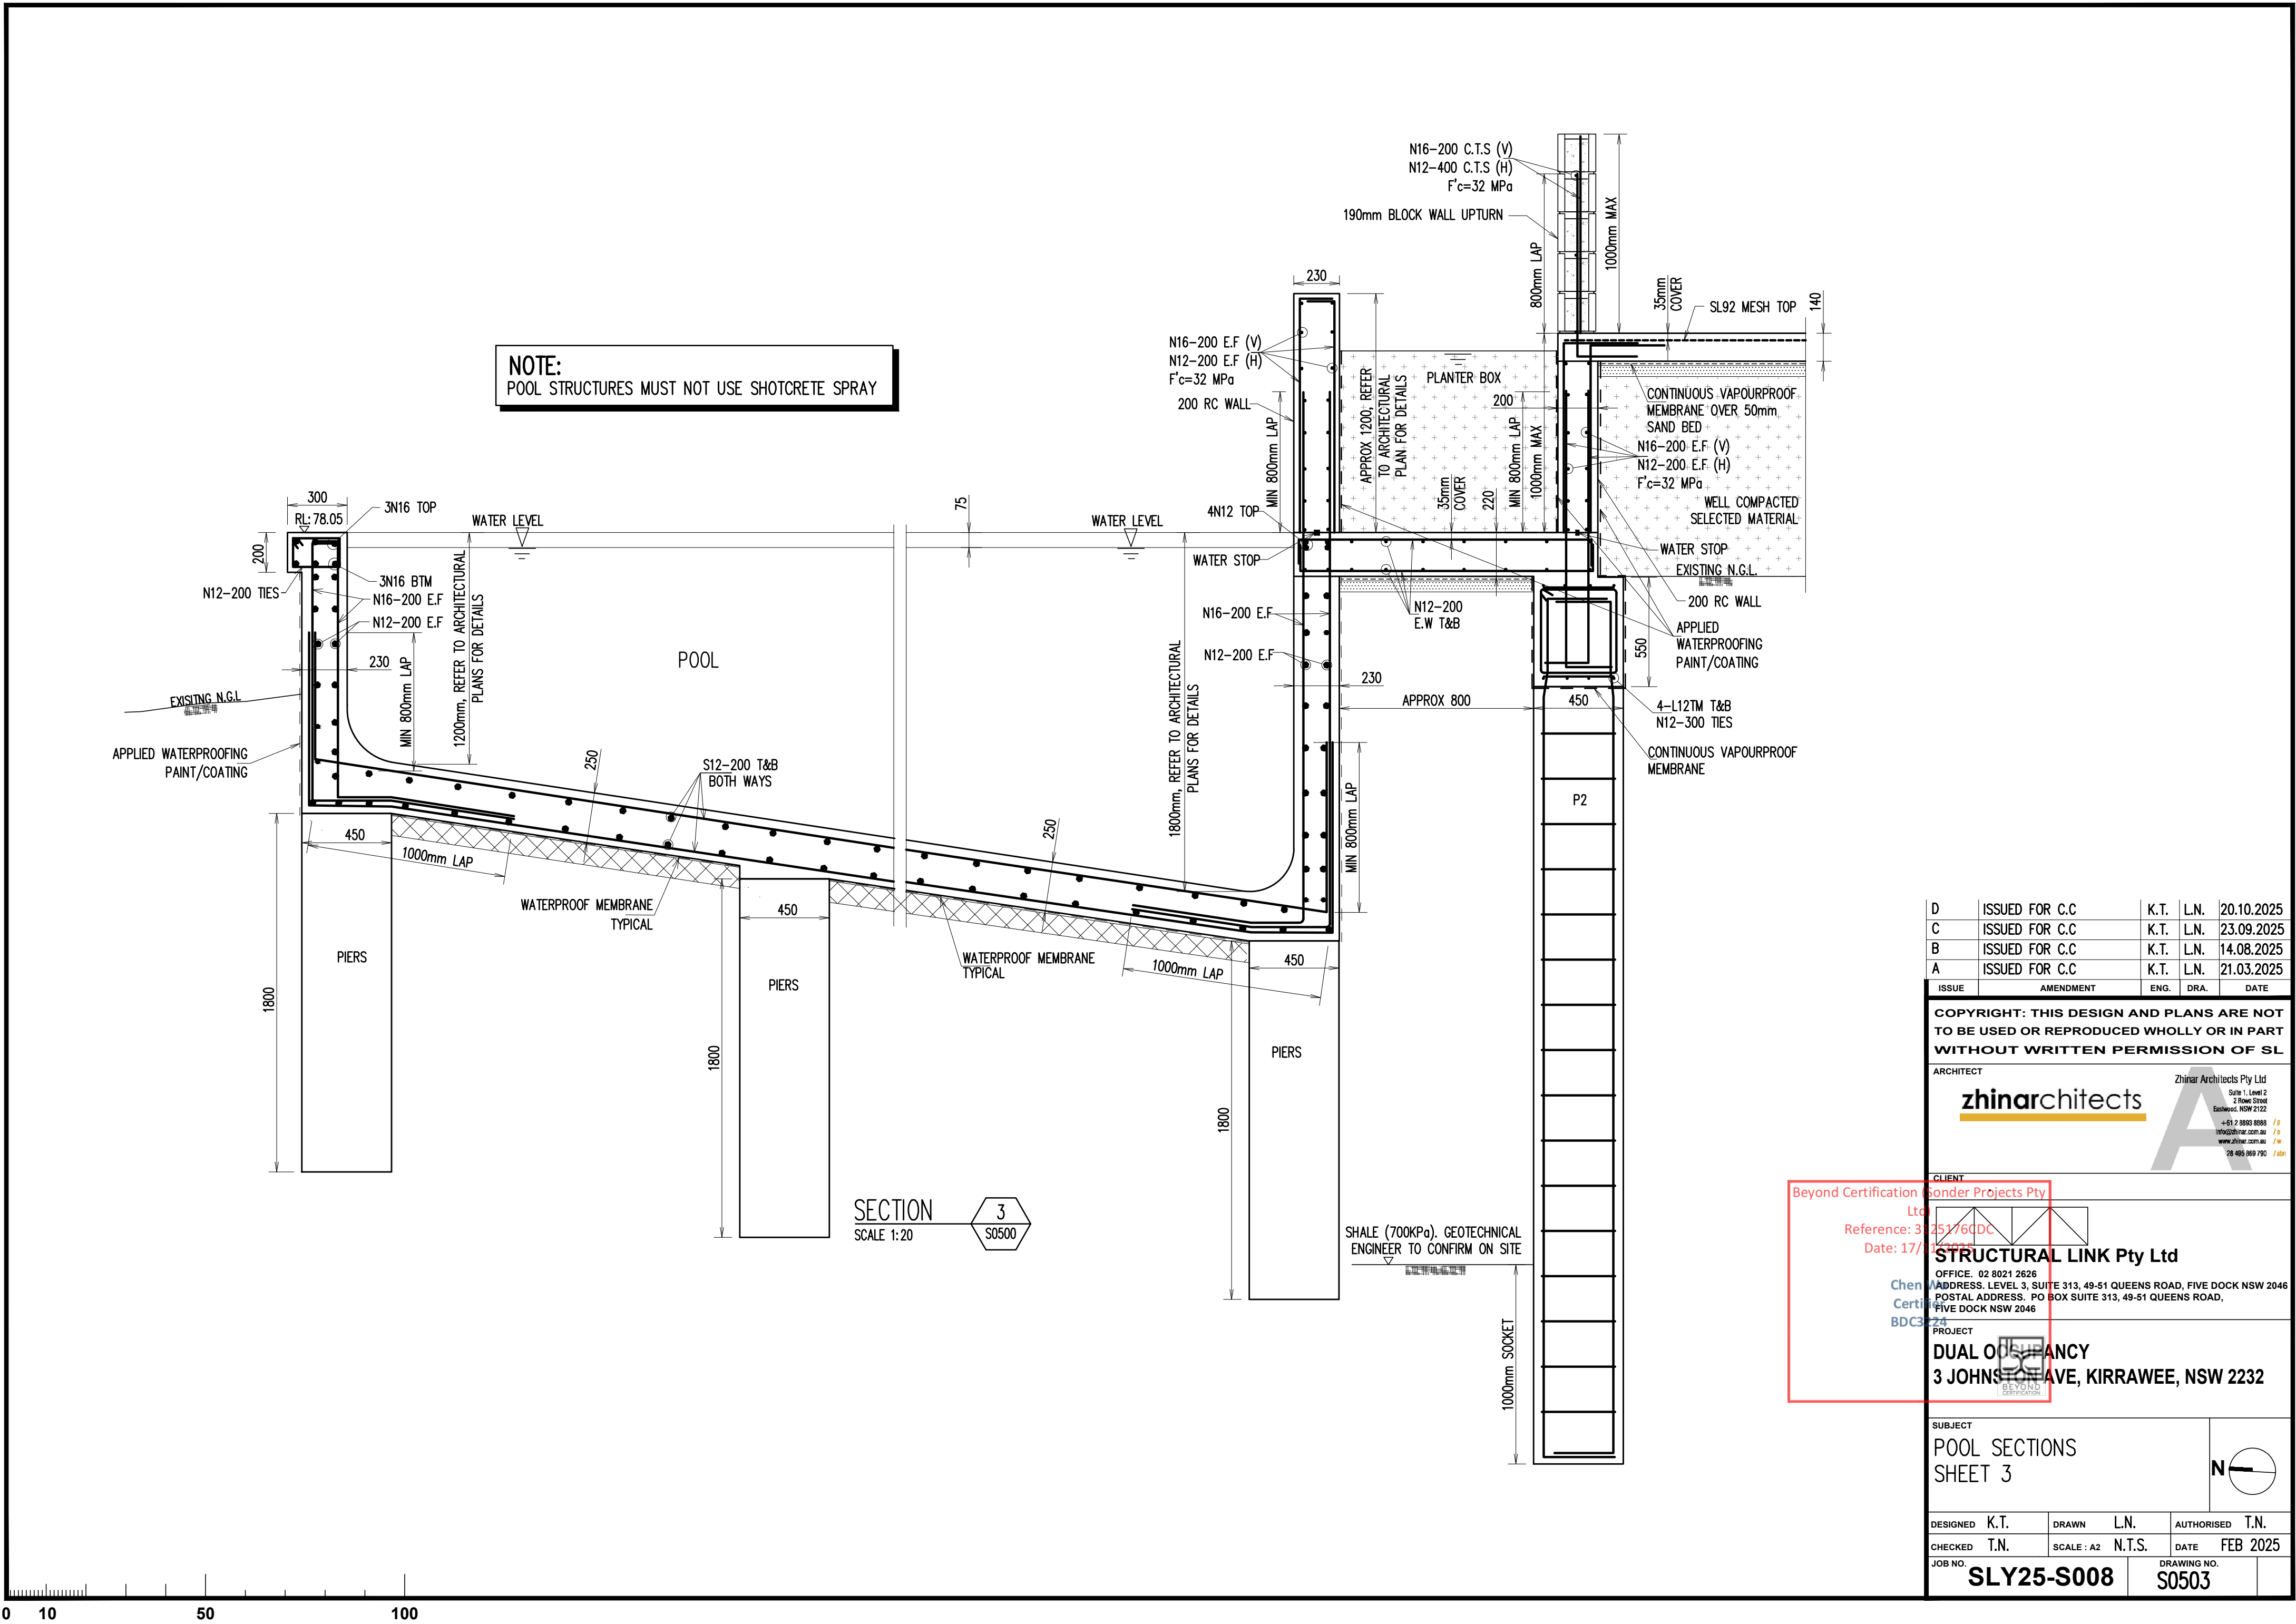

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL


ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /m


CLIENT
Beyond Certification Pty Ltd
Reference: 3125176DC
Date: 17/11/2025
STRUCTURAL LINK Pty Ltd
OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT
DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT
POOL SECTIONS
SHEET 3

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO. S0503	

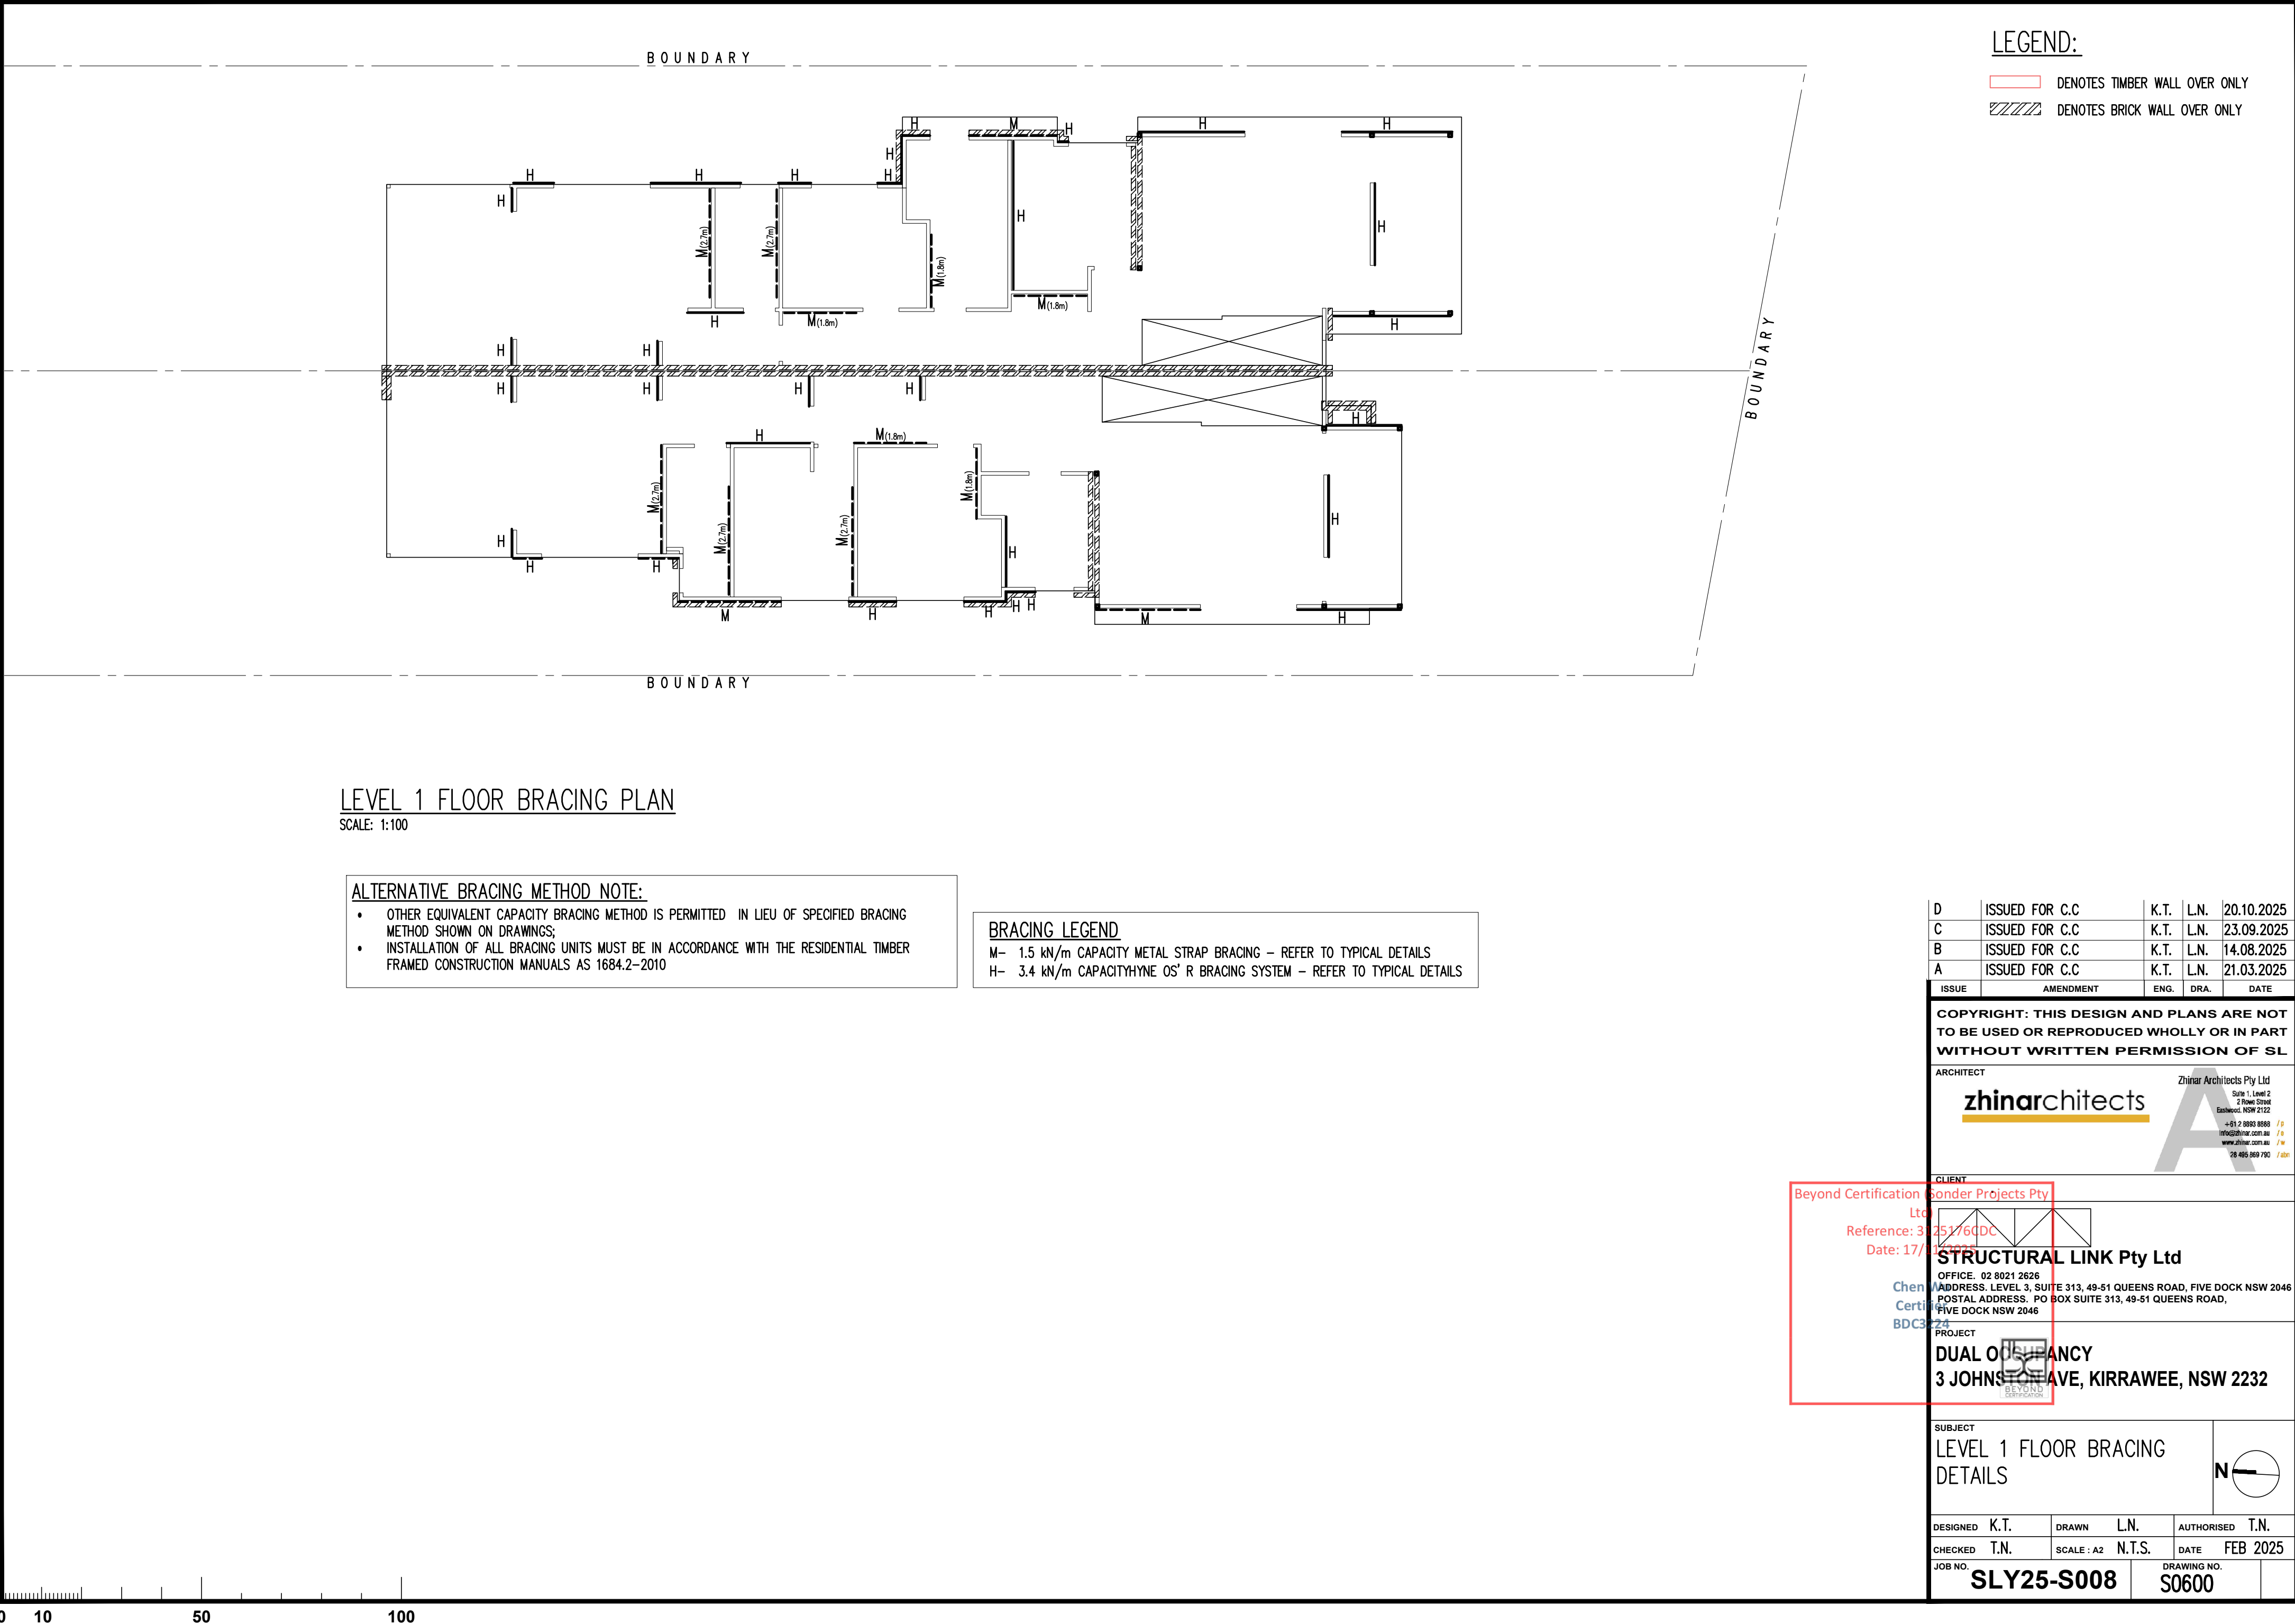

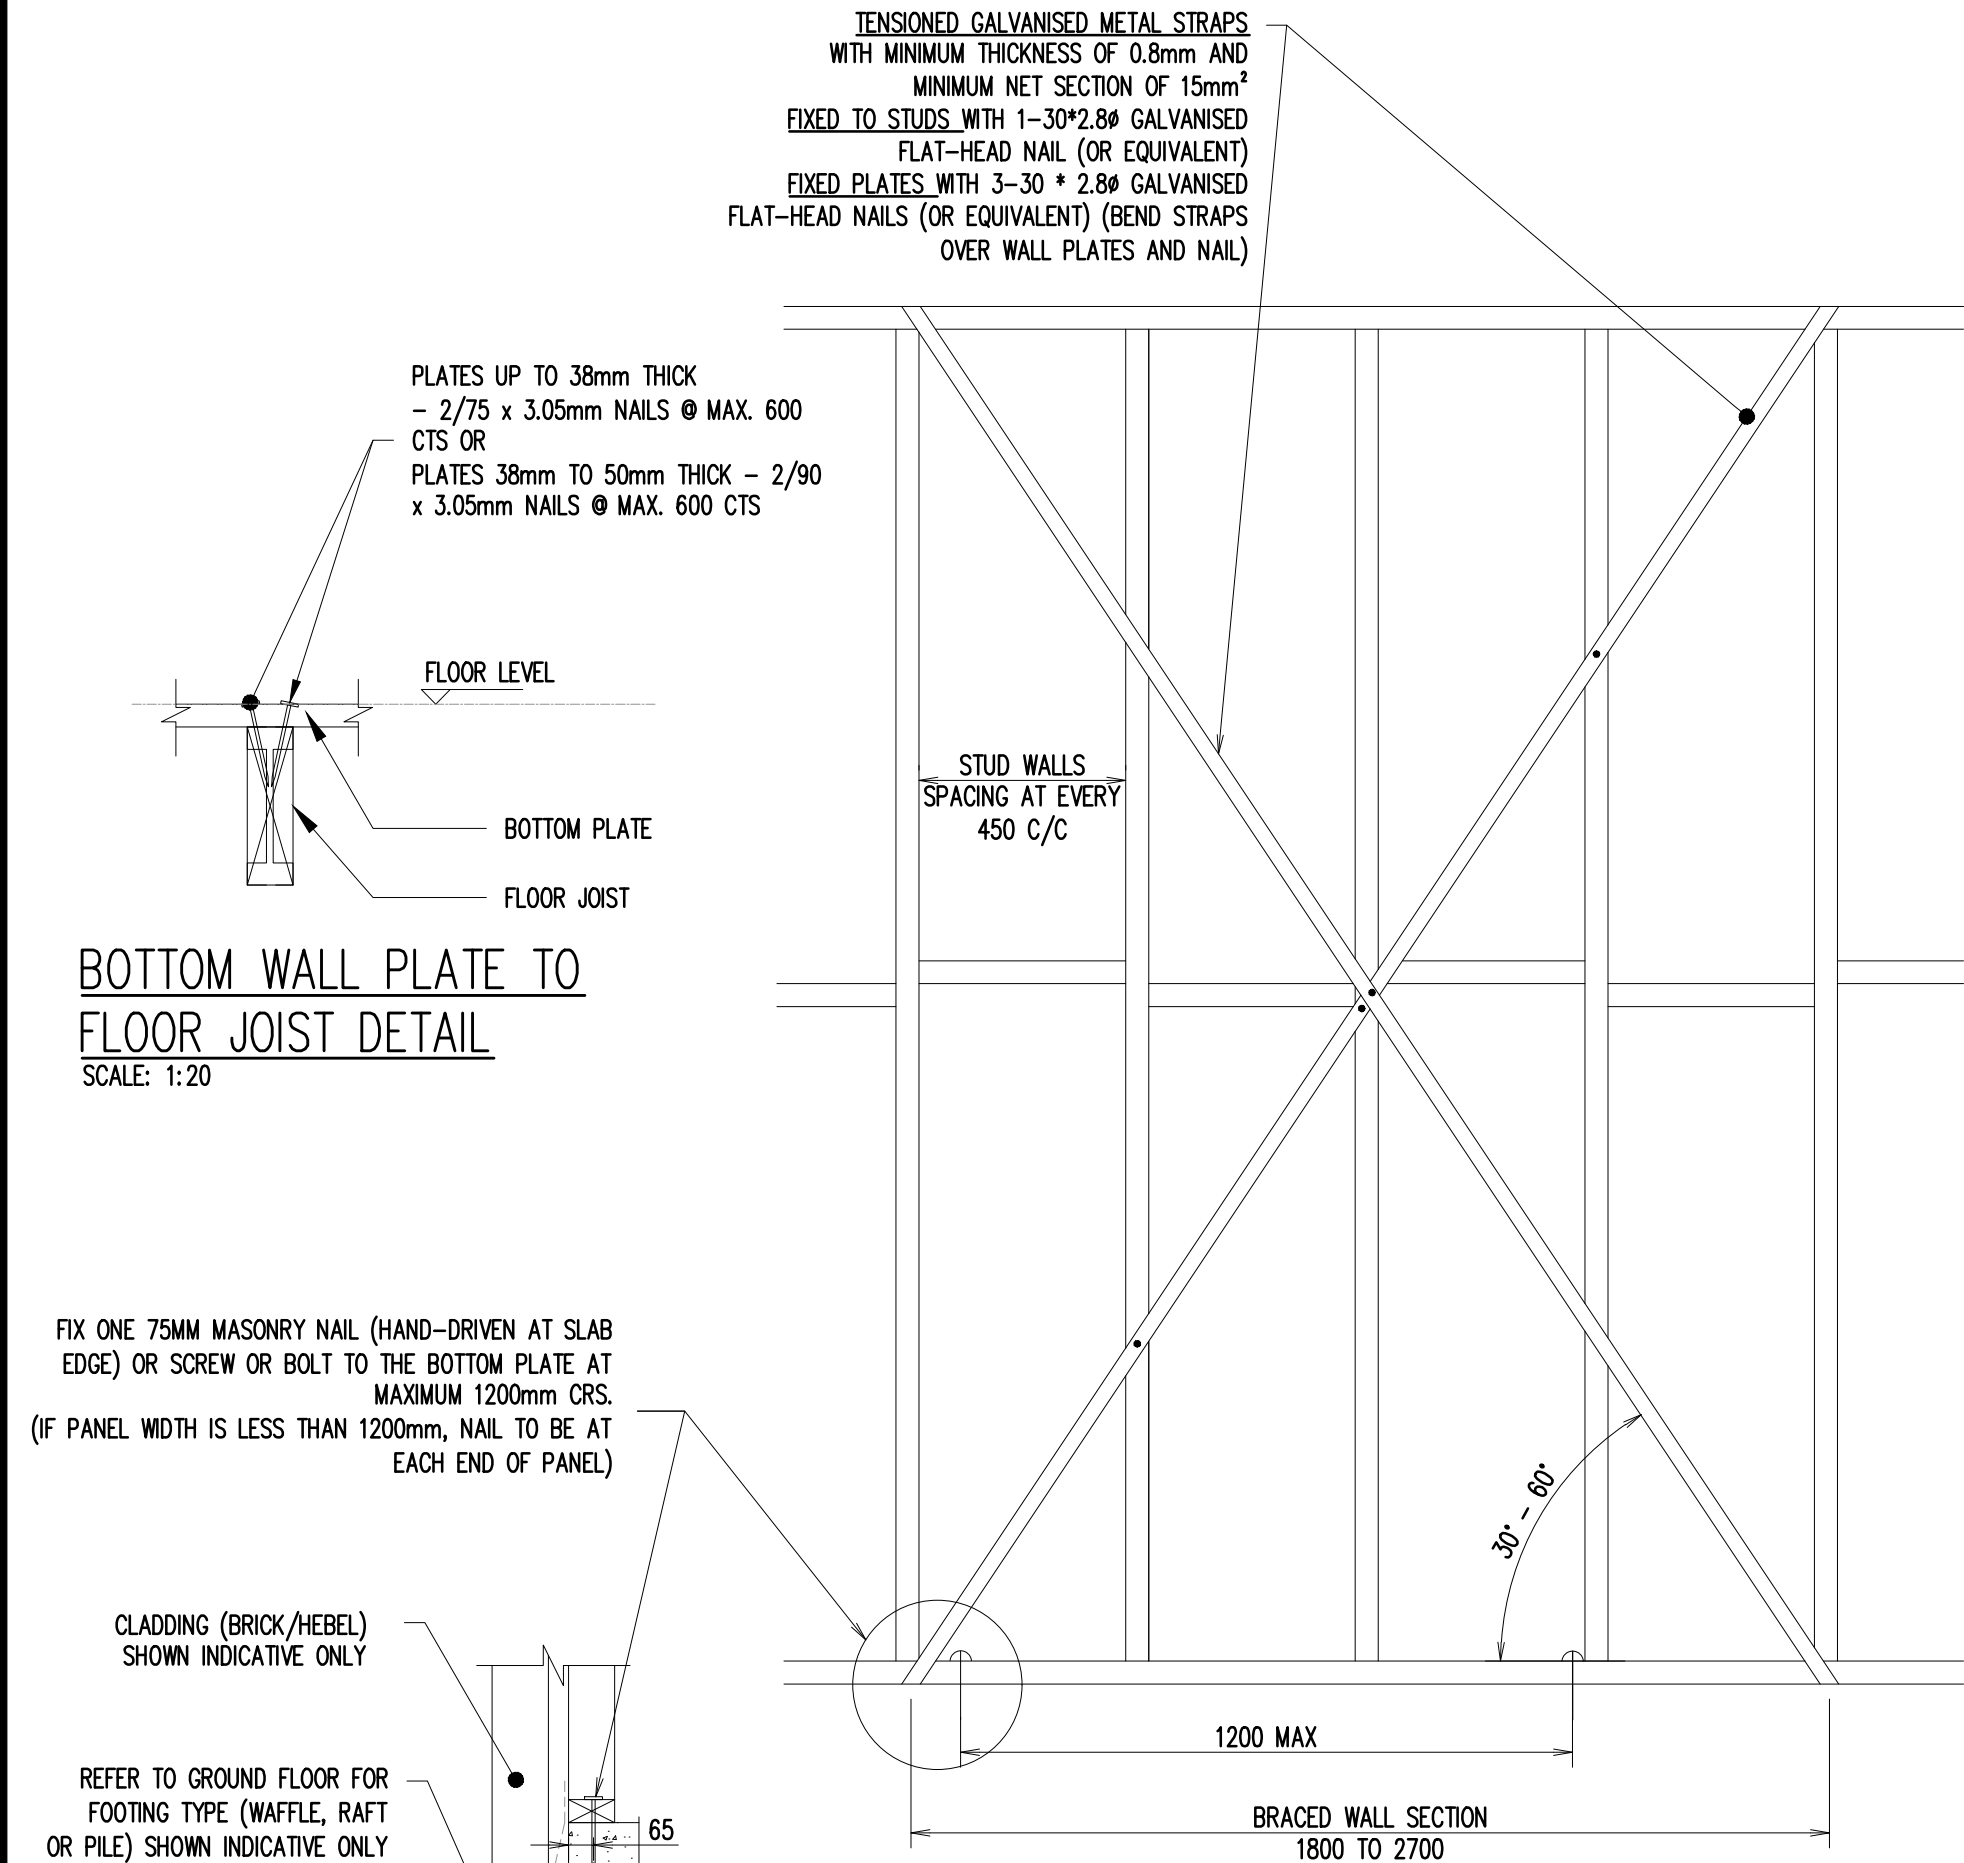


**BOTTOM WALL PLATE TO
FLOOR JOIST DETAIL**
SCALE: 1:20

**DOUBLE DIAGONAL METAL TENSION STRAPS
(BRACING CAPACITY -1.5 kN/m)**
DENOTED AS M ON PLAN.
N.T.S.

EQUIVALENT SPEEDBRACE CAN BE ADOPTED

NOTE:
TIMBER WALL OVER 2700mm
REQUIRED EXTRA ROW OF NOGGING

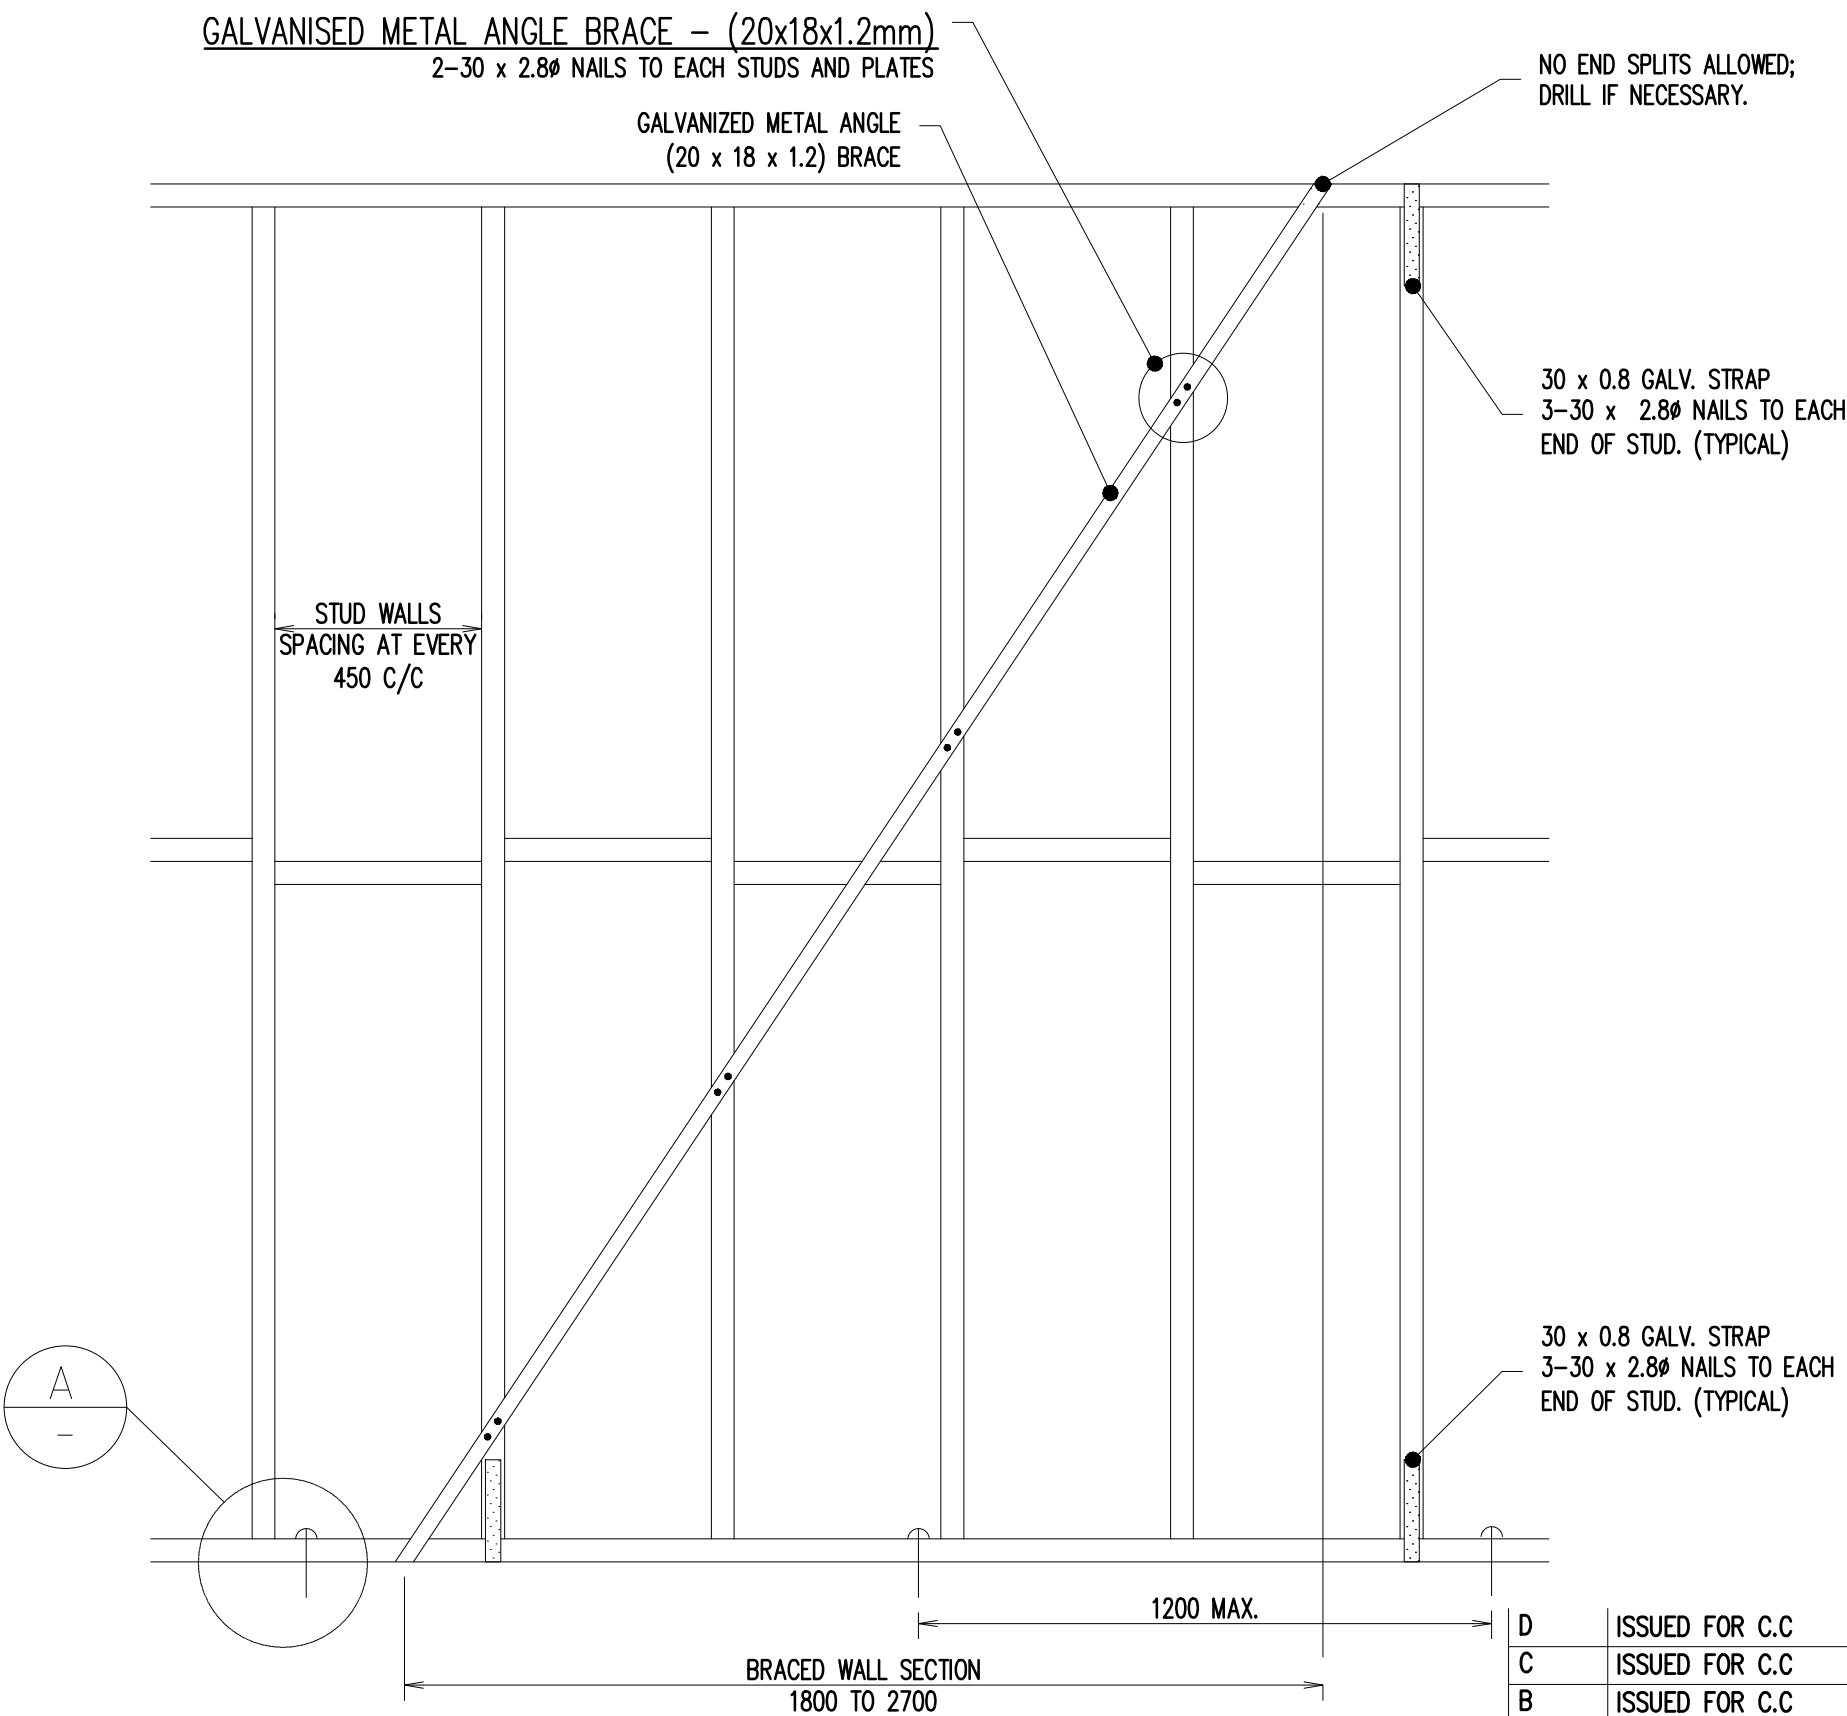

**DIAGONAL METAL ANGLE BRACES
(BRACING CAPACITY - 1.5 kN/m)**
DENOTED AS M ON PLAN.
N.T.S.

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

**COPYRIGHT: THIS DESIGN AND PLANS ARE NOT
TO BE USED OR REPRODUCED WHOLLY OR IN PART
WITHOUT WRITTEN PERMISSION OF SL**

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8863 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 495 969 790 /a

CLIENT

Beyond Certification
Ltd
Reference: 3125176DC
Date: 17/11/2024


STRUCTURAL LINK Pty Ltd
OFFICE. 02 8021 2626
ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS. PO BOX SUITE 313, 49-51 QUEENS ROAD,
FIVE DOCK NSW 2046

PROJECT


DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT		BRACING DETAILS SHEET 1		N	
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0601

1. HYNE OS'BRACE SHALL COMPLY WITH AS/NZS 1859.4.
2. HYNE OS'BRACE SHALL BE NAILED TO FRAME USING MINIMUM Ø30*2.8mm GALVANIZED FLAT-HEAD NAILS OR EQUIVALENT.
3. NAILS SHALL BE LOCATED A MINIMUM OF 10mm FROM THE VERTICAL EDGES AND 15mm FROM THE TOP AND BOTTOM EDGES. MAXIMUM 600mm STUD SPACING.
4. AT LEAST ONE SIDE OF THE BRACING WALL SHALL BE LINED WITH GYPSUM PLASTER BOARD OR APPROVAL EQUIVALENT

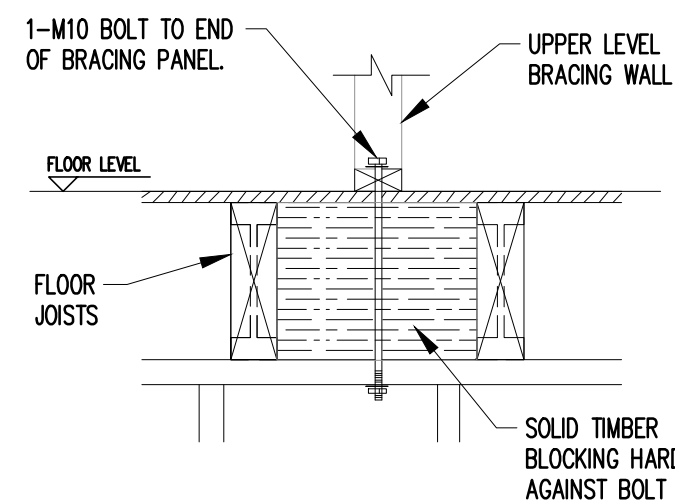


BRACING WALL PARALLEL TO JOISTS
(INTERNAL BRACING WALL SHOWN)

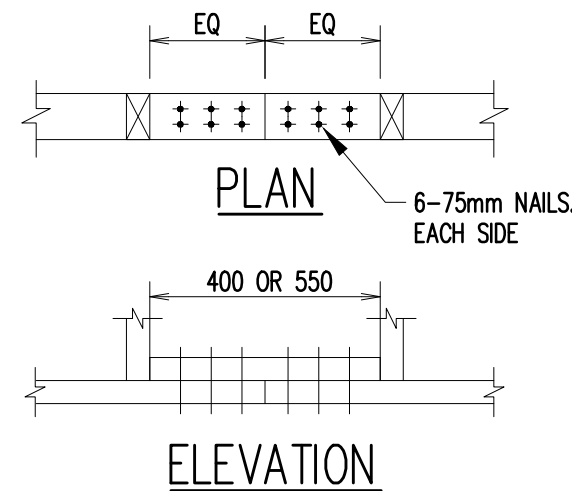


- SPLICE PLATE MUST BE SAME SIZE & STRESS GRADE AS TOP & BOTTOM PLATES
- WHERE TOP & BOTTOM PLATES IN BRACED SECTIONS ARE DISCONTINUED, THEY MUST BE SPLICED AS SHOWN IN THIS DETAIL


TYPICAL TOP & BOTTOM PLATE SPLICE DETAIL

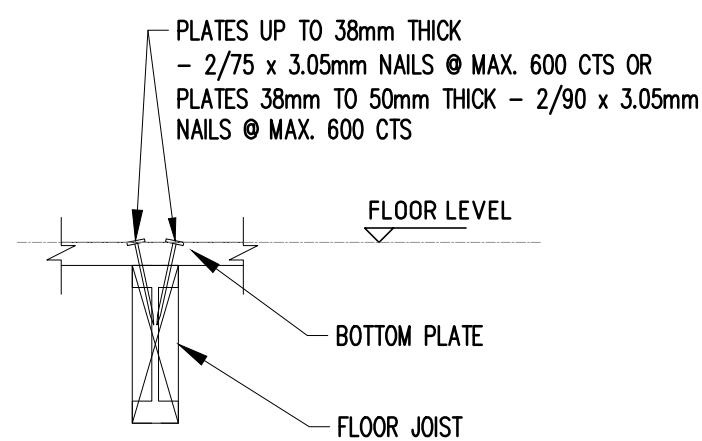

BOTTOM WALL PLATE TO FLOOR JOIST
DETAIL (APPLICABLE TO PANEL WIDTH
LESS THAN 1200mm ONLY)

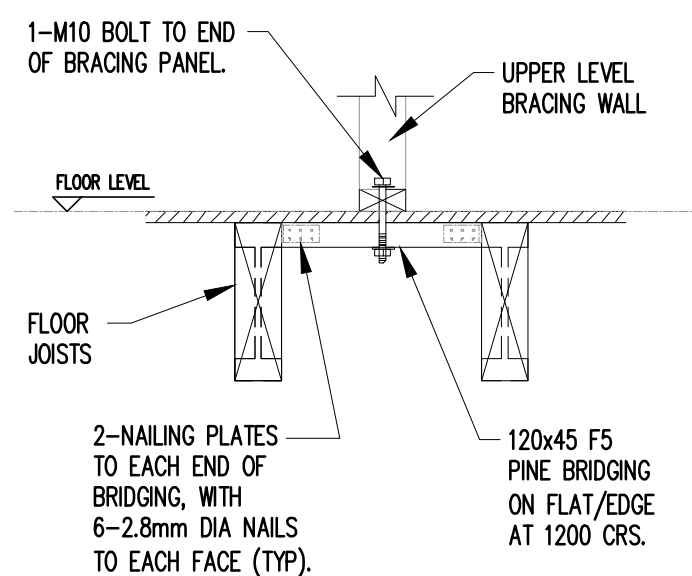

BRACING WALL PARALLEL TO JOISTS (NO STUD WALL UNDER)

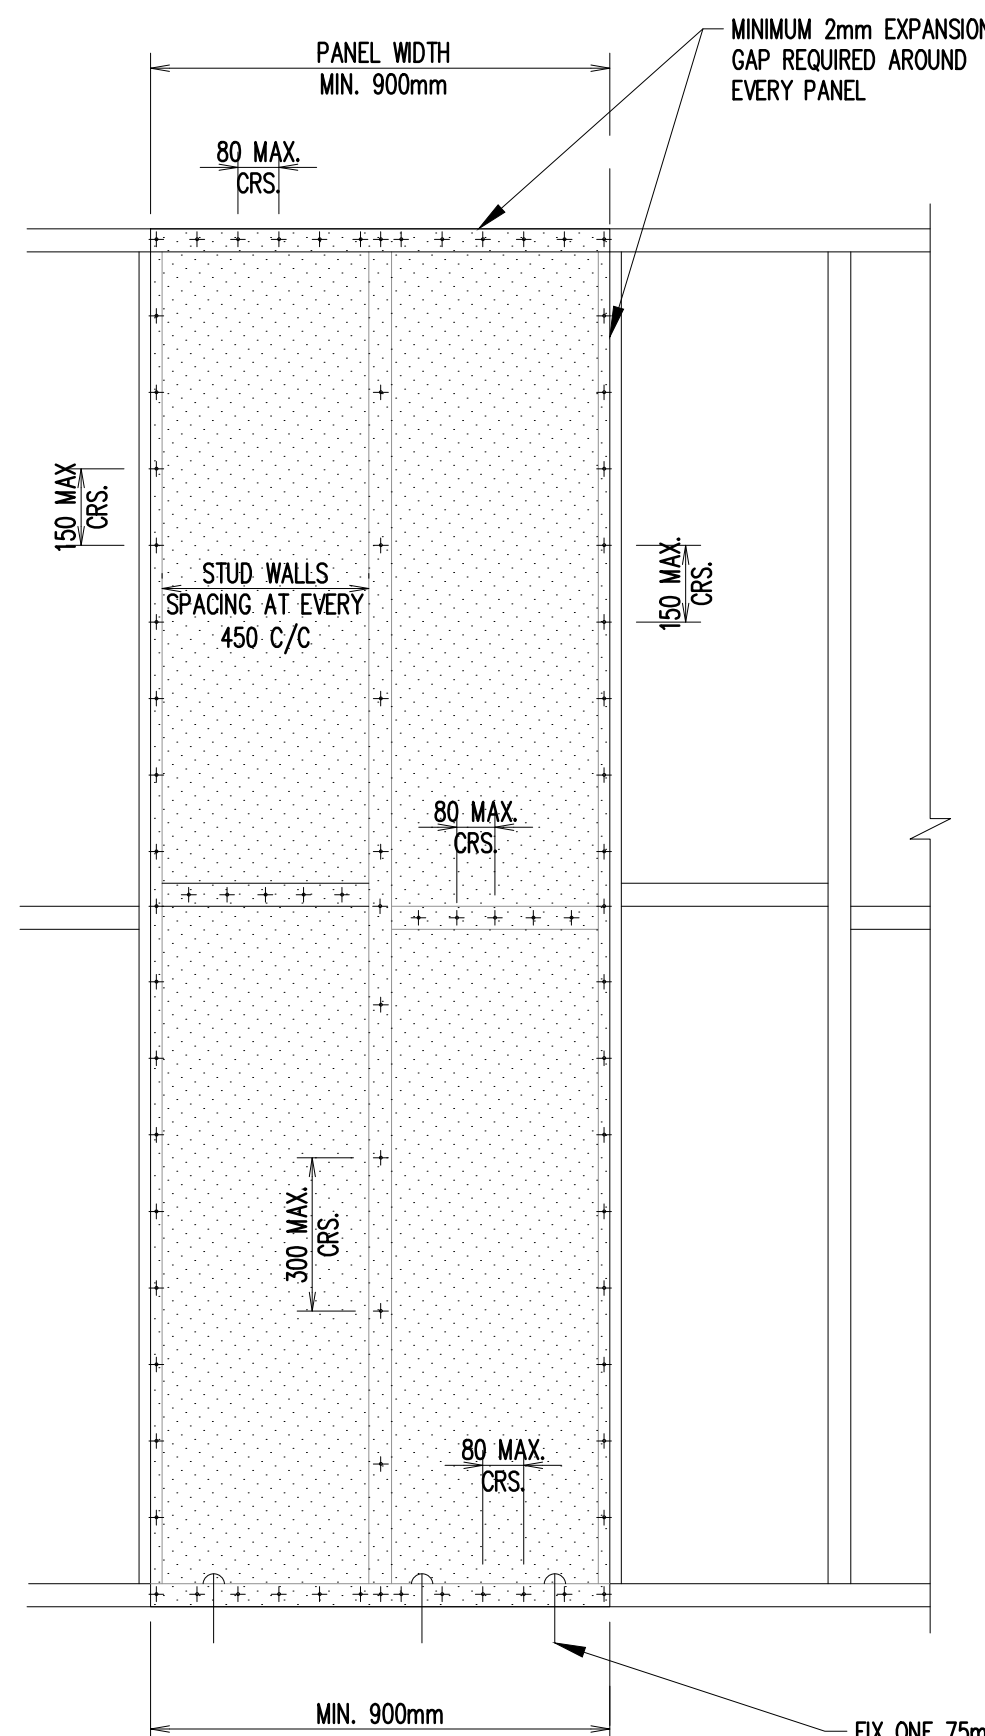


FIX ONE 75mm MASONRY NAIL (HAND-DRIVEN AT SLAB EDGE) OR SCREW OR BOLT TO THE BOTTOM PLATE AT MAXIMUM 1200mm CRS.
(IF PANEL WIDTH IS LESS THAN 1200mm, NAIL TO BE AT EACH END OF PANEL)

HYNE OS' BRACING (R) SYSTEM
(BRACING CAPACITY – 3.4 kN/m)

DENOTED AS H ON PLAN.
N.T.S.

NOTE:
TIMBER WALL OVER 2700mm
REQUIRED EXTRA ROW OF NOGGING

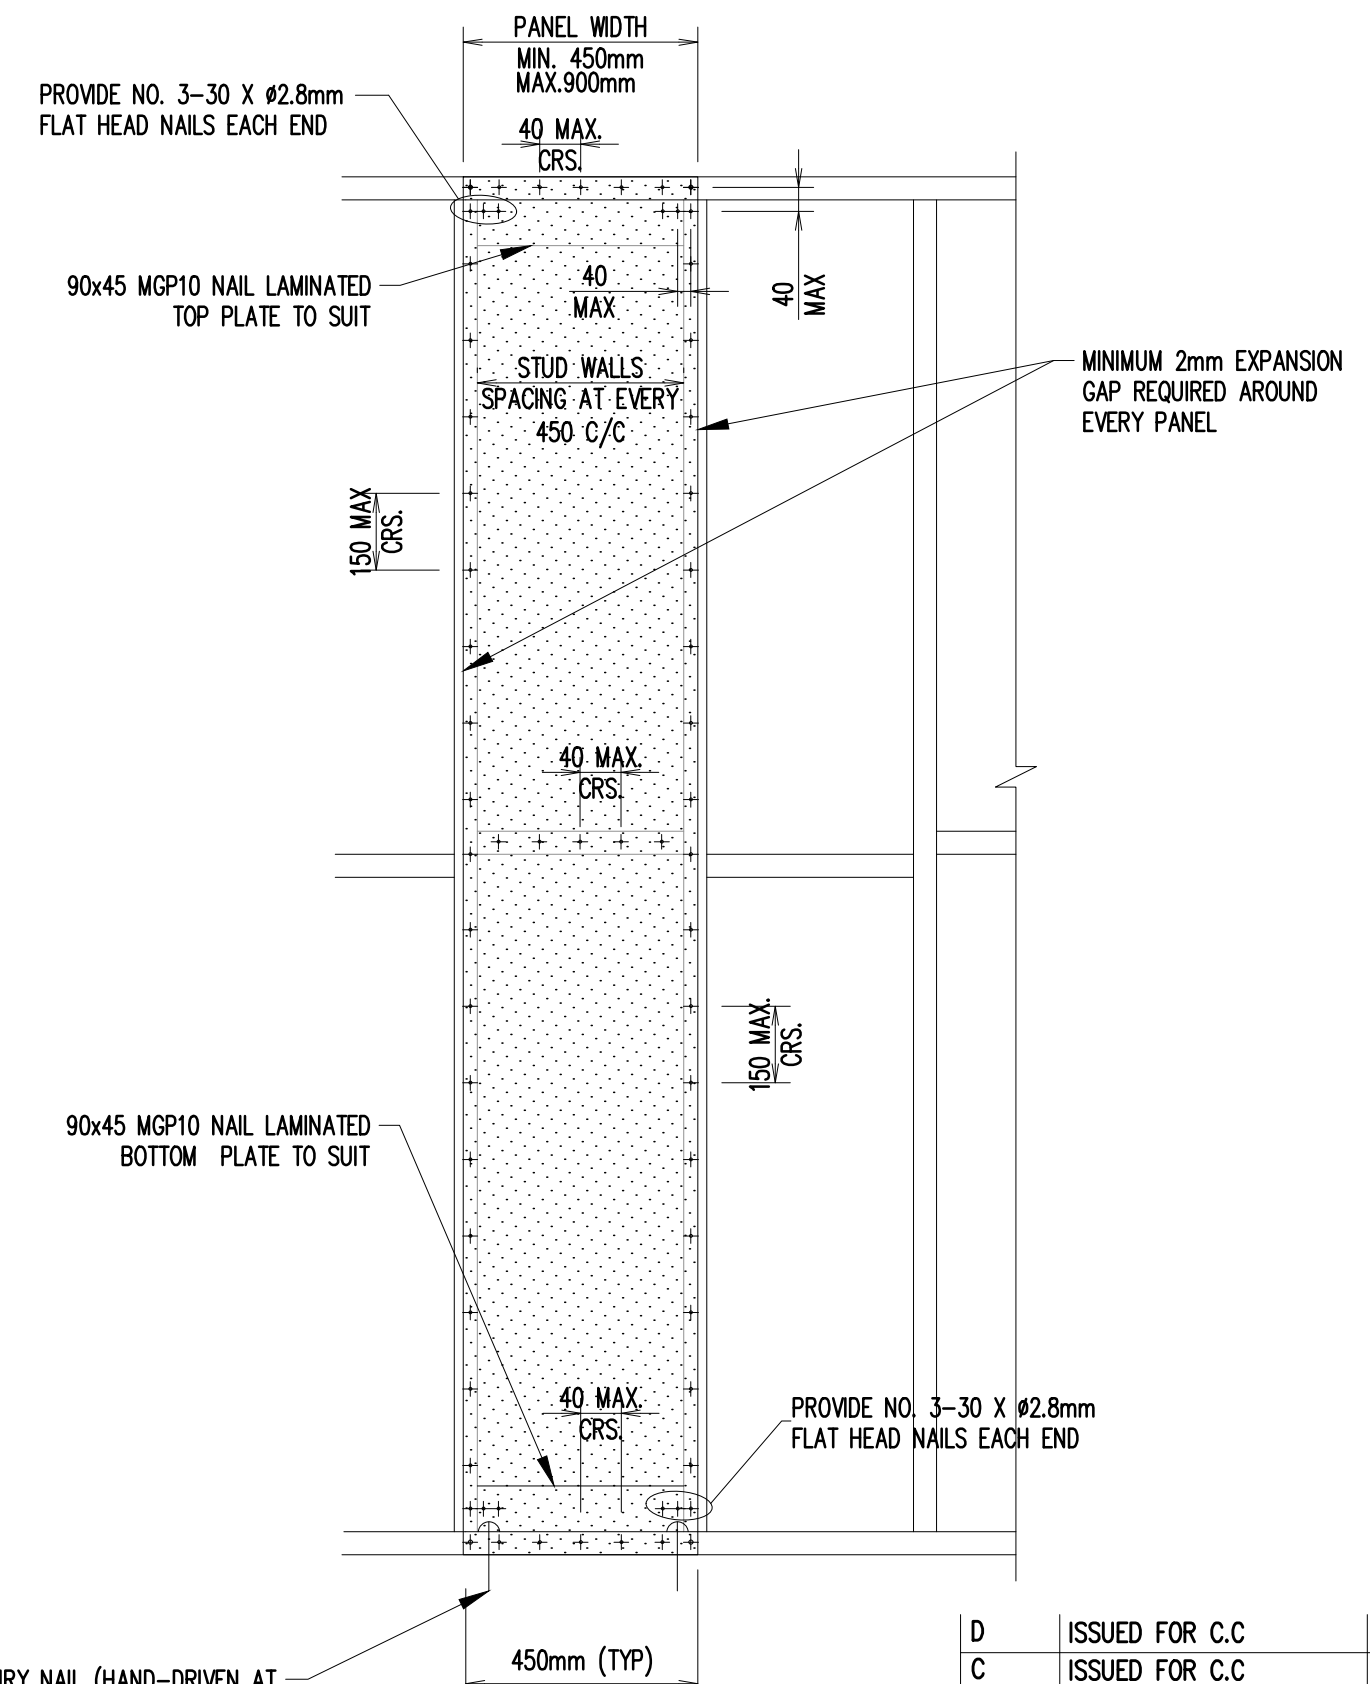

HYNE OS' BRACE® SYSTEM DETAIL
(BRACING CAPACITY – 2.2 kN/m)

DENOTED AS H ON PLAN.
N.T.S.

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhinarchitects Pty Ltd
Suite 1, Level 2
2 Rowe Street
Eastwood, NSW 2122

+61 2 8860 8888 / p
info@zhinarch.com.au / e
www.zhinarch.com.au / w
28 495 869 790 / sbr

CLIENT
n (Sonder Projects Pty

STRUCTURAL LINK Pty Ltd

OFFICE. 02 8021 2626
ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS. PO BOX SUITE 313, 49-51 QUEENS ROAD,
FIVE DOCK NSW 2046

C3224 PROJECT

DUAL OPPORTUNITY
3 JOHNS ST, KIRRAWEE, NSW 2232

BEYOND
CERTIFICATION

SUBJECT	
BRACING DETAILS	

BRACING DETAILS
SHEET 2


N 

[illegible]


DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	DATE	15.12.2025	DATE	FEB. 2025

CHECKED	T.N.	SCALE: A2	N.T.S.	DATE	FEB 2025
JOB NO.			DRAWING NO.		
SI Y25 S008			C0600		


SLY23-3008	S0602	
------------	-------	--

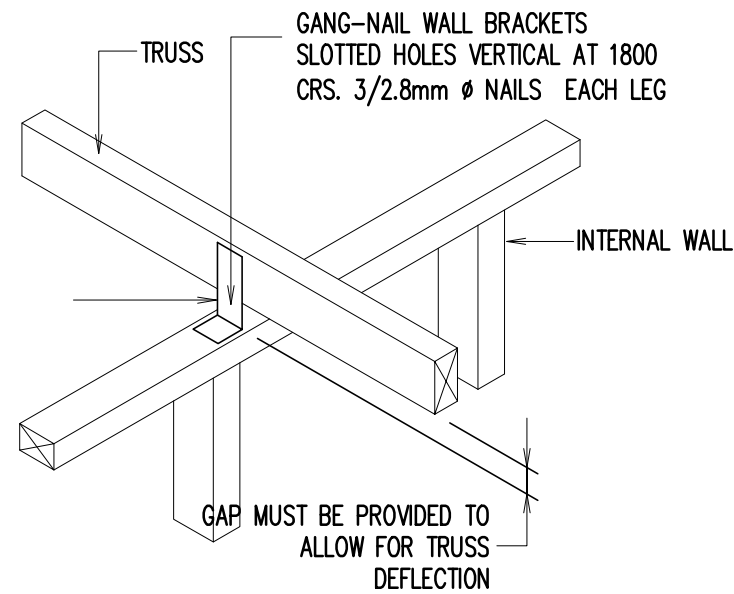



**NON LOAD BEARING WALL
PERPENDICULAR TO TRUSSES**
SCALE 1:20

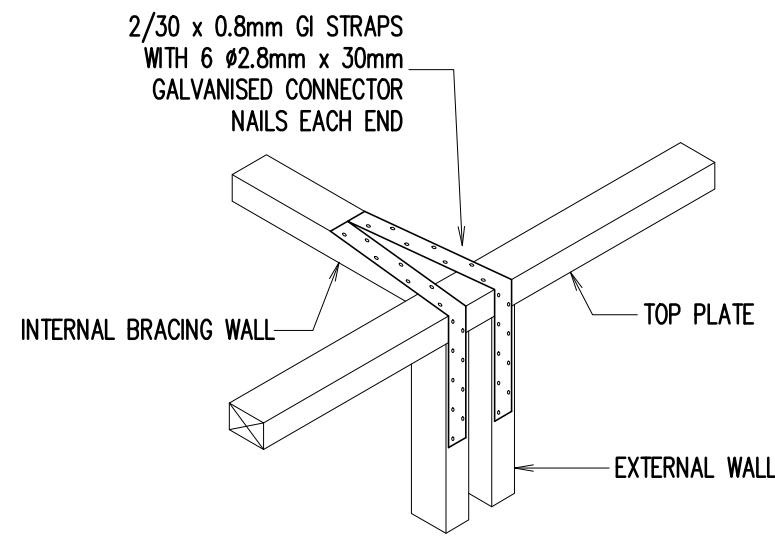



**INTERNAL BRACING WALL TO
EXTERNAL WALL CONNECTION**
SCALE 1:20

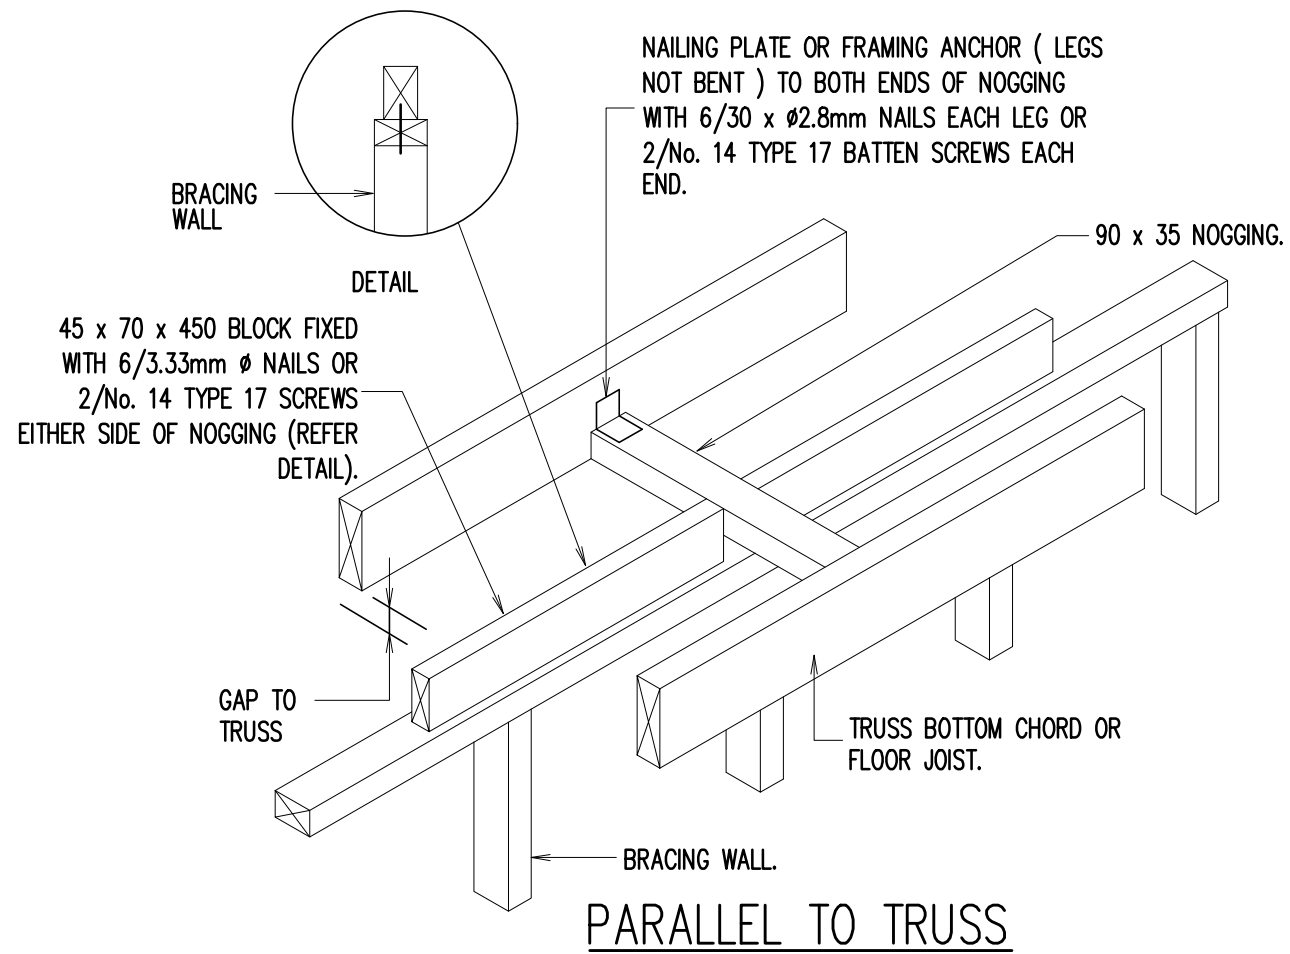

**TIMBER BRACING WALL TOP
CONNECTION DETAIL**
SCALE 1:20

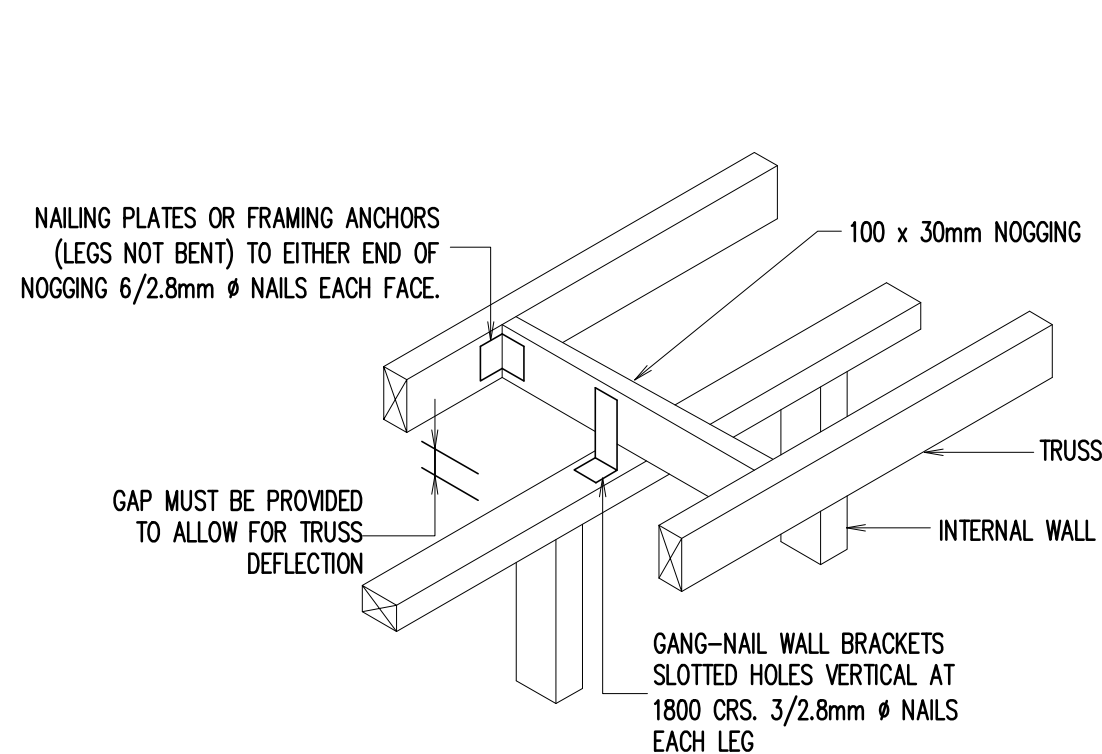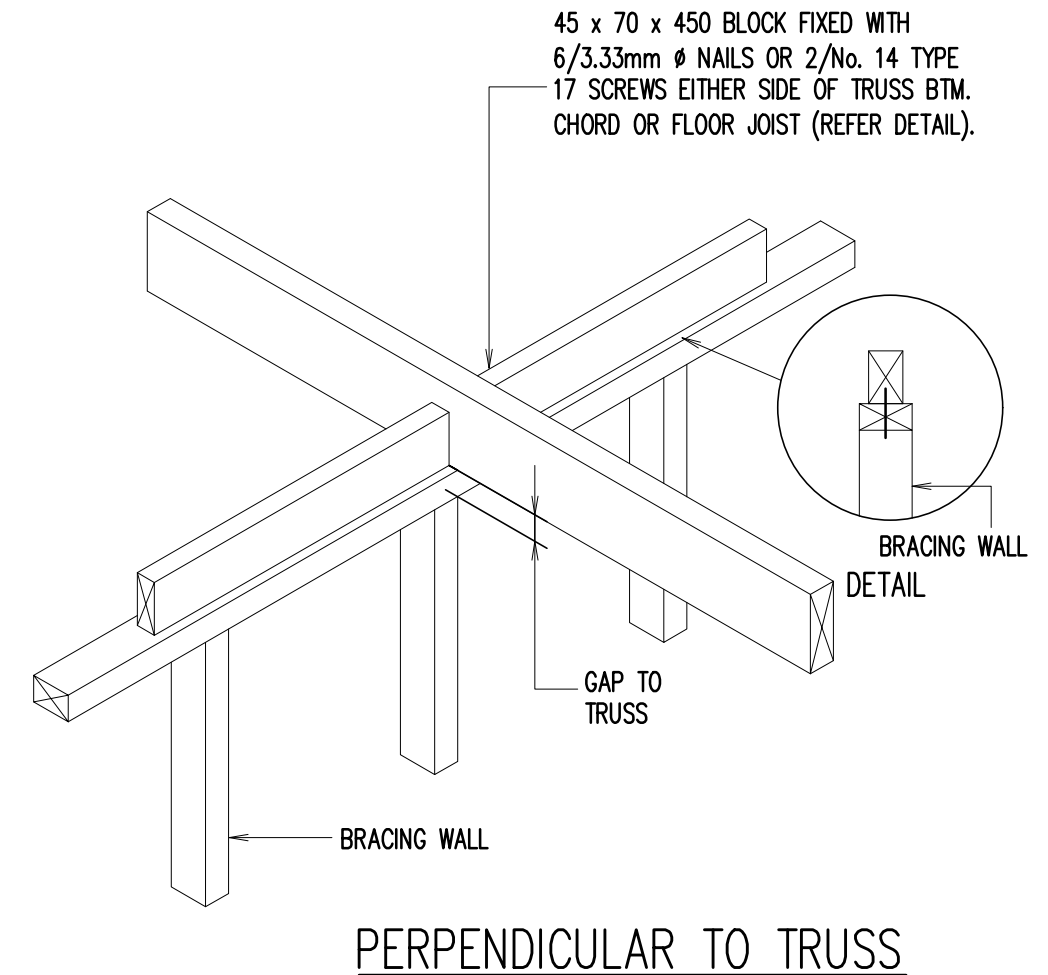

**NON LOAD BEARING WALL
PARALLEL TO TRUSSES**
SCALE 1:20

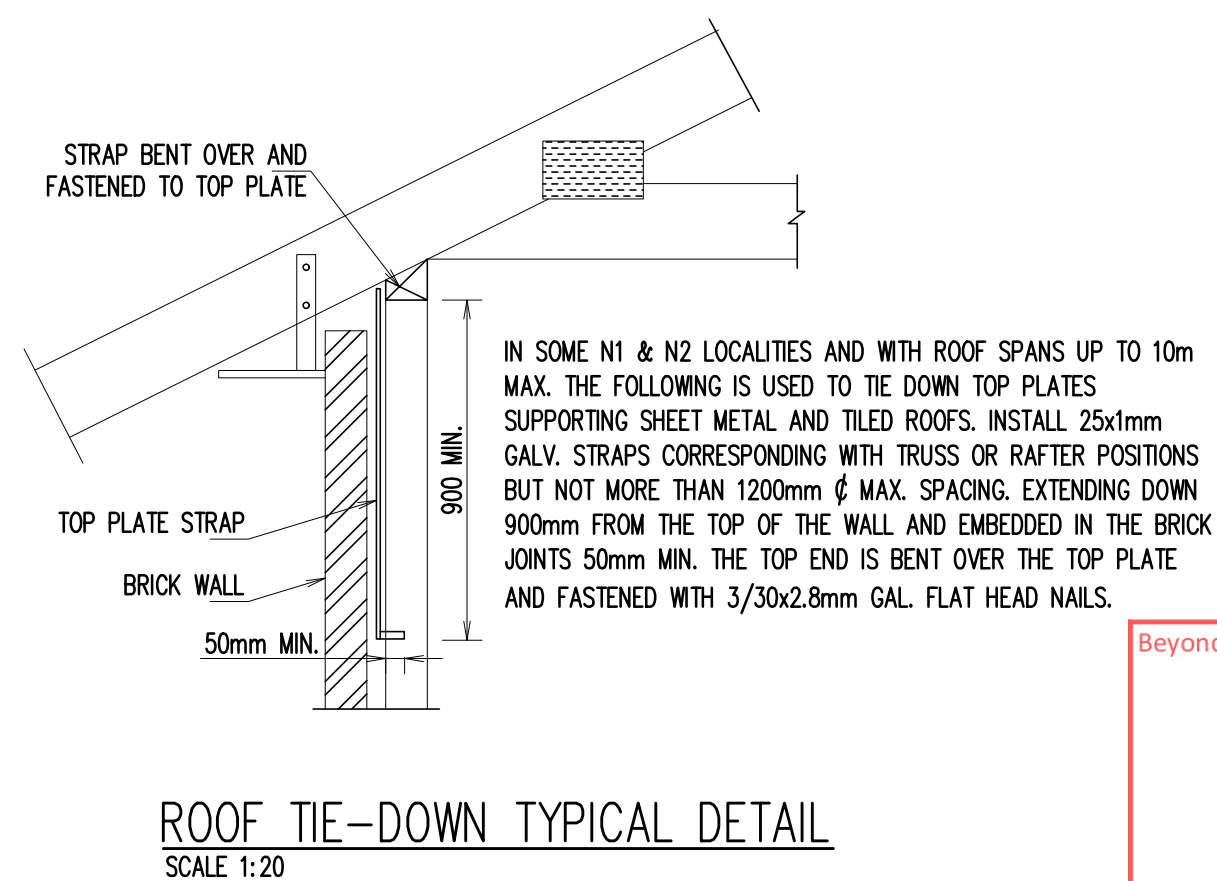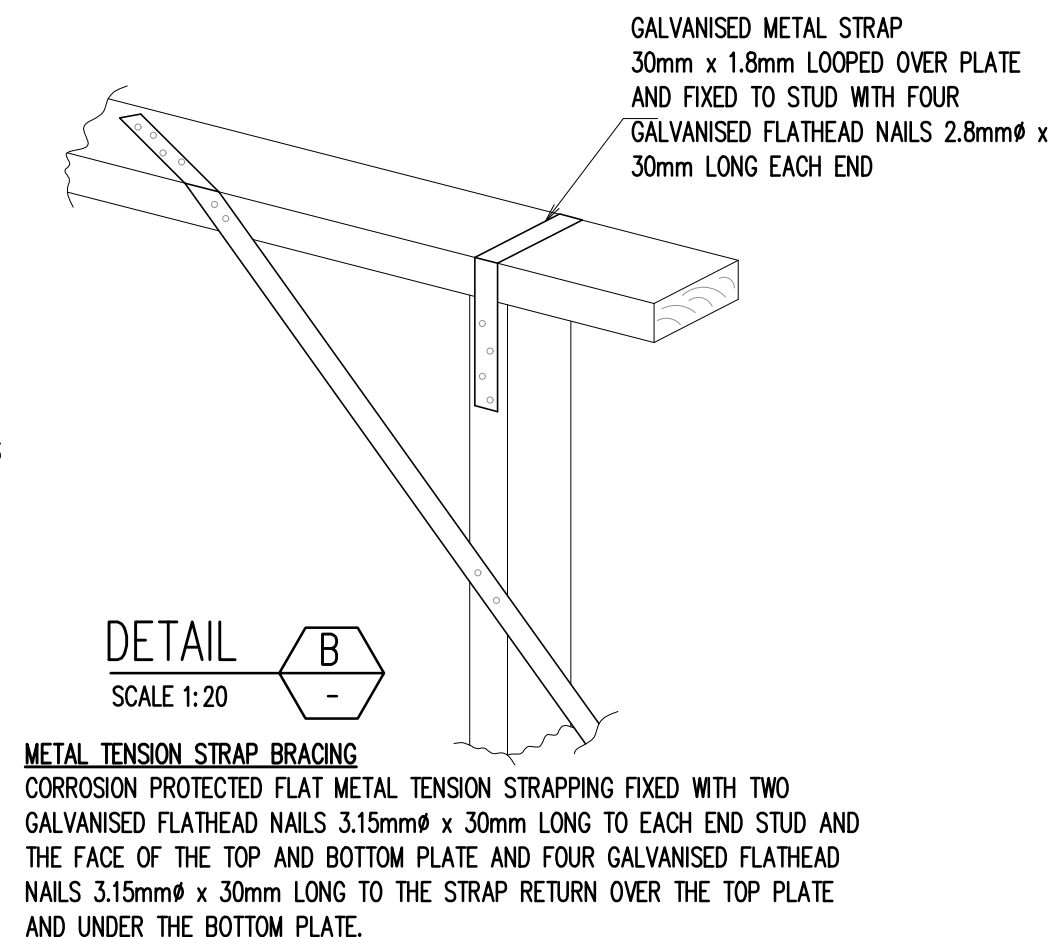


D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

**COPYRIGHT: THIS DESIGN AND PLANS ARE NOT
TO BE USED OR REPRODUCED WHOLLY OR IN PART
WITHOUT WRITTEN PERMISSION OF SL**

ARCHITECT	Zhin Architects Pty Ltd Suite 1, Level 2 2 River Street Eastwood, NSW 2122 +61 2 8868 8888 /p info@zhinarchitects.com.au /e www.zhinarchitects.com.au /w 28 495 969 790 /m
-----------	---

CLIENT	Beyond Certification Ltd Reference: 3125176CDC Date: 17/11/2025
PROJECT	STRUCTURAL LINK Pty Ltd OFFICE. 02 8021 2626 ADDRESS. LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046 POSTAL ADDRESS. PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
SUBJECT	DUAL OCCUPANCY 3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT				N 	
BRACING DETAILS SHEET 3					
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.		DRAWING NO.			
SLY25-S008		S0603			

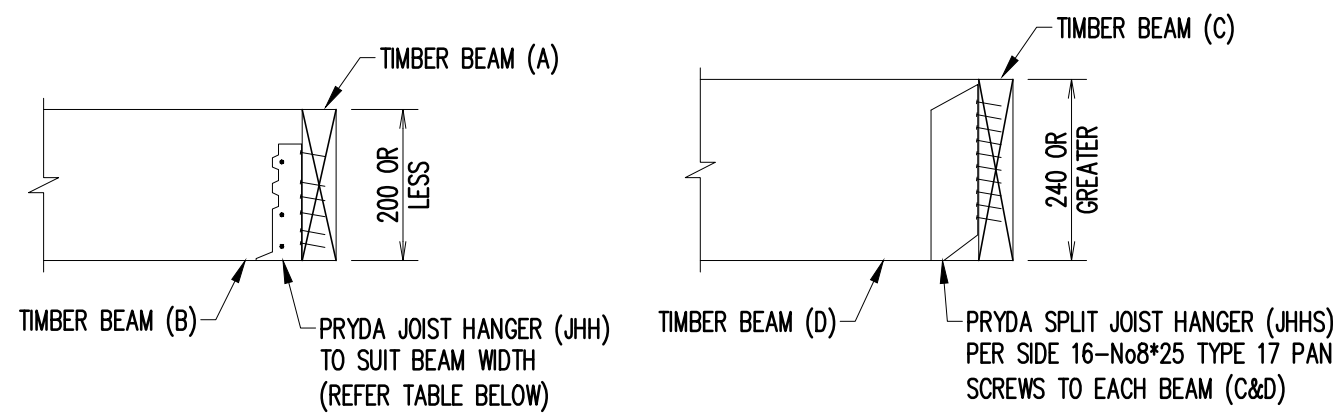

BEAM (B) WIDTH	BRACKET	FIXING
63	JHH65	20-No12*35 TYPE 17 HEX HEAD SCREWS TO BEAM (A) 16-No12x35 TYPE 17 HEX HEAD SCREWS TO BEAM (B)
70	JHH75	20-No12*35 TYPE 17 HEX HEAD SCREWS TO BEAM (A) 16-No12x35 TYPE 17 HEX HEAD SCREWS TO BEAM (B)
90	JHH100	24-No12*35 TYPE 12 HEX HEAD SCREWS TO BEAM (A) 18-No12x35 TYPE 12 HEX HEAD SCREWS TO BEAM (B)

ALTERNATIVE TIMBER BEAM TO TIMBER BEAM CONNECTIONS (FOR PORCH AND/OR ALFRESCO AREAS ONLY)

SCALE: 1:10

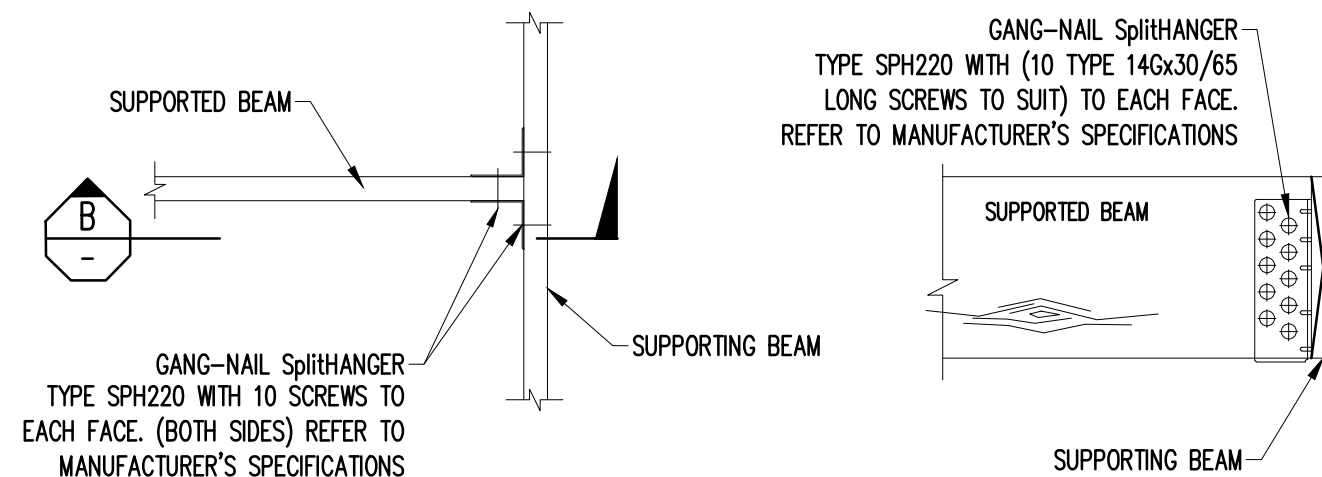


(PLAN VIEW) TIMBER BEAM TO TIMBER BEAM CONNECTION DETAIL

SCALE: 1:10


SECTIONS B-B

SCALE: 1:10

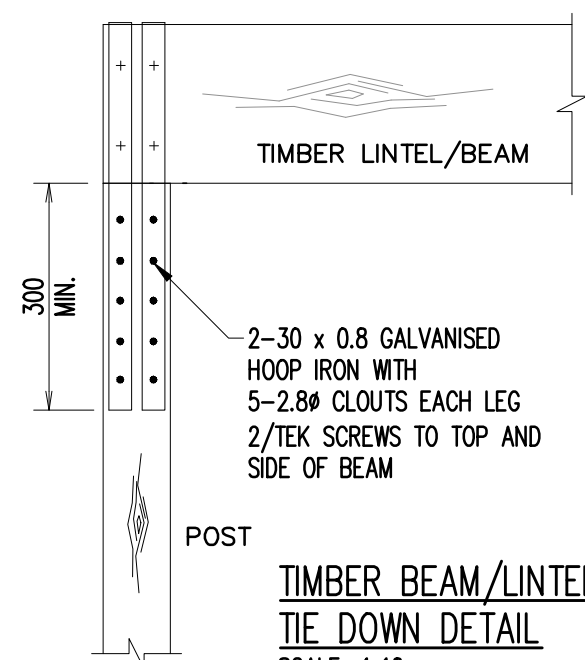

TIMBER BEAM/LINTEL TIE DOWN DETAIL

SCALE: 1:10

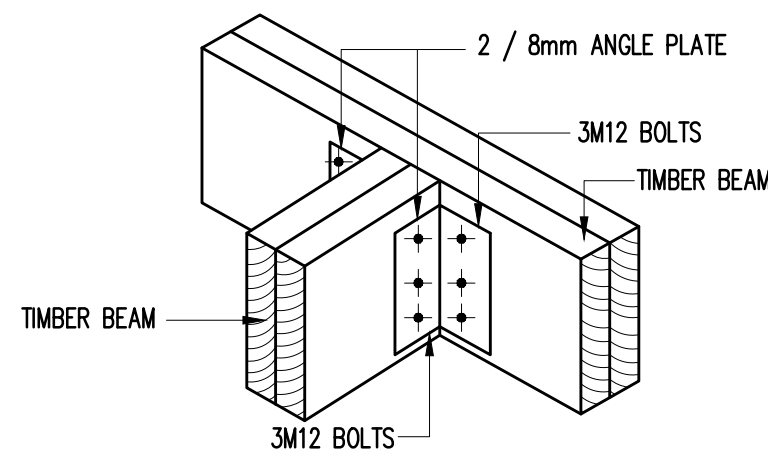


TIMBER BEAM CONNECTION DETAIL

SCALE: N.T.S

NOTE:
1. AT DOUBLE JOIST TO DOUBLE JOIST USE JOIST HANGER TO ONE JOIST AND TRIP L GRIP FIXING TO SECOND JOIST WITH 5 NAILS/LEG. (15 NAILS)
2. AT DOUBLE JOIST TO WALL PLATE USE JOIST HANGER TO ONE JOIST AND TRIP L GRIP FIXING TO SECOND JOIST WITH 5 NAILS/LEG. (15 NAILS)
2-16Ø DYNABOLTS TO WALL
SPACE DYNABOLTS AT 80mm CRS AND 80mm EDGE DISTANCE


TIMBER TO TIMBER RAFTER/JOIST CONNECTION

SCALE: 1:10

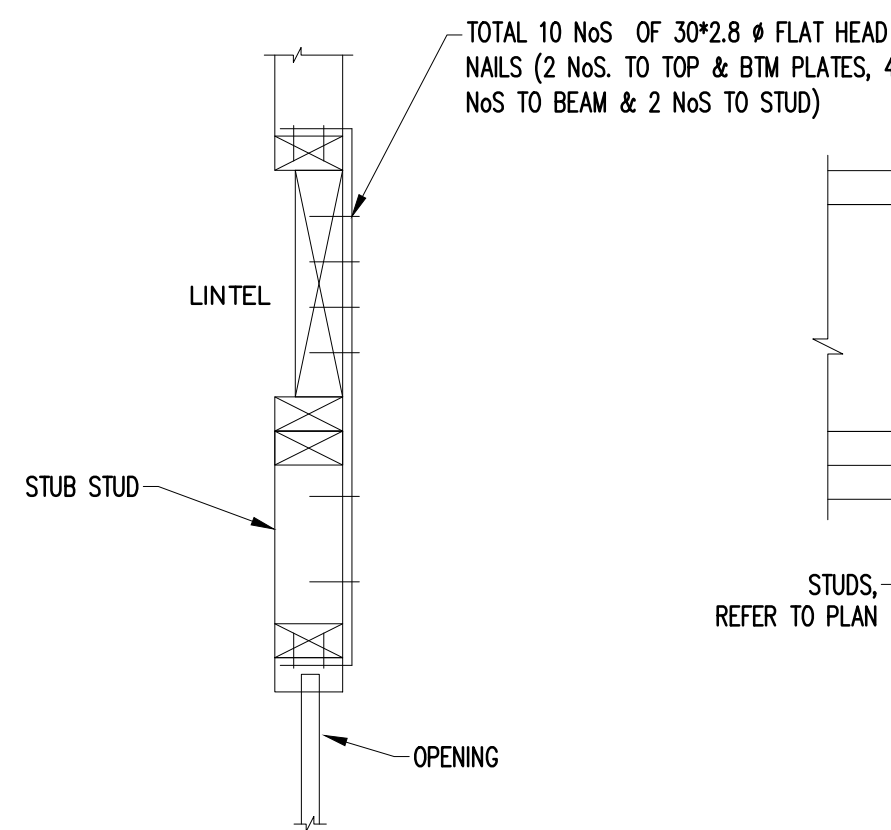



VIEW E-E

SCALE: 1:10

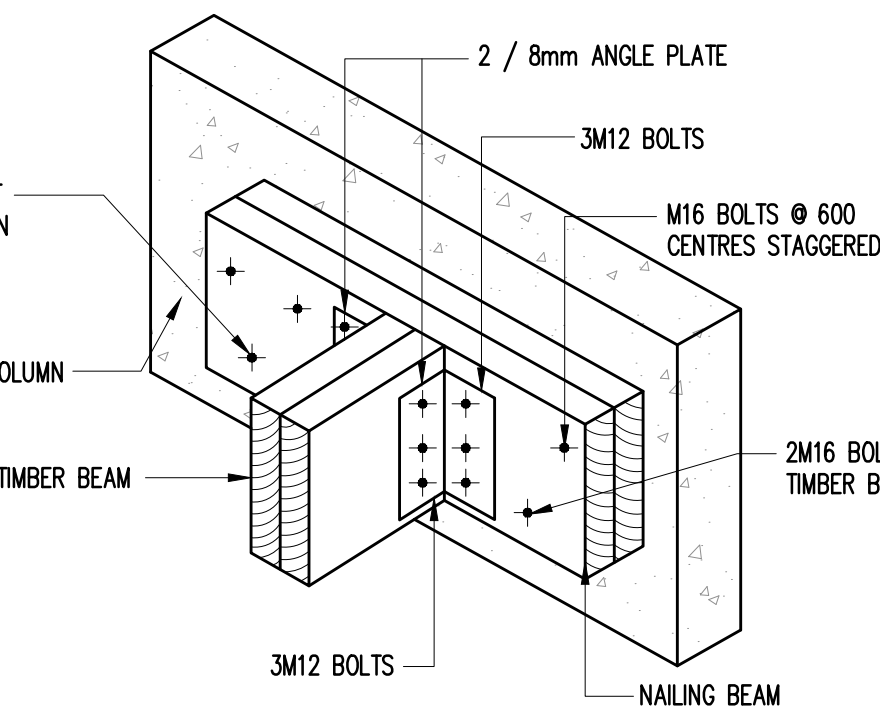


TIMBER BEAM TO NAILING BEAM CONNECTION DETAIL

SCALE: N.T.S

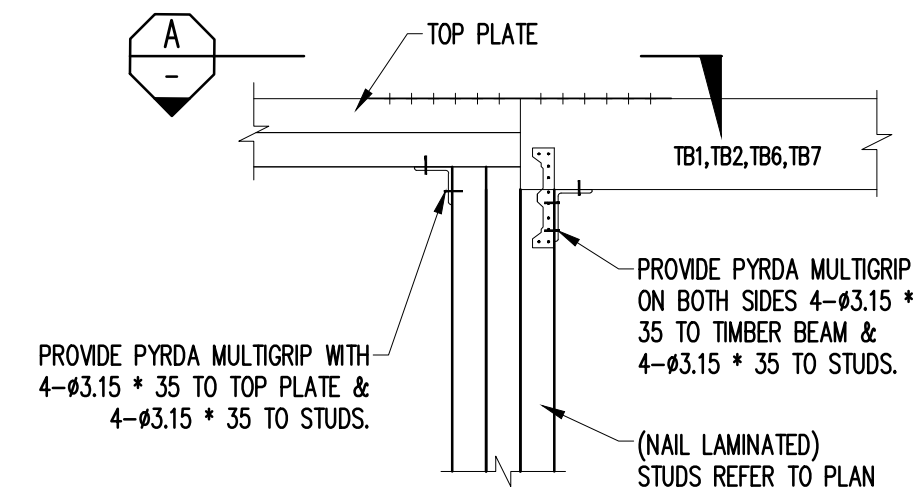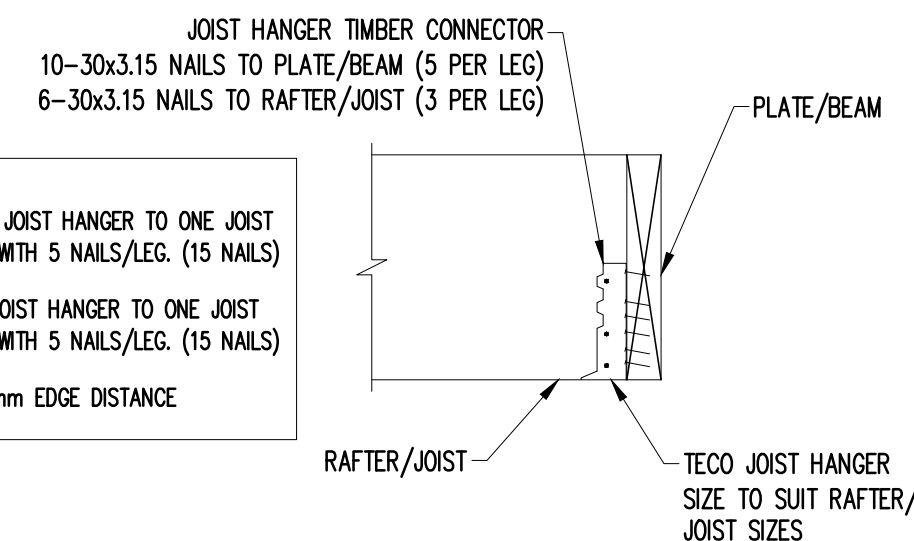

STUD TO TOP PLATE AND LINTEL CONNECTION DETAIL

SCALE: 1:10


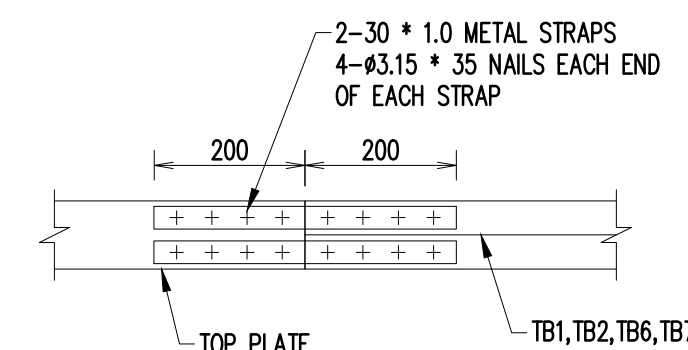


PLAN VIEW A-A

SCALE: 1:10

TYPICAL LINTEL WITHIN FLOOR SPACE DETAIL

SCALE: 1:10

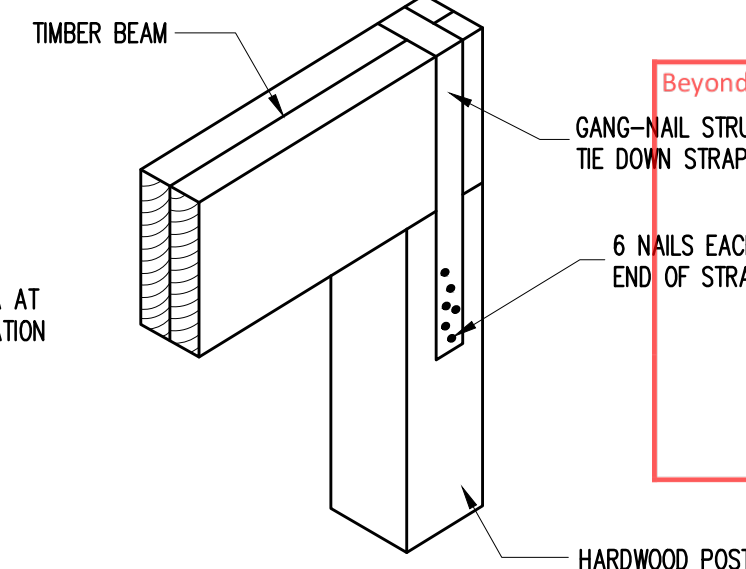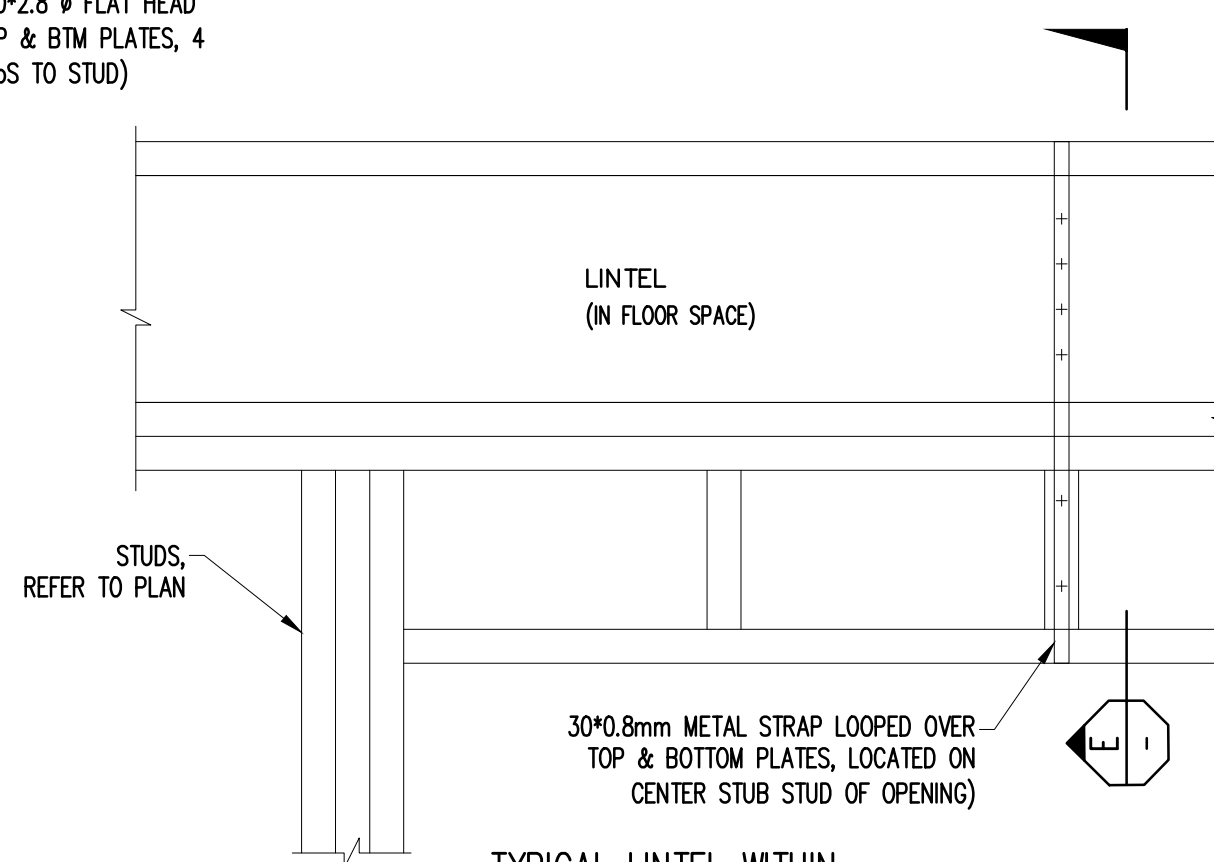

TIMBER BEAM TO POST CONNECTION

SCALE: N.T.S

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rouse Street
Eastwood, NSW 2122
+61 2 8963 8888 / f
info@zhinarch.com.au / e
www.zhinarch.com.au / w
26 495 969 790 / a

CLIENT

Beyond Certification Pty Ltd

Reference: 3125176CDC
Date: 17/11/2025

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT

DUAL OCCUPANCY

3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT

**GROUND, LEVEL 1, ROOF
TIMBER DETAILS, SHEET 2**

DESIGNED K.T.	DRAWN L.N.	AUTHORISED T.N.
CHECKED T.N.	SCALE: A2	DATE FEB 2025
JOB NO.	DRAWING NO.	
SLY25-S008	S0605	

WEEP HOLES

WHILE THE NCC PERMITS WEEPHOLES TO BE SPACED 1200mm MAX. APART, ON STANDARD METRIC BRICKS IT IS BETTER TO REDUCE THIS TO EVERY 4TH PERP. THEY SHOULD OF THE CAVITY. ALL CAVITIES MUST BE KEPT CLEAN OF MORTAR DROPPINGS.

R2 STEEL TIES WITH 300g/m2 GALVANISING (z600) OR BETTER – (NOT SUITABLE FOR AGGRESSIVE SOILS)

TIE PLACEMENT

— THE FIRST TIES AT THE BOTTOM SHOULD BE IN THE FIRST BRICK JOINT ABOVE THE TIMBER BOTTOM PLATE AND THE LAST TIES AT THE TOP SHOULD BE EMBEDDED IN THE JOINT.


ON HOUSES WITH TIMBER FLOORS, TIES SHOULD ALSO BE APPLIED ALONG THE BEARER 300mm APART AT EACH FLOOR LEVEL.

ALSO, DOUBLE THE NUMBER OF TIES AT THE TOP OF WALLS, AT INTERSECTING WALLS AND AROUND DOORS AND WINDOW OPENINGS AND ARTICULATION JOINTS AND IMMEDIATELY ABOVE AND BELOW AN INTERMEDIATE FLOOR SUPPORT.

WHERE NECESSARY, THIS CAN BE ACHIEVED BY FASTENING 2 TIES AT EACH STUD EITHER IN ADJACENT BED JOINTS OR ONE TIE ON EACH SIDE OF THE STUD.



WALL TIE SPACINGS FOR BRICK VENEER FOR WALL Hts. 2.7m MAX

WIND CLASSIFICATION	450 STUD WALLS HORIZONTAL x VERTICAL	60 STUD WALLS HORIZONTAL x VERTICAL
N1-N4 & C1	450 x 600 M	600 x 600 M
C2-C3	450 x 600 M	600 x 600 H

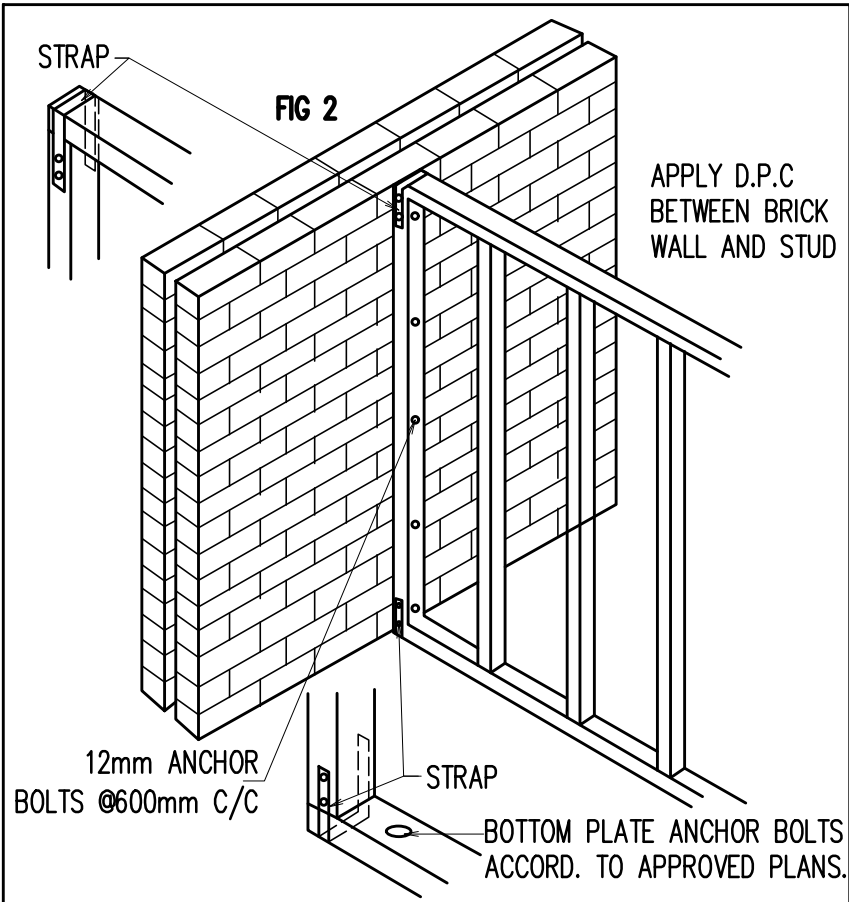


TIMBER WALL CONNECTION TO A DOUBLE BRICK WALL.

NOMINAL NAILING OF PLATES TO STUDS

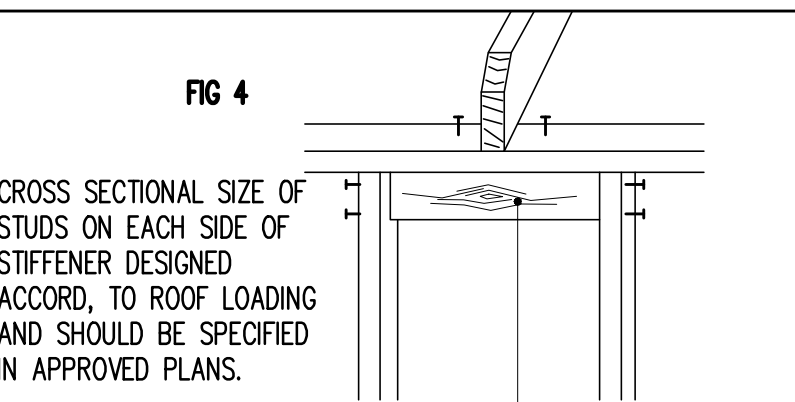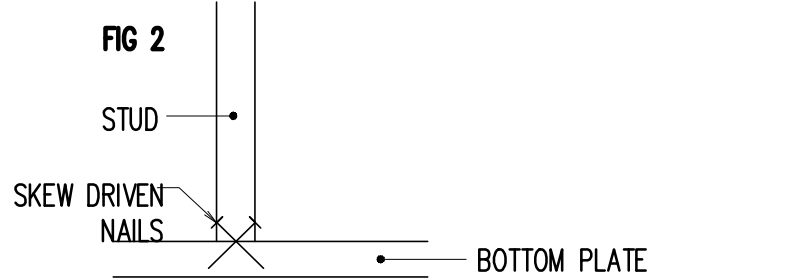


STIFFENER BLOCKING IS THE SAME SIZE AS THE ADJOINING STUDS PLACED ON EDGE WITH 2/3.15 NAILS EACH END AND 2 IN THE TOP EDGE. WHEN THE AREA SUPPORTED EXCEEDS 10m2 BUT IS NOT MORE THAN 15m2 USE TWO STIFFENER BLOCKS WITH 3 NAILS EACH END.

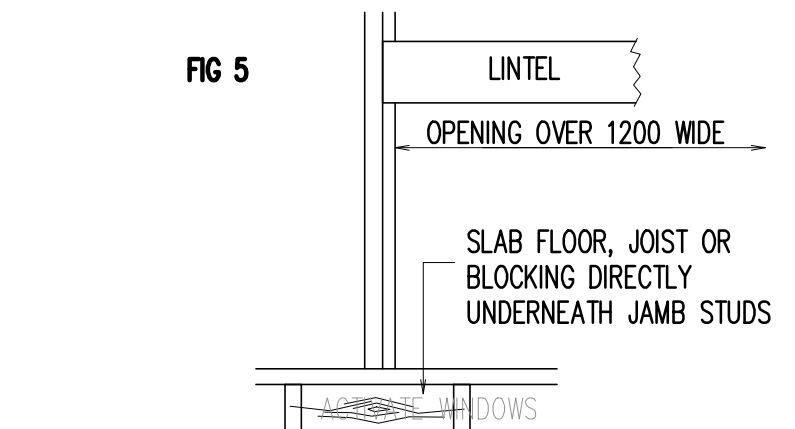


ATTACHING INTERNAL BRACING WALLS TO EXTERNAL WALLS (See Fig 5)

INTERNAL BRACING WALLS SHOULD BE ATTACHED TO THE ROOF FRAMING AND/OR EXTERNAL WALLS. DEPENDING ON THE DESIGN STRENGTH REQUIRED, THIS MAY REQUIRE STRAPPING TO EXTERNAL WALLS AS IN FIG 5 AS WELL AS OTHER CONNECTIONS. REFER TO APPROVED PLANS AND SPECIFICATIONS.

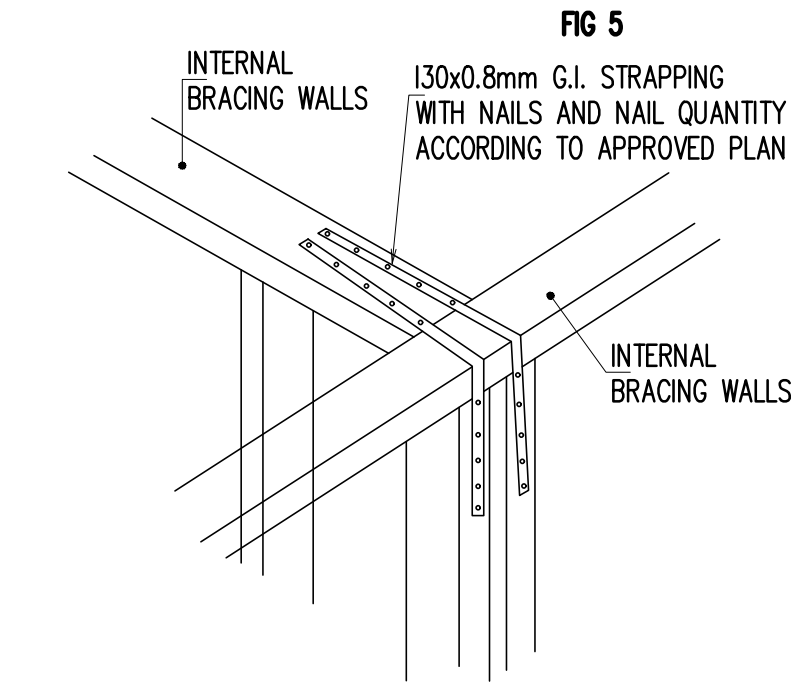

NOMINAL NAILING OF NOGGINGS TO STUDS

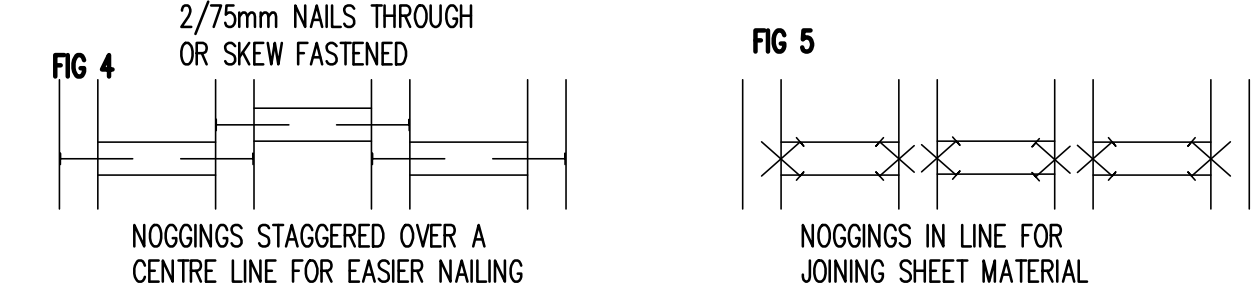



CORNER & PAIRS OF STUDS

PAIRS OF STUDS

PAIRS OF STUDS ARE REQUIRED AT CORNERS AND 'T' JUNCTIONS AS IN FIGS 1-6. THESE ARE SPACED APART WITH BLOCKS FORM THE SAME MATERIAL AS THE STUDS x 200mm LONG. BLOCKS ARE SPACED AT 900mm C/C VERTICALLY MAX.

FOR BRICK VENEER, WHEN PLY BRACING IS TO BE FASTENED TO THE OUTER INTERSECTING CORNER, USE FIGS 1 & 2, OTHERWISE FIG 3 & 4 CAN BE APPLIED TO SAME ONE STUD.

FOR PAIRS OF STUDS AT INTERSECTIONS, BLOCKS ARE USED ON THEIR FLAT AS IN FIG 5 & 6 SPACING-BLOCKS ARE EASIER TO INSTALL AFTER THE FRAMES HAVE BEEN ERECTED, PLUMBED AND BRACED. INSTALL THEM BEFORE INSTALLING THE SHORT NOGGINGS WHICH HAVE BEEN LEFT OUT AT WALL ENDS.

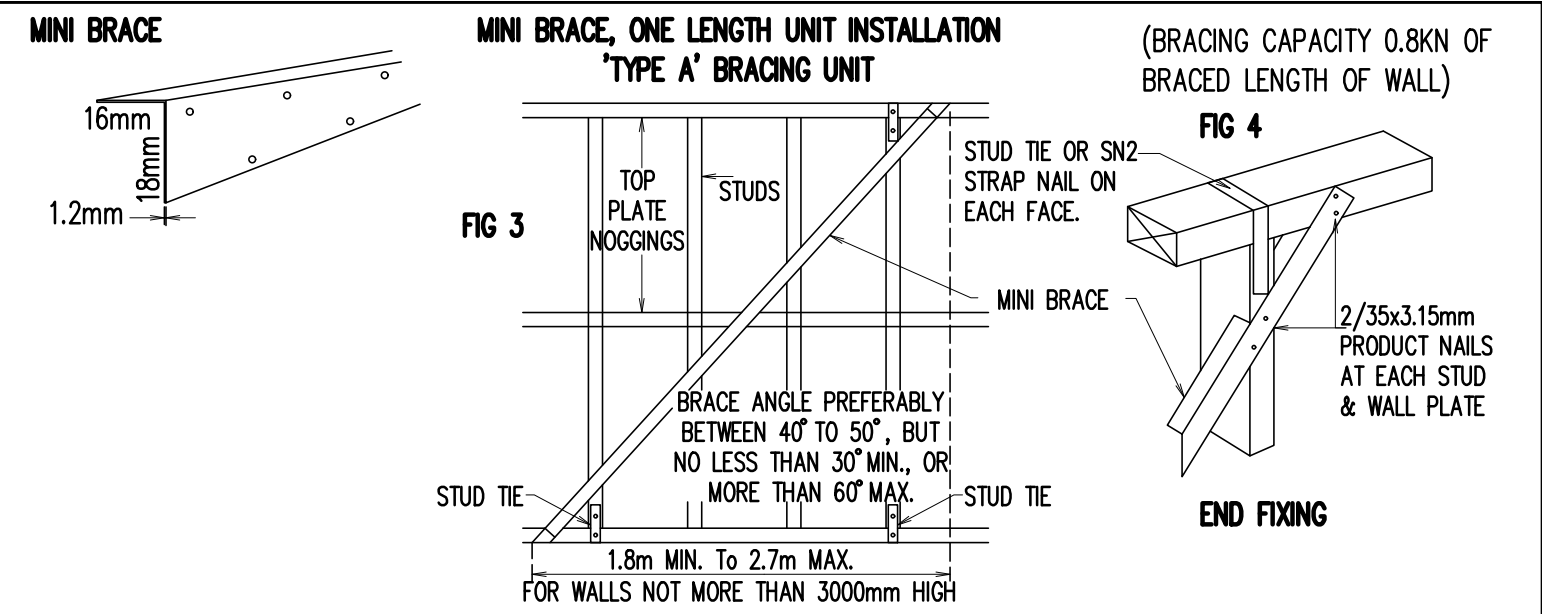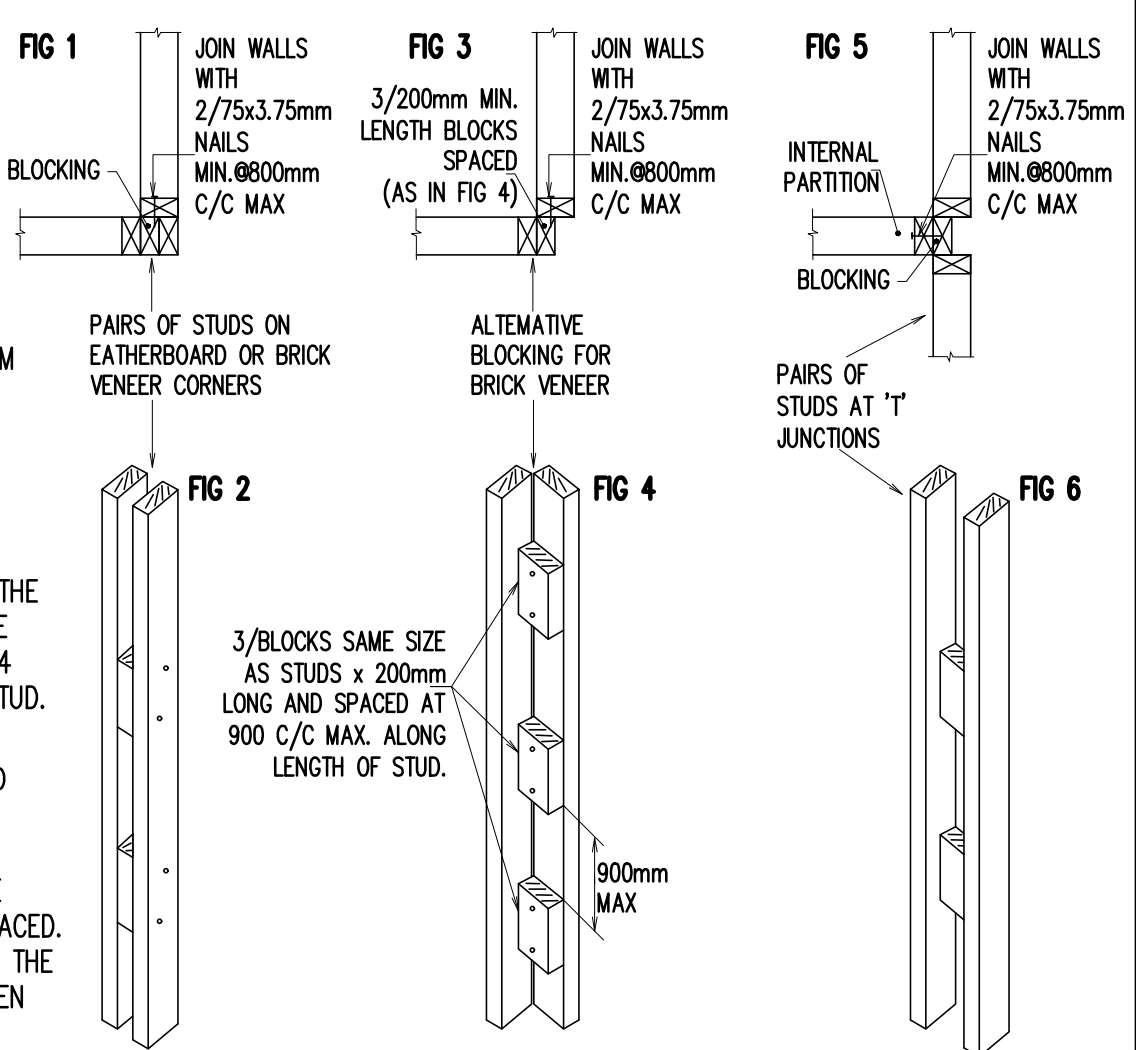


FIXING ROOF BATTENS

VARIOUS FASTENING METHODS ARE USED DEPENDING ON THE DESIGN REQUIREMENT. FIG 10-17 ARE EXAMPLES OF METHODS COMMONLY USED. THE TIE DOWN STRENGTH VALUES OF EACH, VARY, DEPENDING UPON THE APPLIED FASTENER, ITS PENETRATION DEPTH AND THE STRENGTH OF THE RECEIVING MEMBER. APPROVED PLANS SHOULD SPECIFY.

THE REQUIRED METHOD. LOSS OF ROOF CLADDING INCLUDING THE BATTENS IS A COMMON OCCURRENCE IN STORMS AND HIGH WINDS. IT IS ESSENTIAL THAT THE FASTENING METHOD DESIGNATED IN THE APPROVED PLANS BE CAREFULLY ADHERED TO. WHERE FASTENINGS SPLIT THE TIMBERS. HOLES SHOULD BE PRE-DRILLED.

SOME TYPICAL BATTEN FIXING METHODS

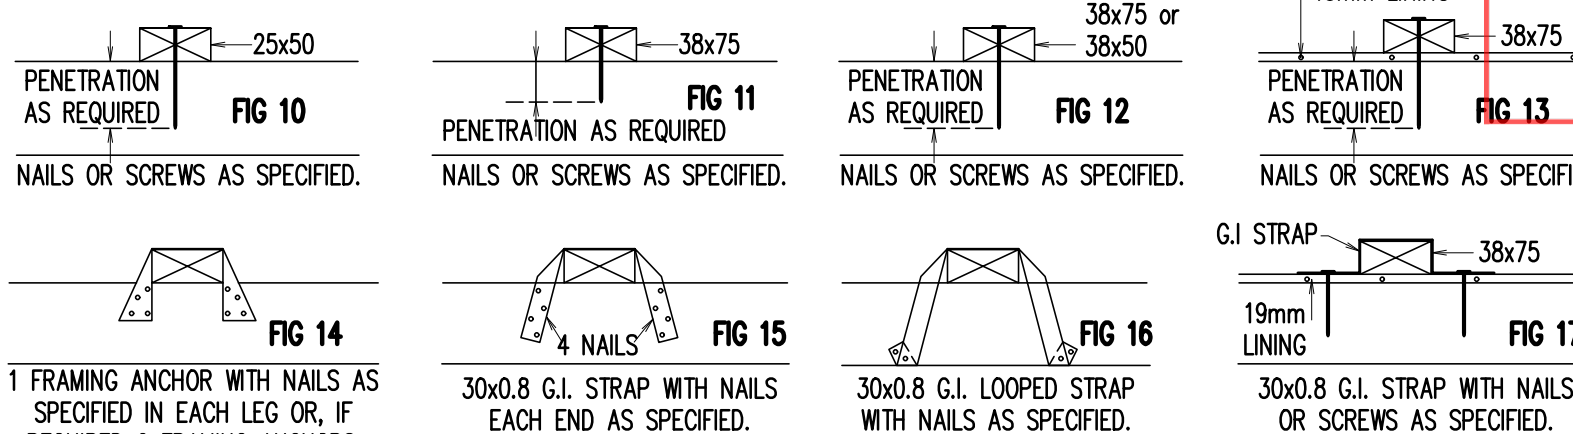


NOGGINGS

ONE ROW OF NOGGINGS IS REQUIRED AT 1350mm C/C MAX. TO REDUCE STUDS TWISTING AND TO STIFFEN THE CENTRE OF FRAMES. IN SOME CASES, THIS WILL ALSO PROVIDE A FIXING BASE FOR WALL LINING JOINTS.

NOGGINGS MAY BE INSTALLED ON FLAT OR ON EDGE. IF VERTICAL BOARD LINING IS BEING APPLIED, ATTACH ROWS OF NOGGINGS AS DIRECTED IN MANUFACTURER'S SPECIFICATIONS. NOGGINGS IS USUALLY CUT FROM THE SAME STOCK AS COMMON STUDS AND IS BEST TO BE NOT LESS THAN 35mm THICK.

NOGGINGS, WHEN FIXED IN A STAGGERED PATTERN, ARE EASIER TO NAIL IN PLACE BUT SHOULD NOT BE OFFSET MORE THAN 150mm ABOUT THE CENTRE LINE. WHEN THEY ARE USED FOR JOINING LININGS, THEY SHOULD BE 45mm THICK TO PROVIDE SUFFICIENT EDGE DISTANCE FOR NAILING AND ARE KEPT IN LINE.

IF GYPROCK PLASTERBOARD SHEETS ARE LAID HORIZONTALLY.

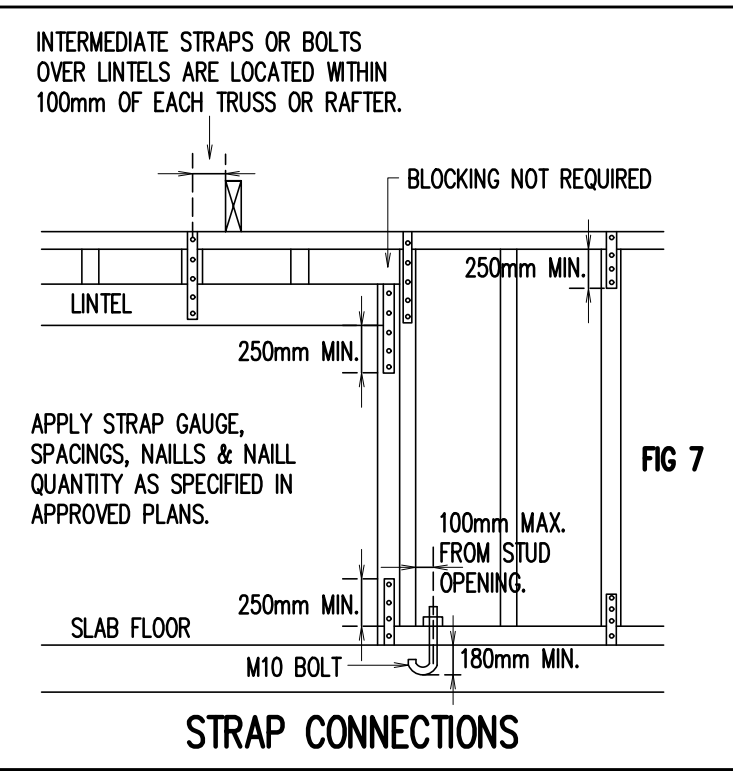

STRAP CONNECTIONS

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL



CLIENT: Beyond Certification Pty Ltd

Reference: 31251760DC

STRUCTURAL LINK Pty Ltd

3 JOHNSON AVE, KIRRAWEE, NSW 2232

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE	A2	DATE	FEB 2025
JOB NO.	SLY25-S008	DRAWING NO.	S0606		

FASTENING JOISTS

JOISTS SHOULD HAVE 30mm MIN. BEARING ON BEARERS, BEAM OR PLATES. JOISTS ARE FASTENED BY EITHER SKEW NAILING, (SEE FIG 1), TRIPLE GRIPS OR JOIST STRAPS USING 30x3.15mm CONNECTOR NAILS ACCORDING TO MANUFACTURER'S REQUIREMENTS. SEE APPROVED PLANS OR SPECIFICATIONS FOR SPECIFIC REQUIREMENT.



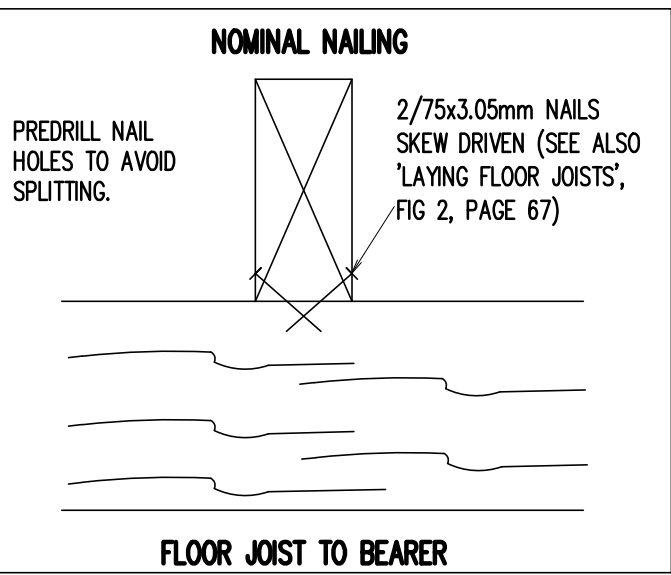


FIG 1


NAILING JOISTS (NOMINAL)

JOISTS ARE SKEW NAILED TO THE PLATES AND BEARERS WITH 2/75x3.05mm MIN. NAILS AT A 45° ANGLE TO EACH CROSSING AND NOT LESS THAN 30° (SEE FIG 2). USE FLATHEAD FOR SOFTWOOD. ADDITIONAL NAILS MAY BE REQUIRED PER JOINT. CHECK PLANS AND SPECIFICATIONS.

CORRECT SKEW NAILING

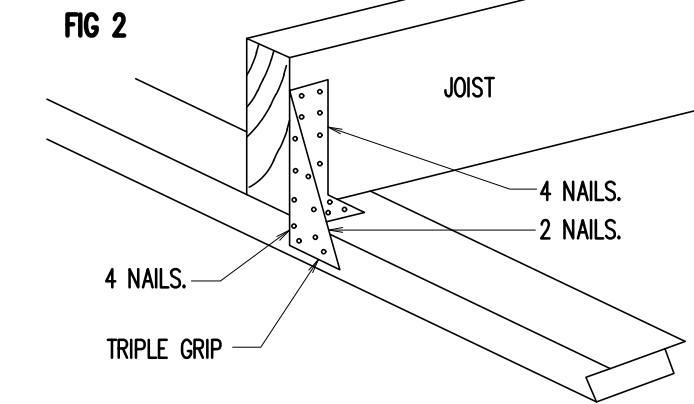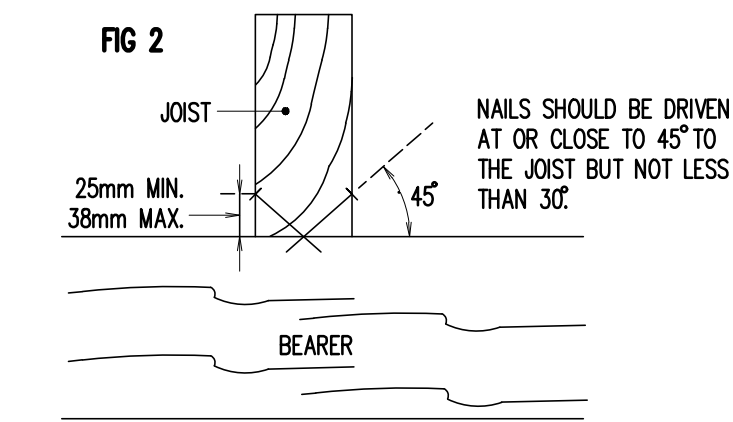


JOISTS OR BEARERS IN MASONRY WALL POCKETS

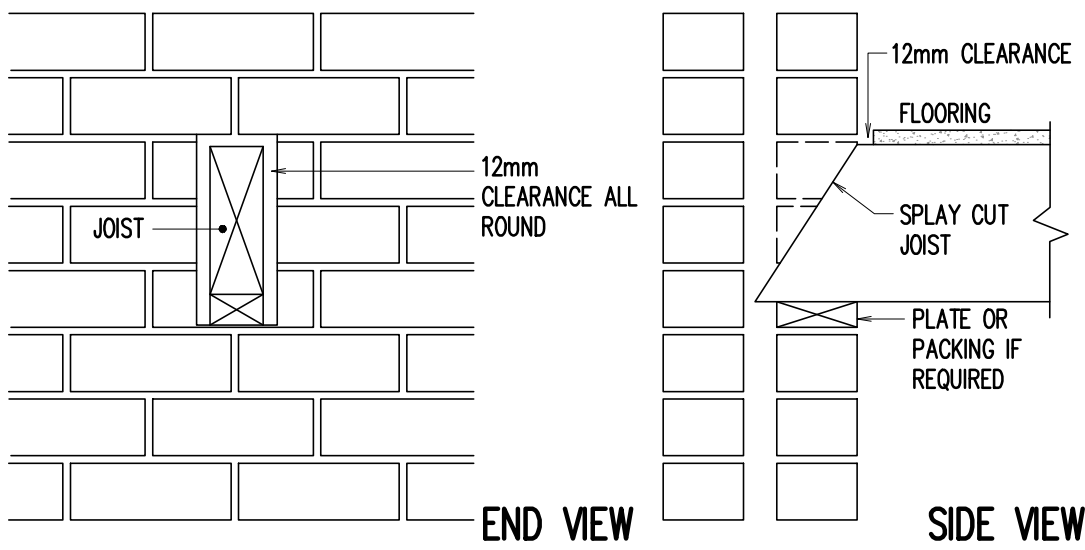

JOIST OR BEARERS WHICH ARE SEATED IN POCKETS IN MASONRY WALLS SHOULD HAVE THEIR ENDS SPLAYED AS ABOVE AND 12mm MIN. SPACE ALLOWANCE ALL ROUND.


SOLID BLOCKING & HERRINGBONE STRUTTING

WHERE THE DEPTH OF JOISTS IS FOUR TIMES THEIR BREADTH (THICKNESS) OR GREATER THEY SHOULD HAVE EITHER A CONTINUOUS TRIMMER JOIST, SOLID BLOCKING OR HERRINGBONE STRUTTING BETWEEN THE OUTER PAIRS OF JOISTS AND AT ALL INTERMEDIATE SUPPORT BEARERS AND WALL @1800mm C/C MAX. IN ADDITION, WHERE DEEP JOISTS ARE UNSEASONED AND WHERE THE SPAN IS OVER 3000mm AND CEILING LINING IS NOT INSTALLED ON THE UNDERSIDE.

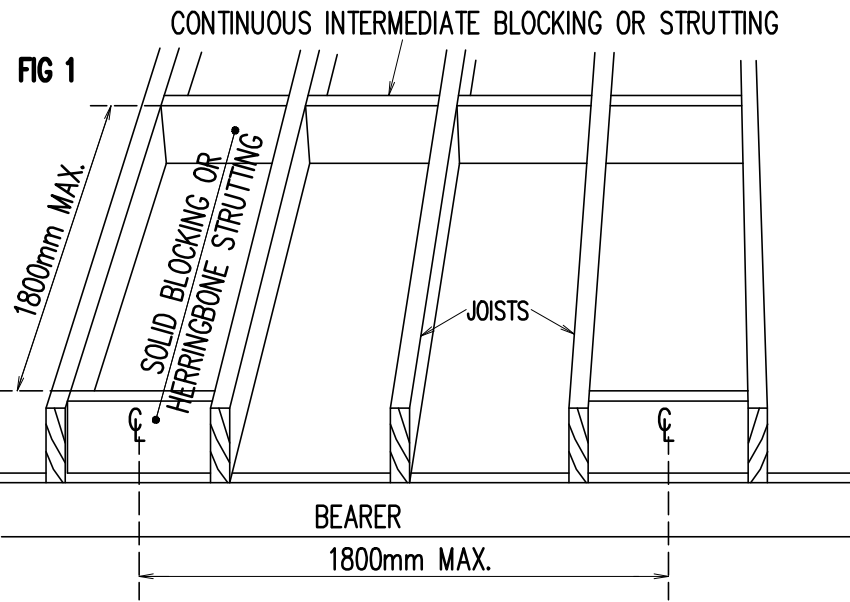

CONTINUOUS BLOCKING OR HERRINGBONE STRUTTING SHOULD BE FITTED BETWEEN JOISTS IN ROWS @1800mm APART MAX.


TRIMMERS AND SOLID BLOCKING CAN BE 25mm MIN. THICK (SEE HERRINGBONE STRUTTING PAGE 68). BLOCKING AND STRUTTING SHOULD BE FIXED 12mm MIN. INSIDE THE UPPER AND LOWER EDGES. HOWEVER, WHEN SOLID BLOCKING IS TO BE UTILISED FOR SHEET EDGE SUPPORT, IT IS KEPT FLUSH WITH THE TOP OF JOISTS.

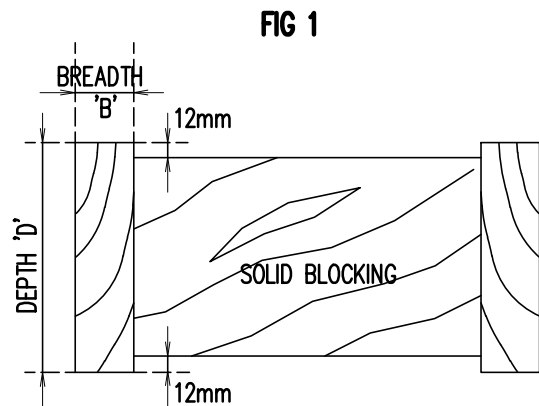


KEEP SOLID BLOCKING 12mm UNDER JOIST TOPS AND BOTTOM TO ALLOW FOR SHRINKAGE AND AIR CIRCULATION UNLESS IT IS BEING UTILISED AS SHEET EDGE SUPPORT SEE ABOVE TEXT.

NOMINAL JOINTS & FASTENINGS FOR BEARERS


WHERE SPECIFIC FASTENINGS ARE SPECIFIED, IT DOESN'T MEAN NOMINAL FASTENINGS CAN BE OMITTED. NOMINAL FASTENINGS ARE EXPECTED BY THE CODE TO BE APPLIED AS WELL IN MOST INSTANCES UNLESS OVERRULED BY THE ENGINEER.

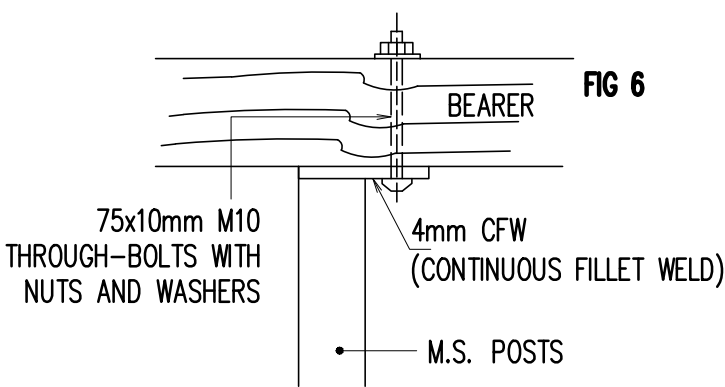


BEARER ANCHORED TO STEEL POST

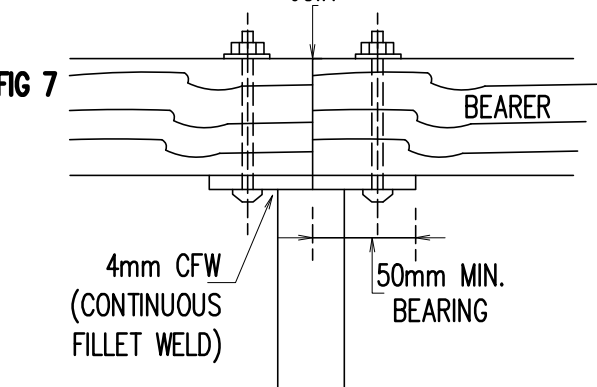


JOIN OVER STEEL POST

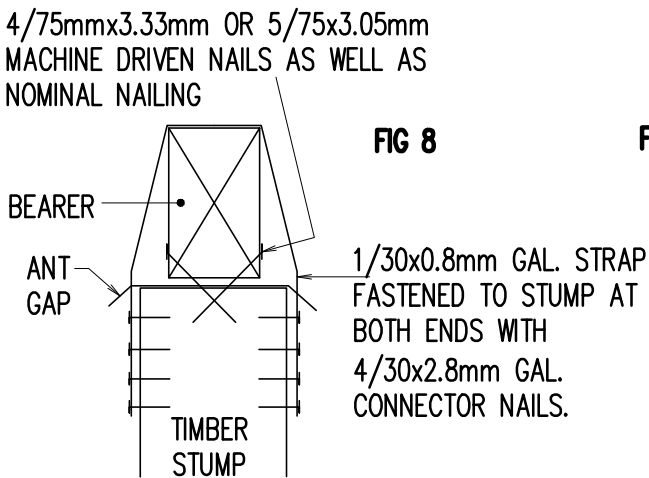

BEARER NAILED & STRAPPED TO STUMP

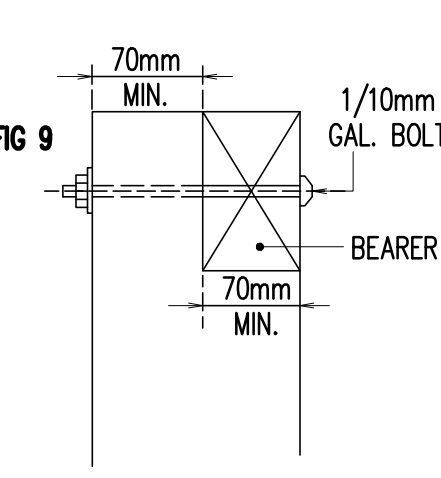

BEARER BOLTED INTO STUMP HALF HOUSING

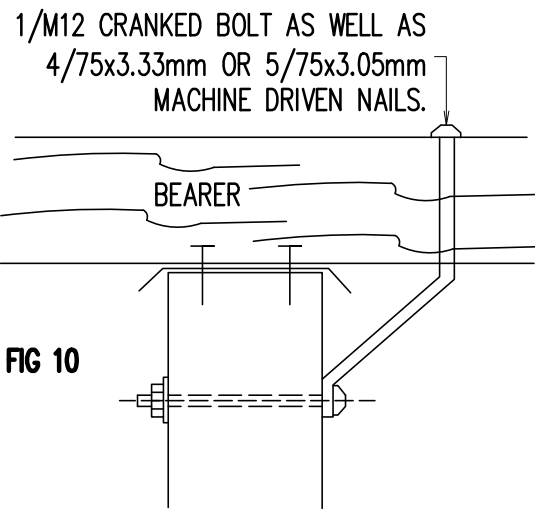

USING A CRANKED BOLT

JOIST OR BEARER TYPICAL CONNECTION DETAILS

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT
zhinarchitects
Zhin Architects Pty Ltd
Suite 1, Level 2
2 River Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
26 465 969 790 /a

CLIENT
Beyond Certification Sonder Projects Pty Ltd

Reference: 31251764DC
Date: 17/11/2025

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046


PROJECT
DUAL OCCUPANCY

3 JOHNSON AVE, KIRRAWEE, NSW 2232


SUBJECT
LEVEL 1, ROOF TIMBER DETAILS, SHEET 2

DESIGNED K.T. DRAWN L.N. AUTHORISED T.N.
CHECKED T.N. SCALE: A2 DATE FEB 2025
JOB NO. **SLY25-S008** DRAWING NO. **S0607**

FASTENING JOISTS DOWN TO SUPPORTS

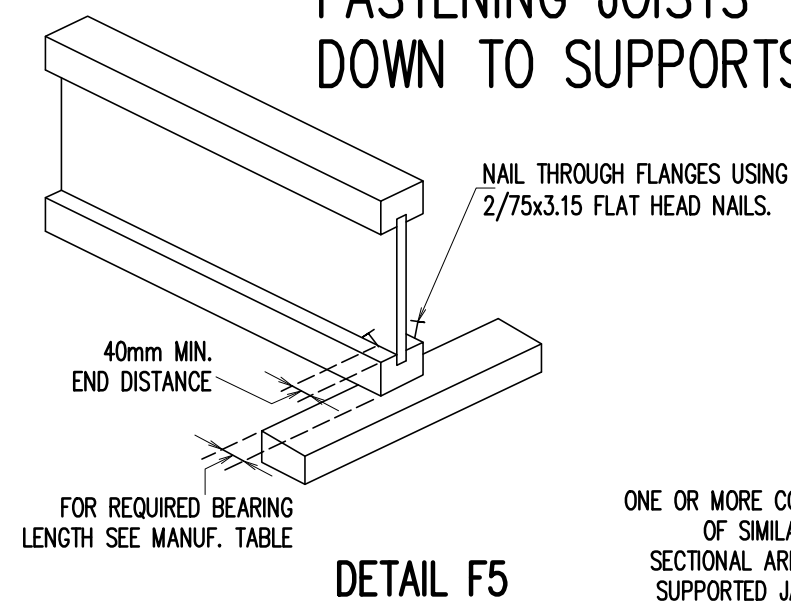


CONCENTRATED LOADS FROM JAMB STUDS OR POSTS

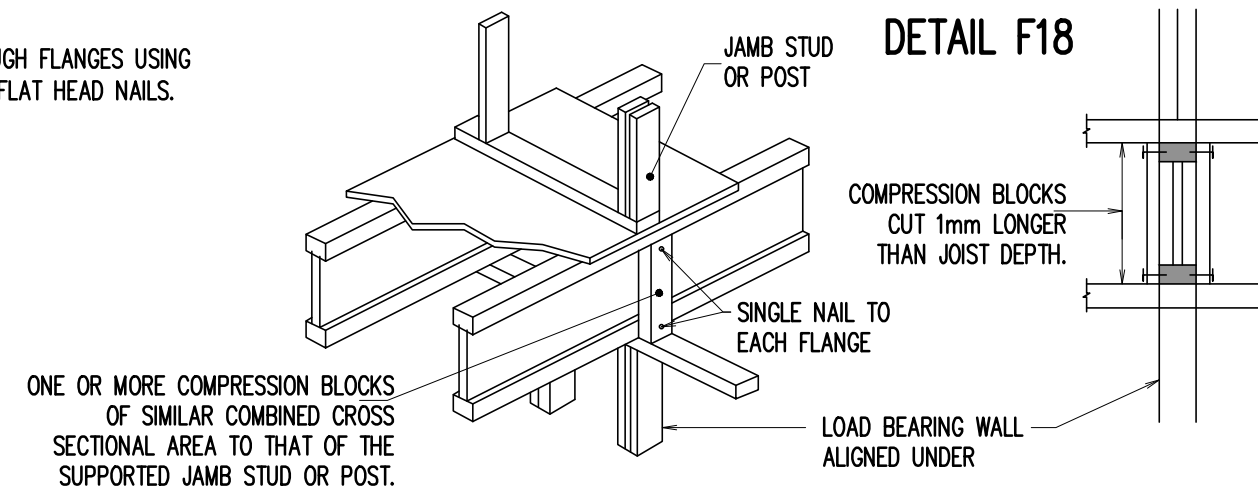

BETWEEN SUPPORTS

IN THE FINISHED STRUCTURE, WITH THE FLOORING ATTACHED NO INTERMEDIATE BLOCKING OR RESTRAINT IS REQUIRED UNLESS TO SUPPORT SHEET FLOORING EDGES. HOWEVER, DURING CONSTRUCTION PRIOR TO WALKING ON BASE JOISTS, JOISTS MUST BE RESTRAINED AT 2500mm MAX. C/C WITH BATTENS FIXED BACK TO POINTS OF RIGIDITY.

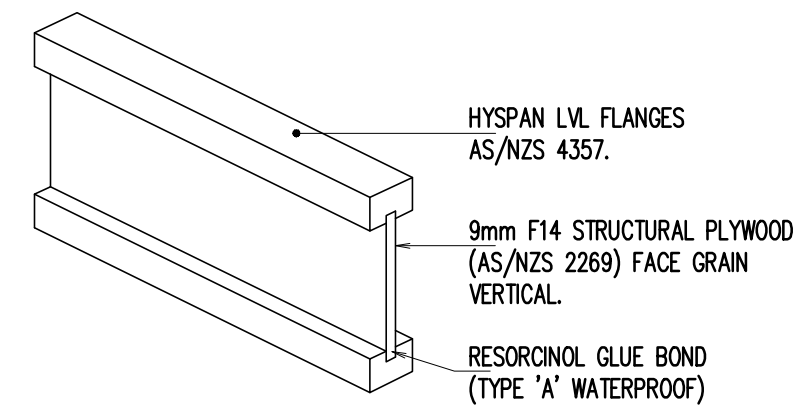


BLOCKING & LATERAL SUPPORT AT SUPPORTS

BLOCKING OR EQUIVALENT TO PREVENT JOISTS ROLLING AT THEIR SUPPORTS IS REQUIRED AND SHOULD BE PROVIDED BY ONE OF THE FOLLOWING METHODS:

- 1). BLOCKING WITH SIMILAR DEPTH SEASONED TIMBER OR HYJOIST OFFCUT (SEE DETAIL F1)
- 2). BRACING WITH SPEEDBRACE OR SIMILAR (SEE DETAIL F2)
- 3). PLYWOOD CLOSURES COMBINED WITH WALL PLATES OR BATTENS (SEE DETAIL F3)

SINGLE BLOCKING CAN BE ARRANGED AT 1800mm MAX. CENTRES OR IN PAIRS AT 3600mm CENTRES IN WHICH CASE THE JOIST ADJACENT TO THE OUTSIDE JOIST SHOULD BE CLOCKED ON BOTH SIDES (OR EQUIVALENT) AND THE SPACING BETWEEN PAIRS OF BLOCKING (OR EQUIVALENT) ALONG THE SUPPORTS IS NOT TO EXCEED 3600mm AS SHOWN IN FIG 2. IN ALL CASES THE RESTRAINT SYSTEMS MUST BE LINKED TO THE TOPS OF ALL ADJACENT JOISTS BY FLOORING OR WALL PLATES IN THE FINISHED STRUCTURE OR BY TEMPORARY BATTENS DURING CONSTRUCTION.



USING JOIST HANGERS

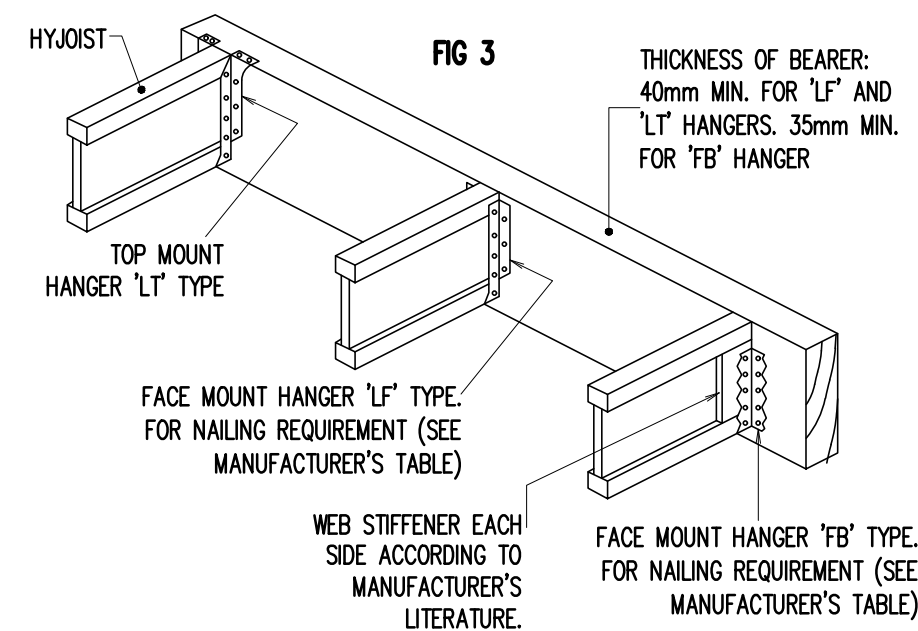

DETAIL F1

DETAIL F3


BLOCKING AT SUPPORTS

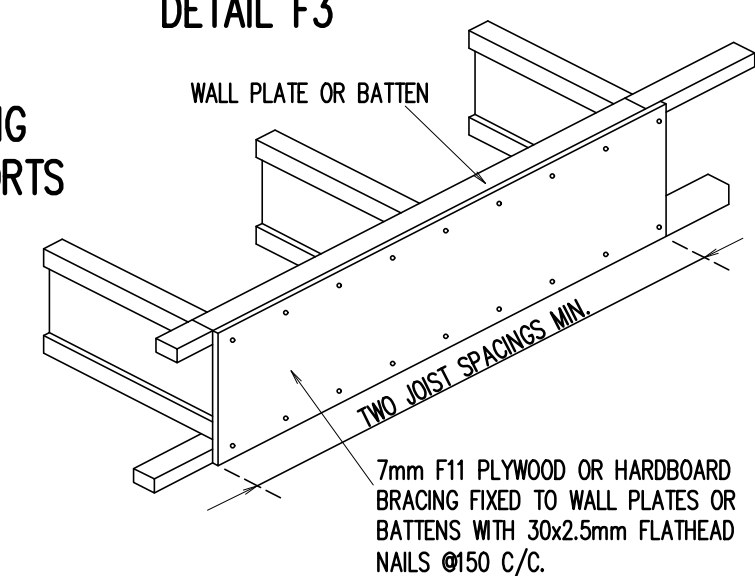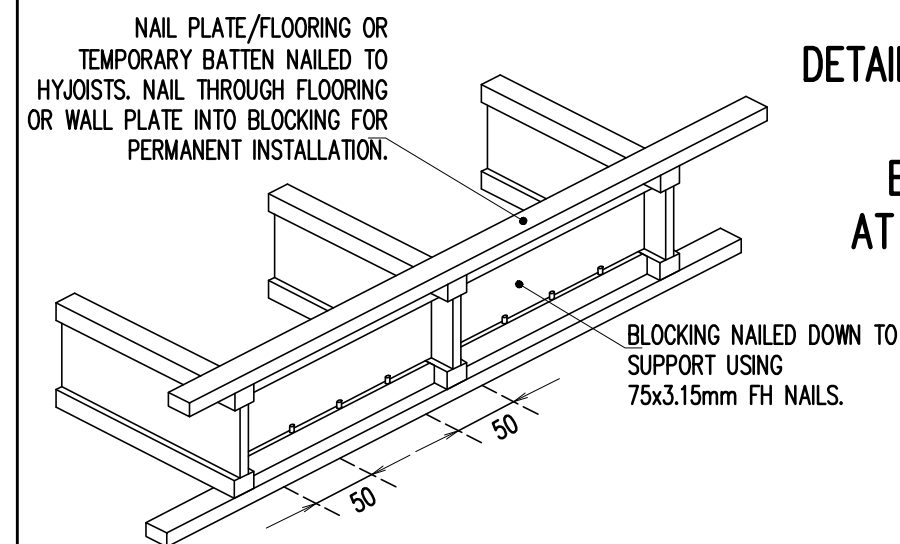

BLOCKING AT SUPPORTS

JOINING TO PARTICLEBOARD OR PLYWOOD


JOINTS CAN BE MADE ON A JOIST OR TRIMMER (SEE FIG 1) OR OFF THE JOISTS AS IN FIG 2.

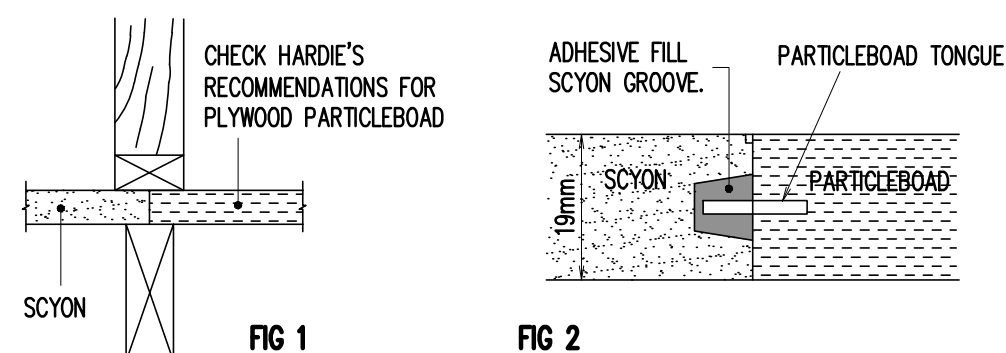


JOINS OVER SUPPORT

JOINS WITHOUT SUPPORT

FASTENINGS-TIMBER JOISTS: 2.8x50mm FC NAILS OR 50mm 'D' HEAD GUN NAIL OR No.8x40mm CSK SELF DRILLING SCREWS: STEEL JOISTS: 0.75-1.9mm BMT USE HARSIE DRIVE TM SCREWS: OVER 1.6mm BMT USE 40mm CSK SELF DRILLING SCREWS. FOR ADDITIONAL FASTENERS SEE WWW.SCYON.COM.AU (SEE FIG 4 FOR NAILING PATTERN AND REFER TO FASTENER MANUF. FOR MORE INFORMATION)

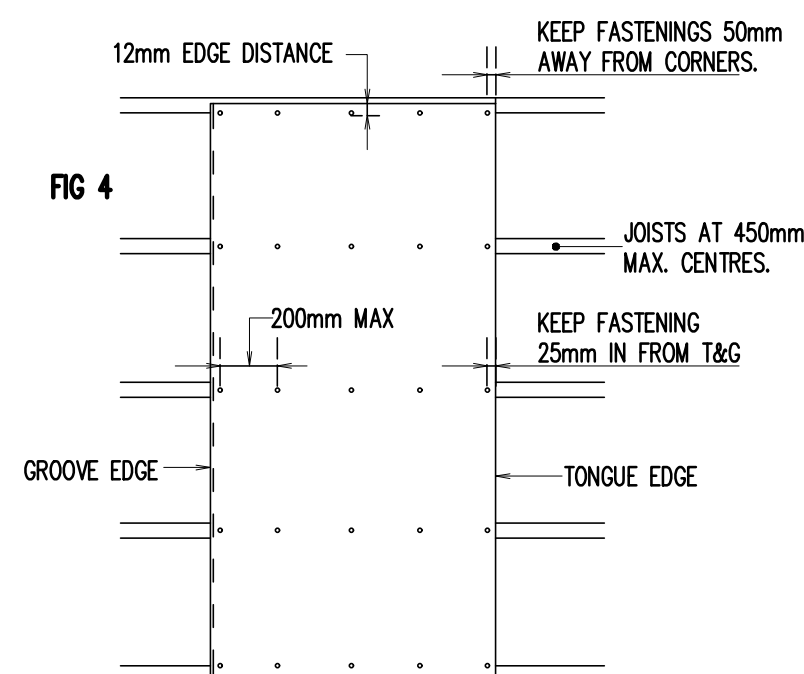

FASTENING LAYOUT

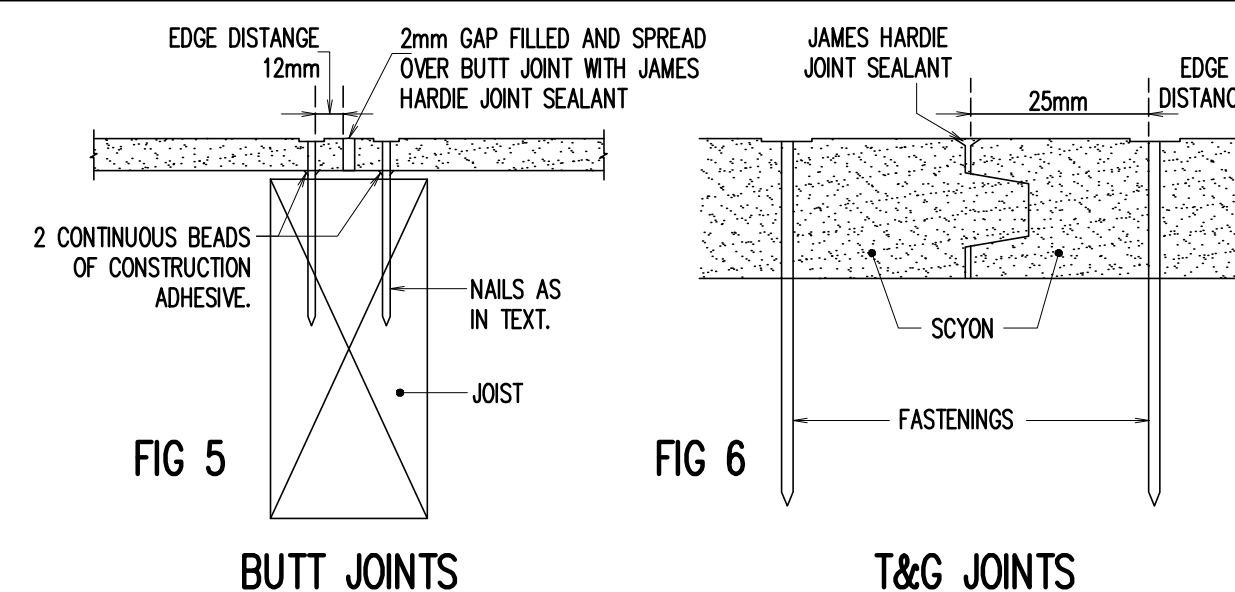

BUTT JOINTS

T&G JOINTS

FIXING OF FLOORING

FLOORING MAY BE NAILED TO JOISTS USING EITHER 2.8mm DIAMETER NAILS, HAND DRIVEN OR 2.5mm DIAMETER NAILS, MACHINE DRIVEN. NAIL LENGTH SHOULD BE MINIMUM OF 2.5 TIMES THE FLOORING THICKNESS (REFER AS 1684.2). NAIL SPACING SHOULD BE AT CENTRES RECOMMENDED FOR THE PARTICULAR FLOORING TYPE. WHERE CENTRES RECOMMENDED ARE LESS THAN 50mm IT IS GOOD PRACTICE TO STAGGER THEIR LOCATION SO AS TO AVOID THE POSSIBILITY OF SPLITTING. IT IS STRONGLY RECOMMENDED THAT FLOORING ADHESIVE IS USED IN CONJUNCTION WITH NAILING.

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rouse Street
Eastwood, NSW 2122
+61 2 8868 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
28 495 969 790 /m

CLIENT

Beyond Certification
Ltd
Reference: 3125176CDC
Date: 17/10/2025


STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT


DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT		LEVEL 1, ROOF TIMBER DETAILS, SHEET 3		N	
DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE	A2	DATE	FEB 2025
JOB NO.	SLY25-S008			DRAWING NO.	S0608

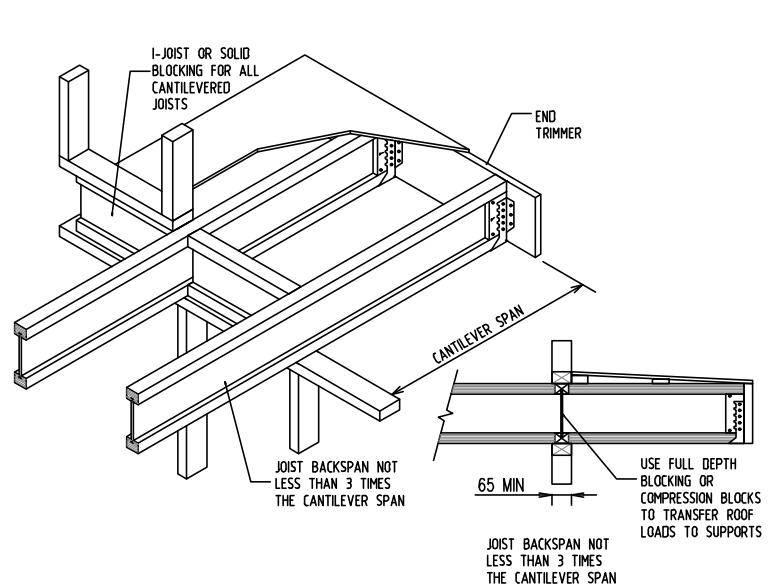


CANTILEVERED JOIST BALCONY DETAIL

NOTE: THE JOISTING AND JOIST MUST NOT BE REMOVED TO THE END
BEHIND THE BALCONY AND MUST BE REINFORCED TO THE END

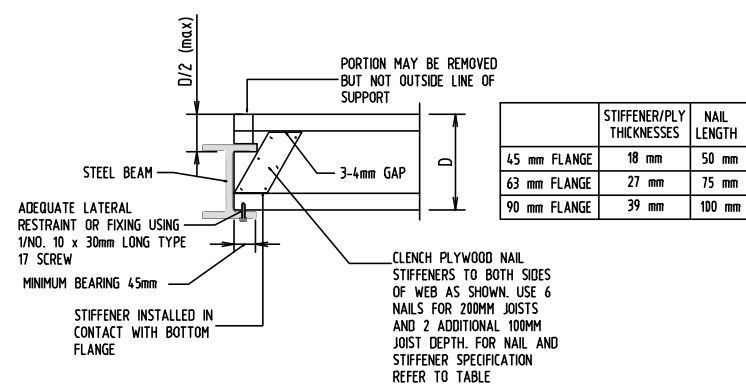


TIMBER JOIST TO STEEL BEAM CONNECTION

NTS

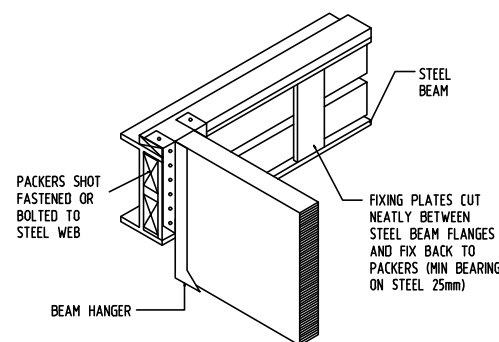


TIMBER LVL TO STEEL BEAM CONNECTION

NTS

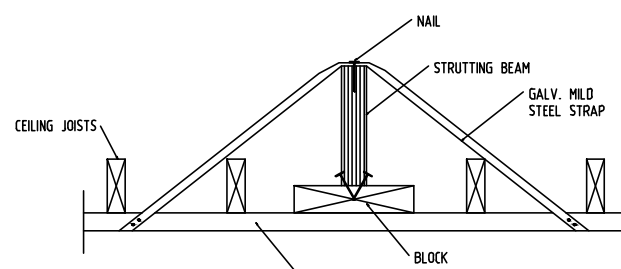


END RESTRAINT DETAIL FOR STRUTTING BEAMS

NTS

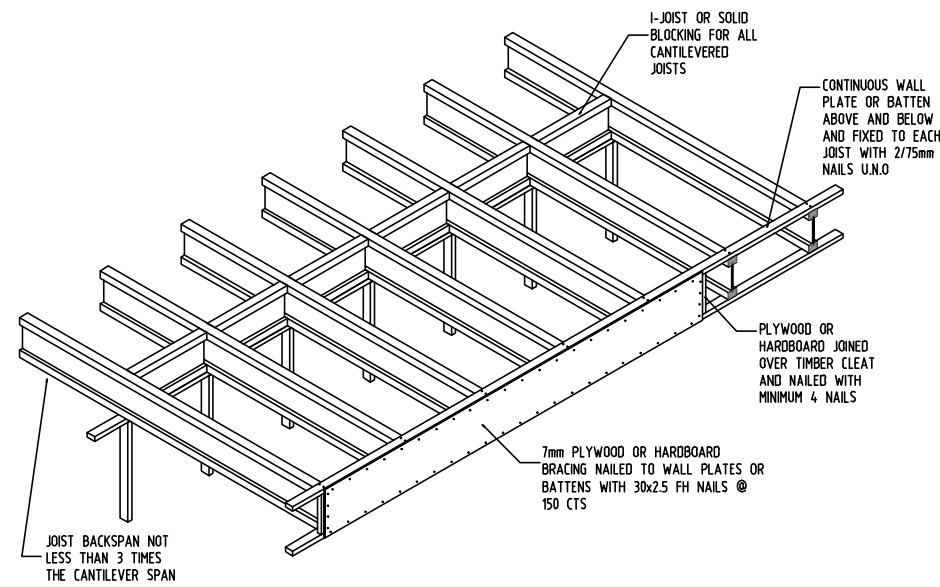


CANTILEVERED JOIST DETAIL

NOTE: THE JOISTING AND JOIST MUST NOT BE REMOVED TO THE END
BEHIND THE BALCONY AND MUST BE REINFORCED TO THE END

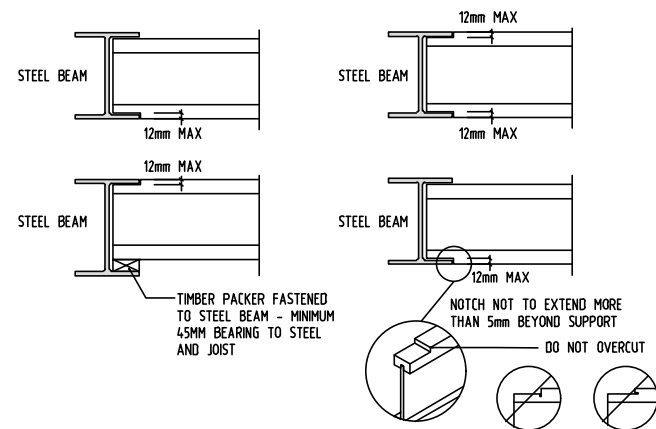


NOTCHING OF FLANGES TO END SUPPORT DETAILS

NTS

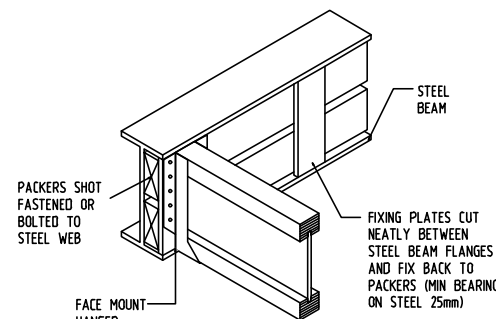

TIMBER JOIST TO STEEL BEAM CONNECTION

NTS

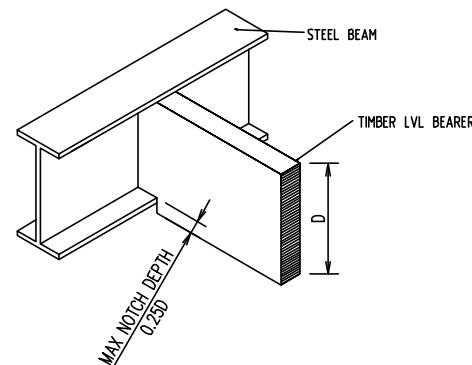


TIMBER LVL TO STEEL BEAM CONNECTION

NTS

Web holes for hyJOIST

Holes may be cut through the web of hyJOIST provided they are located within the central part of the span as specified below.

For hole sizes other than those included below refer to the web hole calculator in designIT. For cases involving non-uniform loading or where the possibility of locating the hole closer to supports needs to be assessed, use the web hole option in the floor joist calculator in designIT.

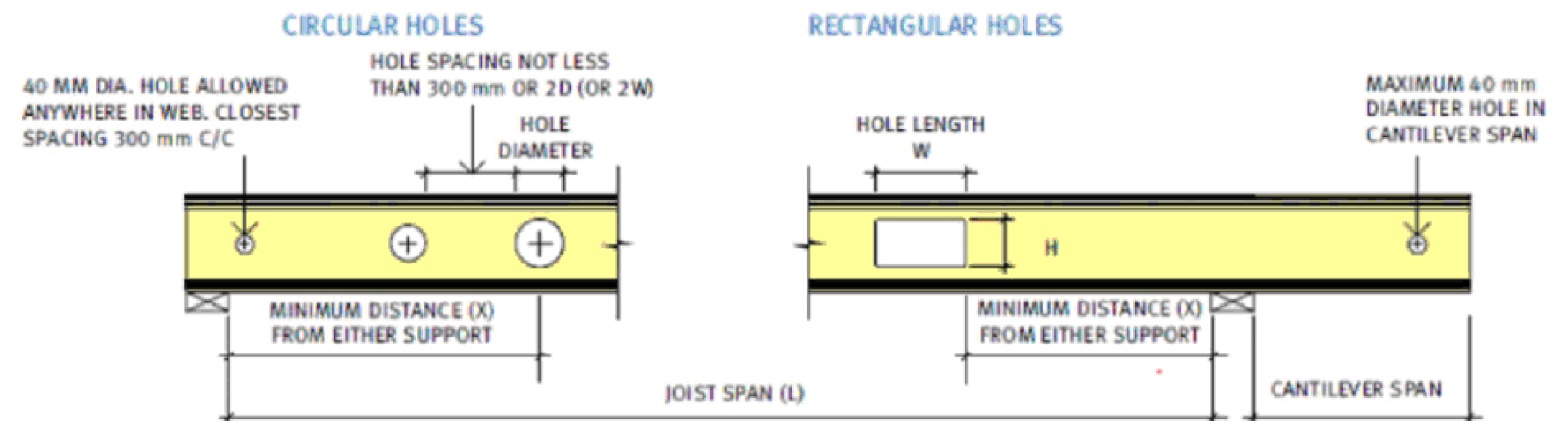

hyJOIST SECTION CODE	MAXIMUM HOLE DIAMETER (mm)	MINIMUM DISTANCE FROM SUPPORT 'X'	HOLE DIAMETER (mm)			
			ø80	ø110	ø125	ø150
HJ200 45	ø118	0.34L	0.16L	0.28L	N/A	N/A
HJ240 45	ø158	0.38L	0.12L	0.21L	0.26L	0.33L
HJ240 63						
HJ240 90						
HJ300 45	ø218	0.41L	0.10L*	0.15L	0.18L	0.24L
HJ300 63						
HJ300 90						
HJ360 63	ø278	0.42L	0.3 m*	0.08L*	0.11L	0.16L
HJ360 90		0.40L	0.3 m*	0.3 m*	0.3 m*	0.05L*
HJ400 90		0.40L	0.3 m*	0.3 m*	0.3 m*	0.08L*

* Minimum distance from any support is 0.3 metres



hyJOIST SECTION CODE	HOLE SIZE HEIGHT (mm)	HOLE SIZE LENGTH (mm)	PERMITTED LOCATIONS FOR RECTANGULAR HOLES							
			L Actual Span 'L' in metres							
			X Minimum distance from the side of the hole to any support - (m)							
HJ200 45	118	230	L	≤ 3.8	4.0	4.2	4.4	4.5		
			X	0.34L	1.38	1.59	1.80	1.90		
HJ240 45	158	310	L	≤ 3.5	3.6	3.8	4.0	4.2	4.4	4.6
			X	0.38L	1.36	1.50	1.65	1.80	1.95	2.10
HJ240 63	158	310	L	≤ 3.5	5.5					
			X	0.38L	2.13					
HJ240 90	158	310	L	≤ 5.8	6.0	6.1				
			X	0.38L	2.36	2.45				
HJ300 45	218	400	L	≤ 3.6	3.8	4.0	4.2	4.4	4.6	> 4.6
			X	0.41L	1.58	1.71	1.84	1.97	2.10	t
HJ300 63	218	400	L	≤ 5.2	5.4	5.6	5.8	6.0	6.2	6.3
			X	0.41L	2.25	2.39	2.54	2.69	2.83	2.91
HJ300 90	218	400	L	≤ 6.4	6.6	6.8	7.0			
			X	0.40L	2.73	2.88	3.04			
HJ360 63	278	500	L	≤ 5.4	5.6	5.8	6.0	6.2	6.4	6.6
			X	0.42L	2.37	2.49	2.62	2.75	2.88	3.02
HJ360 90	278	500	L	≤ 7.2	7.4	7.6	7.7			
			X	0.40L	2.97	3.10	3.17			
HJ400 90	318	600	L	≤ 8.0						
			X	0.40L						

† Use the web hole option in the floor joist calculator in designIT

Interpolate to obtain values of 'X' for spans intermediate between the values given

Notes:

- Data applies for floor joists supporting uniform loads (and concentrated live load not exceeding 1.8 kN).
- Hole locations closer to supports may be possible for some load and support conditions; refer to the 'floor joist calculator' in designIT software or contact our free call market support service on 1800 808 131.
- Spacing between holes to be not less than 300 mm or twice the width (or twice the diameter) of the larger hole.
- Not more than three holes with width or diameter greater than 80 mm in any span.
- For cantilever spans holes greater than 40 mm diameter are not permitted.

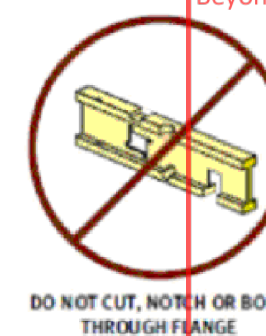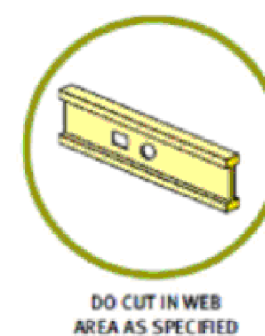

D	ISSUED FOR C.C	K.T.	L.N.	20.10.2025
C	ISSUED FOR C.C	K.T.	L.N.	23.09.2025
B	ISSUED FOR C.C	K.T.	L.N.	14.08.2025
A	ISSUED FOR C.C	K.T.	L.N.	21.03.2025
ISSUE	AMENDMENT	ENG.	DRA.	DATE

COPYRIGHT: THIS DESIGN AND PLANS ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART WITHOUT WRITTEN PERMISSION OF SL

ARCHITECT

zhinarchitects

Zhin Architects Pty Ltd
Suite 1, Level 2
2 Rouse Street
Eastwood, NSW 2122
+61 2 8893 8888 /p
info@zhinarch.com.au /e
www.zhinarch.com.au /w
28 495 969 790 /m

CLIENT

Beyond Certification Pty Ltd
Reference: 31251760DC
Date: 17/12/2024

STRUCTURAL LINK Pty Ltd

OFFICE: 02 8021 2626
ADDRESS: LEVEL 3, SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046
POSTAL ADDRESS: PO BOX SUITE 313, 49-51 QUEENS ROAD, FIVE DOCK NSW 2046

PROJECT

DUAL OCCUPANCY
3 JOHNSON AVE, KIRRAWEE, NSW 2232

SUBJECT

LEVEL 1, ROOF
TIMBER DETAILS, SHEET 4

DESIGNED	K.T.	DRAWN	L.N.	AUTHORISED	T.N.
CHECKED	T.N.	SCALE : A2	N.T.S.	DATE	FEB 2025
JOB NO.	SLY25-S008		DRAWING NO. S0609		