

PROPOSED SINGLE STOREY DWELLING AT 11 WALLA WALLA WAY, MENANGLE PARK


GENERAL NOTES

- THESE ENGINEERING DRAWINGS ARE TO BE READ IN CONJUNCTION WITH PROJECT SPECIFICATIONS AND OTHER CONSULTANTS' DRAWINGS ON THE PROJECT.
- THESE ENGINEERING DRAWINGS HAVE BEEN PREPARED FROM INFORMATION AVAILABLE AT THE TIME OF ISSUE. AS THIS INFORMATION MAY BE THE SUBJECT OF CHANGE PRIOR TO OR DURING CONSTRUCTION THE CONTRACTOR IS TO ADVISE THE ENGINEER WHERE DISCREPANCIES OCCUR.
- THESE DRAWINGS SHALL NOT BE USED FOR FINAL SETOUT OF THE PROJECT UNLESS SPECIFICALLY STATED.
- INSPECTIONS ARE REQUIRED TO BE PERFORMED BY A DULY APPOINTED INSPECTOR FROM 'CAPITAL ENGINEERING CONSULTANTS'. THESE INSPECTIONS ARE REQUIRED TO BE PERFORMED IN ACCORDANCE WITH THE SCOPE OF INSPECTIONS PREPARED BY 'CAPITAL ENGINEERING CONSULTANTS'. THE INSPECTOR IS TO BE GIVEN A MINIMUM OF 48 HOURS NOTICE.
- PRIOR TO THE COMMENCEMENT OF WORKS THE CONTRACTOR IS TO IDENTIFY ALL EXISTING SERVICES. ANY DAMAGE TO EXISTING SERVICES IS TO BE RECTIFIED AT THE CONTRACTORS EXPENSE. SERVICES SHOWN ON 'CAPITAL ENGINEERING CONSULTANTS' DRAWINGS ARE INDICATIVE ONLY.
- DURING CONSTRUCTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE STABILITY OF THE WORKS AND ENSURE NO PART IS OVERSTRESSED.
- WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT AUSTRALIAN STANDARDS AND BCA STATUTORY REQUIREMENTS, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT SUFFICIENT TOLERANCES ARE PROVIDED AND INTEGRATED THROUGHOUT ALL THE ELEMENTS OF THE WORKS.
- ALL NON-LOAD BEARING ELEMENTS SHALL BE KEPT CLEAR OF THE STRUCTURE SOFFIT BY AN ALLOWANCE DETERMINED FROM SPAN/250 OR CANTILEVER/125 BUT NOT LESS THAN 20mm, UNLESS NOTED OTHERWISE ON THE DRAWINGS.
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
- WIND AND EARTHQUAKE LOADS HAVE BEEN DETERMINED IN ACCORDANCE WITH AS1170.2 AND AS1170.4 RESPECTIVELY BASED ON THE FOLLOWING DESIGN CRITERIA :-
WIND LOADS:
REGION A2
TERRAIN CATEGORY 3.0
GUST WIND SPEED $V_{zu}(m/s)$ 41
SHIELDING M_s 1.0
TOPOGRAPHIC M_t 1.0
IMPORTANCE M_i 1.0
- SUPERIMPOSED DEAD LOADS AND LIVE LOADS HAVE BEEN DETERMINED IN ACCORDANCE WITH AS1170.1 AND ARE SHOWN ON THE GENERAL ARRANGEMENT DRAWINGS.
- THE GEOTECHNICAL INVESTIGATION(S) THAT WERE CARRIED OUT AND IMPLEMENTED IN OUR DESIGN ARE INCLUDED IN THE TABLE BELOW :-

GEOTECHNICAL REPORT		
CONSULTANT	REFERENCE	DATE
IDEAL GEOTECH	19626-88834	15/06/2026

FOUNDATION NOTES

- REFER TO THE GEOTECHNICAL ENGINEERING REPORT SPECIFIED IN THE GENERAL NOTES FOR SITE SPECIFIC GEOTECHNICAL INFORMATION.
- FOOTINGS TO BE FOUNDED ON MATERIAL HAVING AN ALLOWABLE BEARING CAPACITY OF 400 kPa ON BEDROCK. WHERE DIFFICULTY IN REACHING THE REQUIRED CAPACITY IS EXPERIENCED, 'CAPITAL ENGINEERING CONSULTANTS' IS TO BE CONTACTED TO RE-ASSESS THE FOOTING DESIGN.
- THE CONTRACTOR IS TO ENGAGE AND PAY A GEOTECHNICAL ENGINEER TO VERIFY THE BEARING CAPACITY OF THE FOUNDATIONS PRIOR TO PLACEMENT OF THE BLINDING LAYER.
- ALL LOOSE MATERIAL AND WATER TO BE CLEANED OUT OF THE FOUNDATION. FORMWORK TO BE USED WHERE THE SIDES OF THE FOUNDATION ARE NOT STABLE.
- A 50mm MINIMUM BLINDING LAYER SHOULD BE APPLIED TO THE BASE OF ALL FOUNDATIONS IMMEDIATELY AFTER VERIFICATION OF THE BEARING CAPACITY BY THE GEOTECHNICAL ENGINEER. WHERE THE FOUNDING MATERIAL IS DEEPER THAN REQUIRED FOR THE FOOTING THE EXCAVATION IS TO BE BACKFILLED WITH A WEAK MIX CONCRETE (N10) TO THE UNDERSIDE OF THE FOOTING.
- WHERE AN EXCAVATION IS REQUIRED OR EXISTS BELOW THE BASE OF A FOOTING THE SIDE OF THE EXCAVATION SHALL BE LOCATED AWAY FROM EDGE OF FOOTING BY THE ADE QUANTITY THAT THE EXCAVATION IS BELOW FOOTING BASE. WHERE THIS CANNOT BE ACHIEVED, 'CAPITAL ENGINEERING CONSULTANTS' SHALL BE CONTACTED FOR FURTHER DIRECTION. MASS CONCRETE IS TO EXTEND TO THE INFLUENCE LINE AS REQUIRED.
- ALL WALLS AND COLUMNS SHALL BE CONCENTRIC WITH THE SUPPORTING FOOTINGS UNLESS NOTED OTHERWISE ON THE DRAWINGS.



CONCRETE NOTES

- GENERAL
- CONCRETE WORK SHALL BE IN ACCORDANCE WITH AS3600 AND WITH THE PROJECT SPECIFICATIONS.
 - CONSTRUCTION JOINTS SHALL BE PROPERLY FORMED AND USED ONLY WHERE SHOWN ON 'CAPITAL ENGINEERING CONSULTANTS' DRAWINGS OR SPECIFICALLY APPROVED BY 'CAPITAL ENGINEERING CONSULTANTS'.
 - ALL THICKNESSES SHOWN ARE MINIMUM STRUCTURAL REQUIREMENTS, NO REDUCTION IN THICKNESS DUE TO FALLS OR TOPPING IS PERMITTED. REFER ARCHITECT DRAWINGS FOR ALL SLAB FALLS AND CONFIRMATION OF SLAB STEPS.
 - UNLESS A GROOVE LINE ALLOWANCE HAS BEEN NOTED ON THE DRAWINGS, NO GROOVE LINES ARE PERMITTED, EXCEPT AT SLAB LINES. ALL GROOVE LINES ARE TO BE SUBMITTED TO 'CAPITAL ENGINEERING CONSULTANTS' FOR APPROVAL.
 - THE FACE OF ALL CONCRETE AGAINST WHICH NEW CONCRETE IS TO BE CAST IS TO BE THOROUGHLY MECHANICALLY SCABBLED, FULLY EXPOSING THE AGGREGATE MATRIX.
 - NO PENETRATIONS GREATER THAN 150mm DIAMETER, OR EMBEDMENT OF PIPES GREATER THAN 40mm DIAMETER OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE MADE IN CONCRETE SLABS. FOR ALL OTHER CONCRETE MEMBERS NO PENETRATIONS, CHASES OR EMBEDMENTS SHALL BE MADE WITHOUT PRIOR APPROVAL BY 'CAPITAL ENGINEERING CONSULTANTS'.
 - CONDUITS GREATER THAN 25mm DIAMETER CAST INTO CONCRETE MEMBERS SHALL BE SPACED AT A MAXIMUM DISTANCE POSSIBLE AND UNDER NO CIRCUMSTANCES CLOSER THAN A CLEAR SPACING OF TWICE THE LARGER CONDUIT DIAMETER FROM PARALLEL REINFORCEMENT OR ANY OTHER CONDUIT.

CONCRETE

- THE CHARACTERISTIC COMPRESSIVE STRENGTH (f_c) AT 28 DAYS OF IN PLACE CONCRETE SHALL BE AS NOTED ON THE DRAWINGS.
- MAXIMUM AGGREGATE SIZE.....20mm
- SLUMP.....80mm
- ALL CONCRETE SHALL BE VIBRATED.
- ALL CONCRETE SHALL BE CURED IN ACCORDANCE WITH THE SPECIFICATION
- ALL CONCRETE SHALL BE SAMPLED AND TESTED IN ACCORDANCE WITH AS1012 AND THE PROJECT SPECIFICATION.
- ALL FORMWORK SHALL COMPLY WITH AS3610
- EACH FLOOR SHALL BE FULLY PROPPED TO THE FLOOR BELOW IN ACCORDANCE WITH AS3610 (FORMWORK CODE).
- THE FLOOR BELOW SHALL BE BACKPROPPED THROUGH A MINIMUM OF TWO STOREYS BELOW. THIS RESULTS IN A MINIMUM OF THREE STOREYS PROPPED AT ALL TIMES.
- PROPS MAY BE REMOVED AFTER 28 DAYS OF CURING OR AFTER 14 DAYS IF THE CONCRETE HAS REACHED ITS CHARACTERISTIC STRENGTH (AS PROVED BY CYLINDER TEST RESULTS).

REINFORCEMENT

- REINFORCEMENT IS TO BE MANUFACTURED IN ACCORDANCE WITH AS1302 AND SHALL BE FIXED AS SHOWN ON DRAWINGS.
Y DEFORMED BAR GRADE 400
N DEFORMED BAR GRADE 500 (NORMAL DUCTILITY)
R PLAIN ROUND BAR GRADE 250
W PLAIN WIRE GRADE 450
F FABRICS GRADE 450
- THE BAR SIZE IS INDICATED BY A NUMBER AFTER THE SYMBOL, WHICH INDICATES THE BAR DIAMETER IN MILLIMETERS.
- REINFORCEMENT SPACING NOMINATED ON DRAWINGS IS TO ASSIST SCHEDULER AND STEELFIXER TO ASSESS TOTAL NUMBER OF BARS REQUIRED. WHERE BARS PLACED IN ACCORDANCE WITH SPACING NOMINATED FOUL WITH OTHER STRUCTURAL REQUIREMENTS, PREFERENCE IS TO BE GIVEN TO RELOCATING BARS BY LOCALLY ADJUSTING SPACING TO ENABLE ASSEMBLY OF REINFORCEMENT TO BE COMPLETED. ENGINEER IS TO BE CONTACTED IN THE EVENT THAT REINFORCEMENT IS NEEDED TO BE CUT ON SITE PRIOR TO CONTINUING.
- LAP LENGTHS TO REINFORCEMENT BARS TO BE AS NOTED ON THE RELEVANT DRAWINGS.
- WELDING OF REINFORCEMENT BARS IS NOT PERMITTED UNLESS APPROVED.
- COVER SHALL BE AS NOTED ON THE RELEVANT DRAWINGS.
- CONCRETE COVERS NOTED ARE MEASURED FROM THE FORMWORK OR GROUND FACE TO THE OUTERMOST REINFORCEMENT COMPONENT, ie. IN COLUMNS AND BEAMS TO THE OUTSIDE OF TIES OR LIGATURES.
- COVER TO BE MAINTAINED DURING POURING BY THE USE OF PLASTIC CHAIRS OR PLASTIC TIPPED METAL CHAIRS.
- WHERE NO REINFORCEMENT IS SHOWN ON THE DRAWING AT RIGHT ANGLES TO THE MAIN REINFORCEMENT DISTRIBUTION REINFORCEMENT IS TO BE PROVIDED.

MASONRY NOTES

- ALL MASONRY SHALL COMPLY WITH AS3700 AND THE PROJECT SPECIFICATION.
- CONCRETE MASONRY UNITS TO HAVE A MINIMUM CHARACTERISTIC UNCONFINED STRENGTH OF 20 MPa IN ACCORDANCE WITH AS2733.
- MASONRY TO BE BEDDED IN FRESHLY PREPARED MORTAR.
(a) CONCRETE BLOCKS :-
MORTAR MIX TO BE UNIFORMLY MIXED IN A RATIO OF ONE PART CEMENT, ONE PART LIME AND SIX PARTS SAND CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.
(b) CLAY BRICKS :-
MORTAR MIX TO BE UNIFORMLY MIXED IN THE RATIO OF ONE PART CEMENT, THREE PARTS SAND AND ONE FOURTH PART LIME CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.
- GROUT SHALL HAVE A COMPRESSIVE STRENGTH (f_c) OF 20 MPa AT 28 DAYS, A SLUMP OF 125mm IN A 150mm SLUMP CONE, A MAXIMUM AGGREGATE SIZE OF 10mm AND BE IN ACCORDANCE WITH AS3700.
- BEDDING OF MASONRY SHALL BE FULL FACE WITH CROSS JOINTS COMPLETELY FILLED. JOINT THICKNESS SHALL NOT EXCEED 12mm.
- PROVIDE WALL TIES AT 600mm MAXIMUM CENTRES VERTICALLY AND HORIZONTALLY. REFER TO MASONRY DETAILS FOR WALL TIE SETOUT AT OPENINGS.
- THE CAVITY SHALL NOT EXCEED 100mm AND SHALL NOT BE SMALLER THAN 40mm UNLESS NOTED OTHERWISE. KEEP CAVITY CLEAN AND CLEAR OF OBSTRUCTIONS.
- RAKING OF JOINTS IS NOT PERMITTED WITHOUT PRIOR APPROVAL FROM 'CAPITAL ENGINEERING CONSULTANTS'.
- ALL WALLS TO BE KEPT STABLE AT ALL STAGES OF CONSTRUCTION AND NOT BE OVER STRESSED AT ANY TIME.
- UNLESS NOTED OR SHOWN OTHERWISE ON DRAWINGS THERE ARE TO BE NO CHASES OR RECESSES PERMITTED IN MASONRY WALLS WITHOUT THE PRIOR APPROVAL OF 'CAPITAL ENGINEERING CONSULTANTS'.

STRUCTURAL STEELWORK NOTES

- ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538, AS1554 AND THE SPECIFICATION.
- UNLESS SHOWN OTHERWISE, ALL STEEL SHALL BE IN ACCORDANCE WITH AS1204 GRADE 300. ALL STEEL HOLLOW SECTIONS SHALL BE GRADE 350 U.N.O. AND SHALL BE IN ACCORDANCE WITH AS1163. ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 STEEL IN ACCORDANCE WITH AS1538
- UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
(i) ALL WELDS SHALL BE 6MM CONTINUOUS FILLET WELDS ALL ROUND.
(ii) ALL BOLTS SHALL BE M20 - 8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION.
PURLIN BOLTS TO BE M12 - 4.6/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END.
(iii) ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK. (U.N.O.)
(iv) ALL CAP PLATES SHALL BE 10 mm THICK. (U.N.O.)
(v) ALL BASE PLATES SHALL BE 10 mm THICK. (U.N.O.)
- BOLT DESIGNATION:
4.6/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.6 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION.
8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION.
8.8/TB REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A BEARING JOINT.
8.8/TF REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A FRICTION JOINT.
- HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE "PART TURN" METHOD OF TIGHTENING.
- ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.
- SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER.
- ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE HOT-DIPPED GALVANIZED.

TIMBER NOTES


- AS 1684 IS RELEVANT TO DOMESTIC CONSTRUCTION IN SHELTERED LOCATIONS.
- SOFTWOOD MINIMUM GRADE F7 U.N.O.
HARDWOOD MINIMUM GRADE F11 U.N.O.
- EXTERNAL TIMBER TO BE EITHER HARDWOOD DURABILITY CLASS I OR II OR IMPREGNATED GRADE F7. PRESSURE TREATED TO AS1684 AND RE-DRILLED PRIOR TO USE. SUPPLEMENTARY TREATMENT SHALL BE APPLIED TO ALL CUT SURFACES. PROVIDE DOCUMENTATION.
- ALL BOLTS IN TIMBER CONSTRUCTION TO BE MIN. M16 U.N.O. BOLT HOLES TO BE DRILLED EXACT SIZE. WASHERS UNDER HEADS AND NUTS TO BE AT LEAST 2.5 TIMES BOLT DIAMETER.
- FINISHED TIMBER SIZES.
SEASONED SOFTWOOD +5,-0mm
UNSEASONED SOFTWOOD F7+3,-3mm
F7+2,-4mm
SEASONED HARDWOOD +2,-0mm
UNSEASONED HARDWOOD -3,-3mm
(SEE ALSO CLAUSE 1.6.2 IN AS 2082)
- ALL TIMBER JOINTS AND NOTCHES TO BE 100mm MINIMUM FROM LOOSE KNOTS. SEVERE SLOPING GRAIN, GUM VEINS OR OTHER MINOR DEFECTS.
FOR JOISTS SPANNING GREATER THAN 3m AND LESS THAN 4.2m PROVIDE ONE ROW OF BLOCKING MID-SPAN.
FOR JOISTS SPANNING GREATER THAN 4.2m AND UP TO 6.0m PROVIDE TWO ROWS OF BLOCKING AT 1/3 POINTS.
FOR DEEP JOISTED FLOORS WHERE A CONTINUOUS TRIMMING JOIST IS NOT PROVIDED AT END OF JOISTS. BLOCKING IS REQUIRED AT 1800 MAXIMUM CENTERS. (REFER TO AS 1684)
- BLOCKING IS NOT REQUIRED FOR JOISTS SPANNING LESS THAN 3m.

BRICK STEEL LINTEL SCHEDULE


OPENING SIZE (mm)	INTERNAL SKIN	EXTERNAL SKIN	END BEARING
UP TO 900mm	85 x 7mm FLAT BAR	85 x 7mm FLAT BAR	100 mm
1500	100 x 100 x 6mm ANGLE	100 x 100 x 6mm ANGLE	100 mm
1800	100 x 75 x 10mm ANGLE	100 x 100 x 6mm ANGLE	100 mm
2400	150 x 100 x 6mm ANGLE	100 x 100 x 6mm ANGLE	150 mm
2700	150 x 90 x 10mm ANGLE	150 x 100 x 6mm ANGLE	150 mm
3300	150 x 100 x 10mm ANGLE	150 x 100 x 6mm ANGLE	150 mm
3600	-	150 x 100 x 10mm ANGLE	150 mm

NOTES

- ALL STEEL LINTELS TO BE HOT DIPPED GALVANIZED.
- ABOVE ALL LINTELS, PROVIDE M.E.T MASONRY REINFORCEMENT FOR 2 COURSES AND CONTINUE 1000mm PAST OPENING.

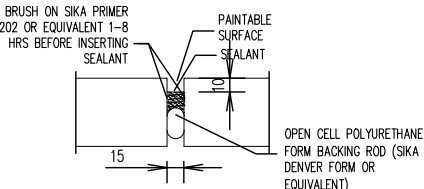

TYPICAL ARTICULATION JOINT DETAIL



ARTICULATION JOINT AND WALL TIE DETAIL

ALL WALL TIES ARE TO BE BUILT IN AND FIXED TO FRAME PROGRESSIVELY AS CONSTRUCTION PROCEEDS. SPACED AT EACH SIDE OF EXPANSION JOINTS AND AT EVERY THIRD COURSE. THE SPACING OF ALL OTHER TIES SHALL BE IN ACCORDANCE WITH PROVISIONS SET IN NCC CLASS 1 AND 10 BUILDINGS, VOLUME 2, AS 4773.2 & BCA 3.3.5.13

PROPOSED SINGLE STOREY DWELLING 11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.



9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026

Architect
TAYLORED DESIGNS & DRAFTING



ISSUED FOR CC	
APPROVED BY:	DATE:
	24/07/2026
PAUL EL-BAYEH	
B.E. (Civil), M.E. (Structural & Foundation), T.E. (Australia), C.P. (Eng. No. 3112146, NER, RPSC)	




COVER SHEET

A1 1 2 3 4 5 6 7 8 9 10

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY

North	Project Number	Revision
	STR26412	
	Drawing Number	A
	S0	

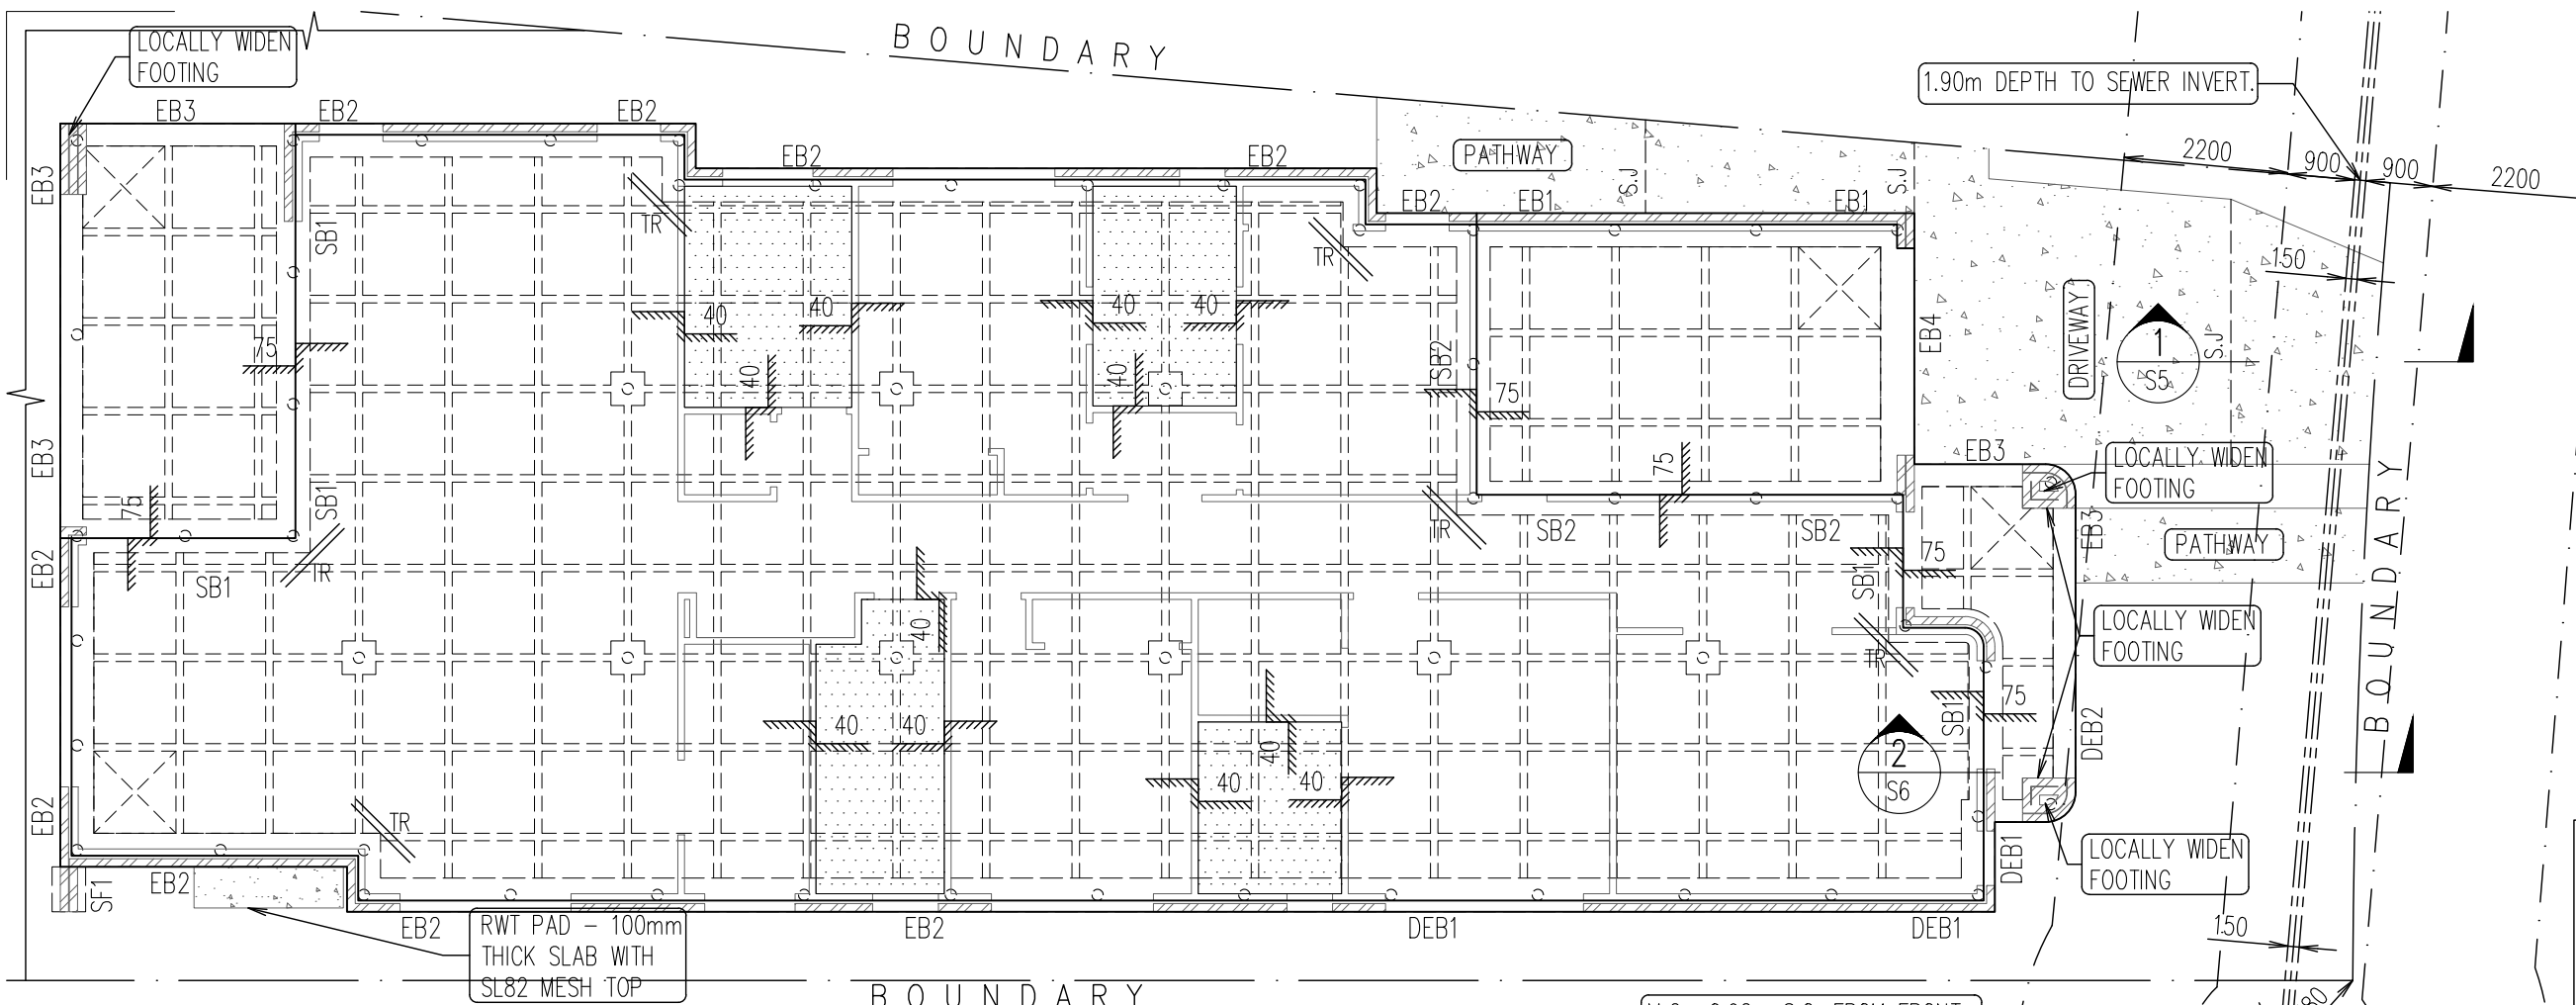

GROUND FLOOR – WAFFLE POD PLAN – 100 mm SLAB U.N.O

- NOTES :
- SITE CLASSIFICATION IN ACCORDANCE WITH AS2870 CLASS M – IDEAL GEOTECH – 19626–88834.
 - SAFE BEARING CAPACITY TO BE A MIN. 400 kPa TO BE BEARING ON BEDROCK.
 - 100mm THICK SLAB SL82 TOP THROUGHOUT
 - ALL INTERNAL PODS TO BE 225mm, GARAGE AND PATIO PODS TO BE 150mm
 - ALL BRICK WALLS TO BE ARTICULATED AND SPACED IN ACCORDANCE TO AS3700 AND ARTICULATED WALLING TECHNICAL GUIDELINE (TN61)
 - ALL CORNERS TO HAVE L-BAR WITH 500mm LEGS TOP AND BOTTOM
 - PODS LESS THAN 400mm LONG CAN BE TAPED
 - ALL EXPOSED SLABS TO BE WATERPROOFED WITH APPROVED SYSTEMS
 - DRAWING TO BE READ IN CONJUNCTION WITH ARCHITECTURAL DRAWINGS.
 - REFER TO ARCHITECTURAL DRAWINGS FOR ALL SETOUT, LEVELS, FALLS ETC.


DRIVEWAY– 120mm SLAB WITH SL82 MESH TOP U.N.O
NOTE :1. MAX 6m SAWN CONTROL JOINT
2. MAX 15m KEYED CONSTRUCTION JOINT
3. MAX 30m EXPANSION JOINT

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX. SIZE)	CEMENT TYPE	f'c
WAFFLE SLAB	80mm	20mm	G.P.	25* MPa
REINFORCEMENT COVER SCHEDULE				
MEMBER	COVER (mm)			EXPOSURE CLASSIFICATION
	TOP	BOTTOM	SIDES	
INTERNAL SLABS	30mm	30mm	30mm	A1
EXTERNAL SLABS	40mm	40mm	40mm	A2

* IF WATERPROOF MEMBRANE IS INSTALLED INCORRECTLY, 32 MPa CONCRETE IS TO BE USED DUE TO ACID SULPHATE

PATHWAY– 100mm SLAB WITH SL82 MESH TOP U.N.O
NOTE :1. MAX 4m SAWN CONTROL JOINT
2. MAX 10m KEYED CONSTRUCTION JOINT
3. MAX 20m EXPANSION JOINT

M.C.: 0.92m S.O. FROM FRONT BOUNDARY OF LOT 4419, 1.38m FROM FRONT LEFT CORNER BOUNDARY. 1.97m DEPTH TO SEWER INVERT.

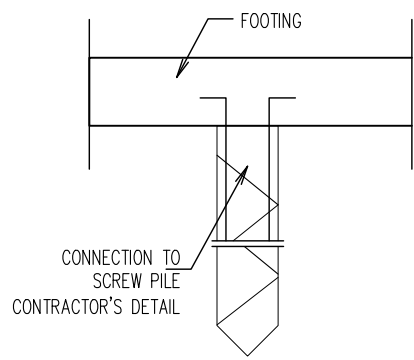

SCREW PILE DETAIL SCALE 1:20

SCREW PILES SCHEDULE		
MARK	SIZE (Ø x THICKNESS)	SWL
○	CONTRACTOR TO CONFIRM SPECS @ MAX 2.0m CTS	100kN

BUILDER TO CONFIRM EXTERNAL FINISH LEVELS, DROP EDGE BEAMS MAY BE REQUIRED.

ALL RETAINING WALLS MAY NOT BE SHOWN ON PLANS & MAY BE REQUIRED. TO BE CONFIRMED DURING CONSTRUCTION

IF SCREW PILES ARE NOT USED, BORE 300Ø CONCRETE PIERS BEARING ON BEDROCK IN THE SAME LOCATION (APPROX. 2.3–2.5m BELOW NGL)

LEGEND	
	LOAD BEARING BRICK WALL ABOVE
	LOAD BEARING TIMBER WALL ABOVE
	DENOTES SCREW PILES – REFER TO SCHEDULE
	DENOTES STARTING POD
	DENOTES SAWN JOINT
	DENOTES STEP IN SLAB
	89 x 89 x 5mm SHS STEEL POST ABOVE
	2N12 1200 LONG TRIMMER BARS
	40mm WET AREA SET-DOWNS

PROPOSED SINGLE STOREY DWELLING 11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.

Capital Engineering Consultants

9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026

Architect
TAYLORED DESIGNS & DRAFTING

Phone: 0401 462 401 Email: info@tayloredesigns.com.au

ISSUED FOR CC

APPROVED BY: DATE: 24/07/2026

PAUL EL-BAYEH
B.E. (Civil), M.E. (Structural & Foundation),
FIE Aust. CPEng No. 3113146, NER, RPSC

FOR CONSTRUCTION CERTIFICATE APPROVAL

GROUND FLOOR SLAB PLAN


Project Number
STR26412

Drawing Number
S1

Revision
A

North

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY

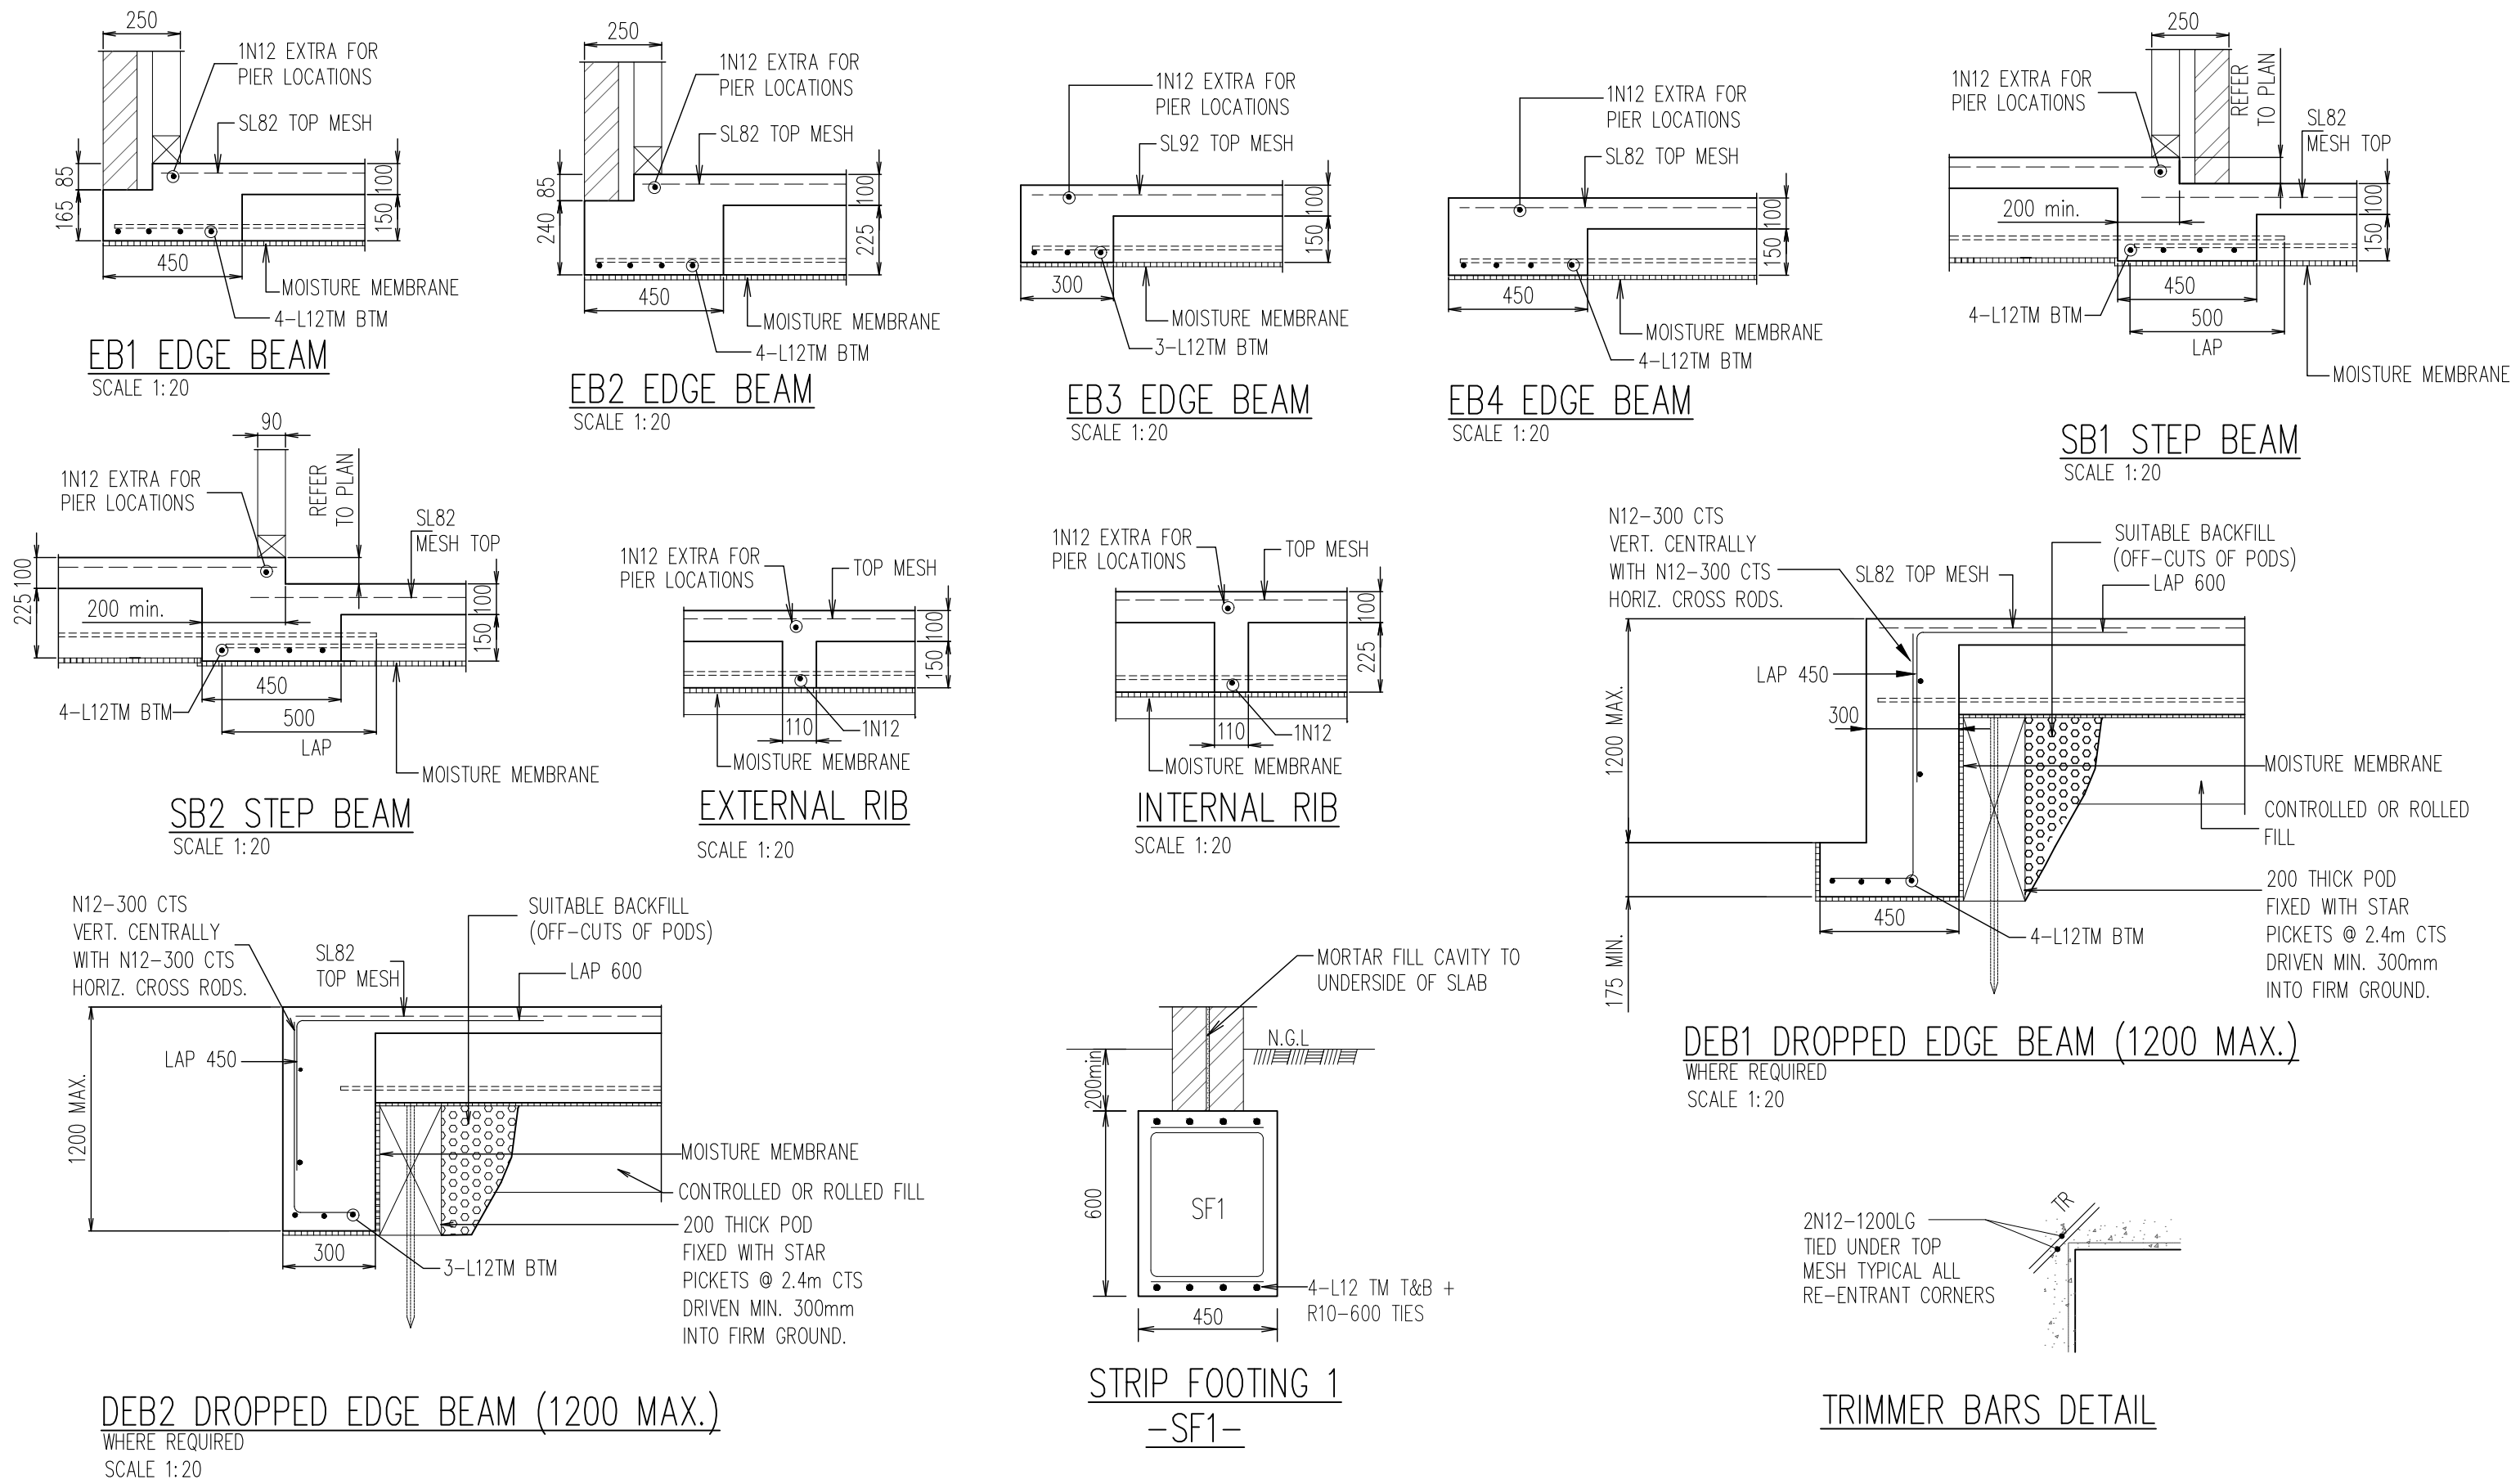

PROPOSED SINGLE STOREY DWELLING
11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.



9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.ccc-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026

Architect
TAYLORED DESIGNS & DRAFTING
TAYLORED
DESIGNS & DRAFTING
Phone: 0401 482 401 Email: info@taylorreddesigns.com.au


FOR CONSTRUCTION CERTIFICATE APPROVAL

ISSUED FOR CC
APPROVED BY: *P. El-Bayeh*
PAUL EL-BAYEH
B.E. (Civil), M.E. (Structural & Foundation)
T.E. Aust. CPD No. 3132148, NER, RPSCQ
DATE: 24/07/2026


Title
GROUND FLOOR SLAB
SECTIONS AND DETAILS

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY


North	Project Number STR26412	Revision A
	Drawing Number S2	

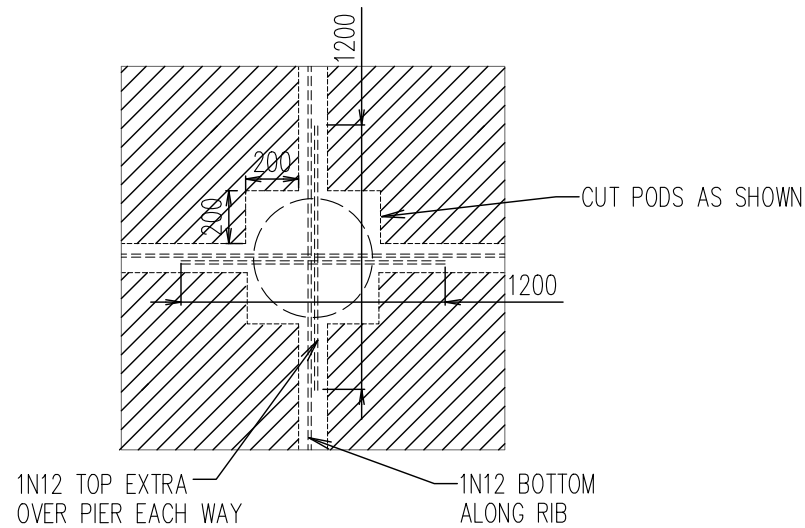


INTERNAL PIER DETAIL
(PLAN VIEW)

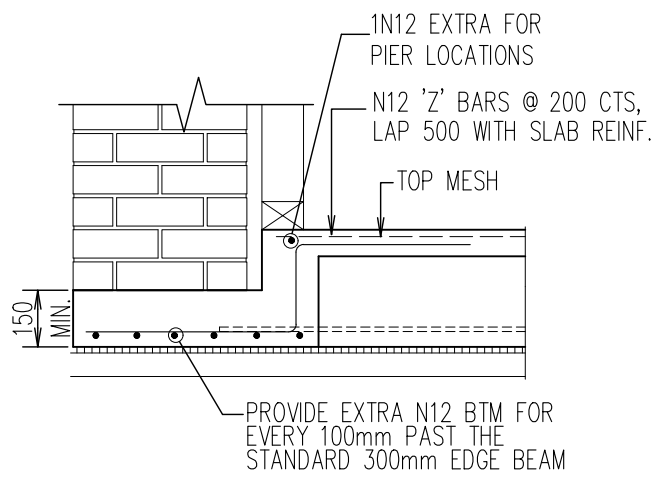


LOCAL WIDENING OF EDGE BEAM
APPLICABLE UNDER ENGAGED BRICK COLUMNS, HOTWATER UNIT PADS, ETC.

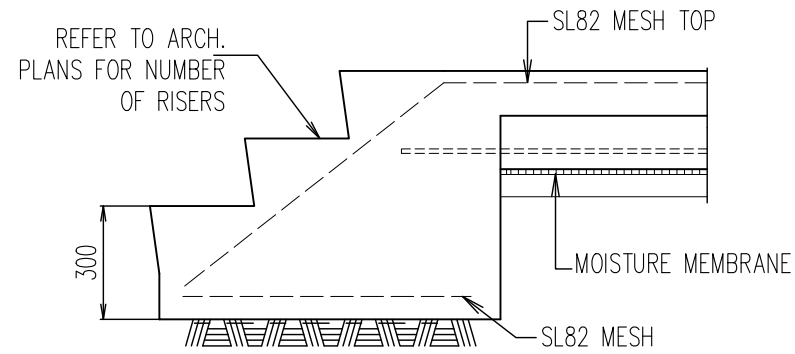


TYPICAL EXTERNAL STAIR DETAIL

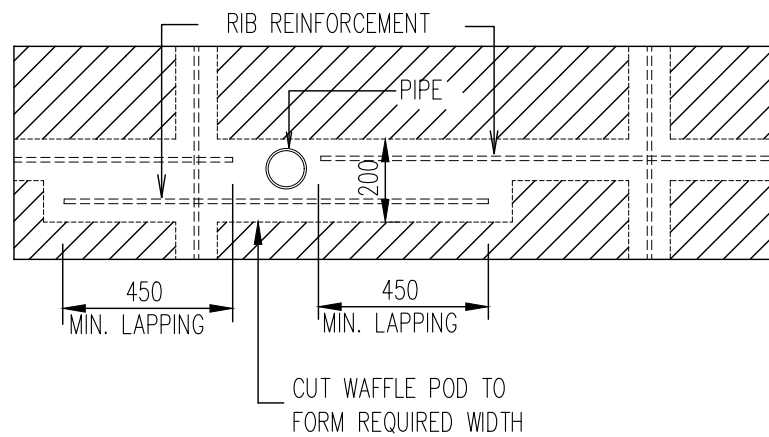

PIPE PENETRATION DETAIL
(PLAN VIEW)

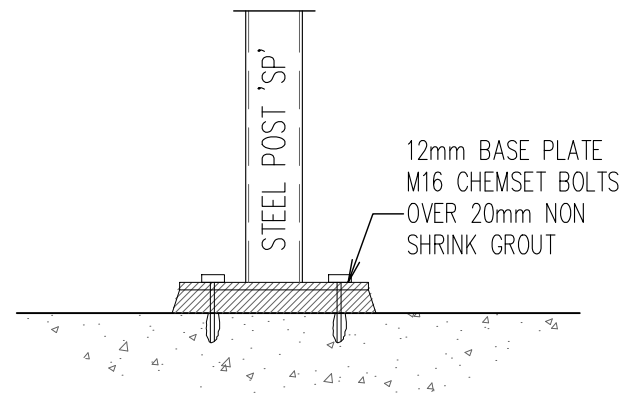

STEEL POST TO SLAB CONNECTION DETAIL

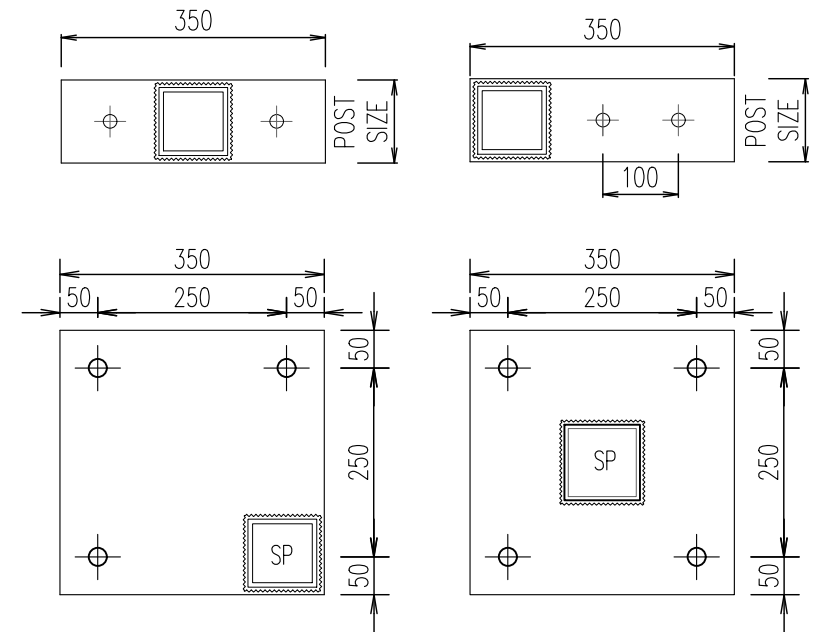

SHS STEEL POST BASE PLATE DETAILS

SCALE 1:10

1. ALL BASE PLATES TO BE 12mm PLATE (8mm CFW)
2. ORIENTATE BASE PLATE TO SUIT WALL LOCATION
3. M16 CHEMSET ANCHOR BOLTS WITH 150mm EMBEDMENT

TYPICAL TILE (30mm) SETDOWN DETAIL

PROPOSED SINGLE STOREY DWELLING
11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.

Capital Engineering Consultants

9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026

Architect
TAYLORED DESIGNS & DRAFTING
TAYLORED
DESIGNS & DRAFTING
Phone: 0401 482 401 Email: info@taylorreddesigns.com.au


FOR CONSTRUCTION CERTIFICATE APPROVAL

ISSUED FOR CC
APPROVED BY: *P. El-Bayeh*
PAUL EL-BAYEH
B.E. (Civil), M.E. (Structural & Foundation),
T.E. Aust. CPDing No. 3132148, NER, RPSCQ


Title
GROUND FLOOR SLAB
SECTIONS AND DETAILS

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY


North
Project Number
STR26412
Drawing Number
S3
Revision
A

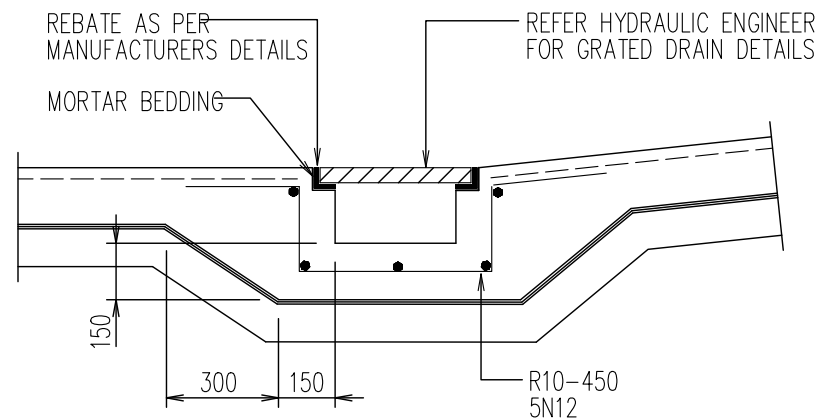


TYPICAL GRATED DRAIN DETAIL
SCALE 1:20

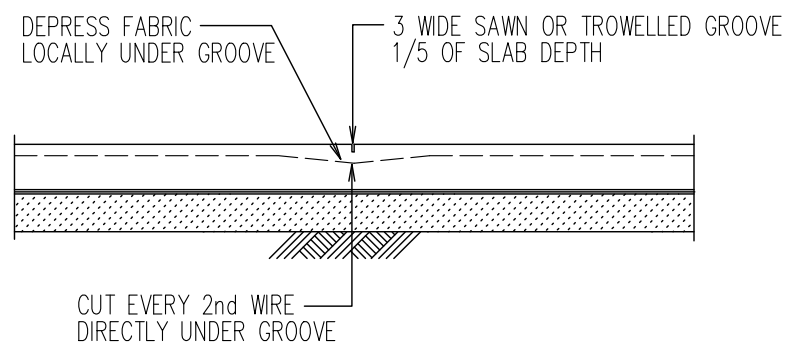


S.J. – SAWN CONTROL JOINT
SCALE 1:20
NOTE: SAWCUT TO BE MADE WITHIN 16 HOURS OF CASTING SLAB

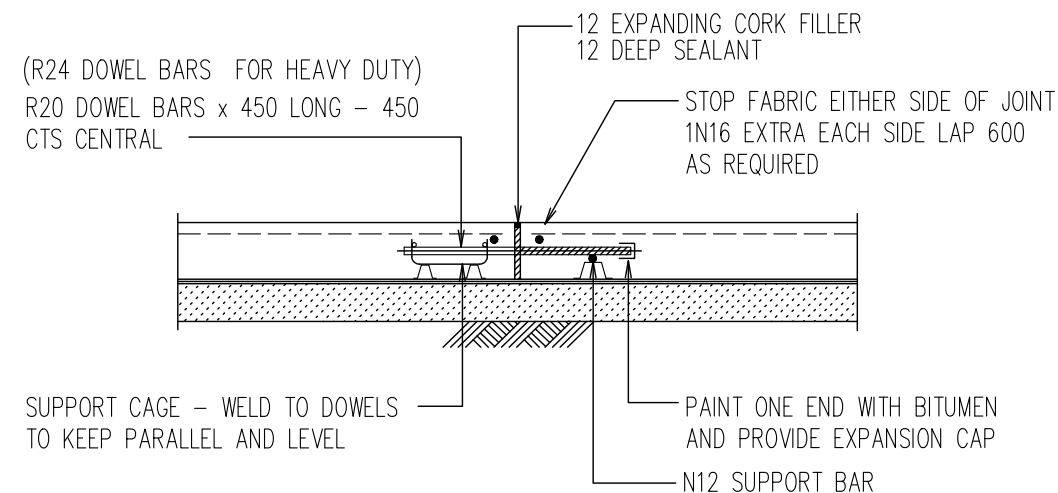

E.J. – EXPANSION JOINT
SCALE 1:20

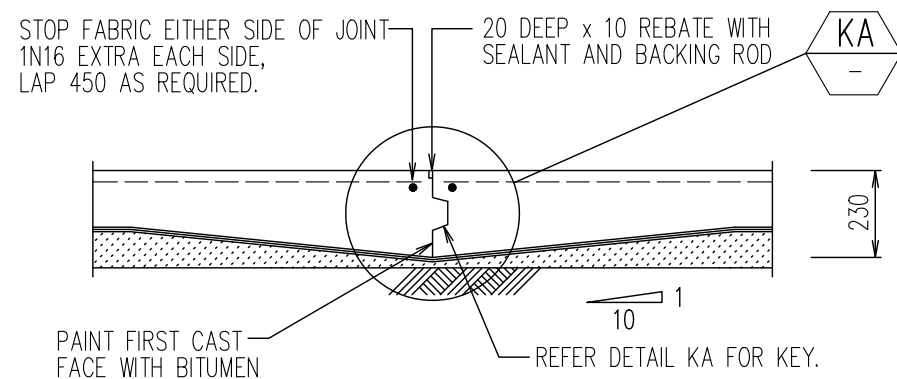

K.J. – KEYED CONSTRUCTION JOINT
SCALE 1:20
CARPARK AND OFFICE FLOORS

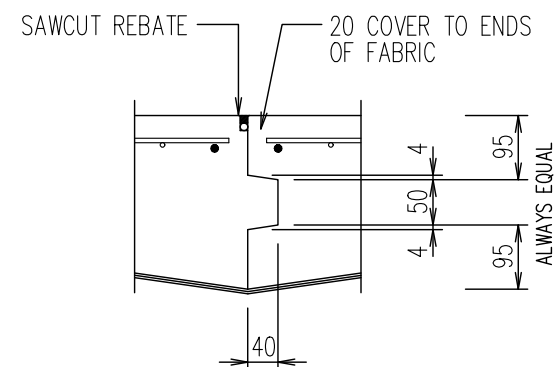

DETAIL
SCALE 1:10
KA

PROPOSED SINGLE STOREY DWELLING
11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.

Capital Engineering Consultants

9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026


Architect
TAYLORED DESIGNS & DRAFTING
TAYLORED
DESIGNS & DRAFTING
Phone: 0401 482 401 Email: info@taylorredesigns.com.au

ISSUED FOR CC
APPROVED BY: *P. El-Bayeh*
PAUL EL-BAYEH
B.E. (Civil), M.E. (Structural & Foundation),
FIE Aust. CRP Reg. No. 3132148, NER, RPSCQ
DATE: 24/07/2026
REGISTERED
Engineers Australia

Title
GROUND FLOOR SLAB SECTIONS AND DETAILS

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY
North
Project Number
STR26412
Drawing Number
S4
Revision
A

FOR CONSTRUCTION CERTIFICATE APPROVAL

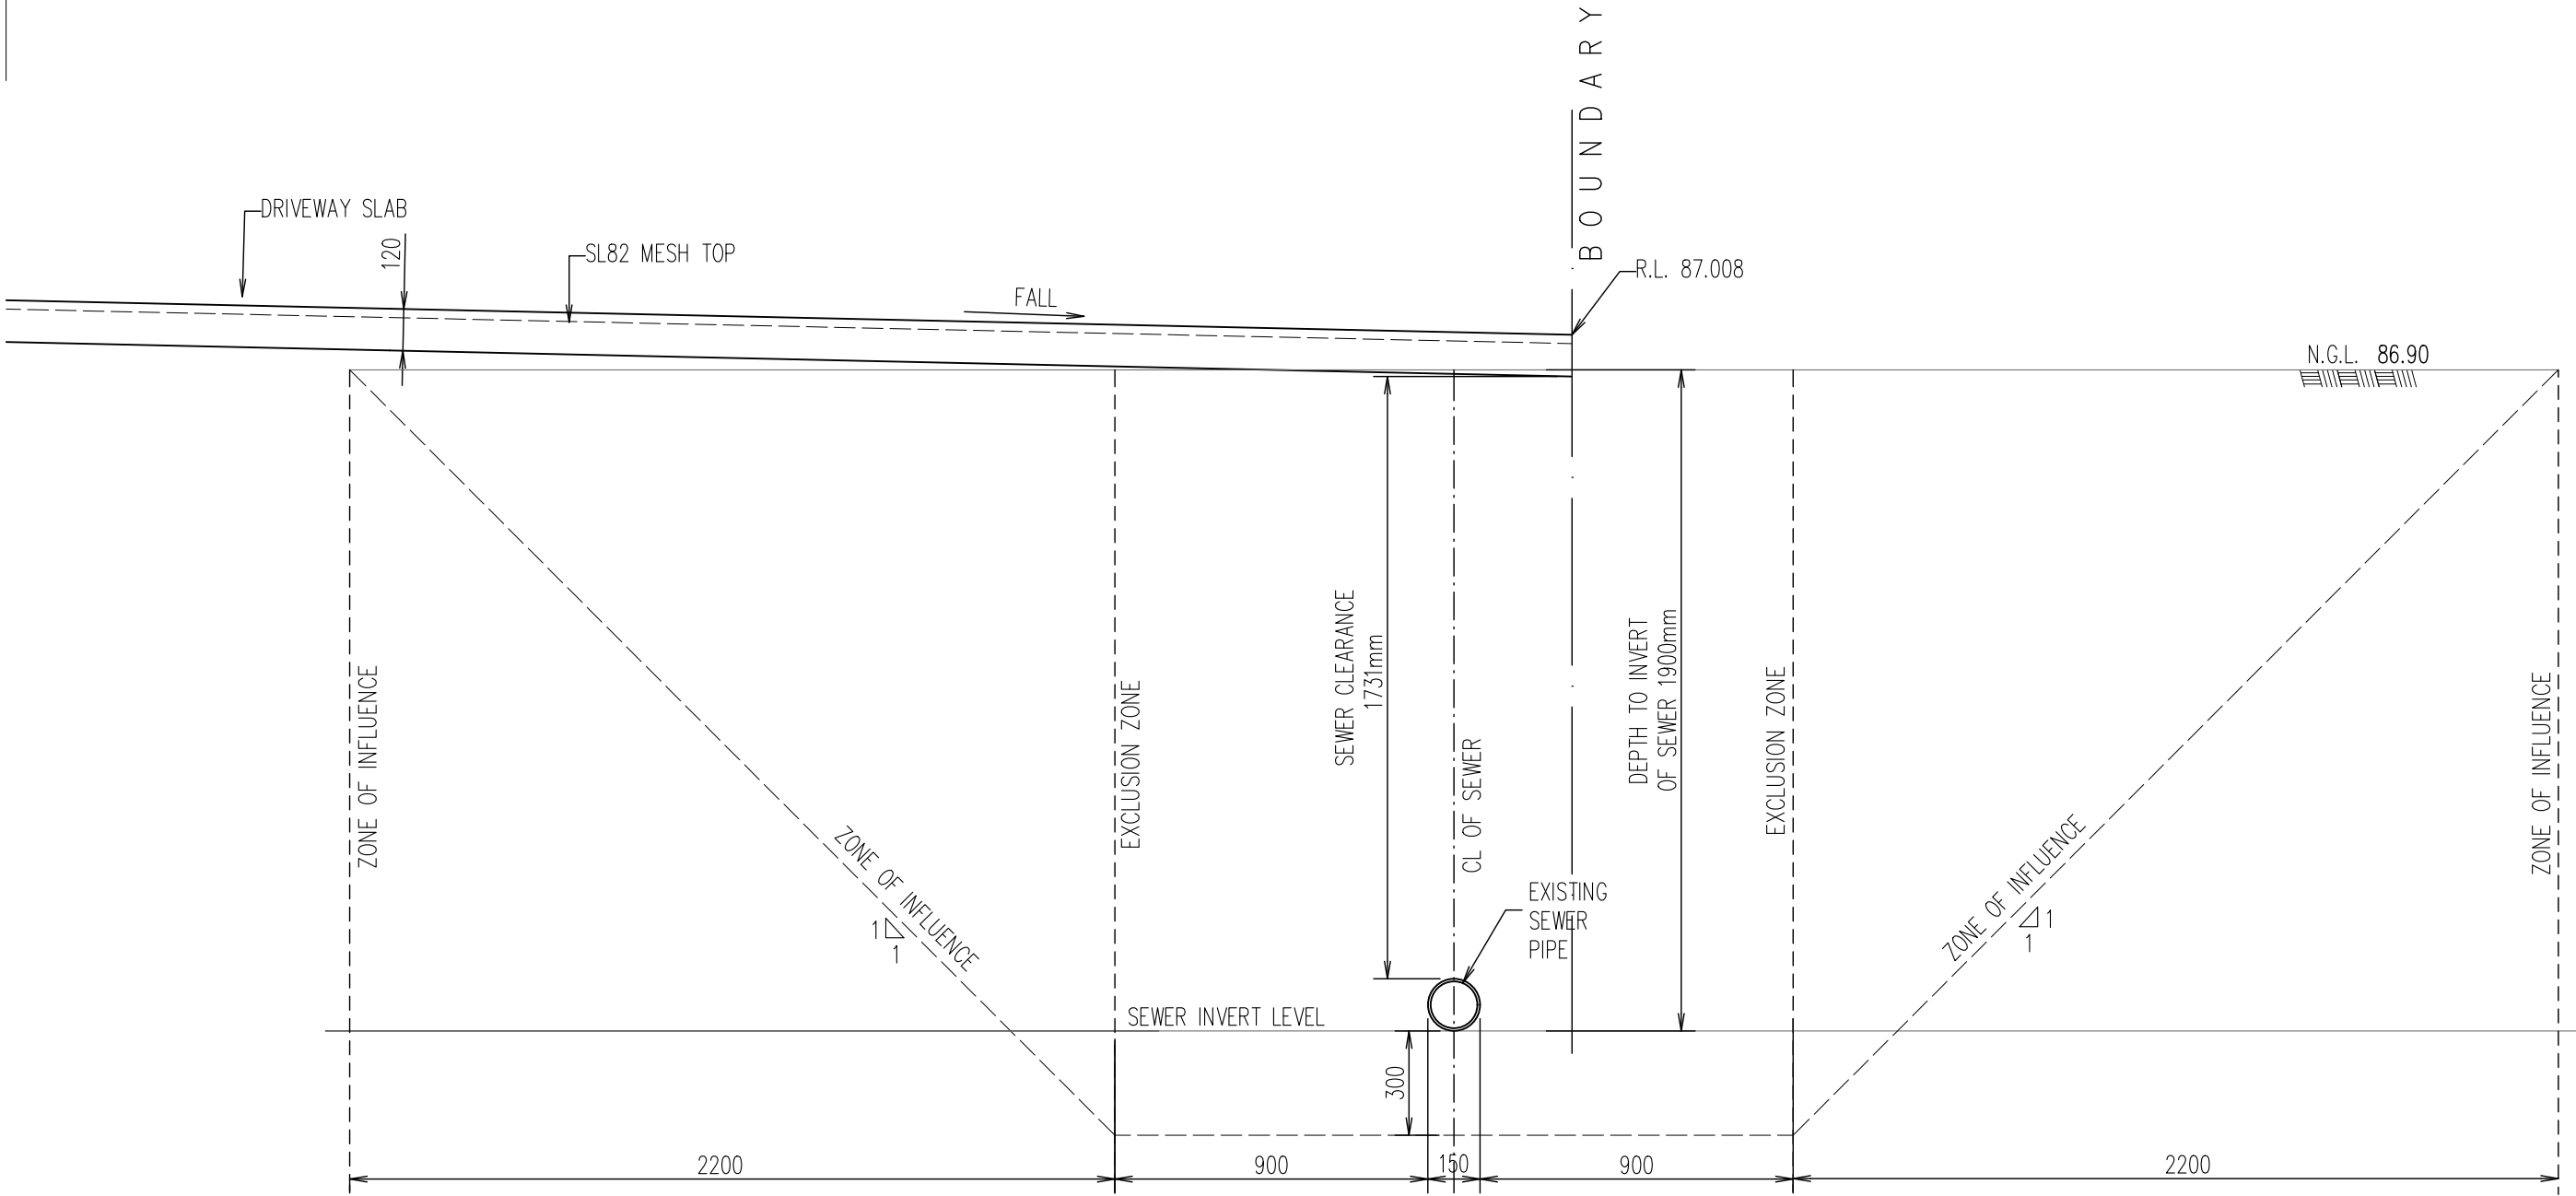

SECTION 1
SCALE 1:20
S1

PROPOSED SINGLE STOREY DWELLING
11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.



9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com


A	ISSUED FOR CC	R.E.	J.C.	24/07/2026
Rev	Description	By	Chk	Date

Architect
TAYLORED DESIGNS & DRAFTING
TAYLORED
DESIGNS & DRAFTING
Phone: 0401 482 401 Email: info@taylorreddesigns.com.au

ISSUED FOR CC	
APPROVED BY: <i>P. El-Bayeh</i> PAUL EL-BAYEH B.E. (Civil), M.E. (Structural & Foundation), FIE Aust. CRP Reg No. 3132148, NER, RPSCQ	DATE: 24/07/2026 REGISTERED NER Engineers Australia

Title GROUND FLOOR SLAB SECTIONS AND DETAILS
--

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY	
North 	Project Number STR26412 Drawing Number S5 Revision A

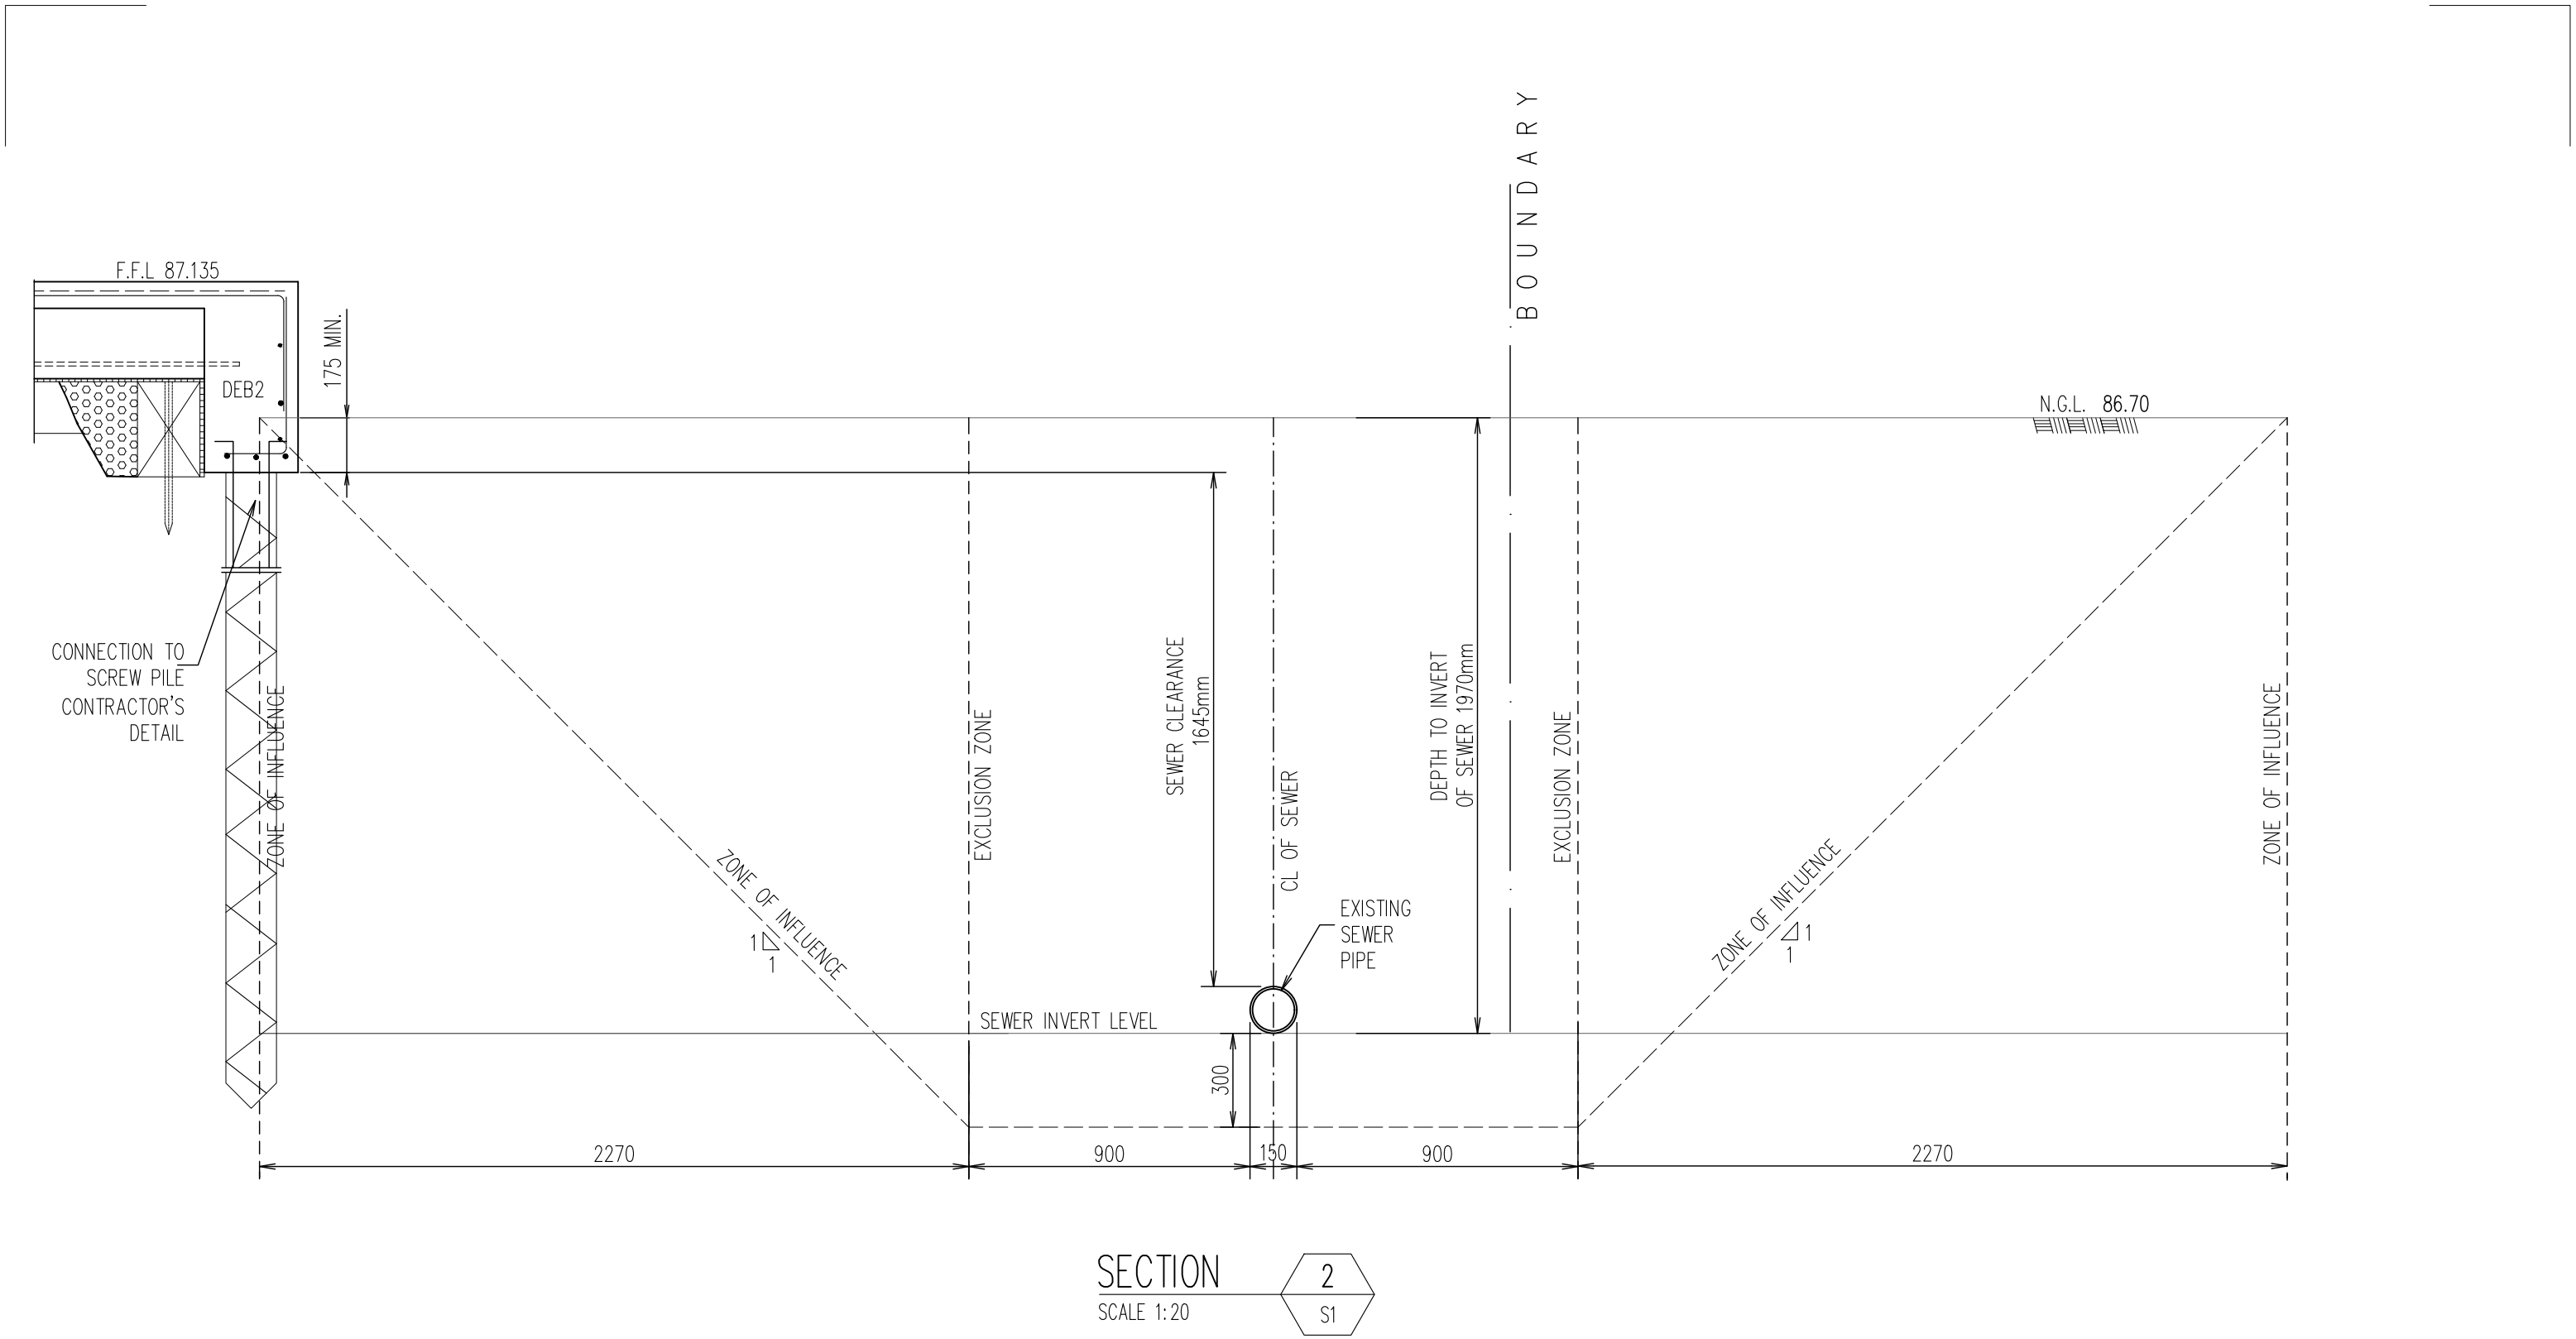

PROPOSED SINGLE STOREY DWELLING
11 WALLA WALLA WAY, MENANGLE PARK

Scale 1:100 @ A3 Date 24/07/2026 Drawn M.K. Design R.E. Approved P.E.



9630 0121
8 Buller Street, North Parramatta, NSW 2151
www.cec-au.com

Rev	Description	By	Chk	Date
A	ISSUED FOR CC	R.E.	J.C.	24/07/2026

Architect
TAYLORED DESIGNS & DRAFTING
TAYLORED
DESIGNS & DRAFTING
Phone: 0401 462 401 Email: info@taylorredesigns.com.au

ISSUED FOR CC
APPROVED BY: *P. El-Bayeh*
PAUL EL-BAYEH
B.E. (Civil), M.E. (Structural & Foundation),
F.R.Aust. CPEng No. 3132148, NER, RPSCQ
DATE: 24/07/2026
REGISTERED
NER
Engineers Australia

Title
GROUND FLOOR SLAB
SECTIONS AND DETAILS

DO NOT SCALE DRAWING, USE FIGURED DIMENSIONS ONLY
North
Project Number
STR26412
Drawing Number
S6
Revision
A

FOR CONSTRUCTION CERTIFICATE APPROVAL