

FOR CONSTRUCTION

LOT 11 36 NARRAMI ROAD, AUSTRAL. IN DP 1256322.


PROPOSED CONSTRUCTION OF A TWO STOREY DWELLING




Sheet List	
Sheet No.	Sheet Name
CDC.01	COVER SHEET
CDC.03	LOCATION PLAN AND SITE PLAN
CDC.05	GROUND FLOOR PLAN
CDC.06	FIRST FLOOR LEVEL
CDC.07	ROOF PLAN
CDC.08	ELEVATION 01
CDC.09	ELEVATION 02
CDC.10	SECTIONS
CDC.11	FLOOR AREA PLAN
CDC.14	COLOR SCHEDULE
CDC.15	LANDSCAPE PLAN
CDC.16	DOOR WINDOW SCHEDULE
CDC.18	WATERPROOFING PLAN
CDC.19	SLAB SETOUT PLAN
CDC.20	3D VIEWS

NOTE: ALL IMAGES ARE FOR ILLUSTRATION ONLY AND ARE SUBJECT TO VARIATION AND TO AVAILABILITY OF MATERIALS.

NARRAMI ROAD

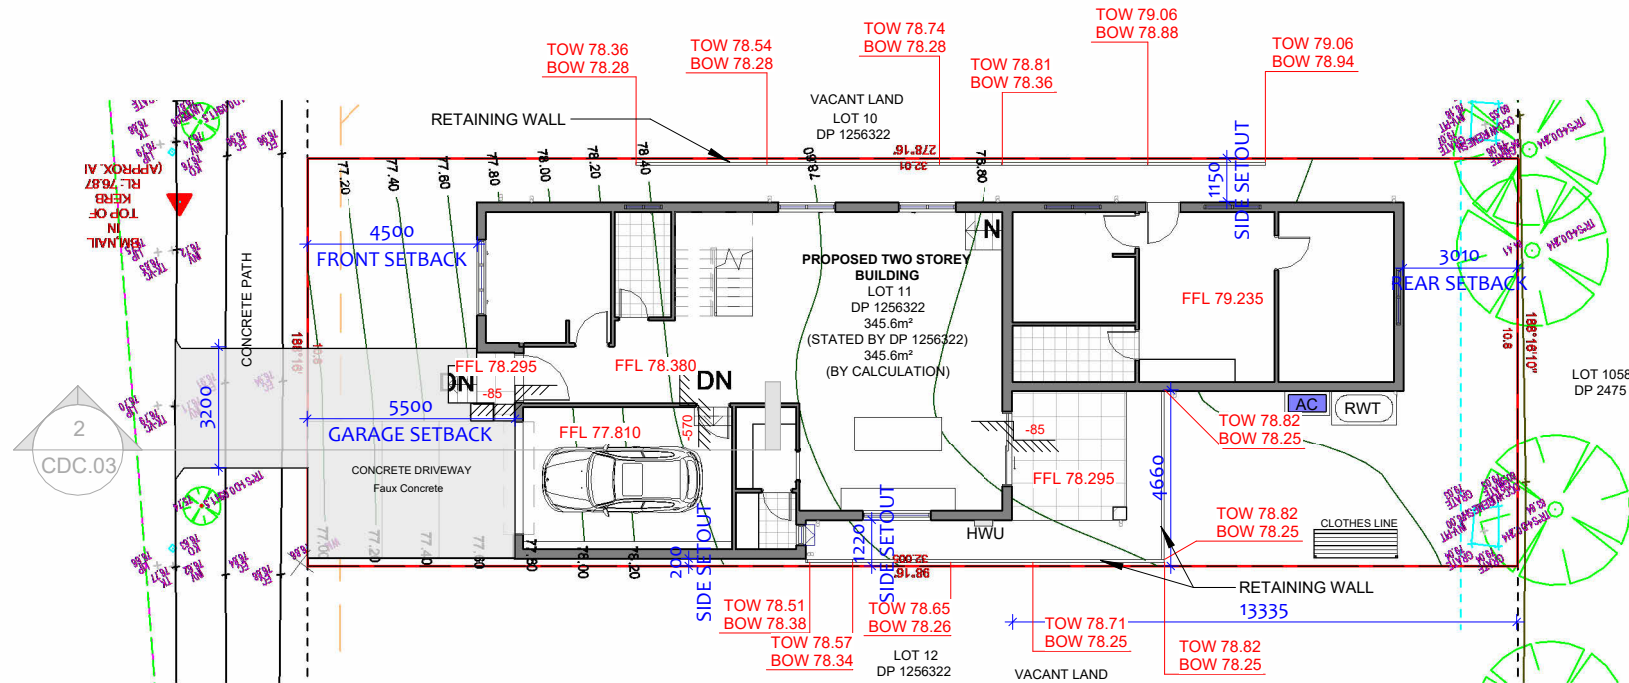

1 CDC - SITE PLAN
1 : 200

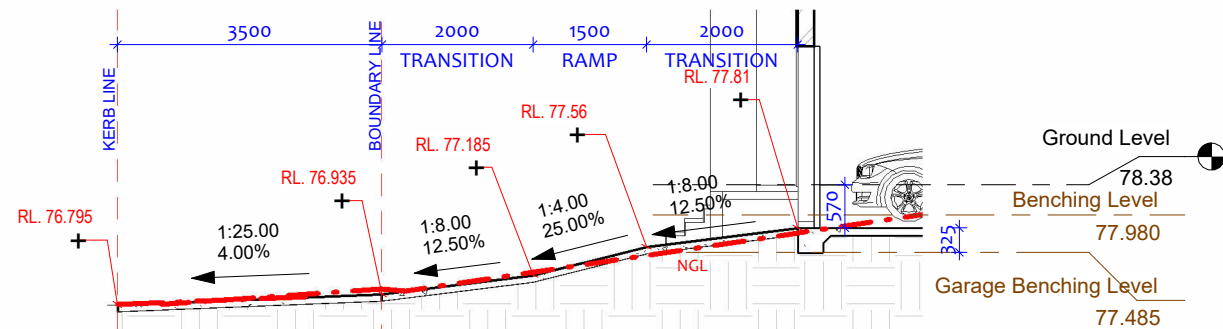

2 DRIVEWAY SECTION
1 : 100

AREA SCHEDULE (RENTABLE)	
NAME	AREA (m2)
LOT AREA	345.6
GROUND FLOOR	137
FIRST FLOOR	95
GARAGE	21
STAIRSCASE VOID	5
PRIVATE OPEN SPACE	24
DRIVEWAY	20.5
FRONT LANDSCAPE	22.5
REAR LANDSCAPE	64.2

GREENFIELD HOUSING CODE COMPLIANCE TABLE

DESCRIPTION		COMPLIANCE		COMMENT
ELEMENT	CODE CONTROL	REQUIREMNT	PROPOSED	
LOAND ZONE	1 GENERAL RESIDENTIAL			
LOT NO	LOT 11			
LOT AREA	345.60 m2			
LOT WIDTH	Standard Lot Min. 6m at Building Line facing primary road	6.0m	10.8 m	YES
HEIGHT	MAX. Height	8.5m	7.64m (MAX.)	YES
FRONT SETBACK	FRONT SET BACK (Min. Setback from Primary Road) For 300-350 sqm. Lot	4.5 m	4.5m	YES
REAR SET BACK (MIN.)	GROUND FLOOR	3m	3.01m	YES
	FIRST FLOOR	6m	13.315 m	
SIDE SET BACK (MIN.)	GROUND FLOOR	0/0.9m	0.2/1.15m	YES
	FIRST FLOOR	1.2/0.9m	1.22/1.15m	
GROSS FLOOR AREA (GFA)	235 sqm.	235.00m2	235 m2	YES
GROSS FLOOR AREA PLAN	GROUND FLOOR		137m2	
	FIRST FLOOR		95m2	
GARAGE			21m2	
TOTAL FLOOR AREA			235 m2	
ROOF AREA			220m2	
PRIVATE OPEN SPACE	>10m Lot width	20m2	24m2	YES
LANDSCAPE AREA	15 % of TOTAL LAND AREA	51.84m2	86.7m2	YES

(D) - EASEMENT TO DRAIN WATER 1.5 WIDE (VIDE DP 1256322)

CONSTRUCTION ISSUE


2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.03
LOCATION PLAN AND SITE PLAN

NARRAMI ROAD

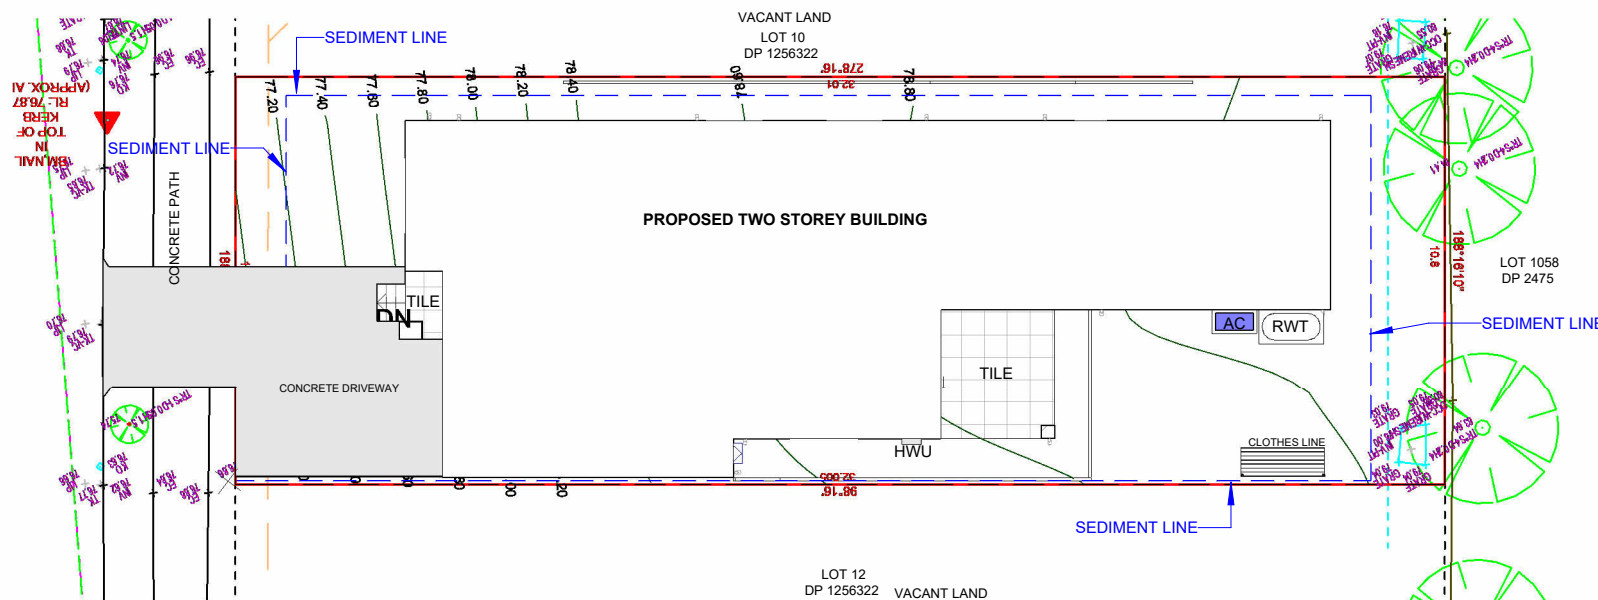





CDC - SITE ANALYSIS AND SEDIMENT CONTROL

1

1 : 200

SD 5-7 STABILISED SITE ACCESS

- 1) STRIP TOPSOIL AND LEVEL SITE.
- 2) COMPACT SUBGRADE.
- 3) COVER AREA WITH GEOTEXILE.
- 4) CONSTRUCT 200 mm THICK PAD OVER GEOTEXILE USING ROADBASE OR 30 mm AGGREGATE. Min 15 m LONG OR TO BUILDING ALIGNMENT. Min 3 m WIDE.
- 5) CONSTRUCT HUMPS IMMEDIATELY WITHIN BOUNDARY TO DIVERT WATER TO A SEDIMENT FENCE OR OTHER SEDIMENT TRAP.

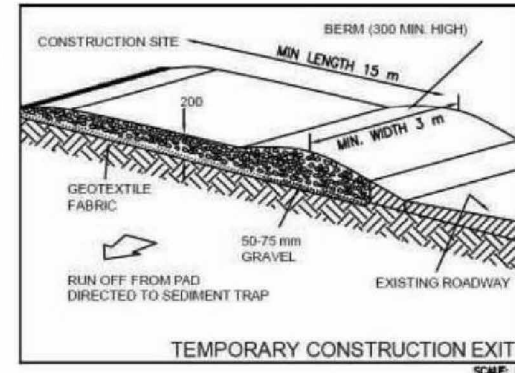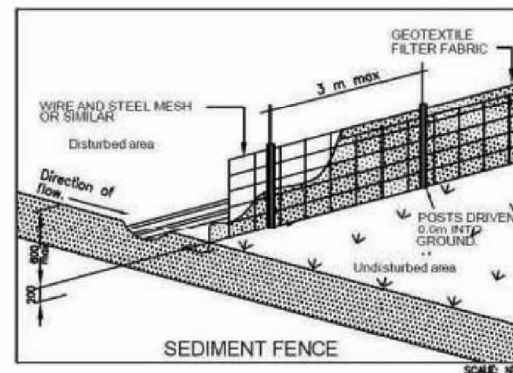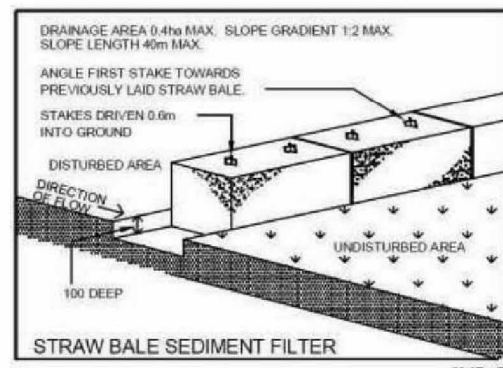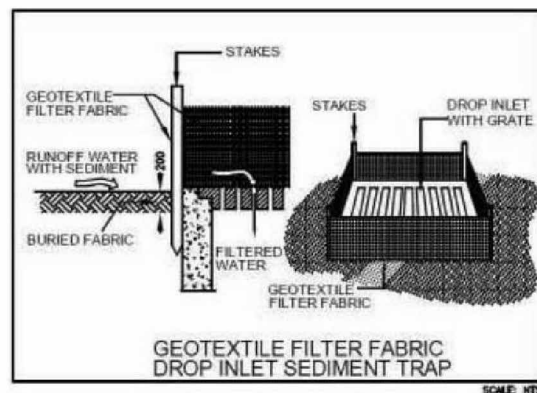

SD 6-9 GEOTEXTILE INLET FILTER

- 1) FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXILE. REFER SD6-7 FOR DETAILS.
- 2) SUPPORT GEOTEXILE WITH MESH TIED TO POSTS AT 1 m Ctrs.
- 3) DO NOT COVER INLET WITH GEOTEXILE.

SITE WORKS NOTES

1. ORIGIN OF LEVELS PROVIDED BY SURVEYOR

2. THE BUILDER SHALL VERIFY ALL DIMENSIONS AND EXISTING LEVELS ON SITE PRIOR TO THE COMMENCEMENT OF WORK AND ANY DISCREPANCIES SHALL BE REPORTED TO THE SURVEYOR / ENGINEER.

3. TOPSOIL SHALL BE STRIPPED FROM THE CONSTRUCTION AREA AND STOCKPILED ON SITE, TO BE LATER SPREAD OR DISPOSED OFF SITE, AS DIRECTED BY SUPERVISOR / ENGINEER.

4. ALL TRENCH BACKFILL MATERIAL SHALL BE COMPACTED TO THE SAME DENSITY AS THE ADJACENT MATERIAL.

5. ALL SERVICE TRENCHES UNDER VEHICULAR PAVEMENTS SHALL BE BACKFILLED WITH SAND OR APPROVED GRANULAR MATERIALS, TO THE UNDERSIDE OF THE PAVEMENT, AND COMPACTED TO 98% STANDARD MAXIMUM DRY DENSITY, IN ACCORDANCE WITH AS 1289E1.1.

TEMPORARY 1.8M HIGH WIRE MESH FENCE WITH DUSTPROOF MESH APPLIED TO FULL HEIGHT TO BOUNDARIES AS REQUIRED

LOCATION OF WASTE BINS

SEDIMENT FENCE AS REQUIRED

GRAVEL ACCESS

SITE ACCESS AREA TO BE USED FOR WASHDOWN AREA

FOOTPATH CLEAN AND CLEAR AT ALL TIMES

LOCATION OF STOCKPILE MATERIAL

MATERIAL STORAGE AREA

TEMPORARY TOILETS

INSTALL TEMPORARY SEDIMENT BARRIERS TO ALL INLET PITS LIKELY TO COLLECT SILT LADEN WATER, TO COUNCIL'S REQUIREMENTS.

SEDIMENT AND EROSION NOTES:

- THIS PLAN TO BE READ IN CONJUNCTION WITH SEDIMENT AND EROSION CONTROL DETAILS AS ATTACHED.
- THE CONTRACTOR SHALL IMPLEMENT ALL SOIL EROSION AND SEDIMENT CONTROL MEASURES AS NECESSARY AND TO THE SATISFACTION OF COUNCIL PRIOR TO THE COMMENCEMENT AND DURING CONSTRUCTION. NO DISTURBANCE TO THE SITE SHALL BE PERMITTED OTHER THAN IN THE IMMEDIATE AREA OF THE WORK AND NO MATERIAL SHALL BE REMOVED FROM THE SITE WITHOUT COUNCIL'S APPROVAL. ALL SEDIMENT AND EROSION CONTROL DEVICES TO BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH STANDARDS OUTLINED IN NSW DEPARTMENT OF HOUSING "MANAGING URBAN STORMWATER-SOILS AND CONSTRUCTIONS".
- TOPSOIL SHALL BE STRIPPED AND STOCKPILED OUTSIDE HAZARDOUS AREAS SUCH AS DRAINAGE LINES. THIS TOP SOIL IS TO BE RESPIRED LATER ON AREAS TO BE REVEGETATED AND STABILISED ONLY. (I.E ALL FOOTPATHS, BATTERS, SITE REGARDING AREAS, BASINS AND CATCH DRAINS). TOPSOIL SHALL NOT BE RESPIRED ON ANY OTHER AREAS UNLESS SPECIALLY INSTRUCTED BY THE SUPERINTENDENT. IF THEY ARE TO REMAIN FOR LONGER THAN ONE MONTH STOCKPILES SHALL BE PROTECTED FROM EROSION BY COVERING THEM WITH A MULCH AND HYDROSEEDING AND, IF NECESSARY, BY LOCATING BANKS OR DRAINS DOWNSTREAM OF A STOCKPILE TO RETARD SILT LADEN RUNOFF.
- THE CONTRACTOR SHALL REGULARLY MAINTAIN ALL SEDIMENT AND EROSION CONTROL DEVICES AND REMOVE ACCUMULATED SILT FROM SUCH DEVICES SUCH THAT MORE THAN 60% OF THEIR CAPACITY IS NOT LOST. ALL THE SILTS TO BE PLACED OUTSIDE THE LIMIT OF WORKS. THE PERIOD FOR MAINTAINING THESE DEVICES SHALL BE AT LEAST UNTIL ALL DISTURBED AREAS ARE REVEGETATED AND FURTHER AS MAY BE DIRECTED BY THE SUPERINTENDENT OR COUNCIL.
- LAY TURF STRIP (MIN 300 mm WIDE) ON 100 mm TOPSOIL WITH 1.0 m LONG RETURNS EVERY 6.0m BEHIND ALL KERB AT THE TOP OF ALL BATTERS AND AROUND STRUCTURES IMMEDIATELY AFTER BACKFILLING OR FORMATION.
- THE CONTRACTOR SHALL GRASS SEED ALL DISTURBED AREAS WITH AN APPROVED MIX AS SHOWN AS PRACTICABLE AFTER COMPLETION OF EARTHWORKS AND REGRADING.
- VEHICULAR TRAFFIC SHALL BE CONTROLLED DURING CONSTRUCTION CONFINING ACCESS WHERE POSSIBLE TO NOMINATED STABILISED ACCESS POINTS.
- WHEN ANY DEVICES ARE TO BE HANDLED OVER TO COUNCIL, THEY SHALL BE IN CLEAN AND STABLE CONDITION.
- THE CONTRACTOR SHALL IMPLEMENT DUST CONTROL BY REGULAR WETTING DOWN (BUT NOT SATURATING) DISTURBED AREA.
- PROVIDE AND MAINTAIN SILT TRAPS AROUND ALL SURFACE INLET PITS UNTIL CATCHMENT IS REVEGETATED OR PAVED.
- REVEGETATE ALL TRENCHES IMMEDIATELY UPON COMPLETION OF BACKFILLING.
- ALL DRAINAGE PIPE INLETS TO BE CAPPED UNTIL:
A) DOWNPIPES CONNECTED
B) PITS CONSTRUCTED & PROTECTED WITH SILT BARRIER

CONSTRUCTION ISSUE

CDC.04

SITE ANALYSIS AND SEDIMENT CONTROL




PROJECT:

36 NARRAMI ROAD, AUSTRAL

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION. ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT VARIATION TO PLANS. SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER. IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS. WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

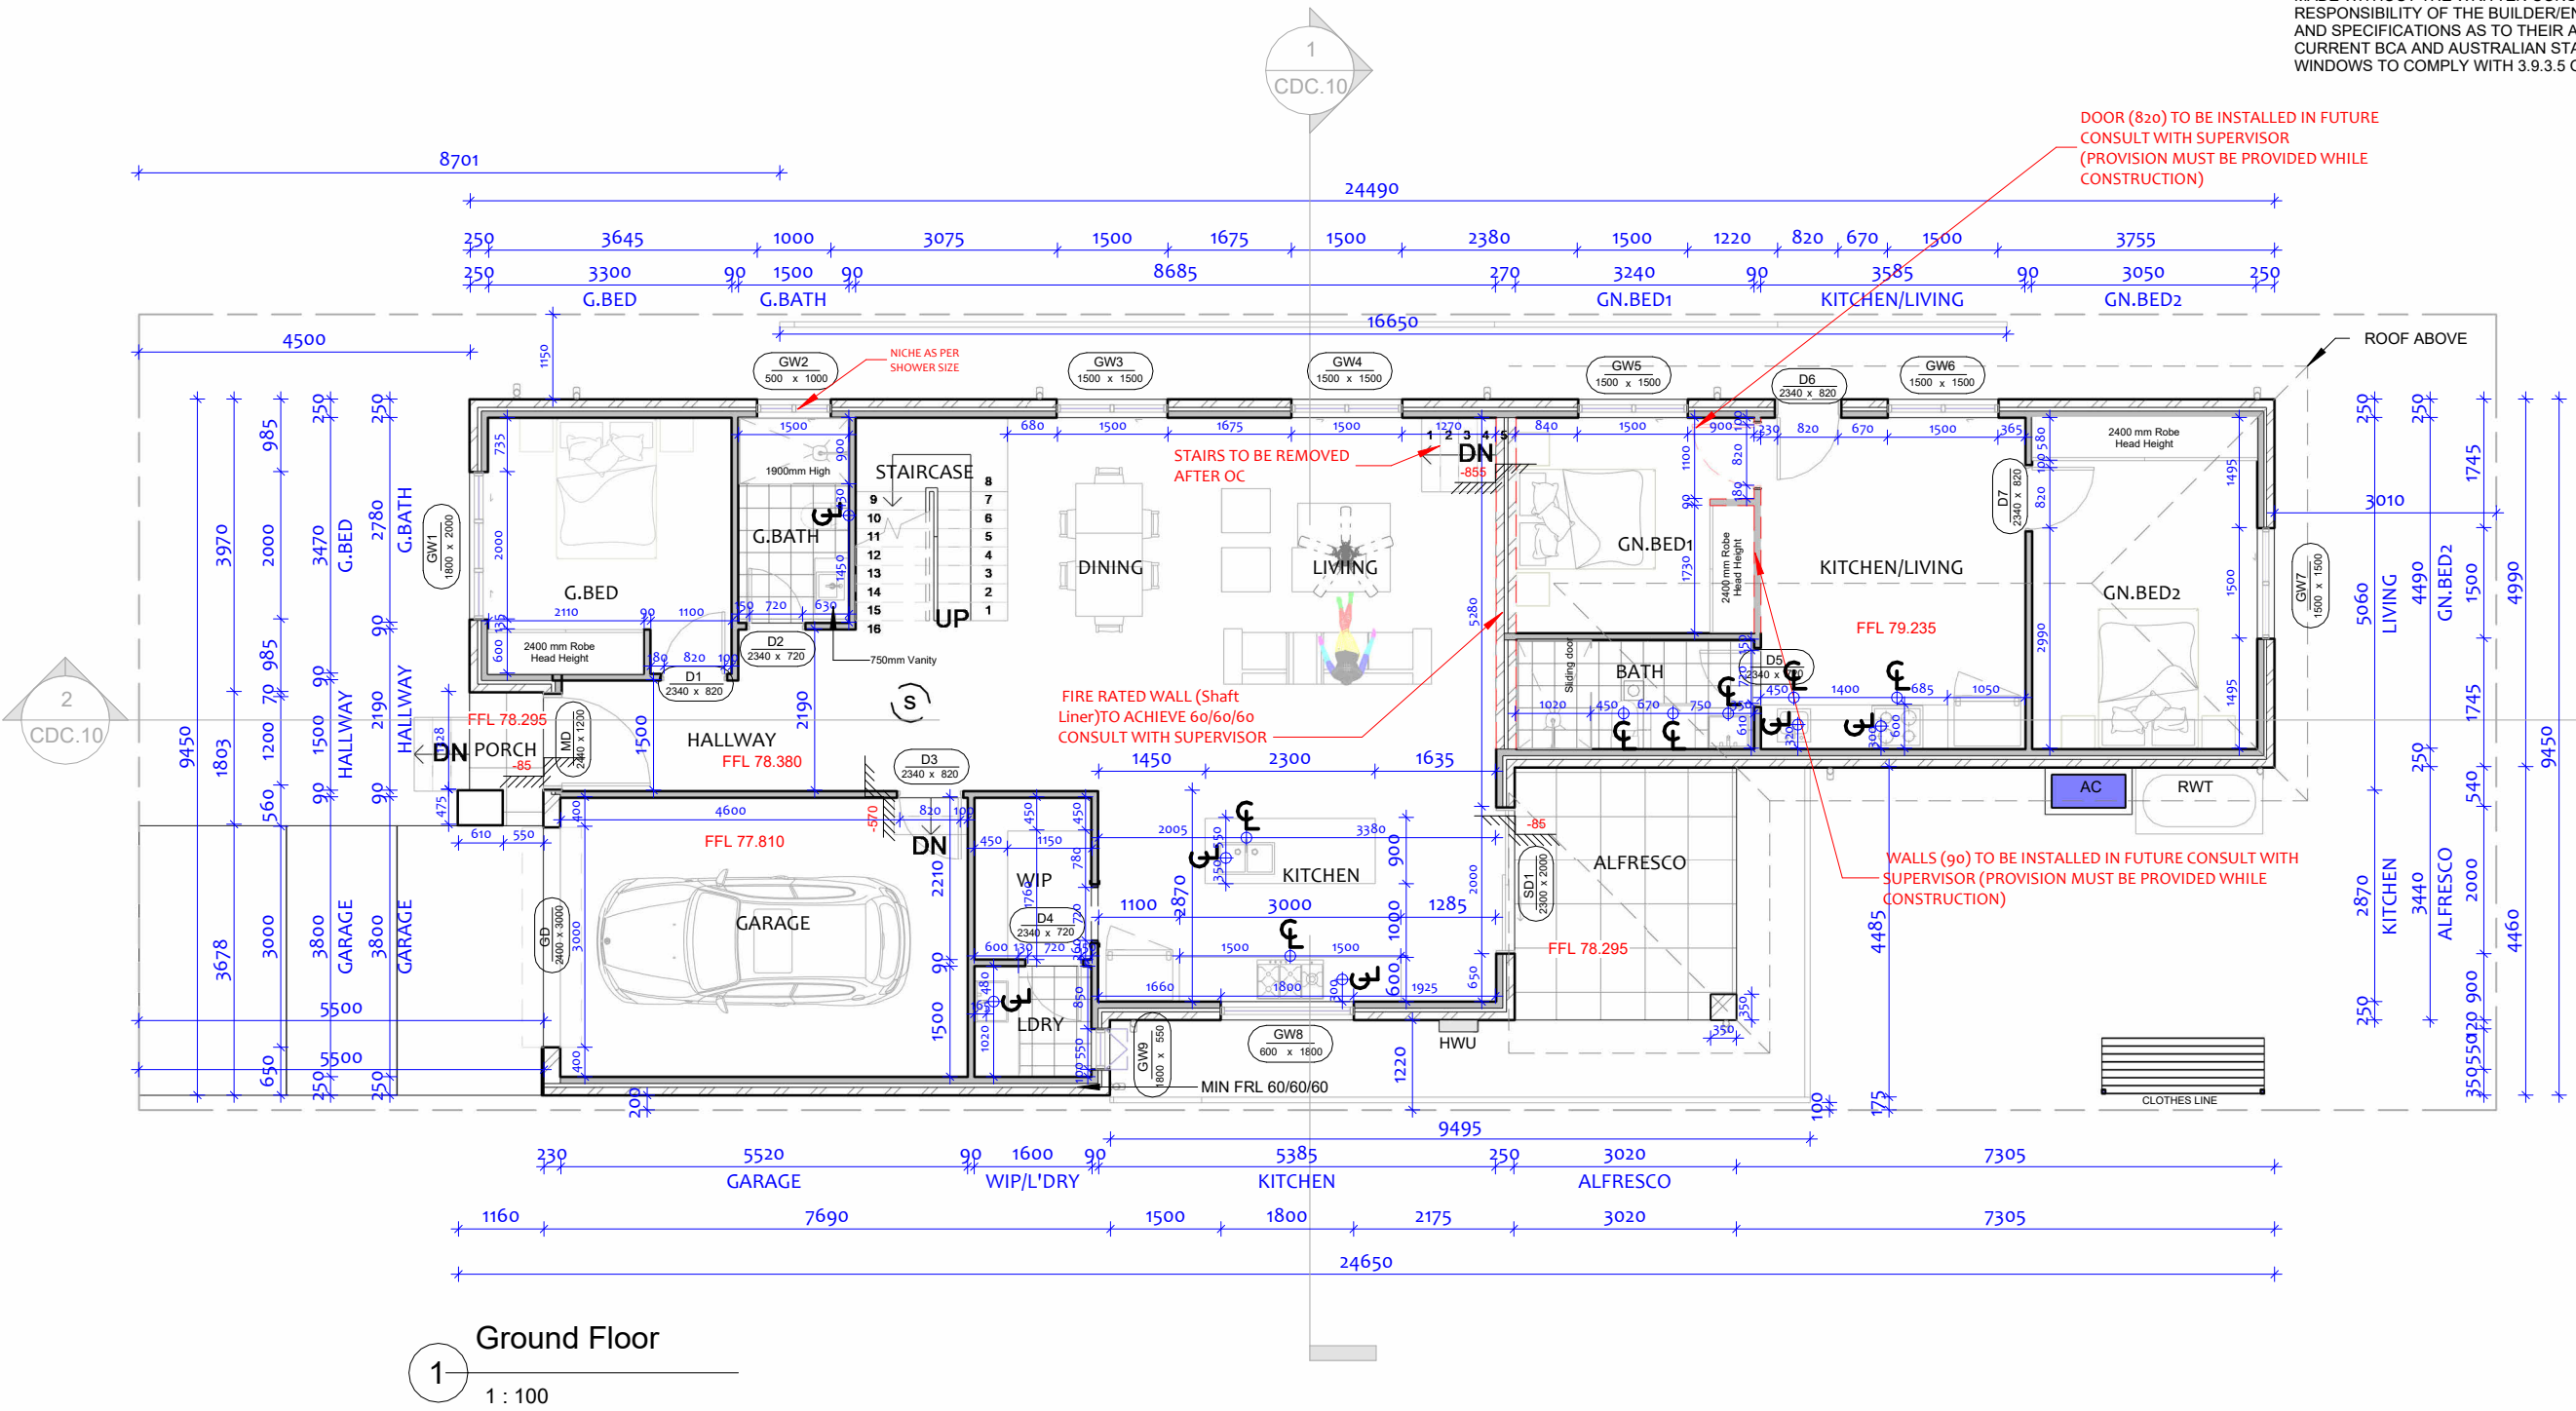

NOTE: PLEASE REFER TO TENDER FOR ALL INCLUSIONS.

CONSTRUCTION ISSUE


2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.05
GROUND FLOOR PLAN

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION. ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT. VARIATION TO PLANS. SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER. IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS. WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

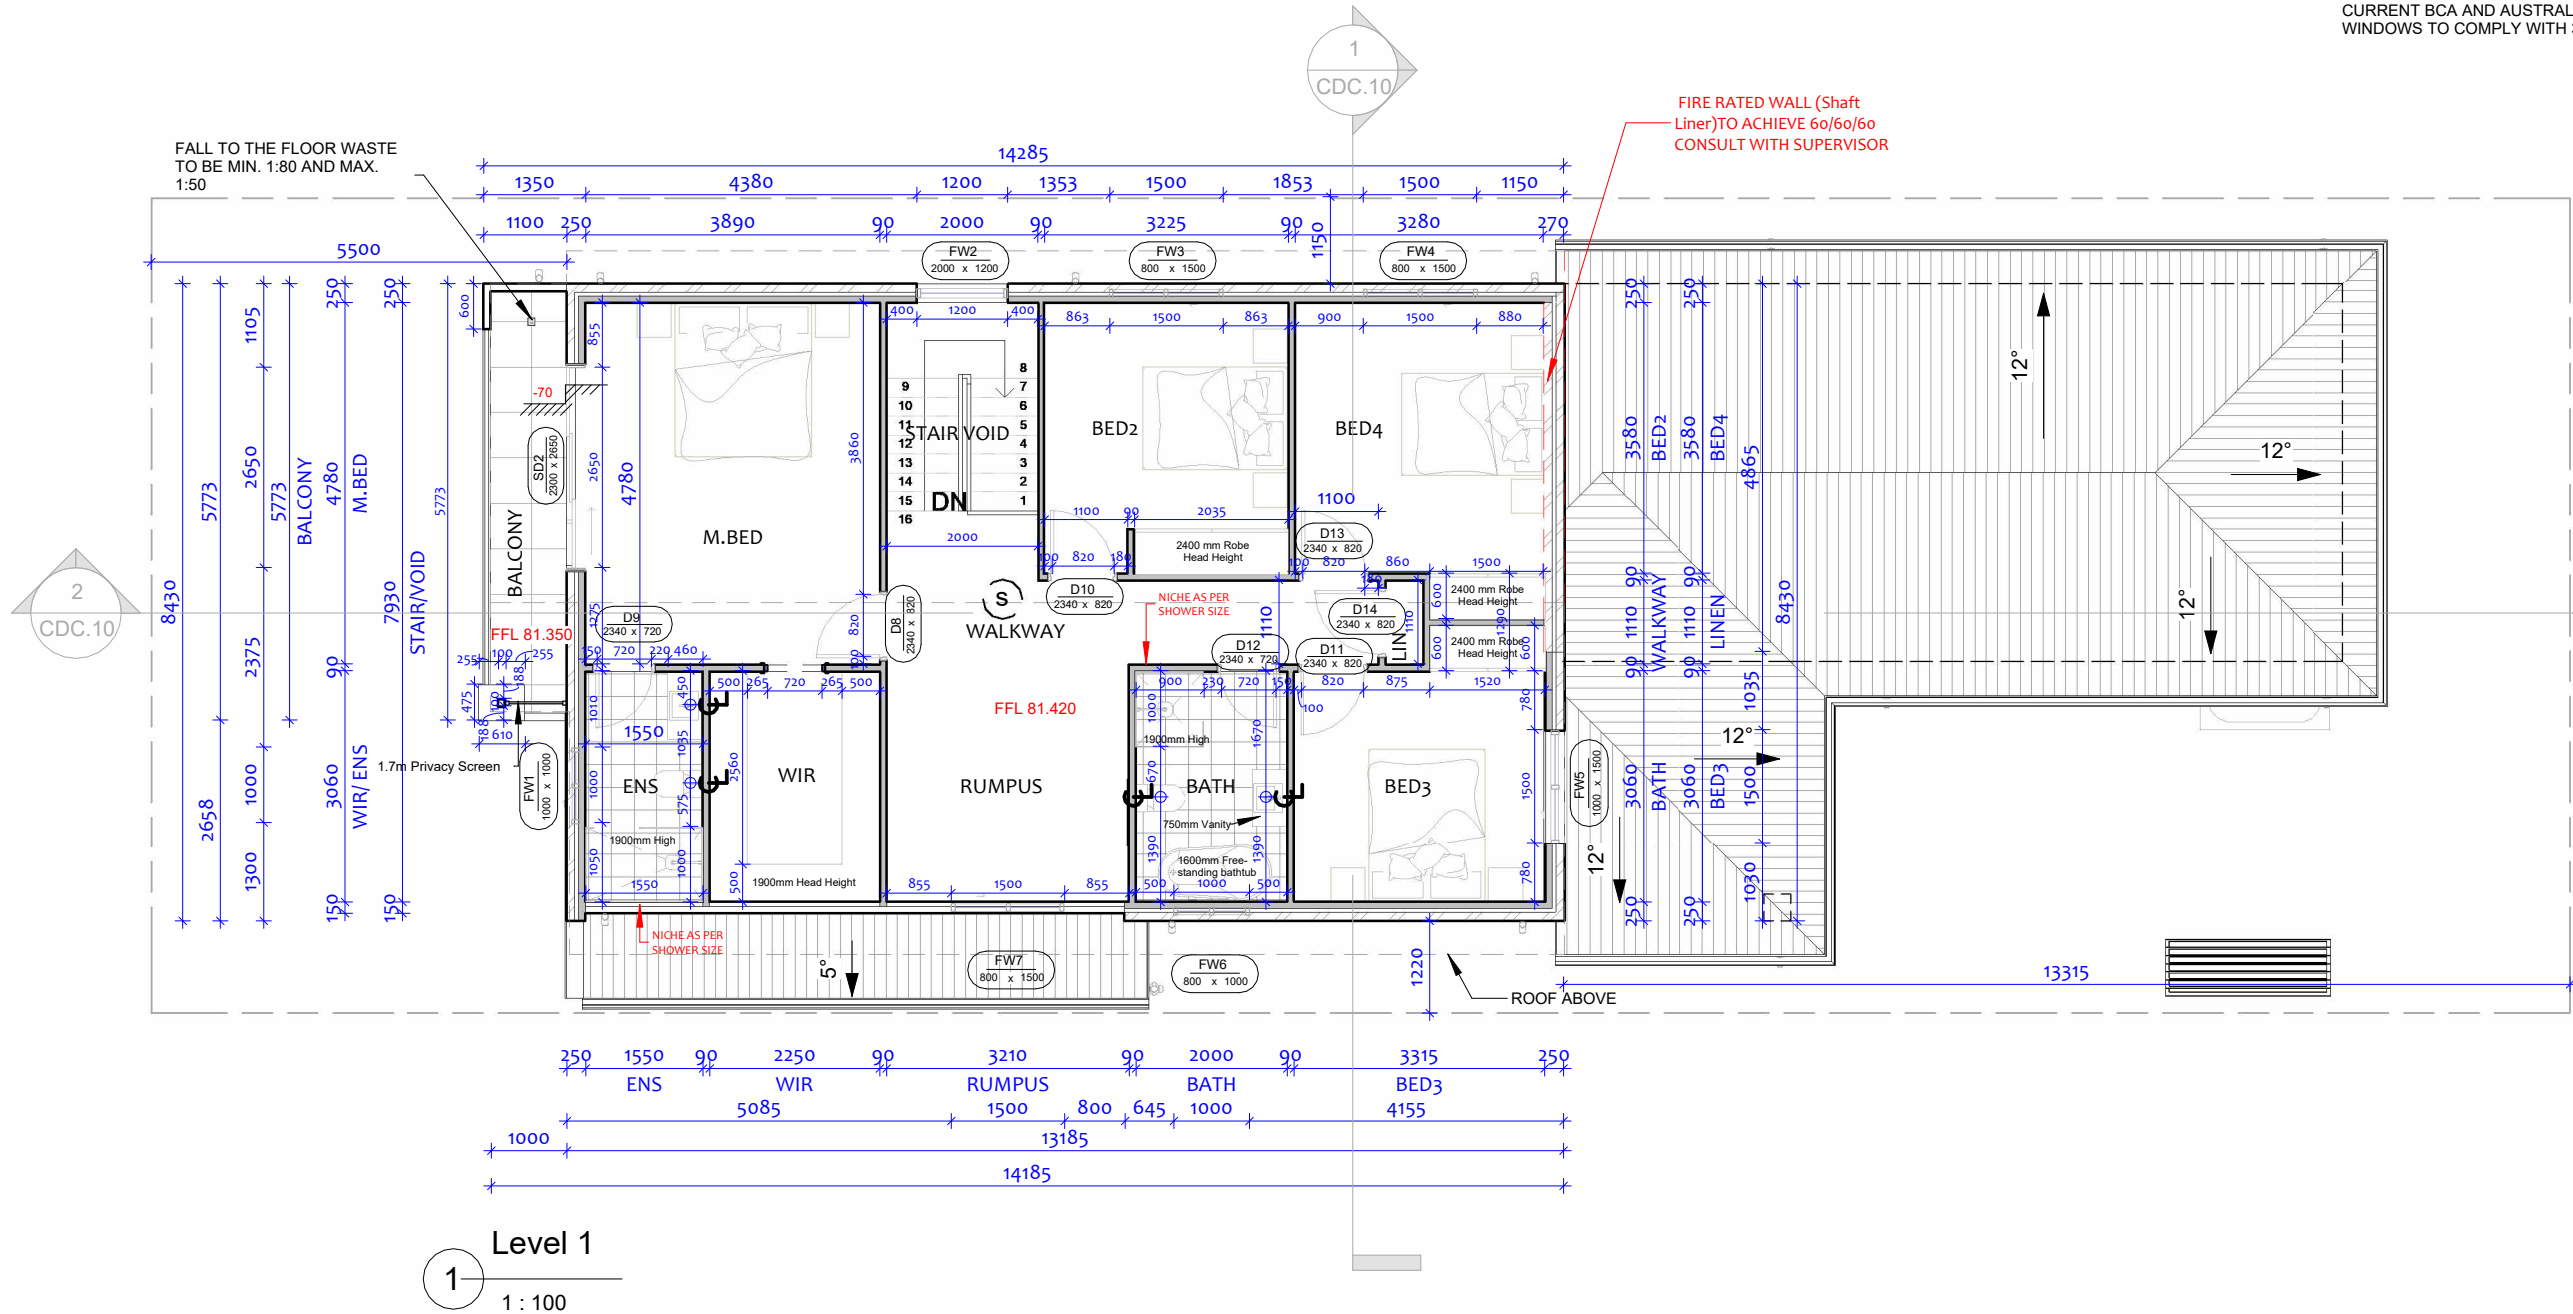

NOTE: PLEASE REFER TO TENDER FOR ALL INCLUSIONS.

CONSTRUCTION ISSUE


2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.06
FIRST FLOOR LEVEL

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION. ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT, VARIATION TO PLANS. SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER. IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS. WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

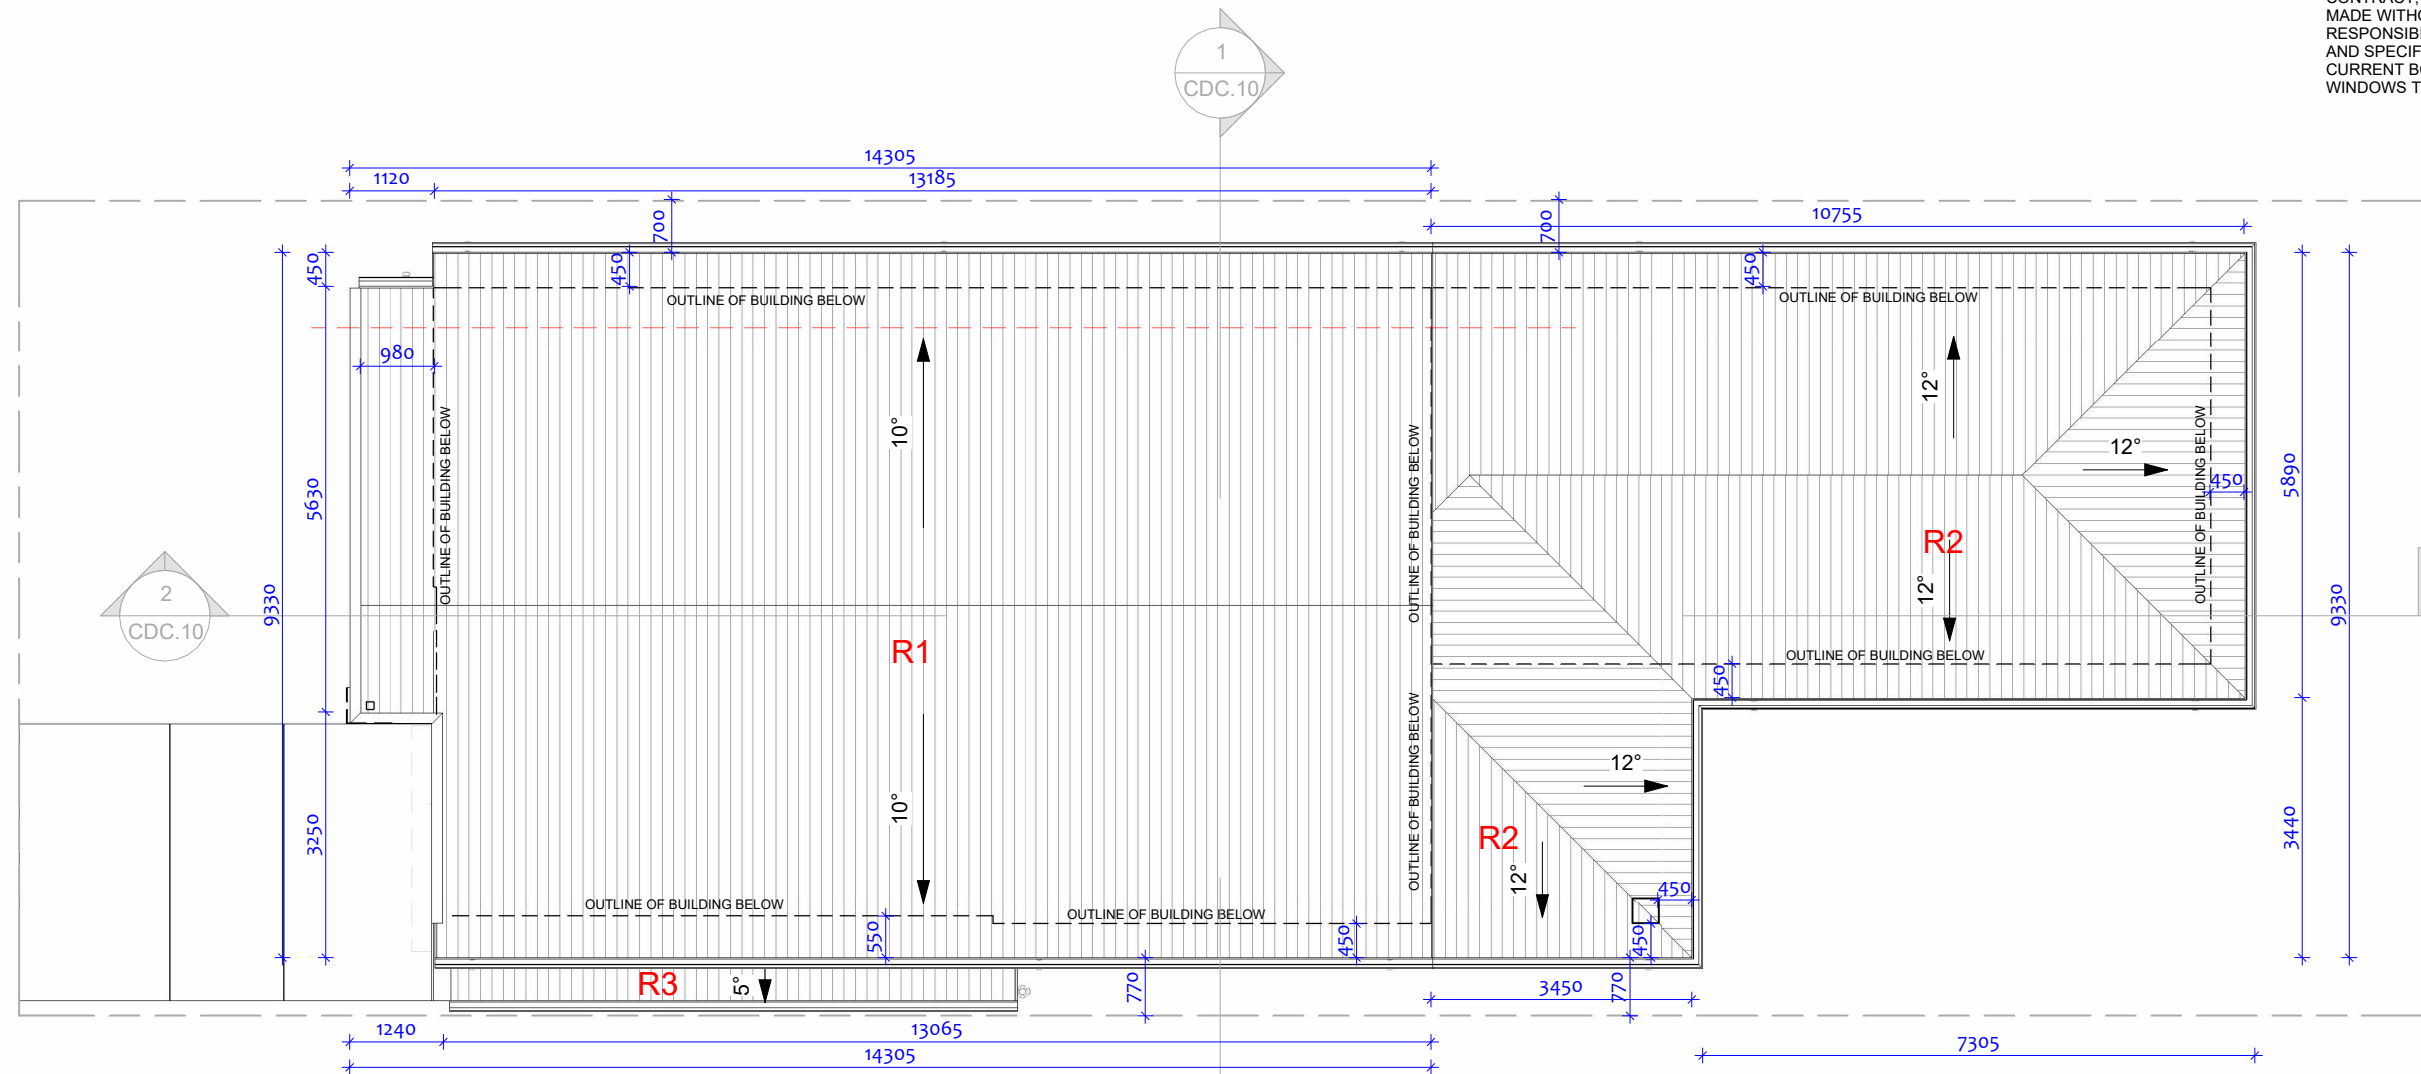

1 ROOF PLAN
1 : 100

Roof Schedule			
Mark	Base Level	Area	Comments
R1	CEILING LEVEL	131 m ²	COLORBOND(Black or Shades of Grey only)
R2	Upper Ground Ceiling	78 m ²	COLORBOND(Black or Shades of Grey only)
R3	Level 1	8 m ²	COLORBOND(Black or Shades of Grey only)
Grand total: 3		217 m ²	



2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CONSTRUCTION ISSUE

CDC.07
ROOF PLAN

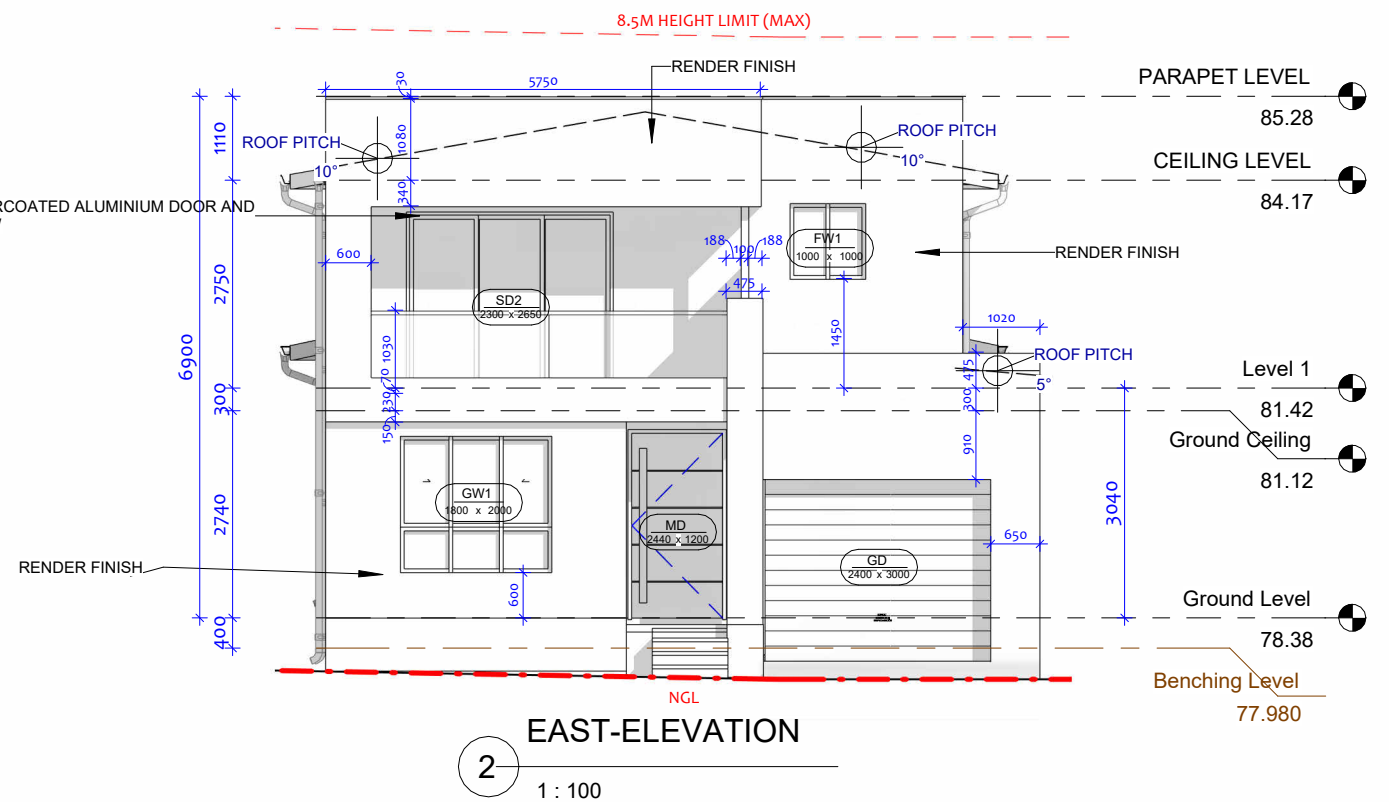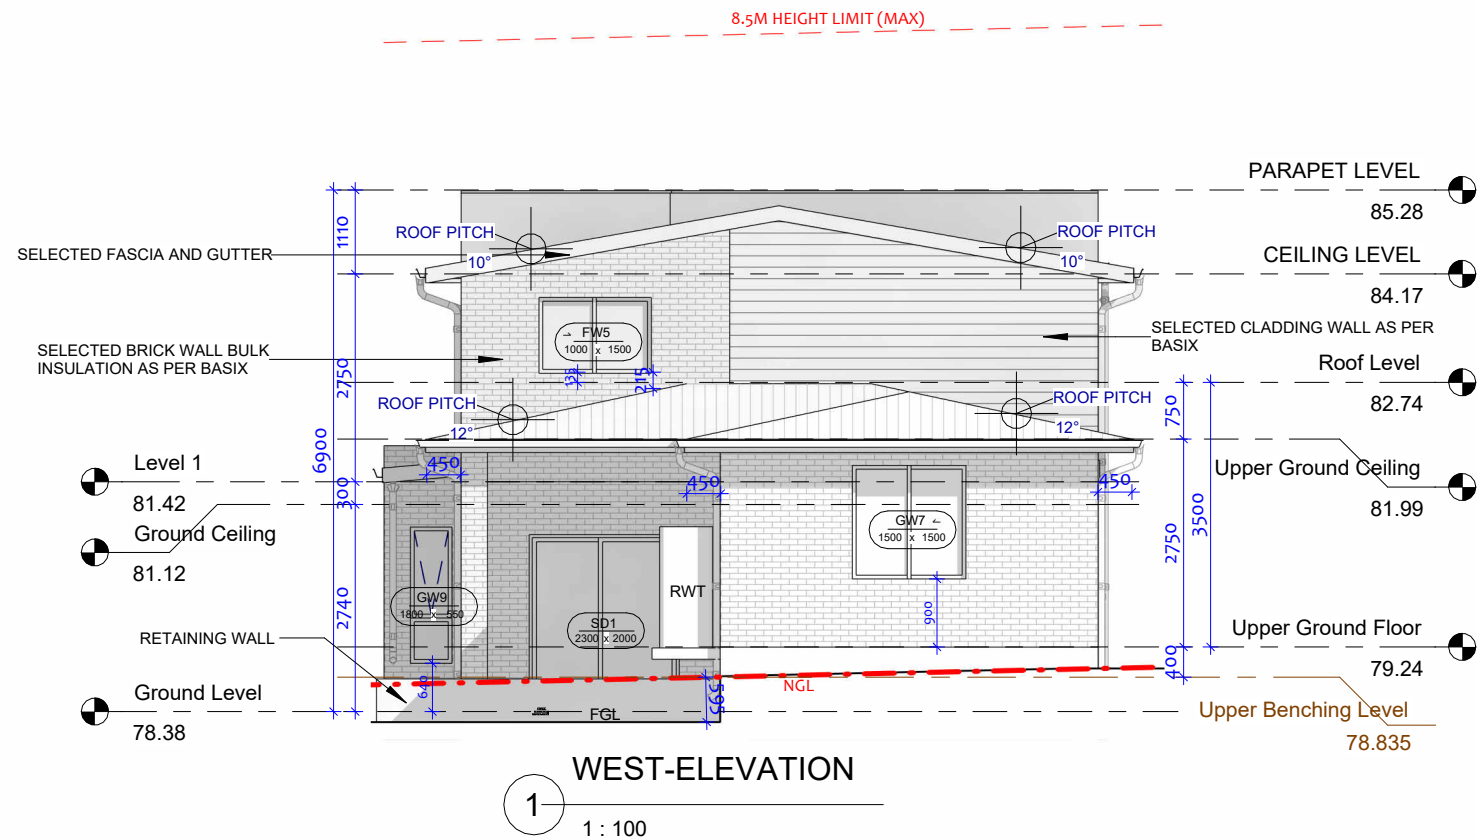



CONSTRUCTION ISSUE

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.08
ELEVATION 01

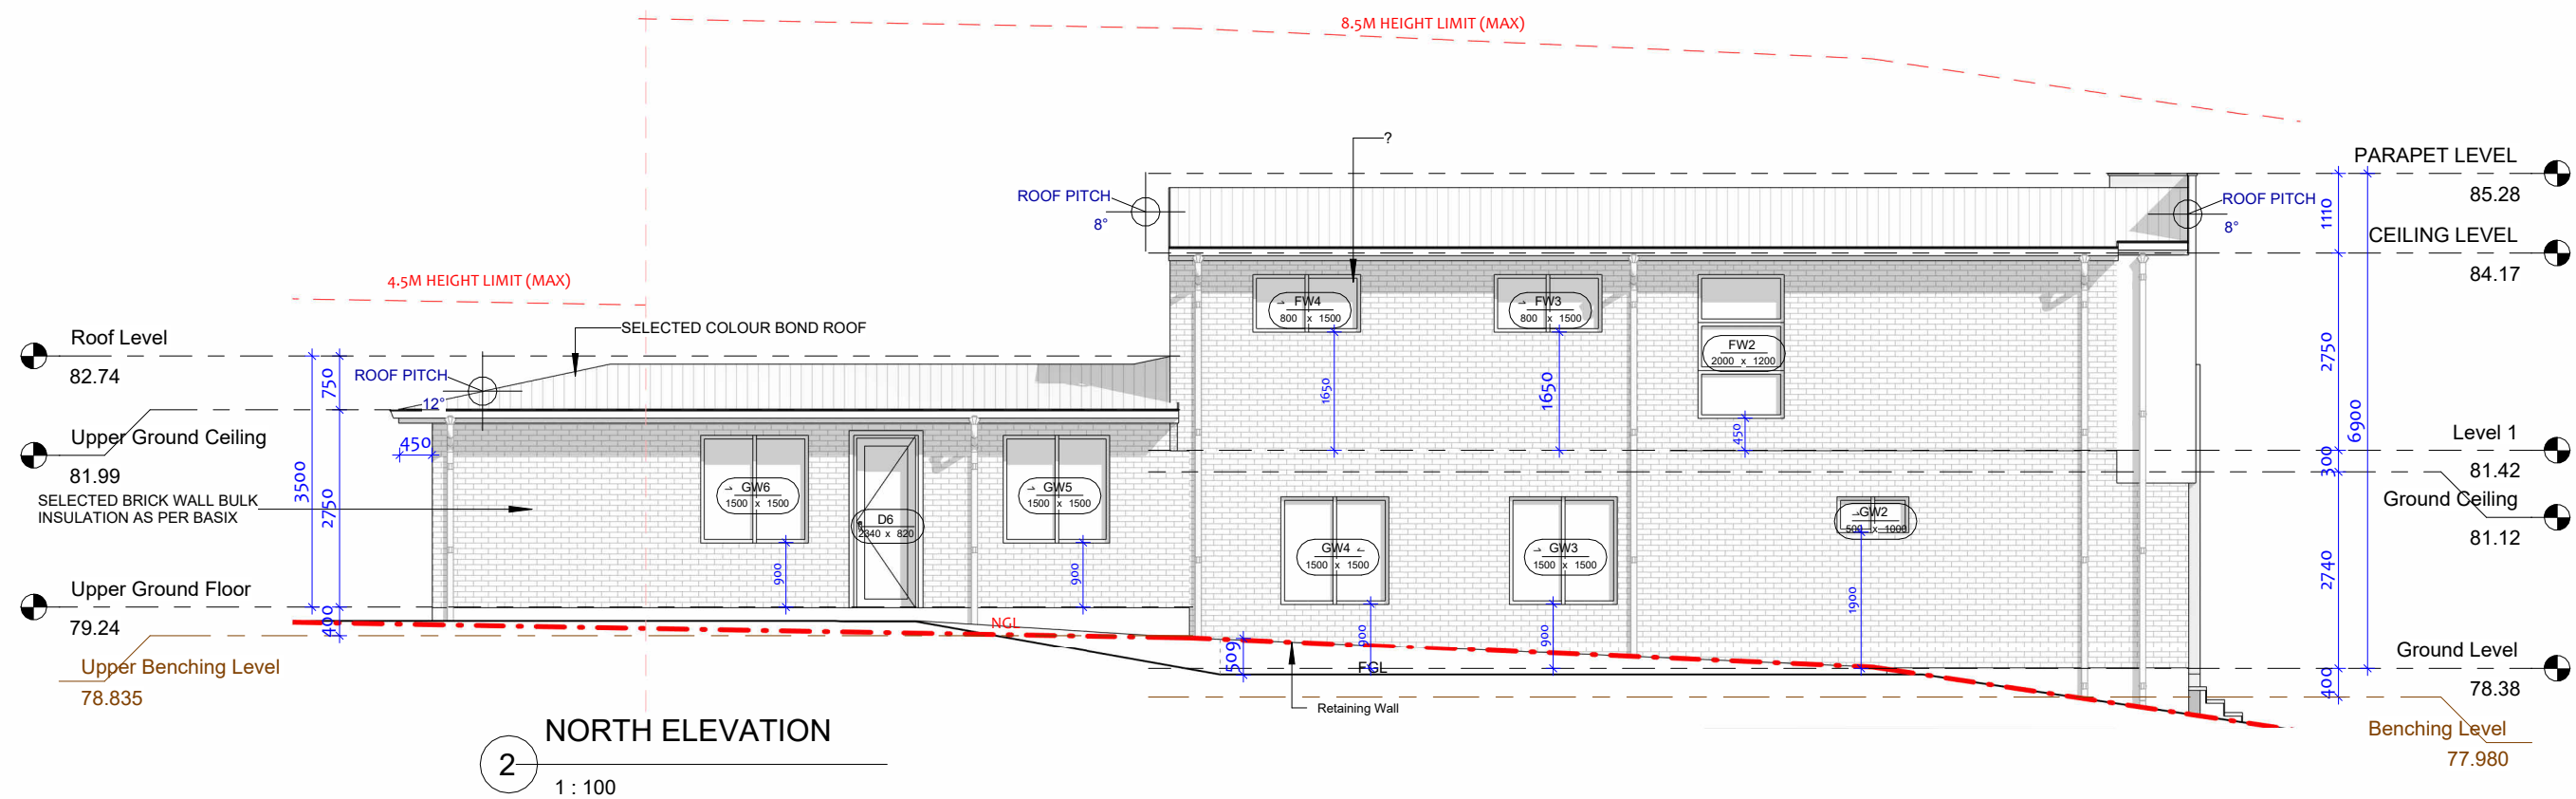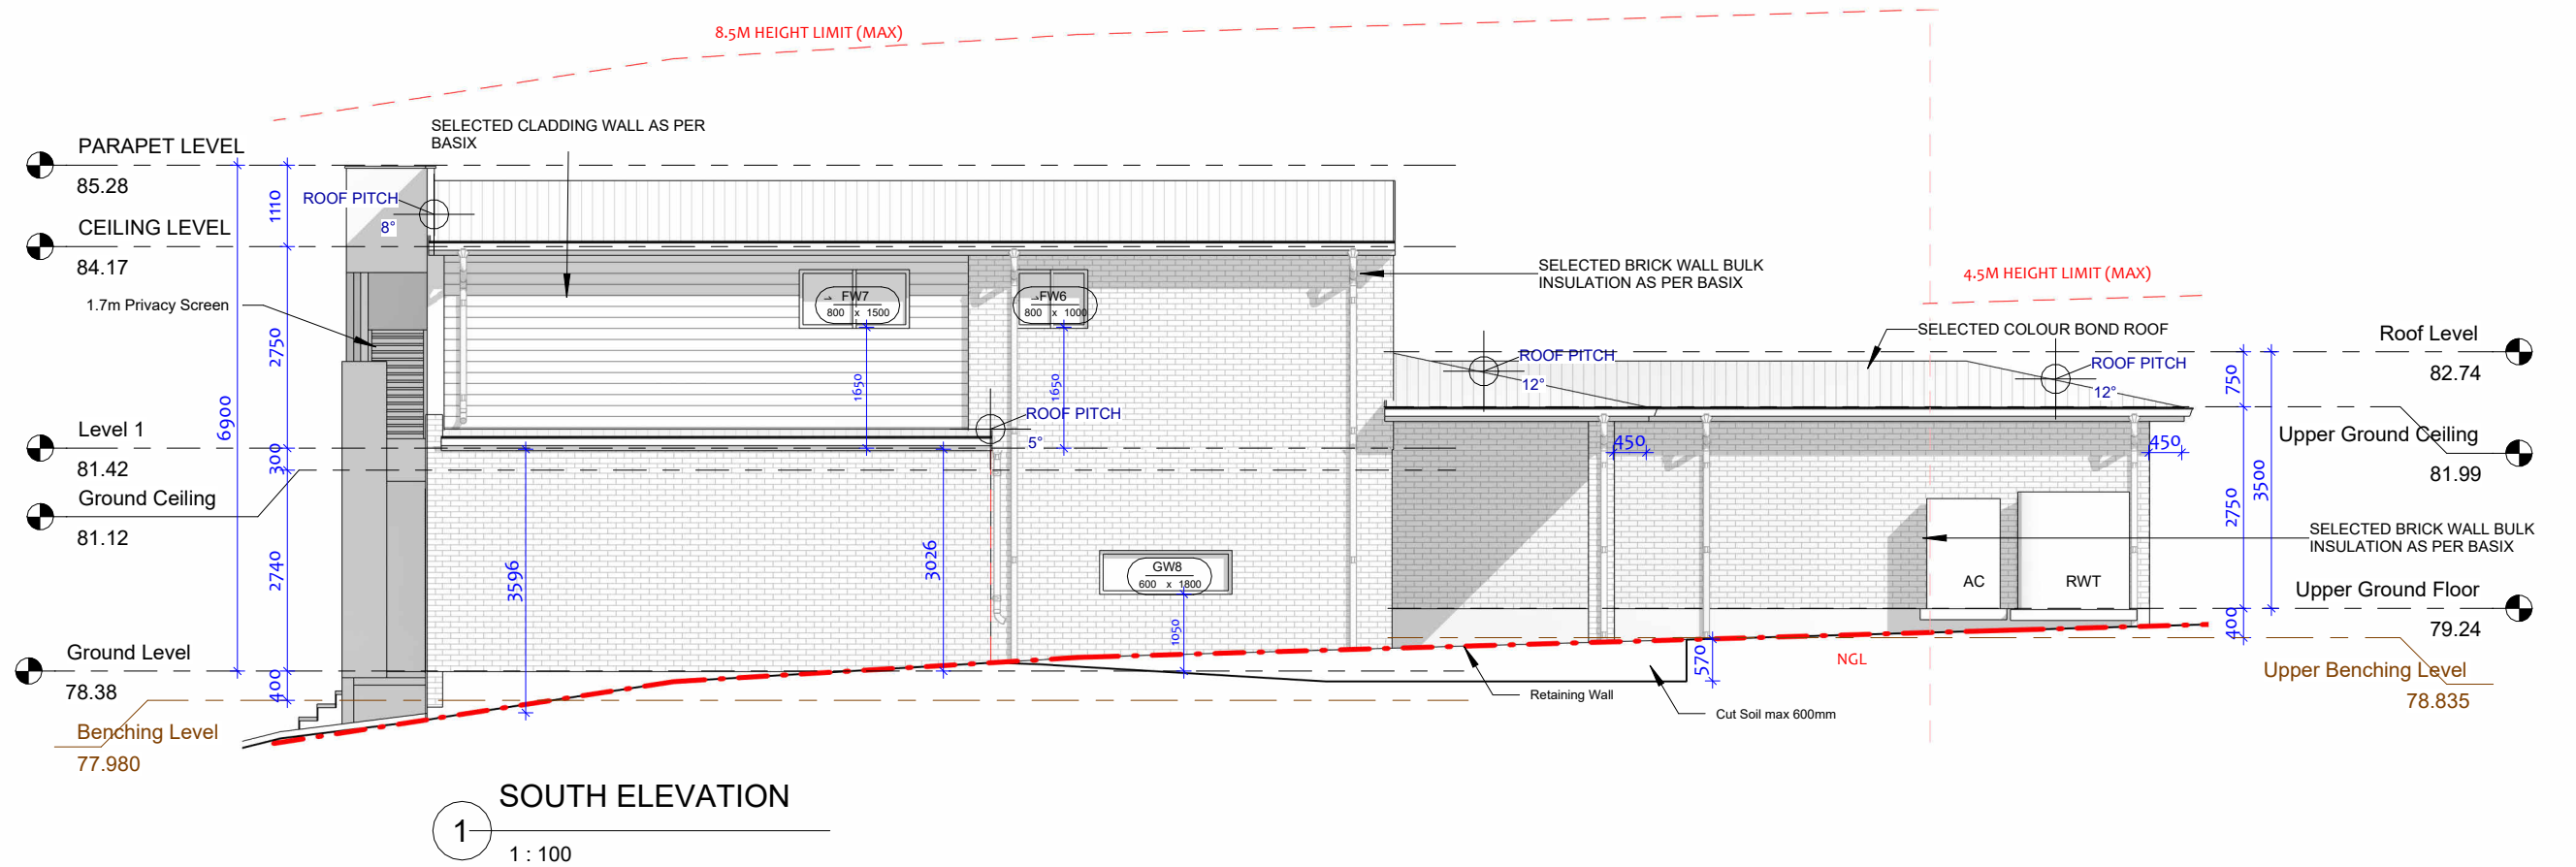


CONSTRUCTION ISSUE

CDC.09
ELEVATION 02


PROJECT:
36 NARRAMI ROAD, AUSTRAL



2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY

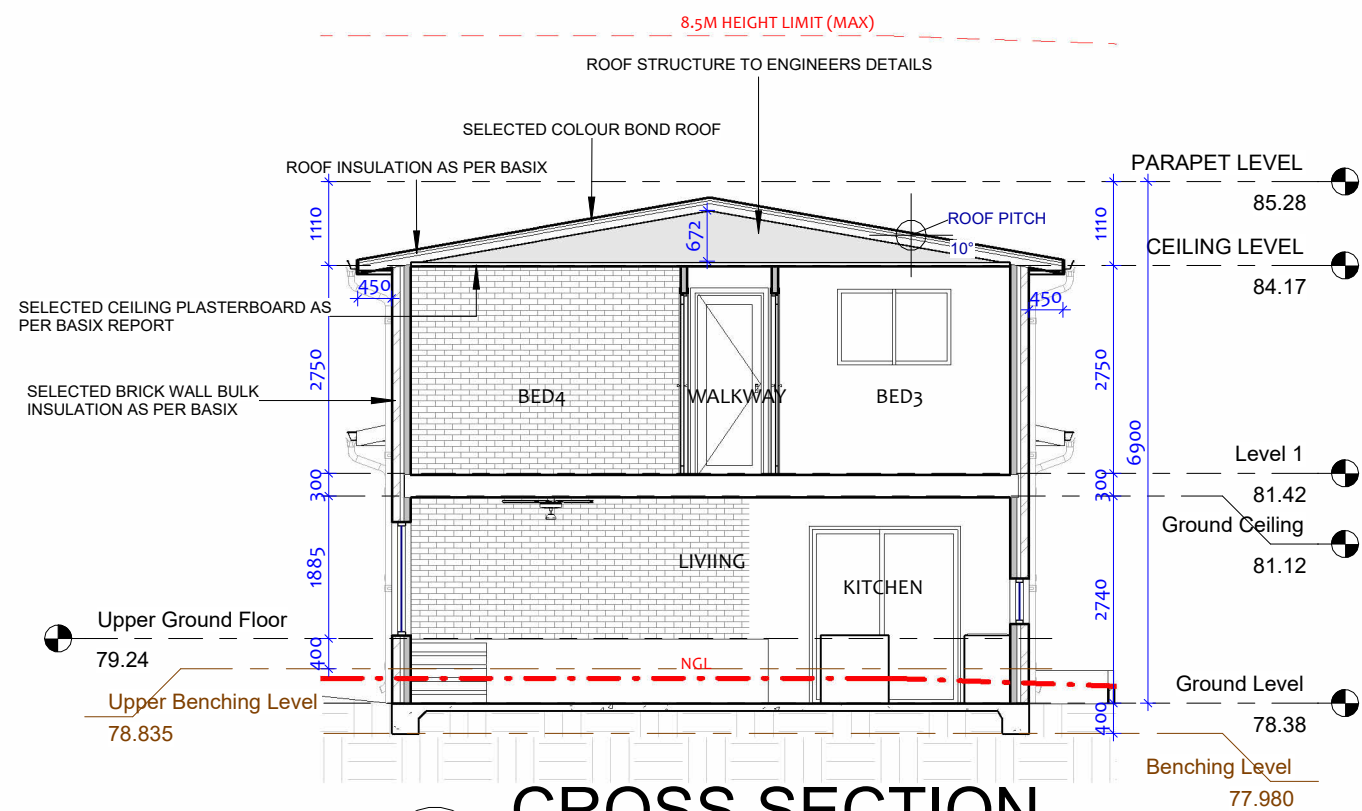

1 CROSS SECTION
1 : 100

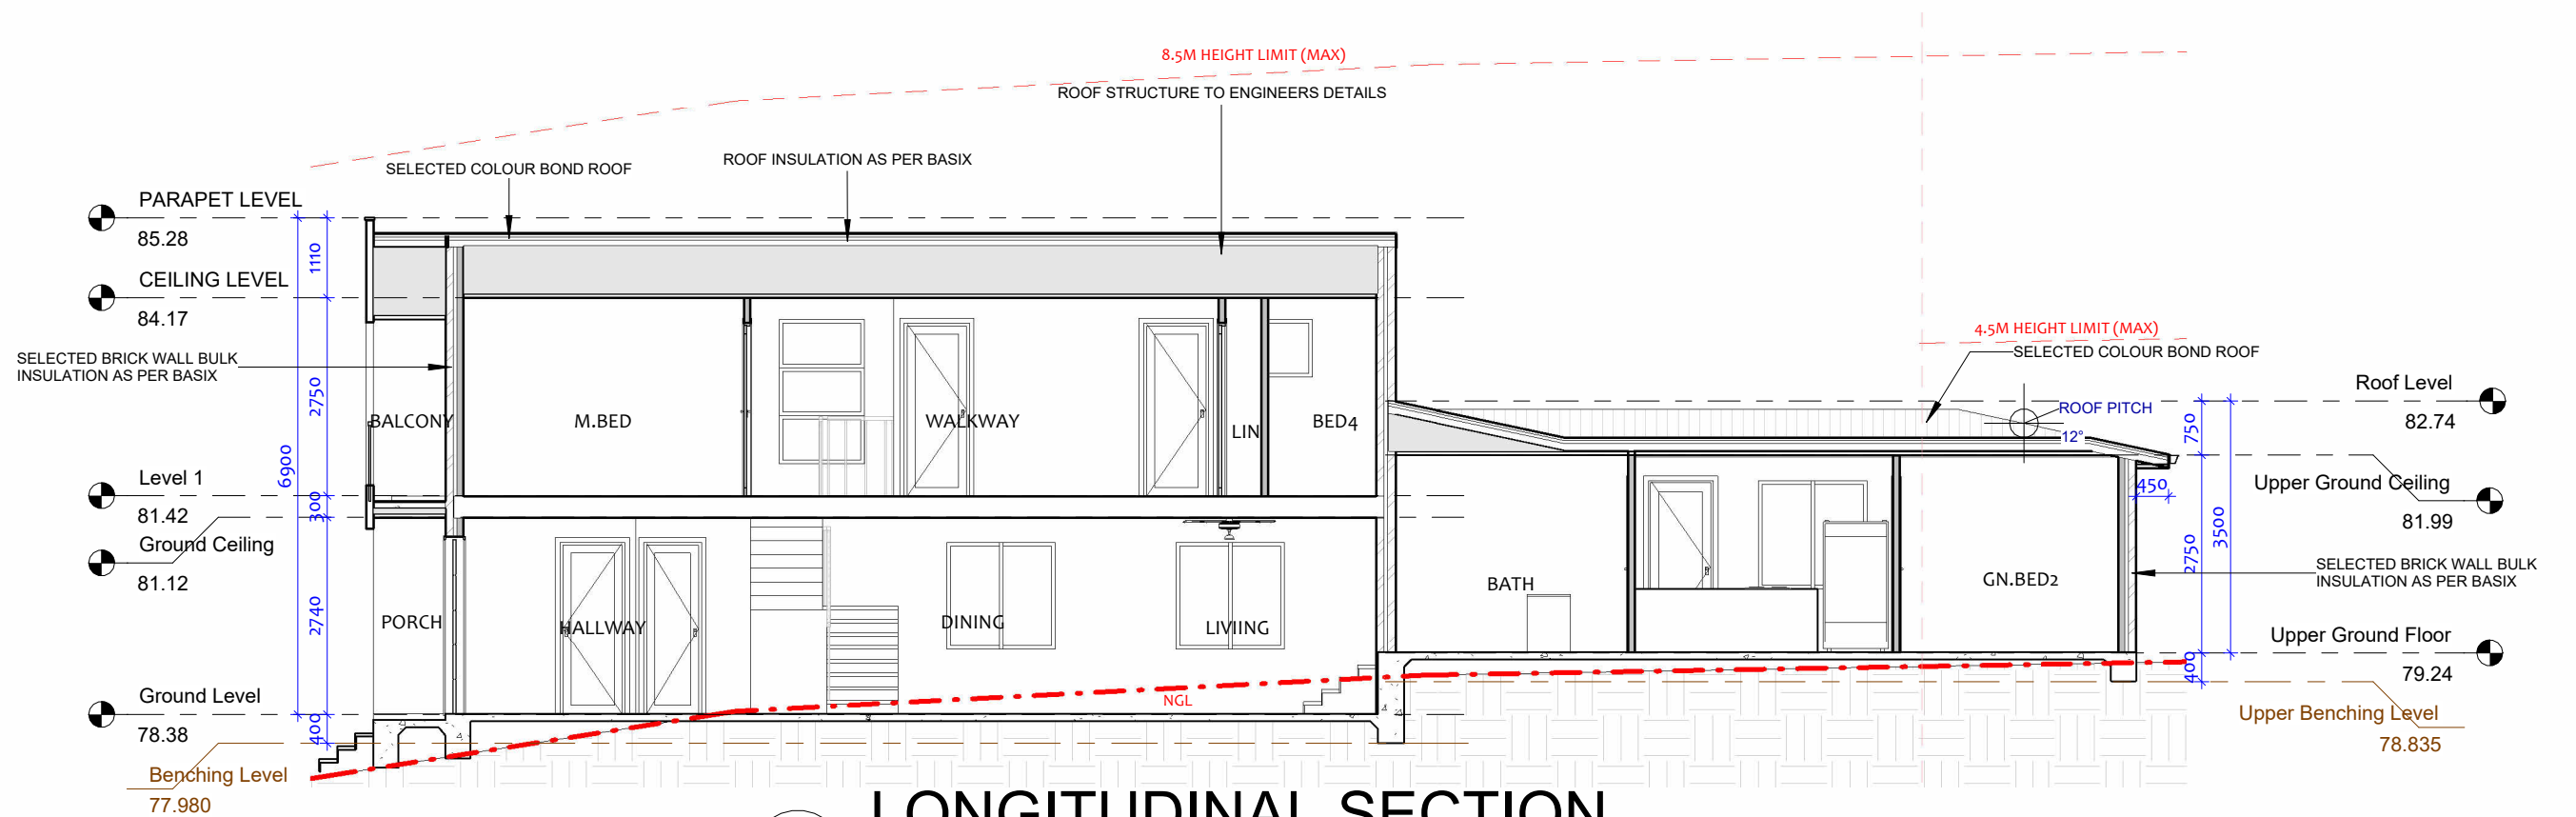

2 LONGITUDINAL SECTION
1 : 100


CONSTRUCTION ISSUE

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY




PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.10
SECTIONS

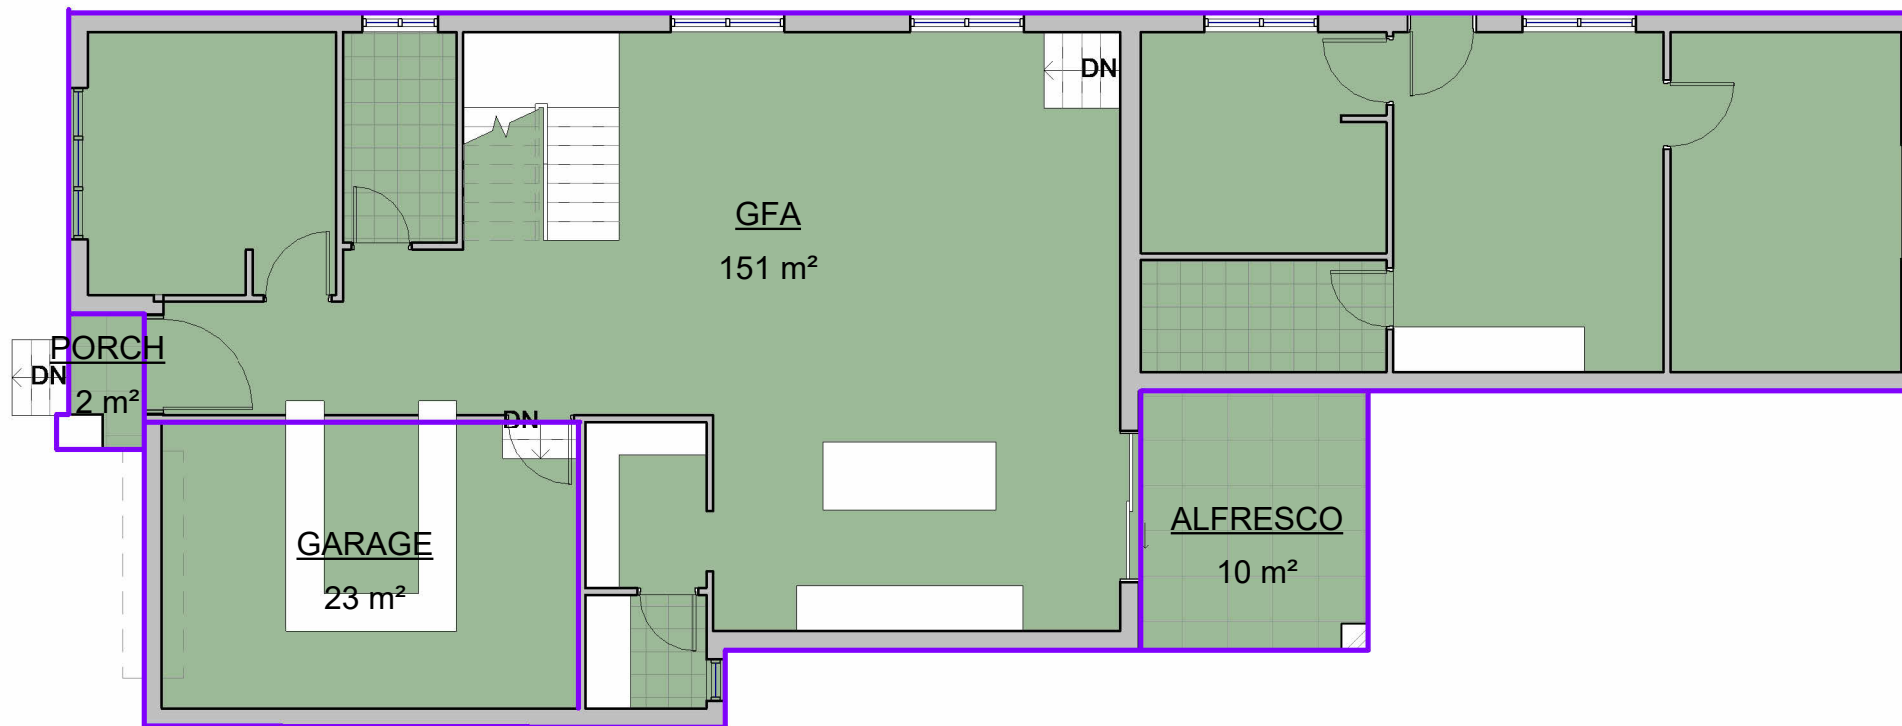

1 Upper Ground Floor
1 : 100

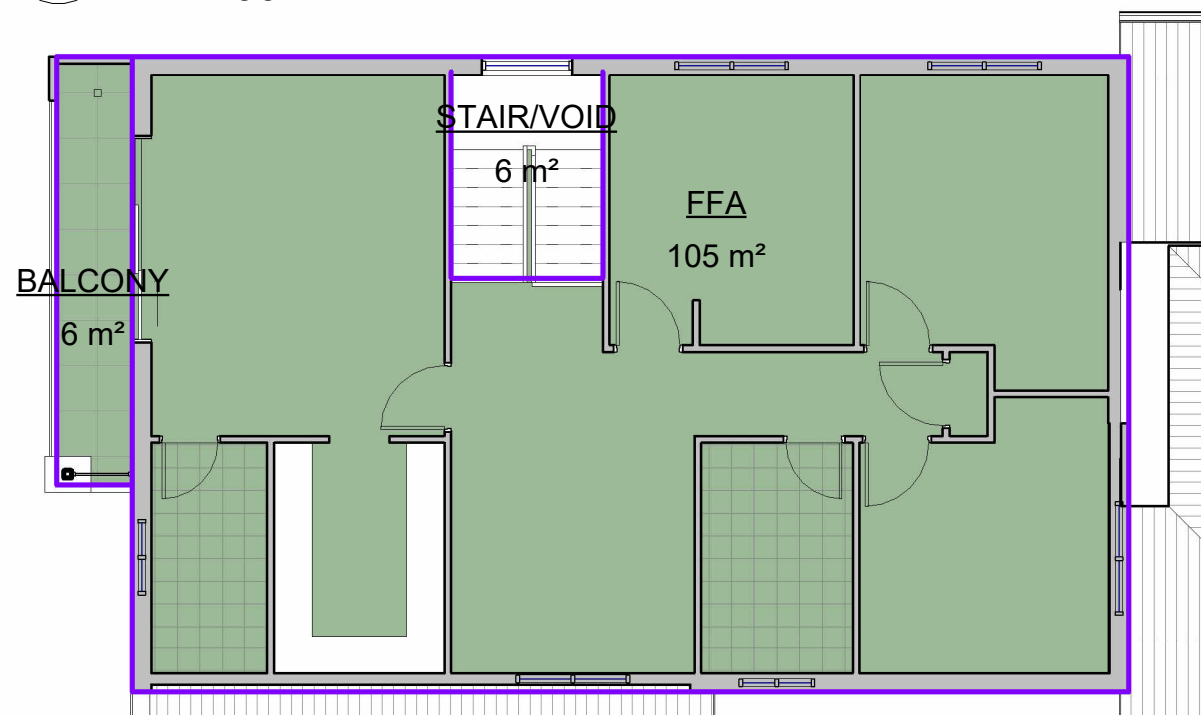

2 Level 1
1 : 100

Area Schedule (Gross Building)	
Name	Area

Upper Ground Floor

GFA	151 m²
PORCH	2 m²
ALFRESCO	10 m²
GARAGE	23 m²

Upper Ground
Floor: 4 187 m²

Level 1

FFA	105 m²
BALCONY	6 m²
STAIR/VOID	6 m²

Level 1: 3 117 m²

Grand total: 7 303 m²

CONSTRUCTION ISSUE


CDC.11
FLOOR AREA PLAN

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
1	6-05-2026	CONCEPT	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL



	1. RF	2. BR1	3. CD1	4. CR1	5. AL	6. ED	7. GD	8. FAS	9. GUT
	ROOF	MAIN WALLS	CLADDING	ACCENT 1/RENDER	WINDOWS/ BALUSTRADE	MAIN DOOR	GARAGE DOOR	FASCIA	GUTTER
MATERIAL	COLORBOND	BRICK	BLUEBOARD	BRICK	ALUMINIUM	TIMBER	COLORBOND	COLORBOND	COLORBOND
COLOUR									

NOTE: ALL COLOURS SPECIFIED ARE INDICATIVE ONLY AND ARE SUBJECT TO VARIATION AND TO AVAILABILITY
ANY DISCREPANCY PLEASE FOLLOW AS PER RENDERED IMAGE

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY




PROJECT:
36 NARRAMI ROAD, AUSTRAL

CONSTRUCTION ISSUE

CDC.14
COLOR SCHEDULE

NARRAMI ROAD

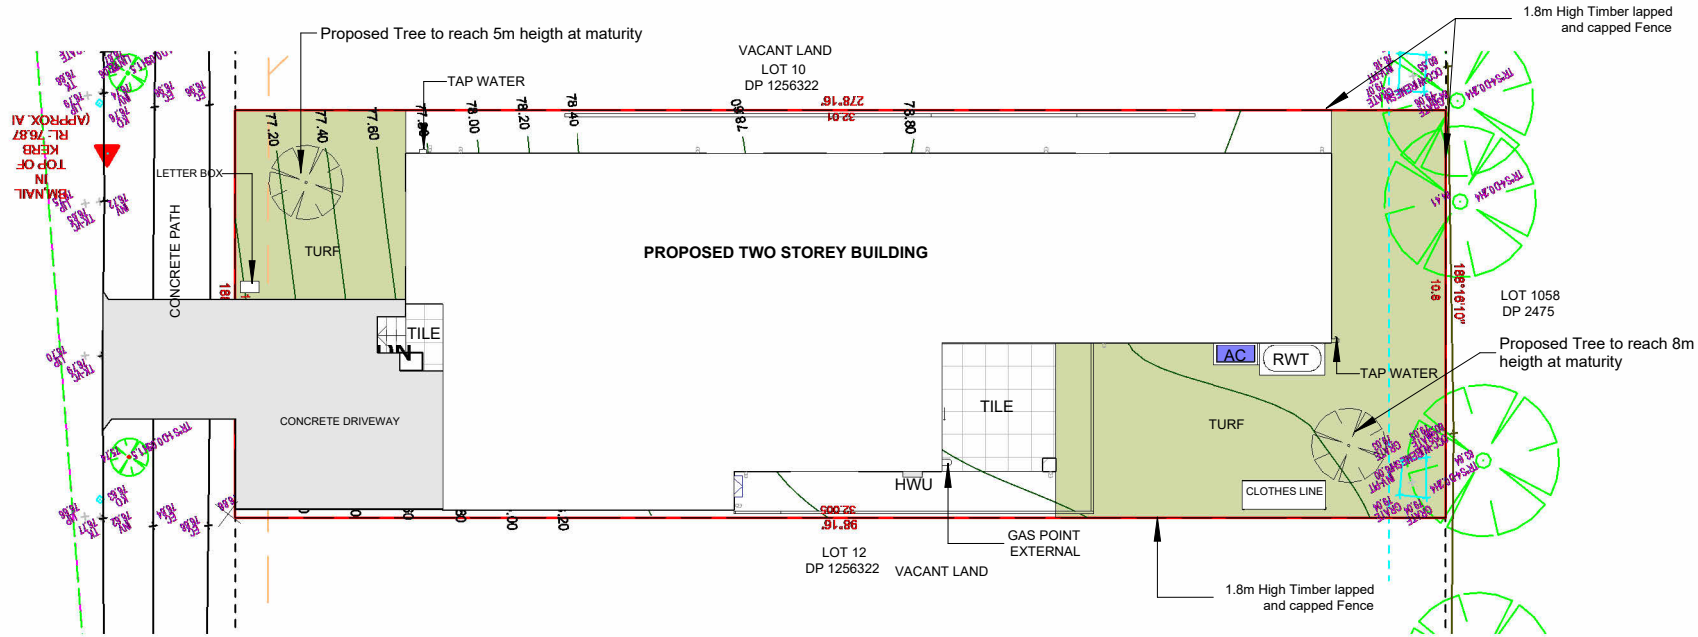

LANDSCAPE AREA	
FRONT AREA	22.5 m ²
BACKYARD AREA	64.2 m ²

1 CDC - LANDSCAPE

1 : 200


GENERAL NOTES:

- LANDSCAPE CONTRACTOR TO CHECK DA CONDITIONS AND STAMPED LANDSCAPE PLAN
- BEFORE COMMENCING WORKS TO ENSURE NO ADDITIONS/AMENDMENTS TO PLAN
- GARDEN BEDS IN OSD BASIN TO CONSIST OF NON FLOATABLE DECORATIVE GRAVEL.
- REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD DETAILS/FINAL LEVELS.
- MULCHED PLANTING BEDS TO BE A MINIMUM DEPTH OF 75mm AS SELECTED.
- CONTRACTOR'S RESPONSIBILITY TO CHECK AND ADJUST SOIL pH AS REQUIRED.
- PROVIDE TIMBER EDGE AS A MINIMUM BENEATH FENCING/GATES TO DEFINE TURF AND GARDEN BEDS/PATHWAYS.EDGING TO BE PROVIDED TO ALL AREAS WHERE DIFFERING MATERIALS MEET i.e TURF/GARDEN, TURF/GRAVEL PATH ETC.
- WEED MAT BENEATH GRAVEL PATHWAYS REQUIRED TO LIMIT MUD TRACKING.
- PREMIUM ORGANIC GARDEN MIX TO BE USED.
- ALL PLANTS TO BE HEALTHY AND VIGOROUS.
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION.
- DO NOT SCALE ARCHITECTURAL SETOUT FROM LANDSCAPE DRAWING.
- EXISTING TREE SPREAD APPROXIMATE ONLY.REFER TO TREE REPORT WHEN APPLICABLE.
- SITE SURVEY PROVIDED BY OTHERS.
- BUFFALO TURF PREFERRED OVER KIKUYU.

LANDSCAPE BASIX NOTE:
THE APPLICANT MUST PLANT INDIGENEOUS OR LOW WATER USE SPECIES OF VEGETATION THROUGHOUT 15 SQM OF THE SITE.


NOTE :BUILDER RESERVES THE RIGHT NOT TO UNDERTAKE NOR SUPPLY CERTIFICATE FOR OCCUPATION CERTIFICATE.
NOTE : TO AID COMPLIANCE WITH BASIX LEGISLATION,PLANTS (WHERE APPLICABLE) HAVE BEEN SELECTED FROM THE LOCAL CITY COUNCIL/SHIRE PLANT LISTS.
NOTE: LOCATION OF SEWER MAINS/LINES,WATER PIPES,UNDERGROUND ELECTRICITY AND OTHER SERVICES MUST BE OBTAINED PRIOR TO COMMENCEMENT OF ANY WORK ON SITE.

CONTRACTORS NOTE : CALCULATED ARES DETERMINED BY CAD AND HAVE BEEN ROUNDED UP FOR USE AS A GUIDE ONLY ALLOW STANDARD PERCENTAGE FOR CUTTING AND WASTAGE .CONFIRM DIMENSIONS AND NUMBERS PRIOR TO QUOTING/ORDERING.

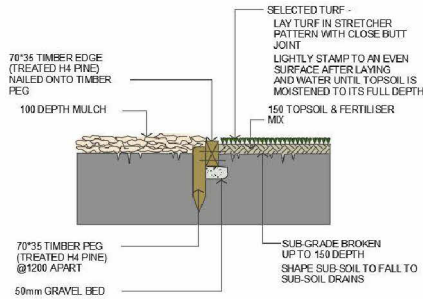

1. TURF & GARDEN EDGE DETAIL

NOTE:
ALIGNMENT OF BRICK EDGE SHALL BE EVEN & FREE FROM DIPS AND HUMPS.

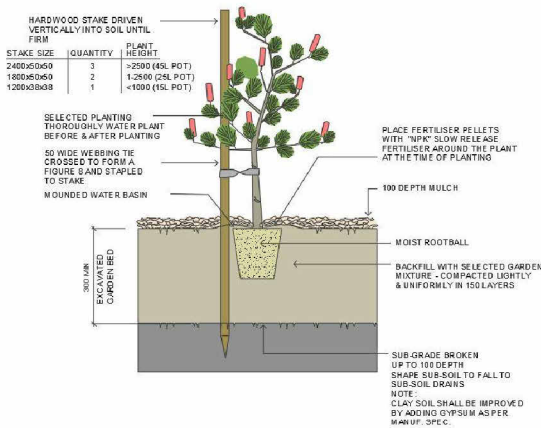

2. TREE & SHRUB PLANTING IN GARDEN BED

NOTE:
DO NOT PLANT IN UNSUITABLE WEATHER CONDITIONS SUCH AS EXTREME HEAT, COLD, WIND OR RAIN.
CLAY SOIL IS TO BE TREATED WITH CLAY BREAKER AND ORGANIC COMPOST

CONSTRUCTION ISSUE

REV	DATE	DESCRIPTION	BY
2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.15
LANDSCAPE PLAN

Window Schedule 1					
Mark	Height	Width	Sill Height	Head Height	Description

Ground Level

GW1	1800	2000	600	2400	SLIDING & FIXED
GW2	500	1000	1900	2400	SLIDING
GW3	1500	1500	900	2400	SLIDING
GW4	1500	1500	900	2400	SLIDING
GW8	600	1800	1050	1650	FIXED
GW9	1800	550	640	2440	FIXED with AWNING

Ground Level: 6

Upper Ground Floor

GW5	1500	1500	900	2400	SLIDING
GW6	1500	1500	900	2400	SLIDING
GW7	1500	1500	900	2400	SLIDING

Upper Ground Floor: 3

Level 1

FW1	1000	1000	1450	2450	SLIDING
FW2	2000	1200	450	2450	FIXED
FW3	800	1500	1650	2450	SLIDING
FW4	800	1500	1650	2450	SLIDING
FW5	1000	1500	1450	2450	SLIDING
FW6	800	1000	1650	2450	SLIDING
FW7	800	1500	1650	2450	SLIDING

Level 1: 7

Door Schedule 1				
Mark	Height	Width	Count	Description

Ground Level

D1	2340	820	1	FLUSH DOOR
D2	2340	720	1	FLUSH DOOR
D3	2340	820	1	FLUSH DOOR
D4	2340	720	1	FLUSH DOOR
GD	2400	3000	1	GARAGE DOOR
MD	2440	1200	1	SOLID CORE DOOR
SD1	2300	2000	1	SLIDING DOOR

Ground Level: 7

Upper Ground Floor

D5	2340	720	1	FLUSH DOOR
D6	2340	820	1	FLUSH DOOR
D6A	2340	820	1	FLUSH DOOR
D7	2340	820	1	FLUSH DOOR

Upper Ground Floor: 4

Level 1

D8	2340	820	1	FLUSH DOOR
D9	2340	720	1	FLUSH DOOR
D10	2340	820	1	FLUSH DOOR
D11	2340	820	1	FLUSH DOOR
D12	2340	720	1	FLUSH DOOR
D13	2340	820	1	FLUSH DOOR
D14	2340	820	1	FLUSH DOOR
SD2	2300	2650	1	SLIDING DOOR

Level 1: 8

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CONSTRUCTION ISSUE

CDC.16
DOOR WINDOW SCHEDULE

ABCB HOUSING PROVISIONS : PART 10.2 WET AREA WATERPROOFING

10.2.1 Wet Areas

1.

Building elements in wet areas within a building must be protected with a waterproofing system.
2.

The waterproofing system in (1) must be either waterproof or water resistant in accordance with 10.2.2 to 10.2.6.

10.2.2 Shower Area (enclosed and unenclosed)

1.

For a shower area with a hob, step-down or level threshold, the following applies:

a.

The floor of the *shower area* must be *waterproof*, including any hob or step-down (see Figure 10.2.2); and

b.

The walls of the *shower area* must be *waterproof* not less than 1800 mm above the floor substrate (see Figure 10.2.2).

c.

Wall junctions and joints within the *shower area* must be *waterproof* not less than 40 mm either side of the junction (see Figure 10.2.2).

d.

Wall/floor junctions within the shower area must be *waterproof* (see Figure 10.2.2).

e.

Penetrations within the *shower area* must be *waterproof*.
2.

A shower with a *preformed shower base* must also comply with the requirements of (1), except for (a) which is not applicable.

Figure 10.2.2: Extent of treatment for shower areas - concrete compressed fibre-cement and fibre-cement sheet floors.

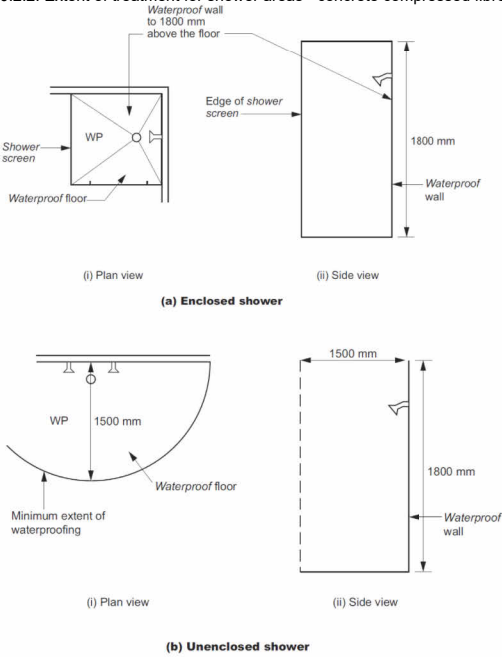


Figure Notes
Wall/floor junction heights are to be as per 10.2.2 to 10.2.6 (as applicable).

Notes
Where a shower is above a bath or spa, use requirements for shower.

10.2.3 Area outside shower area

1.

For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.
2.

For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.
3.

Wall/floor junctions must be -

a.

waterproof, and

b.

where a flashing is used, the horizontal leg must be not less than 40 mm.

10.2.4 Areas adjacent to baths and spas without showers

1.

For areas adjacent to all baths and spas, the following applies:

a.

For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.

b.

For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.

c.

Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.
2.

For areas adjacent to non-freestanding baths and spas, the following applies:

a.

Walls must be water resistant (see Figure 10.2.4a and Figure 10.2.4b)-

•

to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is within 75mm of a wall; and

•

for all exposed surfaces below vessel lip.

b.

Wall junctions and joints must be water resistant within 150mm above a vessel for the extent of the vessel.

c.

Wall/floor junctions must be waterproof for the extent of the vessel (see Figure 10.2.4a and Figure 10.2.4b).

3.

For inserted baths and spas, the following applies.

a.

For floors and horizontal surfaces:

•

Any shelf area adjoining the bath or spa must be waterproof and include a waterstop under the vessel lip.

•

There are no requirements for the floor under a bath or spa.

b.

For walls:

•

Waterproof to not less than 150mm above the lip of a bath or spa.

•

There are no requirements for the floor under a bath or spa.

c.

For wall junctions and joints, the following applies:

•

Waterproof junctions within 150mm of a bath or spa.

•

There are no requirements for junctions and joints in walls beneath the lip of a bath or spa.

d.

Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.

Figure 10.2.4a: Areas adjacent to baths and spas without showers for concrete, compressed fibre-cement and fibre-cement sheet flooring

Figure 10.2.4b: Areas adjacent to baths and spas without showers for timber floors including particle-board, plywood and other floor materials

10.2.5 Other areas

1.

For walls adjoining other types of vessels (e.g. sink, basin or laundry tub), the following applies:

a.

Walls must be water resistant to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is within 75 mm of a wall (see Figure 10.2.5.)

b.

Waterproof wall junctions where a vessel is fixed to a wall.

c.

Waterproof tap and spout penetrations where they occur in surfaces required to be waterproof or water resistant.

2.

For laundries and WCs, the following applies:

a.

The floor of the room must be water resistant.

b.

Wall/floor junctions must be water resistant, and where a flashing is used, the horizontal leg must not be less than 40 mm.

3.

For WCs with handheld bidet spray installations, the following applies:

a.

The floor of the room must be waterproof.

b.

Walls must be -

•

waterproof in WC area within a 900 mm radius from the wall connection of the handheld bidet spray device to a height of not less than 150mm above the floor substrate; and

•

water resistant in WC area within a 900 mm radius from the wall connection of the handheld bidet device to not less than 1200 mm above the finished floor level of the WC.

c.

Wall junctions within the WC area within 900 mm radius from the wall connection of the handheld bidet spray device must be waterproof.

d.

Wall/floor junctions within the WC area within 1000 mm radius from the wall connection of the handheld bidet spray device must be waterproof.

e.

Penetrations in the WC area must be waterproof.

Figure 10.2.5: Bath and vessel abutting wall - areas to be protected

10.2.6 Waterproofing systems

1.

For the purposes of this Part, a waterproofing system is deemed -

a.

waterproof, if it complies with (2); or

b.

water resistant, if it complies with (3).

2.

For a waterproofing system required to be waterproof in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.8 must be used.

3.

For a waterproofing system required to be water resistant in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.9 must be used in conjunction with the materials in 10.2.10.

10.2.12 Construction of wet area floors - falls

Where a floor waste is installed -

a.

the minimum continuous fall of a floor plane to the waste must be 1:80; and

b.


the maximum continuous fall of a floor plane to the waste must be 1:50.

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY

PROJECT:
36 NARRAMI ROAD, AUSTRAL

CONSTRUCTION ISSUE

CDC.18
WATERPROOFING PLAN

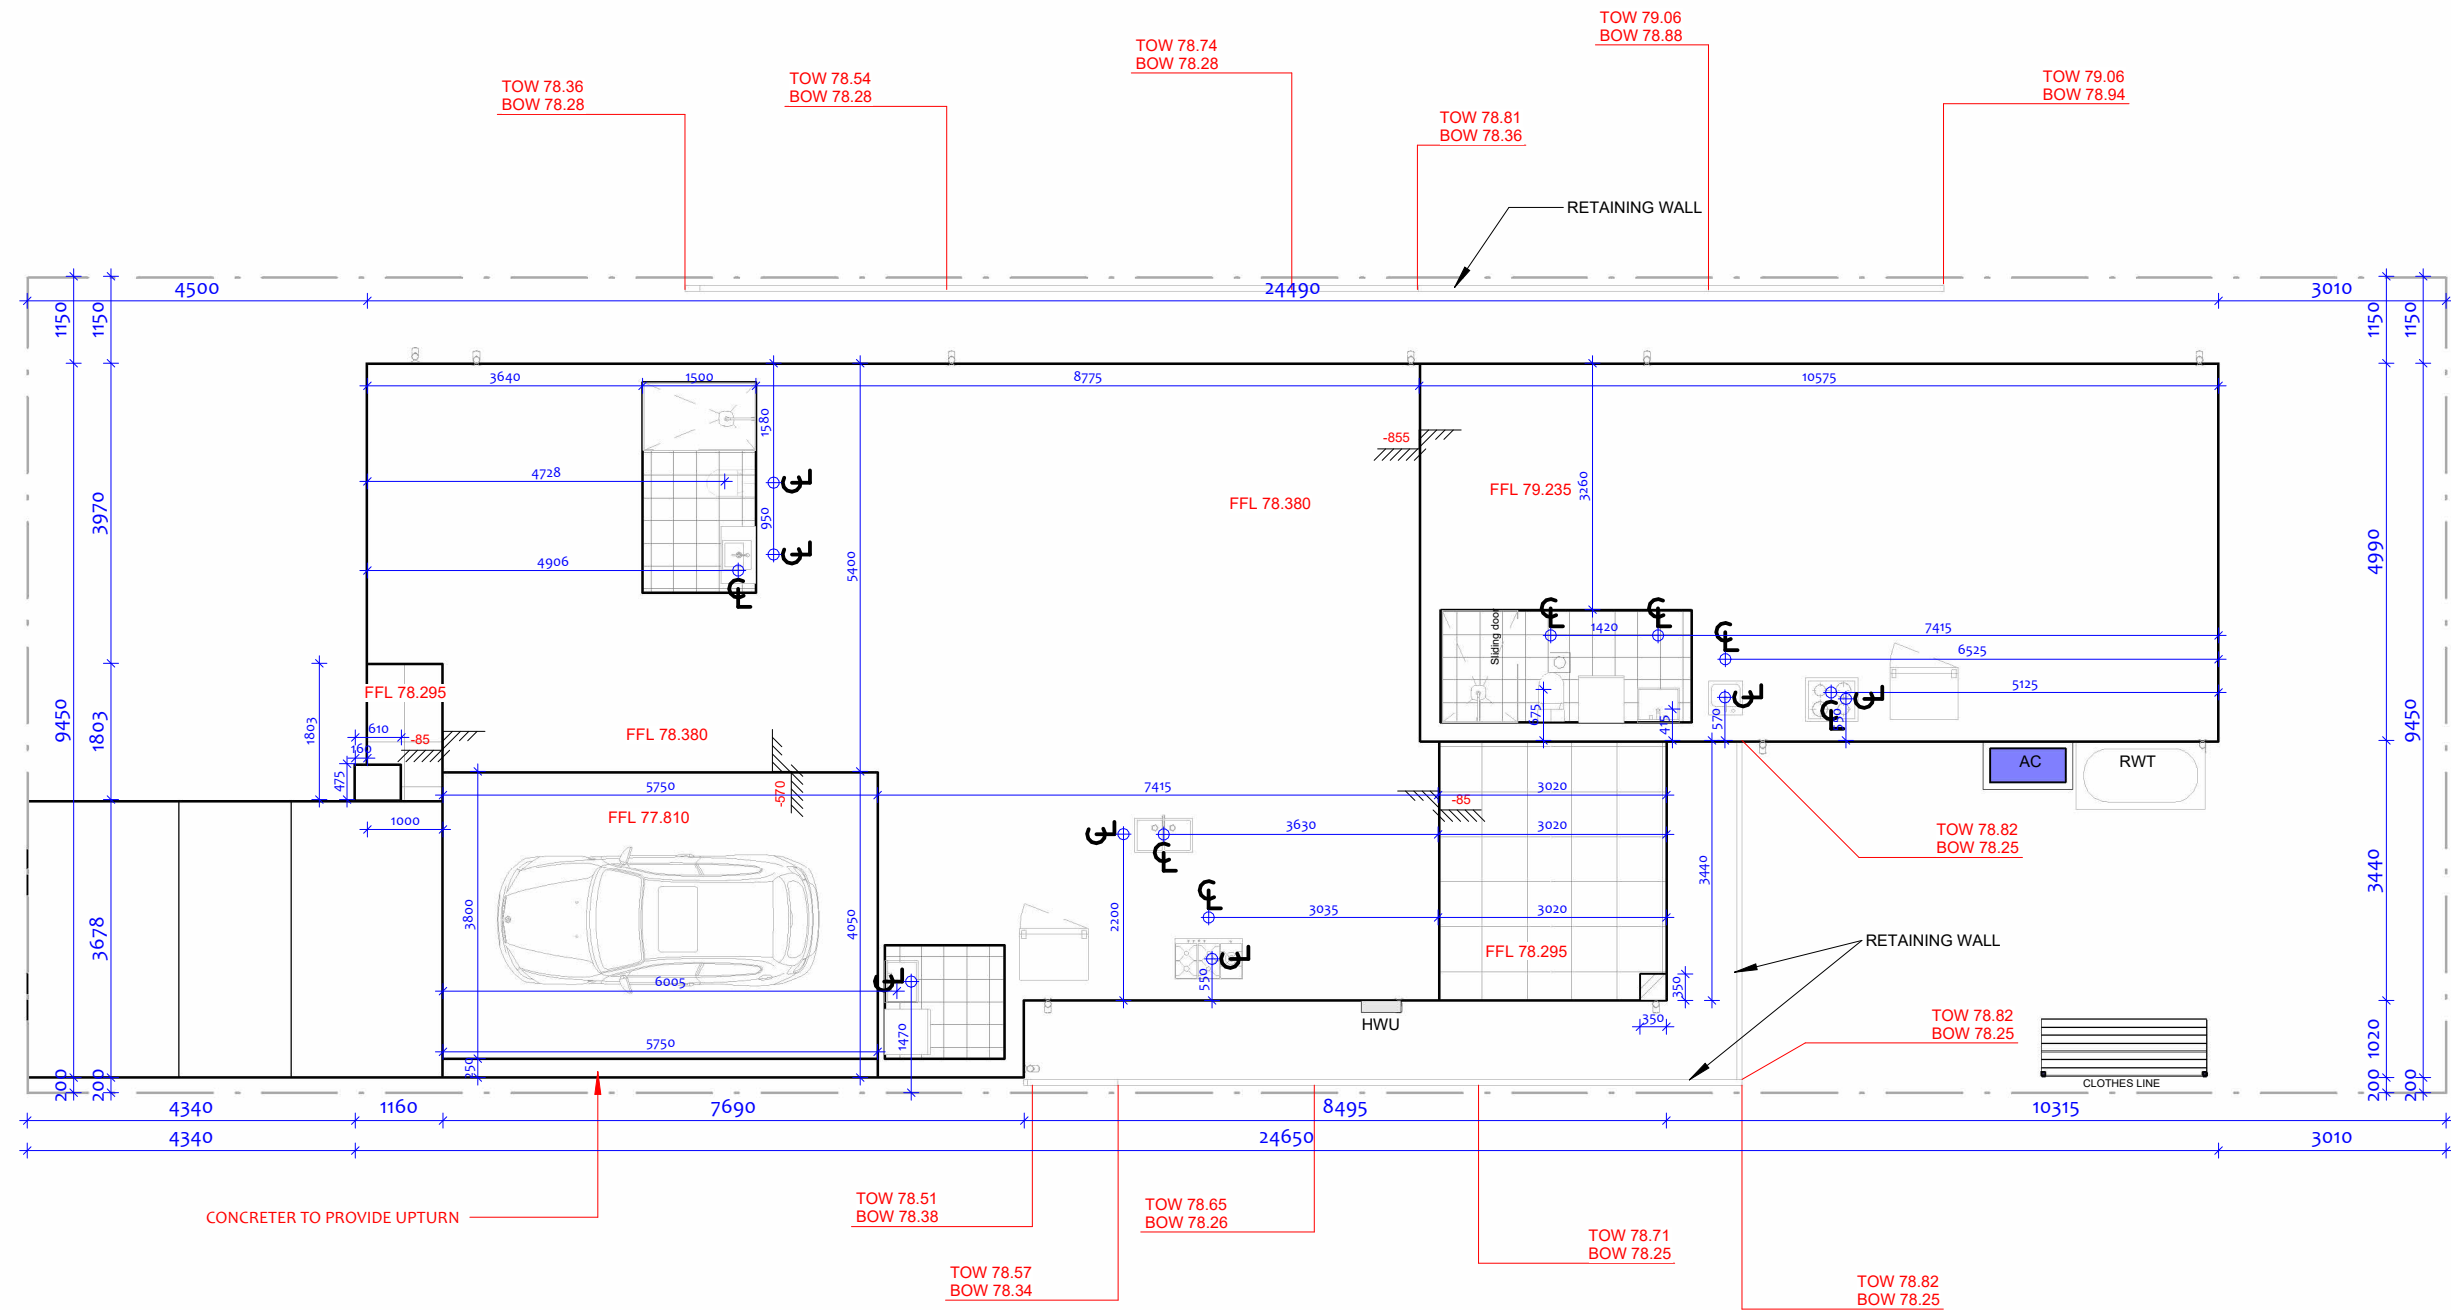


CONSTRUCTION ISSUE

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CDC.19
SLAB SETOUT PLAN

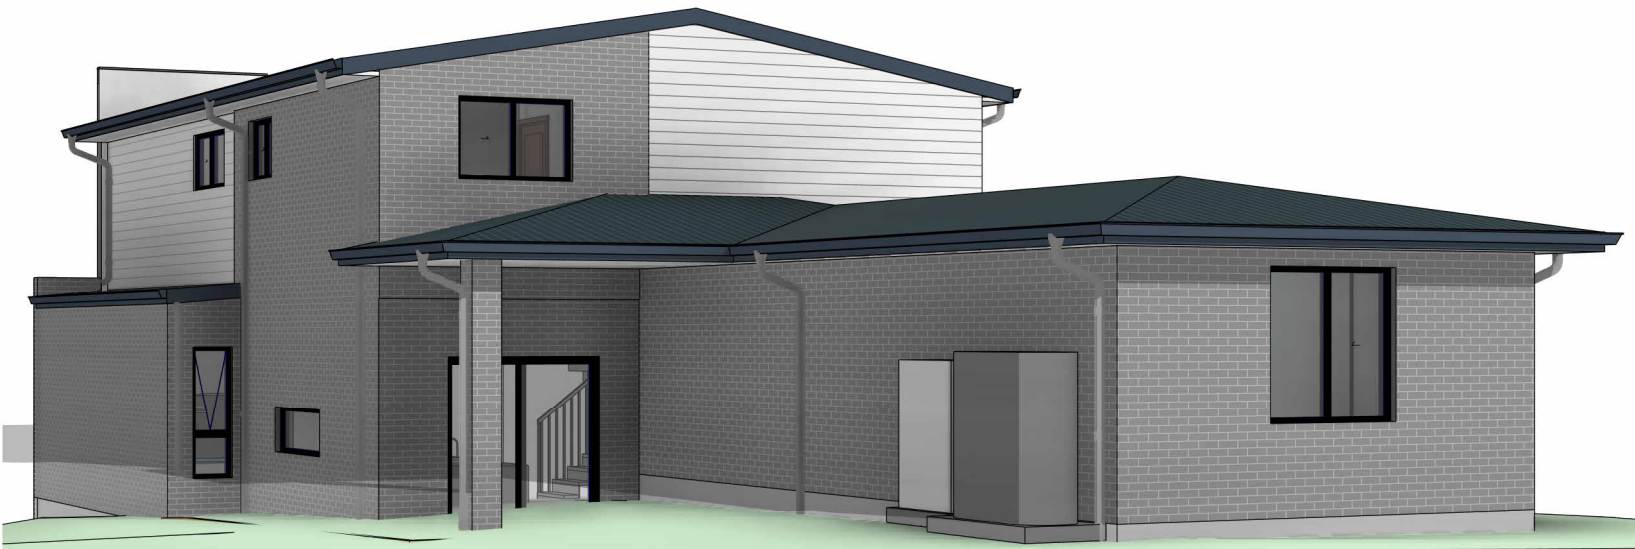

2	24-06-2026	Garage roof reduced to 5 degrees for height compliance, Main roof slope made 10 Degrees for AC clearance, split level	
REV	DATE	DESCRIPTION	BY



PROJECT:
36 NARRAMI ROAD, AUSTRAL

CONSTRUCTION ISSUE
CDC.20
3D VIEWS