


Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2739

- G1. THESE DRAWING SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS DRAWING AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ALL DISCREPANCIES SHALL BE REFERRED TO THE ENGINEER FOR DECISION BEFORE PROCEEDING WITH THE WORK.
- G2. DIMENSIONS SHALL NOT BE OBTAINED BY SCALING THE STRUCTURAL DRAWINGS. (REFER ARCHITECTURAL DRAWINGS).
- G3. SETTING OUT DIMENSIONS SHOWN ON THE DRAWINGS SHALL BE VERIFIED BY THE BUILDER.
- G4. SITE PREPARATION SHALL INCLUDE: STRIP GRASS/VEGETATION, STRIP TOPSOIL, BENCHING THE SITE BY CUT & FILL TO A LEVEL PLATFORM NOMINALLY 150mm BELOW FINISH SLAB LEVEL.
- G5. TREATMENT OF CUT- AND - FILL SLOPING SITES:



G6. THIS DOCUMENT IS SIGNED SUBJECT TO CERTIFICATE OF INSPECTION- ISSUED BY THIS OFFICE. ALL PIERS, SLAB & FOOTING REINFORCEMENT SHALL BE INSPECTED BY THE ENGINEER PRIOR TO THE POURING OF CONCRETE. GIVE 24 HOURS NOTICE TO THE ENGINEER.

G7. SLAB DESIGN IS GENERALLY IN ACCORDANCE WITH AS2870-2011 "RESIDENTIAL SLABS AND FOOTINGS".

G8. ENGINEERS STRUCTURAL DRAWINGS ARE SIGNED & ISSUED ON THE UNDERSTANDING THAT THE BUILDER MAINTAINS IN FORCE, PROPER & ADEQUATE CONTRACT WORKS INSURANCE & PUBLIC LIABILITY INSURANCE DURING THE COURSE OF THE CONSTRUCTION, &/ OR ANY MAINTENANCE PERIOD. CLAIMS OR DAMAGE TO ANY ADJACENT PROPERTY OR BUILDING IS NO THE RESPONSIBILITY OF THE ENGINEER.

G9. DURING CONSTRUCTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE STRUCTURE IN A STABLE CONDITION AND ENSURING NO PART SHALL BE OVERSTRESSED UNDER CONSTRUCTION ACTIVITIES.

G10. WORKMANSHIP AND MATERIALS ARE TO BE IN ACCORDANCE WITH THE REFER CURRENT S.A.A. CODES INCLUDING ALL AMENDMENTS, AND THE LOCAL STATUTORY AUTHORITIES, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.

G11. THE BUILDER IS TO MAKE GOOD AND/ OR REPAIR ALL DAMAGED SURFACES DURING PERFORMANCE OF THE WORK.

G12. IF IN DOUBT WITH ANY DETAILS ON THESE STRUCTURAL PLANS, CONTACT ENGINEER.

G13. THESE DRAWINGS DEPICT THE PROPOSED COMPLETE STRUCTURE. THEY DO NOT DESCRIBE A WORK METHOD. THE DETERMINATION OF A SAFE WORK METHOD REMAINS THE RESPONSIBILITY OF THE CONTRACTOR. ANY ELEMENT WHICH POSES AN UNACCEPTABLE LEVEL OF SAFETY RISK TO CONSTRUCT SHALL BE REFERRED TO THE STRUCTURAL ENGINEER. TEMPORARY BRACING AND SUPPORT OF STRUCTURE IS THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE MAINTAINED DURING ALL STAGES OF CONSTRUCTION.

G14. THESE DRAWINGS ARE BASED ON INFORMATION SUPPLIED BY THE CLIENT. IF ANY ASPECT OF THE SITE PREPARATION OR PROPOSED CONSTRUCTION CHANGES FROM THAT ORIGINALLY ADVISED, THE ENGINEER MUST BE NOTIFIED. NO CHANGES IN ANY STRUCTURAL ELEMENT SHALL BE MADE WITHOUT WRITTEN APPROVAL FROM THE STRUCTURAL ENGINEER.

G15. CONSTRUCTION USING THESE DRAWINGS SHALL NOT COMMENCE UNTIL THE DRAWINGS ARE DESIGNATED "ISSUED FOR CONSTRUCTION".

G16. CIVPLEX STRUCTURAL ENGINEERSS ACCEPT NO RESPONSIBILITY FOR ANY WORK NOT INSPECTED OR NOT APPROVED BY THE STRUCTURAL ENGINEER DURING CONSTRUCTION.

G17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE LOCATION OF ALL EXISTING AND PROPOSED SERVICES IN THE VICINITY OF THE WORKS. ANY SERVICES SHOWN ARE PROVIDED FOR INFORMATION ONLY. THE CONTRACTOR SHALL CONFIRM THE LOCATION OF ALL SERVICES PRIOR TO COMMENCING AND SHALL BE RESPONSIBLE FOR THE REPAIR OF ANY DAMAGE CAUSED TO SERVICES, AS WELL AS ANY LOSS INCURRED AS A RESULT OF THE DAMAGE TO ANY SERVICE.

G18. THE APPROVAL OF THE RELEVANT STATUTORY AUTHORITY AND THE ENGINEER SHALL BE OBTAINED BEFORE BUILDING ADJACENT TO OR OVER ANY SERVICES OR EASEMENTS.


G19. ALL PROPRIETARY ITEMS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS & DETAILS.

G20. WATERPROOFING REQUIREMENTS ARE PREDOMINANTLY THE RESPONSIBILITY OF THE ARCHITECT AND ARE NOT NECESSARILY INDICATED ON THESE DRAWINGS.

1. FOR SITE CLASSIFICATION, FOUNDATION MATERIAL & ALLOWABLE BEARING CAPACITY REFER TO GEOTECHNICAL INFORMATION TABLE ON GROUND SLAB LAYOUT PLAN
2. THE SITE CLASS SHALL BE DETERMINED IN ACCORDANCE WITH AS2870 AND RELEVANT STATE REGULATIONS. CONFIRMATION OF SITE CLASSIFICATION IS REQUIRED BY A GEOTECHNICAL ENGINEER PRIOR TO CONSTRUCTION COMMENCING ON SITE.
3. ALL THE REQUIREMENTS OF THE GEOTECHNICAL REPORT FOR THE SITE SHALL BE OBSERVED AND MET.
4. THE GEOTECHNICAL INVESTIGATION REPORT IS FOR INFORMATION ONLY, IT IS NOT A COMPLETE DESCRIPTION OF CONDITIONS AT OR BELOW GROUND LEVEL.
5. THE GEOTECHNICAL REPORT IS BASED ON THE CONDITIONS EXISTING ON THE LAND AT THE TIME OF THE SITE INVESTIGATION AND THE PROPOSED CUT / FILL INFORMATION PROVIDED BY THE CLIENT. ANY UNADVISSED CUTTING OR FILLING WILL CHANGE THE CHARACTERISTICS OF THE SITE AND MAY RENDER THE GEOTECHNICAL REPORT IRRELEVANT.
6. SHOULD SOIL CONDITIONS ENCOUNTERED ON SITE DIFFER SIGNIFICANTLY FROM THOSE INDICATED IN THE GEOTECHNICAL REPORT, THE ENGINEER MUST BE NOTIFIED BEFORE PROCEEDING AS THE SITE CLASSIFICATION MAY NEED REVISING AND MODIFICATIONS TO THE DESIGN MAY BE REQUIRED.

- F1. THE FOOTING AND FOUNDATION DESIGN HAS BEEN CARRIED OUT IN ACCORDANCE WITH AS2870. CONFIRMATION OF THE SITE CLASSIFICATION IN ACCORDANCE WITH AS2870 IS REQUIRED BY A GEOTECHNICAL ENGINEER PRIOR TO CONSTRUCTION COMMENCING ONSITE AND SHALL INCLUDE CONFIRMATION OF BEARING CAPACITY.
- F2. FOOTINGS HAVE BEEN DESIGNED FOR AN ALLOWABLE BEARING CAPACITY OF 100kPa AT FOUNDATION LEVEL.
- F3. THE BUILDER SHALL OBTAIN APPROVAL OF THE FOUNDATION MATERIAL BEFORE PLACING CONCRETE.
- F4. ALL FOOTING EXCAVATIONS SHALL BE FINISHED CLEARED AND HORIZONTAL OR AT A SLOPE OF NOT MORE THEN 1 IN 10.
- F5. SERVICE TRENCH:

- (I) SERVICE TRENCH CAN REMOVE SUPPORT FROM FOOTINGS WHICH MAY CAUSE SETTLEMENT/ROTATION OF FOOTING.
- (II) EXCAVATION LOCATION AND DEPTH SHOULD BE SUCH THAT EXCAVATION IS NO DEEPER THAN CRITICAL DEPTH LINE (CDL).

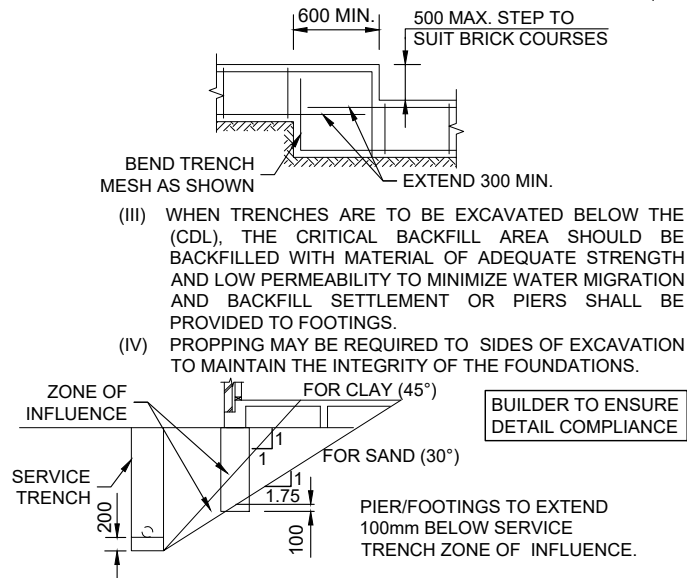

FILL USED TO SUPPORT THE GROUND SLAB SHALL BE ROLLED FILL OR CONTROLLED FILL AS FOLLOWS:

- (a) ROLLED FILL MATERIAL COMPACTED IN LAYERS BY REPEATED ROLLING WITH AN EXCAVATOR OR SIMILAR EQUIPMENT.
- (b) CONTROLLED FILL SHALL BE PLACED, TESTED & CERTIFIED BY A QUALIFIED GEOTECHNICAL ENGINEER AS DEFINED IN AS3798.

F7. WHERE FILL CONSISTS OF REACTIVE CLAY, THE FILL SHALL BE PLACED IN A MOIST CONDITION.

F8. PERMANENT EXCAVATIONS OF ANY VERTICAL OR NEAR VERTICAL STRUCTURE WITHIN 2m OF THE BUILDING & DEEPER THAN 0.6m IN MATERIAL OTHER THAN ROCK SHALL BE ADEQUATELY RETAINED OR BATTERED.

F9. EXCAVATIONS SHALL NOT EXCEED BELOW A LINE DRAWN AT 30° FOR SAND & 45° FOR CLAY TO THE HORIZONTAL FROM THE BOTTOM EDGE OF THE FOOTING/ PIER WITHOUT PRIOR CONSENT.

F10. ALL FOOTINGS SHALL BE LOCATED CENTRALLY UNDER WALLS AND COLUMNS U.N.O.

F11. DO NOT BACKFILL RETAINING WALLS (OTHER THAN CANTILEVER WALLS) UNTIL FLOOR CONSTRUCTION AT TOP AND BOTTOM IS COMPLETED.

F12. (i) SAND FILL UP TO 0.8m DEEP, WELL COMPACTED IN NOT MORE THAN 0.3m THICK LAYERS BY A VIBRATING ROLLER.
(ii) NON-SAND FILL UP TO 0.4m DEEP, WELL COMPACTED IN NOT MORE THAN 0.15m LAYERS BY A MECHANICAL ROLLER. (IF CLAY USE PAD FOOT ROLLER) CLAY FILL SHALL BE MOIST DURING COMPACTION.

F13. THE CONCRETE GROUND SLAB DESIGN INCLUDES ACCEPTABLE LEVELS OF FOUNDATION PERFORMANCE AS OUTLINED BY AS2870. ACCORDINGLY CATEGORY 1 OR 2 DAMAGE (AS SPECIFIED IN APPENDIX C) MAY BE EXPECTED UNDER SOME CONDITIONS. SHOULD A HIGHER LEVEL OF CRACK CONTROL BE REQUIRED THEN THE ENGINEER SHOULD BE NOTIFIED SO THAT THIS CAN BE INCORPORATED INTO THE DESIGN.

F14. CIVPLEX STRUCTURAL ENGINEERS RECOMMEND THAT THE FOUNDATIONS ARE TO BE MAINTAINED BY THE HOUSE TENANT/OWNER IN ACCORDANCE WITH THE 'FOUNDATION MAINTENANCE AND FOOTING PERFORMANCE: A HOME OWNERS GUIDE' REPORT PREPARED BY CSIRO.

F15. FOOTINGS & BORED PIERS SHALL BE CONCRETED ON THE DAY OF APPROVAL (UNLESS PERMISSION IS GIVEN OTHERWISE) TO AVOID SOFTENING OR DRYING OUT. THIS IS ALSO IMPERATIVE TO AVOID ACCIDENTS AND INJURIES ON SITE.

F16. FOOTING AND SLAB PIERS ARE REQUIRED WHERE UNCONTROLLED FILL UNDER THE EDGE BEAM OR SLAB IS PRESENT.

F17. BORED PIERS SHALL BE IN ACCORDANCE WITH AS2159 PILING CODE.

F18. THE CONTRACTOR SHALL ARRANGE FOR A REPRESENTATIVE FROM THE ENGINEERING CONSULTANT TO BE PRESENT AT THE TIME OF DRILLING ALL OF THE BORED PIERS TO DETERMINE THE FOUNDING LEVELS.

F19. WHERE PIERS ARE USED TO SUPPORT A SLAB ON UNCONTROLLED FILL, IT IS RECOMMENDED THAT PLUMBING AND DRAINAGE PIPES FOUNDED WITHIN SUCH FILL SHALL BE HUNG FROM THE SLAB MESH WITH NON-CORROSIVE STRAPS.


F20. ALLOTMENTS CONTAINING REACTIVE SITES CLASSIFIED AS M, H1, H2 OR E SHALL BE PROVIDED WITH AN ADEQUATE SYSTEM OF DRAINAGE IN ACCORDANCE WITH AS2870 TO ENSURE BEST POSSIBLE FOUNDATION PERFORMANCE. AT A MINIMUM THE FOLLOWING SHOULD BE MAINTAINED: THE SITE SHOULD BE GRADED OR DRAINED SO THAT WATER CANNOT POND AGAINST OR NEAR THE BUILDING. SUBFLOOR AREAS SHOULD BE GRADED TO PREVENT WATER PONDING.

F21. BACKFILL TO RETAINING WALLS SHALL BE FREE DRAINING GRANULAR MATERIAL. PROVIDE SUBSOIL DRAIN AT BASE OF WALL. DO NOT BACKFILL UNTIL 14 DAYS AFTER CORE FILLING, OR IF APPLICABLE, AFTER RESTRAINING SLAB OVER HAS BEEN CURED FOR 7 DAYS. ALL RETAINING WALLS ARE TO BE PROPPED PRIOR TO THE COMMENCEMENT OF ANY BACKFILL TO PROVIDE SUPPORT. BACKFILL SHALL BE COMPACTED TO 98% STANDARD MAXIMUM DRY DENSITY WITHIN 2% OF OPTIMUM MOISTURE CONTENT.

F22. SCREW PIER DESIGN, SUPPLY AND INSTALLATION IS THE RESPONSIBILITY OF THE CONTRACTOR.

F23. IF TREES ARE LOCATED WITHIN THE ZONE OF INFLUENCE OR IN CLOSE PROXIMITY TO A PROPOSED DWELLING, IT IS RECOMMENDED THAT ANY TREES & ROOT SYSTEMS BE REMOVED. IF THE TREES AND ROOTS CANNOT BE REMOVED, PIERING AND/OR AN APPROPRIATELY DESIGNED AND RECOGNISED ROOT BARRIER SYSTEM MAY BE REQUIRED. CONTACT ENGINEER PRIOR TO COMMENCEMENT OF ANY WORK.

FM1. THE SITE SHALL BE GRADED OR DRAINED SO THAT WATER CANNOT POND AGAINST OR NEAR THE HOUSE. THE GROUND IMMEDIATELY ADJACENT TO THE HOUSE SHALL BE GRADED TO A UNIFORM FALL OF 50mm (MIN) AWAY FROM THE HOUSE OVER THE FIRST METRE.

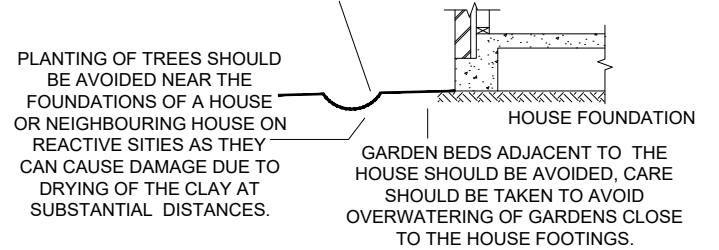

FM2. A MORE EXTENSIVE DISCUSSION OF THIS MATERIAL IS CONTAINED IN THE CSIRO PAMPHLET "GUIDE TO HOME OWNERS ON FOUNDATION AND MAINTENANCE AND FOOTING PERFORMANCE" AND ITS RECOMMENDATIONS SHOULD BE FOLLOWED.

FM3. THE OWNERS ATTENTION IS DRAWN TO APPENDIX B OF AS2870-2011 PERFORMANCE REQUIREMENTS AND FOUNDATION MAINTENANCE.

FM4. SURFACE DRAINAGE SHALL BE DESIGNED & CONSTRUCTED TO AVOID WATER PONDING AGAINST OR NEAR THE FOOTING, DURING CONSTRUCTION, WATER RUN-OFF SHALL BE COLLECTED & CHanneLED AWAY FROM THE BUILDING.

FM5. INSPECTIONS OF THE RESIDENCE & IMMEDIATE SURROUNDS SHALL BE CARRIED OUT BY A QUALIFIED PEST EXPERT ON AN ANNUAL BASIS BY THE HOME OWNER.

FM6. SITE MAINTENANCE IS THE RESPONSIBILITY OF THE HOME OWNER. ALL THE FOLLOWING RECOMMENDATIONS SHOULD BE CARRIED OUT IN FULL:

- (a) CSIRO BOOKLET "FOUNDATION MAINTENANCE AND FOOTING PERFORMANCE: A HOMEOWNERS GUIDE".
- (b) AS2870 APPENDIX 'B' FOUNDATION PERFORMANCE & MAINTENANCE.

FM7. ALL SOILS ARE AFFECTED BY WATER. SILTS ARE WEAKENED BY WATER AND SOME SANDS CAN SETTLE IF HEAVILY WATERED, BUT MOST PROBLEMS ARISE ON CLAY FOUNDATIONS. CLAYS SWELL AND SHRINK DUE TO CHANGES IN MOISTURE CONTENT AND THE POTENTIAL AMOUNT OF THE MOVEMENT IS IMPLIED IN THE SITE CLASSIFICATION.

A	STABLE (NON-REACTIVE)		
S	SLIGHTLY REACTIVE	H	HIGHLY REACTIVE
M	MODERATELY REACTIVE	E	EXTREMELY REACTIVE

FM8. CLASS M, H & E SITES: SANDS, SILTS AND CLAYS SHALL BE PROTECTED FROM BECOMING EXTREMELY WET BY ADEQUATE ATTENTION TO SITE DRAINAGE AND PROMPT REPAIR OF PLUMBING LEAKS.

FM9. CLASS M, H & E SITES: SITES CLASSIFIED AS M, H OR E SHALL BE MAINTAINED AT ESSENTIALLY STABLE MOISTURE CONDITIONS AND EXTREMES OF WETTING AND DRYING PREVENTED.

FM10.THE SITE DRAINAGE REQUIREMENTS SHALL BE MAINTAINED FOR THE ECONOMIC LIFE OF THE BUILDING.

FM11.RESTRICTIONS ON TREES AND SHRUBS: PLANTING OF TREES SHOULD BE AVOIDED NEAR THE FOUNDATION OF A HOUSE OR NEIGHBOURING HOUSE ON REACTIVE SITES AS THEY CAN CAUSE DAMAGE DUE TO



DRYING OF THE CLAY AT SUBSTANTIAL DISTANCES. TO REDUCE, BUT NOT ELIMINATE, THE POSSIBILITY OF DAMAGE, TREE PLANTING SHOULD BE RESTRICTED TO A DISTANCE FROM THE HOUSE OF:

1.50 x MATURE HEIGHT FOR E SITES
1.00 x MATURE HEIGHT FOR H SITES
0.75 x MATURE HEIGHT FOR M SITES

FM12. WHERE ROWS OR GROUPS OF TREES ARE INVOLVED, THE DISTANCE FROM THE BUILDING SHOULD BE INCREASED. REMOVAL OF TREES FROM THE SITE CAN ALSO CAUSE SIMILAR PROBLEMS.

FM13.REPAIR OF LEAKS: LEAKS IN PLUMBING, INCLUDING STORM WATER AND SEWERAGE DRAINAGE SHOULD BE REPAIRED PROMPTLY.

FM14.TREES AND LARGE SHRUBS TYPICALLY REQUIRE SUBSTANTIAL VOLUMES OF WATER/MOISTURE TO SURVIVE. TREES ABSORBING MOISTURE EXACERBATES THE POTENTIAL FOR CLAYS TO SHRINK, THUS

3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust	 Civplex Structural Engineers Pty Ltd www.civplex.com.au ABN: 38 151 321 247 Mobile: 0411 864 076 Fax: (02) 9753 0112 Email: admin@civplex.com.au	PROPOSED RESIDENCE		TITLE: CONSTRUCTION NOTES - SHEET 1		SHEET: 1 of 10
2	ISSUED FOR CONSTRUCTION	07.05.26			CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD	SCALE: N.T.S.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.	
1	ISSUED FOR CONSTRUCTION	16.04.26			LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON	JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3	
0	ISSUED FOR CONSTRUCTION	21.03.26							
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD						
ISSUE	DESCRIPTION	DATE							


CONSTRUCTION NOTES - SHEET 2

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BPC2729

DRAINAGE REQUIREMENTS:

- D1. DRAINAGE WORKS TO BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT EDITIONS OF AS2870, AS/NZS 3500 PLUMBING & DRAINAGE, AS/NZS 2032 INSTALL OF PVC PIPES.
- D2. THE BASE OF TRENCHES SHALL BE SLOPED AWAY FROM THE BUILDING.
- D3. TRENCHES SHALL BE BACKFILLED WITH CLAY IN THE TOP 300mm WITHIN 1.5m OF THE BUILDING.
- D4. WHERE PIPES PASS UNDER THE FOOTINGS, THE TRENCH SHALL BE BACKFILLED FULL DEPTH WITH CLAY OR CONCRETE TO RESTRICT THE INGRESS OF WATER BENEATH THE FOOTING SYSTEM.
- D5. SUBSURFACE DRAINS TO REMOVE GROUNDWATER SHALL NOT BE USED WITHIN 1.5m OF THE BUILDING.
- D6. LAGGING SHALL BE USED AROUND ALL STORMWATER AND SANITARY PLUMBING DRAIN PIPE PENETRATIONS THROUGH FOOTINGS. CLASS H1 (20mm) & CLASS H2/E (40mm).
- D7. ALL STORMWATER AND SANITARY PLUMBING DRAINS ATTACHED TO OR EMERGING FROM UNDERNEATH BUILDINGS CONSTRUCTED ON HIGHLY REACTIVE CLAY SITES (H1, H2 & E) SHALL INCORPORATE FLEXIBLE JOINTS IMMEDIATELY OUTSIDE THE FOOTING/BUILDING PERIMETER TO ACCOMMODATE DIFFERENTIAL MOVEMENT.
- D8. ALL PLUMBING JOINTS TO BE IN ACCORDANCE WITH NCC/AS2870/AS3500.

FLEXIBLE JOINT IMMEDIATELY OUTSIDE FOOTING TO ACCOMMODATE A TOTAL RANGE OF DIFFERENTIAL MOVEMENT OF THE SITE (ys)




UNDER SLAB PLUMBING DETAIL FOR H1, H2, P & E SITES

AGGRESSIVE SOILS:

- A1. BUILDING WITH MASONRY OR CONCRETE IDENTIFIED TO BE EXPOSED TO SALINE OR ACID SULFATE SOILS SHALL BE PROTECTED IN ACCORDANCE WITH THE MANAGEMENT PLANS FROM GEOTECHNICAL & LOCAL AUTHORITIES. ANY PROTECTION REQUIREMENTS SHALL BE PROVIDED TO THIS OFFICE BY THE BUILDER BEFORE COMMENCING DETAILING.

PIERS:

- P1. ALL EDGE BEAMS & STIFFENING BEAMS TO BE FOUNDED ON CONSISTENT NATURAL STRATA OF (MIN.) BEARING CAPACITY 150 kPa OTHERWISE, Ø400 PIERS AT 1500 CTS (MIN.) ARE REQUIRED TO BY-PASS FILL & ACHIEVE BEARING CAPACITY ON NATURAL STRATA - 250 kPa REFER ENGINEER FOR PIER LAYOUT.
- P2. IF PIERS ARE REQUIRED, AN ADDITIONAL 1N12 (2000 LONG) - BOTH WAYS FIXED TO THE UNDERSIDE OF THE TOP FABRIC MESH IS REQUIRED ALONG PIER LOCATIONS.

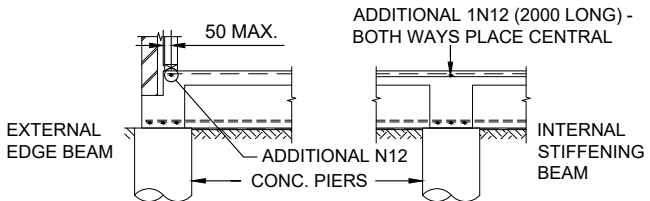

IMPORTANT NOTE: IF PIERS ARE DEEPER THAN 2500mm ENGINEER TO BE NOTIFIED FOR DECISION.

- P3. IF ANY PIER (OR FOOTING) ENCOUNTERS ROCK OR SHALE, ALL EDGE BEAMS ARE TO BE PIERED TO ROCK/SHALE - 400 PIERS AT 1.8m CTS.
- P4. ALL PIERS ARE TO BE DEWATERED CLEAN & FINISHED SQUARE AT BASE PRIOR TO PLACEMENT OF CONCRETE.
- P5. PIERS TO ROCK OR SHALE NEED NOT BE FOUNDED 500mm MIN. BELOW FOOTING TRENCH LEVEL.
- P6. IF PREVIOUSLY FILLED GROUND, INADEQUATE BEARING OR EXCESSIVE GROUNDWATER IS ENCOUNTERED, THE ENGINEER IS TO BE CONTACTED IMMEDIATELY.
- P7. PIER TOPS ARE TO BE FINISHED SMOOTH AND 20mm ABOVE TRENCH LEVEL TO HELP PREVENT SILTATION - IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE PIER TOPS ARE CLEAN AND FREE OF FOREIGN MATTER PRIOR TO THE LAYING OF THE MEMBRANE AND CONCRETE SLAB. ENGINEERS SPOT CHECKS DOES NOT RELEASE THE CONTRACTOR FROM THIS RESPONSIBILITY.
- P8. ALL PIERS TO BE POURED SEPARATE FROM FOOTINGS AND SLABS.
- P9. WHERE PIER DEPTHS PIERS EXCEED 2500mm, CONTACT ENGINEER
- P10. SCREW PIERS & TIMBER PILES SHALL BE INSTALLED & CERTIFIED BY A SUITABLY QUALIFIED LICENSED CONTRACTOR.
- P11. SCREW PIERS SHALL SUIT RELEVANT SALINITY REQUIREMENTS.

REINFORCEMENT:

- R1. ENSURE MAX. 20mm TOP COVER TO FABRIC REINFORCEMENT IN ORDER TO MINIMIZE SHRINKAGE CRACKS.
- R2. FABRIC REINFORCEMENT:
- MESH 2
CUT CORNER
MESH 3
ONE FULL SQUARE PLUS 25mm.
MESH 1
SQUARE & 25 LAP
- R3. TRENCH MESH: 500mm MIN. LAP.
- R4. AROUND THE ENTIRE EDGE OF THE SLAB, THERE MUST BE AN INTACT EDGE WIRE OF THE FABRIC PARALLEL TO AND 20mm FROM THE FORM BOARD, OTHERWISE PROVIDE AN ADDITIONAL 1N12 TO EDGE.
- R5. ALL REINFORCEMENT SHALL BE FIRMLY SUPPORTED ON MILD STEEL PLASTIC TIPPED CHAIRS OR CONCRETE CHAIRS AT NOT GREATER THAN 1m CTS BOTH WAYS.
- R6. SITE BENDING OF DEFORMED REINFORCING BARS SHALL BE DONE WITHOUT HEATING USING MECHANICAL BENDING TOOLS.
- R7. PLACED ON BAR CHAIRS AT 1m CTS EACH WAY.
- R8. LAP LENGTH FOR REINFORCING BARS AS FOLLOWS:
12mm ØBAR - 600mm LAP
16mm ØBAR - 800mm LAP
- R9. REINFORCING BARS SHALL BE TIED BENEATH THE SLAB FABRIC.

CONCRETE:

- C1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS3600 CURRENT EDITION.
- C2. CONCRETE QUALITY

Element	Slump	Max size Aggregate	Fc (28 DAYS)	Admixture
Slab	80mm	20mm	32 MPa	nil
Footings	80mm	20mm	32 MPa	nil
Piers	80mm	20mm	32 MPa	nil

- C3. CLEAR CONCRETE COVER TO REINFORCEMENT SHALL BE AS FOLLOWS UNLESS OTHERWISE SHOWN:

Cast against forms complying with AS1509			
Element	In sheltered locations	Exposed to ground or weather	Cast against other form - work or the ground
Footings		65	75
Slabs & walls	30	40	65

- C4. ALL CONCRETE PLACED SHALL BE WELL VIBRATED AND COMPACTED USING AN APPROVED VIBRATOR AND TECHNIQUE.
- C5. CONSTRUCTION JOINTS WHERE NOT SHOWN SHALL BE LOCATED TO THE APPROVAL OF THE ENGINEER.
- C6. NO HOLES OR CHASES OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE MADE IN CONCRETE MEMBERS. WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- C7. THE CONTRACTOR SHALL NOTIFY ENGINEER 24 HOURS BEFORE REINFORCEMENT IS COMPLETED. AT COMPLETION OF THE FIXING OF THE REINFORCEMENT THE CONTRACTOR SHALL ALLOW TWO HOURS FOR ENGINEERS INSPECTION, UPON APPROVAL CONCRETE MAY BE ORDERED.
- C8. CONCRETE TO BE CURED A MINIMUM OF 7 DAYS AFTER POURING.
- C9. FORMWORK TO BEAMS AND SLABS SPANNING GREATER THAN 5M SHALL BE PRE-CAMMERED UPWARDS BY 1/500 OF CLEAR SPAN IN EACH SPAN UNLESS NOTED DIFFERENTLY ON THE DRAWINGS.
- C10. CURING OF ALL CONCRETE SHALL BE ACHIEVED BY KEEPING SURFACES COMPLETELY WET FOR A PERIOD OF 3 DAYS, AND PREVENTION OF LOSS OF MOISTURE FOR A TOTAL OF 7 DAYS FOLLOWED BY A GRADUAL DRYING OUT. POLYTHENE SHEETING OR WET HESSIAN MAY BE USED TO RETAIN CONCRETE MOISTURE.
- C11. U.N.O. A 0.2mm POLYETHYLENE DAMP PROOFING HIGH IMPACT RESISTANT MEMBRANE SHALL BE PLACED BENEATH THE SLAB SO THAT THE BOTTOM SURFACE IS ENTIRELY UNDERLAID.
- C12. THE MEMBRANE SHALL BE BRANDED "AS2870 CONCRETE UNDERLAY, 0.2mm HIGH IMPACT RESISTANT" + INCLUDE THE MANUFACTURER NAME.
- C13. LAPPING SHALL BE 200mm AT JOINTS & TAPED OR SEALED AT PLUMBING PENETRATIONS WITH CONTINUOUS CLOSE FITTING SLEEVE OR MADE CONTINUOUS WITH THE VAPOUR BARRIER BY TAPING & MADE WATERPROOF.

CONCRETE CONT:

- C14. CURING THE CONCRETE SHALL START IMMEDIATELY AFTER FINISHING. PLASTIC OR WAX LIQUID SPRAYS MAY BE USED IN ACCORDANCE WITH THE MANUFACTURERS SPECIFICATIONS. EXTRA PRECAUTIONS SUCH AS THE METHOD OF EVAPORATIVE RETARDATION (THE USE OF ALIPHATIC ALCOHOLS) IS RECOMMENDED DURING HOT WEATHER POURS TO HELP AVOID THERMAL RELATED CRACKING.
- C15. CURING OF CONCRETE SHALL BE IN ACCORDANCE WITH AS3600
- C16. ALIPHATIC ALCOHOL - WHEN SHADE TEMPERATURE EXCEEDS 35°C SPRAY THE EXPOSED SURFACE OF CONCRETE SLAB DURING THE PLACING AND FINISHING OPERATION WITH FINE FILM OF APPROVED ALIPHATIC ALCOHOL. REPEAT THE SPRAY IF THE SPRAYED SURFACE HAS BEEN RE-WORKED.
- C17. MAXIMUM LIFT OF POUR FOR CONCRETE ELEMENTS TO BE 1M UNLESS METHOD OF PLACEMENT HAS BEEN APPROVED BY THE ENGINEER.
- C18. TO ACHIEVE WATERPROOF PROPERTIES XYPEX CONCENTRATE MAY BE MIXED WITH CONCRETE IN STRICT ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS. XYPEX MAY BE USED IN THE FOLLOWING AREAS;
(A) CONCRETE ROOF
(B) CONCRETE BALCONIES
(C) EXPOSED COLUMNS
(D) LIFT PIT AND LIFT WALL TO GROUND LEVEL GENERALLY, WATERPROOFING TO BE IN ACCORDING TO ARCHITECT'S AND CLIENTS REQUIREMENTS. SEEK SPECIALIST ADVICE.

ROOF:


- R1. THE GROUND SLAB HAS BEEN DESIGNED FOR ROOF LOADING SUPPORTED BY PROPRIETARY PRE-FABRICATED TRUSSES ONTO THE EXTERNAL WALLS ONLY.

PLASTIC SHRINKAGE CRACKING:

- X1. WATER MUST NOT BE ADDED TO CONCRETE ON SITE AS EXCESSIVELY WET CONCRETE IS ONE OF THE MAIN COURSES OF SHRINKAGE CRACKING.
- X2. ENSURE MAX. 20mm TOP COVER TO FABRIC REO. IN ORDER TO MINIMIZE SHRINKAGE CRACKS.
- X3. SHRINKAGE CRACKING IS ALMOST INEVITABLE & DOES NOT REPRESENT FAILURE. HOWEVER, IS OF CONCERN UNDER BRITTLE FLOOR COVERINGS DAMAGE MAY BE REDUCED BY USING FLEXIBLE MORTARS & GLUES FOR FIXING TILES & FIXING OPERATION TO BE DELAYED AS LATE AS POSSIBLE.
- X4. AT ALL RE-ENTRANT CORNERS, EITHER ONE STRIP OF 3-L11TM OR 3N12 BARS 2000mm LONG SHALL BE PLACED ACROSS THE DIRECTION OF POTENTIAL CRACKING.

GALINTEL 'T' BAR:

- Y1. PLACE GALINTEL 'T' BAR OVER OPENING ALLOWING A MINIMUM OF 200mm END BEARING.
- Y2. GALINTEL 'T' BAR MUST BE PROPPED BEFORE BRICKLAYING.
i) FROM 2.4m TO 3.3m SPAN x 2 PROPS.
ii) FROM 3.6m TO 4.5m SPAN x 3 PROPS.
iii) FROM 4.8m TO 5.7m SPAN x 4 PROPS.
SPACED EQUALLY ALONG THE LENGTH
- Y3. WHEN LAYING BRICKS MORTAR MUST BE APPLIED TO ALL BRICK FACES COMING IN CONTACT WITH THE 'T' BAR.
- Y4. PROPS TO REMAIN IN PLACE UNTIL MORTAR ACHIEVES FULL STRENGTH (7 DAYS MIN.).
- Y5. A MINIMUM 1:4 MORTAR MIX IS TO BE USED AND APPLIED TO ALL FACES BETWEEN STEEL AND BRICKS (VERT. AND HORIZ. LEGS) AND BETWEEN BRICKS ABOVE THE STEEL SECTION.

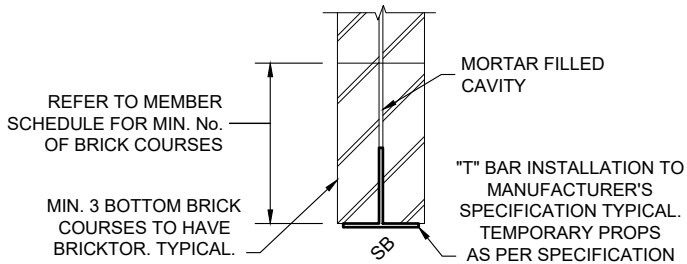


TYPICAL GALINTEL T-BAR DETAIL

NOTE:
GALINTEL T-BAR DESIGNED BASED ON UNIFORMLY DISTRIBUTED LOADING TO T-BAR. IF POINT LOADS ARE TO BE APPLIED, THE ENGINEER IS TO BE INFORMED PRIOR TO LOADING.

REINFORCED BLOCKWORK:

- B1. ALL WORKMANSHIP / MATERIALS TO BE IN ACCORDANCE WITH AS3700.
- B2. ALL BLOCKS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 25 MPa.
- B3. CHASES AND HOLES SHALL NOT BE MADE IN BLOCKWORK WITHOUT THE PRIOR APPROVAL OF SUPERINTENDENT.
- B4. PROVIDE CLEAN OUT HOLES AT THE BOTTOM OF ALL CORES FILLED. ALL MORTAR SHALL BE REMOVED FROM BOTTOM OF WALL BEFORE CLEAN OUT HOLES ARE FILLED FOR GROUTING.
- B5. CORES SHALL BE CLEANED AND VERTICAL BARS TIED TO STARTER BARS.
- B6. CONCRETE TO WALLS TO BE THOROUGHLY VIBRATED AND POURED IN LIFTS OF 1800 MAX. SECOND LIFT TO BE VIBRATED INTO THE FIRST LIFT.
- B7. TOP COURSE IN HOLLOW BLOCK WALLS SHALL BE LAID IN SOLID BLOCK.
- B8. PROVIDE CLEAN-OUT HOLES AT BASE OF ALL WALLS AND ROD CORE HOLES TO REMOVE PROTRUDING MORTAR FINS.
- B9. CORE FILLING GROUT SHALL HAVE MINIMUM CHARACTERISTIC STRENGTH OF 25 MPa, 10mm AGGREGATE, 230mm SLUMP +/- 30mm. THOROUGHLY COMPACT CORE FILL GROUT WITH A MECHANICAL VIBRATOR.
- B10. PROVIDE 55mm COVER TO REINFORCING BARS FROM THE OUTSIDE FACE OF THE BLOCKWORK.
- B11. BACKFILL TO RETAINING WALLS IS TO BE FREE DRAINING GRANULAR MATERIAL UNLESS NOTED OTHERWISE. PROVIDE A SUBSOIL DRAIN TO WEEP HOLES.
- B12. ALL MASONRY WALLS AND PIERS SUPPORTING SLABS AND BEAMS SHALL HAVE A PRE-GREASED GALVANISED STEEL SLIP JOINT BETWEEN THE TOP OF THE MASONRY AND THE CONCRETE SLAB SOFFIT UNLESS NOTED OTHERWISE.
- B13. PROVIDE VERTICAL JOINTS AT 8M MAX. CENTERS, AND 5M MAXIMUM DISTANCE FROM CORNERS IN ALL MASONRY WALLS. REFER DETAIL BELOW.




BLOCKWORK CONTROL JOINT

JOINTS AT 8.0M MAX. CENTRES

MASONRY:

(BRICKWORK OR UNREINFORCED BLOCKWORK)

- M1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS2733, AS4773 & AS3700 CURRENT EDITION WITH AMENDMENTS AND OTHER RELEVANT CODES.
- M2. CUTTING AND CHASING OF MASONRY WALL IS NOT PERMITTED WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- M3. NO MASONRY WALL TO BE BUILT ON PROPPED SLABS.
- M4. OBTAIN ENGINEERS APPROVAL BEFORE COMMENCING MASONRY WALL ON SUSPENDED SLABS.
- M5. UNO MIN. COMPRESSIVE STRENGTH OF LOAD BEARING BRICKS SHALL: CLAY BRICKS f_c = 20 MPa
CONCRETE BRICKS f_c = 15 MPa
- M6. PLACE 2 LAYERS OF MALTHOID OR SIMILAR BETWEEN LOAD BEARING MASONRY WALL AND CONCRETE SLABS (AT THE BASE AND AT TOP). ENSURE TOP SURFACE OF MASONRY IS SMOOTH.
- M7. LINTELS NOT SHOWN ON DRAWINGS TO BE AS PER TYPICAL DETAIL. ALL LINTELS TO EXTERNAL LEAF TO BE HOT DIP GALVANIZED.
- M8. THE STABILITY OF THE BRICK WALLS DURING CONSTRUCTION SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. WALLS MAY NEED TEMPORARY BRACING.
- M9. CORROSION PROTECTION FOR WALL TIES TO BE IN ACCORDANCE WITH BCA VOLUME 2 HOUSING PROVISIONS.
- M10. THE WALL TIES TO EXISTING CAVITY WALLS TO BE INSPECTED AND IF RUSTED NEW TIES AS NOTED IN TABLE ABOVE SHALL BE INSTALLED AT MAXIMUM OF 600 x 600 CTS BOTH DIRECTIONS AND 300 CTS AT OPENINGS.
- M11. MASONRY, MORTAR & BUILT IN MASONRY COMPONENTS SHALL COMPLY WITH CURRENT EDITIONS OF AS3700 & AS4773
- M12. UNO PROVIDE 'TYPE A' MEDIUM DUTY WALL TIES SPACED AND FIXED IN ACCORDANCE WITH BCA VOL 2 TABLE 5.6.5a, 5.6.5b & 5.6.5c

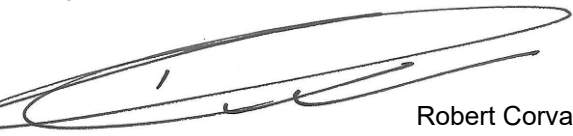3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	

www.civplex.com.au

Civplex

Structural Engineers Pty Ltd

ABN: 38 151 321 247

Mobile: 0411 864 076 Fax: (02) 9753 0112


Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: CONSTRUCTION NOTES - SHEET 2		SHEET: 2 of 10
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD	SCALE: N.T.S.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.	
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON	JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3	

CONSTRUCTION NOTES - SHEET 3

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Professional Engineer
No. 123456789
BDC2729
Not Validated by a scheme approved under Professional Standards Legislation.

MASONRY CONT:

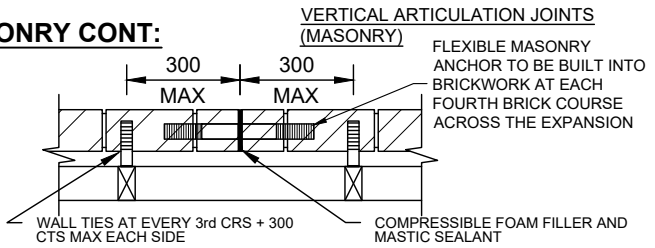

CORROSION PROTECTION FOR WALL TIES				MORTAR AS3700
ref. BCA VOL 2 TABLE 5.6.5d				
ZONE	DURABILITY CLASS	EXPOSURE CONDITION	WALL TIE SPECIFICATION	
1	R4	<1Km FROM BREAKING SURF	• GRADE 316L STAINLESS STEEL • ENGINEERED POLYMER COMPLYING WITH AS2699.1	M4 (1:4)
		<100m FROM SALT WATER WITHIN HEAVY INDUSTRIAL AREAS		
2	R3	1-10Km FROM BREAKING SURF	• GALV. SHEET STEEL TIES - 470g/m² COATING MASS • GALV. WIRE TIES - 470g/m² COATING MASS • GRADE 304L STAINLESS STEEL	M3 (1:5)
		100-1000m FROM SALT WATER		
3	R1 & R2	ALL OTHER AREAS	• GALV. SHEET STEEL TIES - 300g/m² COATING MASS GALV. AFTER MANUFACTURE	M2 (1:2.8)

TIMBER:

- T1. ALL TIMBER WALL, ROOF + FLOOR MATERIALS, DESIGN & WORKMANSHIP SHALL GENERALLY BE IN ACCORDANCE WITH AS1720, AS2858, AS1860 AND AS 1684 RESIDENTIAL TIMBER FRAMED CONSTRUCTION.
- T2. WASHERS SHALL BE PROVIDED UNDER ALL NUTS AND BOLT HEADS BEARING AGAINST TIMBER.
- T3. ALL TIMBER EXPOSED TO WEATHER, DAMP ENVIRONMENT OR PESTS (WHITE ANTS) TO BE TREATED WITH AN APPROVED PEST RESISTING AND WOOD PRESERVING COMPOUND ON ALL FACES, ENDS AND NOTCHES. PERIODIC INSPECTIONS OF THE TIMBERS SHOULD BE CARRIED OUT AS MAINTENANCE AND SHOULD ANY DEFECTS BE FOUND THEN THEY MUST BE RECTIFIED IMMEDIATELY.
- T4. ALL WORKS TO BE CARRIED OUT AS PER GOOD BUILDING PRACTICE. SPECIAL ATTENTION TO BE PAID TO STRAPPING DOWN ALL ROOFS.
- T5. ALL ROOF TRUSSES, THEIR FIXINGS, HOLDING DOWN DETAILS, ADDITIONAL STEEL AND TIMBER BEAMS TO BE BY THE TIMBER SUB-CONTRACTOR DETAILS. ALL TIMBER BEAM TO TIMBER BEAM CONNECTION MUST BE TRIP-L-GRIP FASTENED AS A MINIMUM.
- T6. REFER TO THE MANUFACTURERS SPECIFICATIONS FOR INSTALLATION DETAILS OF JOISTS, TIMBER BEAMS & TRUSSES WHERE APPLICABLE.
- T7. SOLID TIMBER JOISTS SHALL NOT BE NOTCHED IN EXCESS OF THE RECOMMENDATIONS OF AS1684. WHERE NECESSARY PROVIDE A TIMBER PLATE OVER THE STEEL BEAM & PROVIDE TOP MOUNT JOIST HANGERS.
- T8. SOFTWOOD MIN. GRADE MGP10 UNO. / HARDWOOD MIN. GRADE F17 UNO.
- T9. EXCEPT WHERE OTHERWISE SHOWN ON THESE ENGINEERING DRAWINGS, ALL TIMBER CONNECTION, TIE DOWN AND BRACING DETAILS SHALL COMPLY WITH AS1684 AND AS1720.
- T10. ALL BOLTS IN TIMBER CONSTRUCTION SHALL BE MINIMUM M16 UNO. ALL BOLTED CONNECTIONS SHALL USE WASHERS UNDER HEADS AND NUTS WHICH ARE TO BE AT LEAST 3 TIMES THE BOLT DIAMETER. ALL BOLTS AND WASHERS SHALL BE HDG IN ACCORDANCE WITH AS1720.
- T11. ALL TRUSSES AND RAFTERS SHALL BE FIXED TO TOP PLATE WITH METAL MULTIGRIP TIE DOWNS.
- T12. DURING CONSTRUCTION IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT THE TIMBER IS PROTECTED FROM THE WEATHER AND ITS STRENGTH IS NOT IMPAIRED IN ANY WAY.
- T13. DURABILITY GRADE OF ALL TIMBERS.

LOCATION	HAZARD CLASS (SOFTWOODS)	DURABILITY CLASS (HARDWOODS)
INTERNAL ABOVE GROUND	H2	CLASS 1 OR 2
EXTERNAL ABOVE GROUND	H3	CLASS 1 OR 2
BELOW GROUND	H4	CLASS 1

STRUCTURAL STEELWORK:

- S1. FABRICATION / INSTALLATION OF STRUCT. STEEL WORK IN ACCORDANCE WITH AS4100 AND OTHER RELEVANT CURRENT STANDARDS. ALSO ALL STRUCTURAL STEEL MEMBERS SPECIFIED ON THESE DRAWINGS AS BEING GALVANISED SHALL CONFORM TO THE STANDARDS OF AS4680 & NCC VOL 2 HOUSING PROVISIONS STANDARD 2022 CI 6.3.9
- S2. UNLESS NOTED OTHERWISE, USE:
a) 10mm GUSSET AND END PLATES.
b) M20 8.8/S BOLTS. HIGH STRENGTH STRUCTURAL (AS1252A)
c) 6mm CONTINUOUS FILLET WELDS VIA E48XX MILD ELECTRODES.
d) BUTT WELDS WHERE INDICATED IN THE DOCUMENTS SHALL BE COMPLETE PENETRATION BUTT WELDS AS DEFINED IN AS1554.
- S3. STEEL WORK DESIGNED IN ACCORDANCE WITH AS4100 "STEEL STRUCTURES CODE" + AS1170/AS1170.2 "DEAD + LIVE + WIND LOADS"
- S4. ALL STEELWORK SHALL BE SECURELY TEMPORARILY BRACED BY THE ERECTOR AS NECESSARY TO STABILIZE THE STRUCTURE DURING CONSTRUCTION.
- S5. THE BUILDER SHALL PROVIDE ALL CLEATS AND DRILL ALL HOLES NECESSARY FOR FIXING STEEL TO STEEL AND TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED IN THE DRAWINGS.
- S6. WELDS TO BE PROPERLY CHIPPED TO REMOVE SLAG.
- S7. BEAMS SUPPORTED ON BRICKWORK (BEARING NOTED ON PLAN) SHALL HAVE INCOMPRESSIBLE PACKING AS REQUIRED UNDER THE ENDS OF THE BEAM TO ENSURE EVEN BEARING ON THE BRICKWORK.
- S8. STABILITY OF THE STRUCTURE DURING CONSTRUCTION IS BUILDERS RESPONSIBILITY. ADEQUATE TEMP. BRACING SHALL BE PROVIDED AS IS NECESSARY TO STABILISE THE STRUCTURE DURING CONSTRUCTION.
- S9. SITE WELDING OF HOT DIP GALVANISED STEEL IS PREMISABLE IF UPON COMPLETION THE WELDS ARE TREATED WITH THE APPROPRIATE COATING AS PER AS/NZS2312.
- S10. BEAMS WHICH SPAN 12 m AND OVER TO HAVE A PRE-CAMBER UPWARD AT THE CENTRE OF THEIR SPAN OF SPAN/300 U.N.O. BEAMS CANTILEVERING OVER 3m TO BE PRE-CAMBERED UPWARD AT THE END OF THE CANTILEVER OF SPAN/250 U.N.O.
- S11. SURFACE PREPARATION IS CRITICAL TO LONG LIFE PERFORMANCE OF PAINTED/GALVANISED SURFACES.
- S12. ANY FURTHER WELDED JOINTS ARE TO BE PAINTED WITH 2 COATS OF APPROVED GALVANIZED PAINT.
- S13. BASE PLATE GROUT TO BE HIGH STRENGTH CEMENTITIOUS NON-SHRINK OR APPROVED EQUIVALENT UNLESS NOTED OTHERWISE ON DRAWINGS.
- S14. ALL MEMBERS SHALL BE SUPPLIED IN SINGLE LENGTHS. SPLICES SHALL ONLY BE PERMITTED IN LOCATIONS SHOWN ON STRUCTURAL DRAWINGS.
- S15. THE INSTALLATION OF GALINTELS AND 'T' BARS TO BE STRICTLY IN ACCORDANCE WITH MANUFACTURES SPECIFICATIONS.
- S16. THE BUILDER IS TO MAKE GOOD AND/ OR REPAIR ALL DAMAGED SURFACES DURING PERFORMANCE OF THE WORK.
- S17. REFER TO STRUCTURAL STEEL MEMBERS (LINTELS) + (BEAMS + POSTS) TABLES FOR ALL STEEL WORK CORROSION PROTECTION.
- S18. ALL BOLTS SHALL BE M20 GRADE 8.8/S UNO.
- S19. NO CONNECTION SHALL HAVE LESS THAN 2 BOLTS UNO.
- S20. ALL BOLTS, NUTS AND WASHERS SHALL BE HOT DIP GALVANISED.
- S21. BOLTS GRADED 4.6 OR 8.8 ARE SHOULD NOT BE WELDED.
- S22. ENSURE ALL BOLTS HAVE SUFFICIENT LENGTH SO THAT AT LEAST ONE FULL THREAD IS EXPOSED BEYOND THE NUT AFTER TIGHTENING.
- S23. ALL STEELWORKS TO UNDERGO SA 2.5 BLAST CLEANING PRIOR TO PROTECTION COATING U.N.O. REFER AS2312.1 & AS2312.2.
- S24. PROTECTIVE COATING REQ'D ON ALL STEELWORK PARTIALLY EMBEDDED IN CONCRETE UNO. THE COATING SHOULD BE NON-CONDUCTIVE AND EXTEND A MINIMUM OF 200mm INTO THE CONCRETE AND A MINIMUM OF 100mm ABOVE THE CONCRETE IN ACCORDANCE WITH AS2312.
- S25. AS AN ALTERNATIVE TO GALVANISING, STRUCTURAL STEEL WORK MAY BE GRIT BLASTED TO CLASS 2.5 AND PAINTED WITH PROTECTIVE COATING TO SUIT APPROPRIATE ATMSOSPHERIC CORROSIVITY CATEGORIES BASED ON AS3212.1:2014
- S26. UNLESS NOTED OTHERWISE, PROTECTIVE COATINGS FOR BUILT-IN COMPONENTS FOR MASONRY CONSTRUCTION, INCLUDING (BUT NOT LIMITED TO) WALL TIES, MASONRY ANCHORS, CONNECTORS, SHELF ANGLES, LINTEL BARS, BED JOINT MESH, BOLTS & FIXINGS SHALL BE ACCORDING TO AS3700, AS2312,AS2699, & NCC VOLUME 2 HOUSING PROVISIONS STANDARD 2022 CI. 5.6.7b.
- S27. THE BUILDER SHALL PROVIDE ALL CLEATS AND DRILL HOLES NECESSARY FOR FIXING STEEL TO STEEL AND TIMBER TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS.
- S28. TEMPORARY BRACING REQUIRED FOR STABILITY OF STEELWORK DURING CONSTRUCTION.
- S29. CHIP ALL WELDS FREE OF SLAG.
- S30. DO NOT GROUT UNDER BASE PLATES UNTIL FIRST LEVEL STEELWORK IS PLUMB AND FIXED BY WELDING OR BOLTING.

STRUCTURAL STEEL - PROTECTIVE COATINGS (BEAMS + POSTS):

STRUCTURAL STEEL MEMBERS (BEAMS + POSTS)			
LOCATION	ENVIRONMENTAL EXPOSURE CLASS	TYPICAL DISTANCE	
		SURF COAST	SHELTERED COAST
INTERNAL	C1 - VERY LOW (DRY INDOORS)	ref. NOTE below	ref. NOTE below
EXTERNAL	C2 - LOW (ARID/URBAN INLAND)	>50Km	>1Km
	C3 - MEDIUM (COASTAL)	1Km - 50Km	50m - 1Km
	C4 - HIGH (CALM SEASHORE)	200m TO 1Km	<50m
	C5 - VERY HIGH (SURF SEASHORE)	<200m	N/A

STRUCTURAL STEEL MEMBERS (BEAMS + POSTS)		
LOCATION	ENVIRONMENTAL EXPOSURE CLASS	MILD STEEL CORROSION RATE
INTERNAL	C1 - VERY LOW (DRY INDOORS)	<1.3g µm/ YEAR
EXTERNAL	C2 - LOW (ARID/URBAN INLAND)	1.3 TO 25 µm/ YEAR
	C3 - MEDIUM (COASTAL)	25 TO 50 µm/ YEAR
	C4 - HIGH (CALM SEASHORE)	50 TO 80 µm/YEAR
	C5 - VERY HIGH (SURF SEASHORE)	80 TO 200 µm/ YEAR

STRUCTURAL STEEL MEMBERS (BEAMS + POSTS)			
ENVIRONMENTAL EXPOSURE CLASS	MINIMUM PROTECTIVE COATING		
	OPTION 1 (HDG)	OPTION 2 (DUPLEX SYSTEM)	OPTION 3 (PAINT SYSTEM)
C1 - VERY LOW	HDG75	-	
C2 - LOW	HDG75	-	ACL2, ACC2, IZS1, PUR2A
C3 - MEDIUM	HDG225	-	ACL3, ACC4, ACC5, IZS1, PUR3, PUR4
C4 - HIGH	HDG450	HDG150 + 4D or HDG300 + 2D	ACC6, IZS3, PUR5
C5 - VERY HIGH	HDG900	HDG300 + 5D or HDG600 + 4D	ACC6 , PUR5

TABLE NOTES

- THIS TABLE - STRUCTURAL STEEL MEMBERS (BEAMS + POSTS) THAT ARE NOT BUILT INTO MASONRY WALLS - ref. AS4312:2008
- THIS TABLE INCLUDES A BASIC DESCRIPTION OF THE NECESSARY REQUIREMENTS, THE RELEVANT CURRENT AUSTRALIAN STANDARDS SHOULD BE REFERENCED FOR MORE DETAILED INFORMATION
- ALL CLASS 1 BUILDING INTERNAL BEAMS SHALL BE CLASSIFIED AS C1 UNO PER AS4100:2020 - REFER AS4212 TABLE 2.1 FOR OTHER BUILDING CLASSES
- AS4312:2008 ATMOSPHERIC CORROSIVITY ZONES IN AUSTRALIA
- ADDITIONAL DECORATIVE COATINGS CAN BE APPLIED, BUT NOT BE CONSIDERED AS PART TO SATISFYING THE REQUIREMENTS OF THIS TABLE.
- ANY BEAM OR POST WITH A COATING THAT IS MODIFIED BY CUTTING, WELDING, OR WHERE DAMAGED, MUST HAVE THE COATING RESTORED TO PROVIDE AN EQUIVALENT LEVEL OF PROTECTION PROVIDED BY THE ORIGINAL COATING
- OPTION 2 (DUPLEX SYSTEM)
- ref. ABCB HOUSING PROVISION STANDARD-2022 TABLE 6.3.9c / AS2312.2
- OPTION 3 (PAINT)
- ref. ABCB HOUSING PROVISION STANDARD-2022 TABLE 6.3.9b / AS2312.1

STRUCTURAL STEEL - PROTECTIVE COATINGS (BEAMS + POSTS) CONT:

- HDG - HOT DIPPED GALVANISED
- DFT - DRY FILM THICKNESS
- 2D - DEGREASE, WASH + DRY THE HDG STEEL, THEN SWEEP BLAST IT + PAINT WITH 2-PACK INHIBITIVE EPOXY PRIMER TO 75 µm DFT + POLYURETHANE or 2-PACK ACRYLIC GLOSS TO 100 µm DFT.
- 4D - DEGREASE, WASH + DRY THE HDG STEEL, THEN SWEEP BLAST IT + PAINT WITH 2-PACK HIGH BUILD EPOXY TO 250 µm DFT plus POLYURETHANE or 2-PACK ACRYLIC GLOSS TO 100 µm DFT.
- 5D - DEGREASE, WASH + DRY THE HDG STEEL, THEN SWEEP BLAST IT + PAINT WITH 2-PACK EPOXY PRIMER (INHIBITIVE) TO 75 µm DFT + 2-PACK HIGH-BUILD EPOXY TO 225 µm DFT + POLYURETHANE or 2-PACK ACRYLIC GLOSS TO 100 µm DFT.
- HDG75 / HDG150 / HDG225 ref. AS4680 FOR DESCRIPTION


STRUCTURAL STEEL - PROTECTIVE COATINGS (LINTELS):

STRUCTURAL STEEL MEMBERS (LINTELS)			
LOCATION	DURABILITY CLASS	TYPICAL DISTANCE	
		SURF COAST	SHELTERED COAST
EXTERNAL & INTERNAL	R1 & R2	>10Km	>1Km
	R3	1Km TO 10Km	100m TO 1Km
	R4	<1Km	<100m

STRUCTURAL STEEL MEMBERS (LINTELS)	
DURABILITY CLASS	MATERIAL OR PROTECTIVE REQUIREMENTS (ref. AS 2699.3)
R1 & R2	HDG - MIN. THICKNESS OF 300 g/m² or STAINLESS STEEL 316L
R3	HDG - MIN. THICKNESS OF 600 g/m² or STAINLESS STEEL 316L
R4	STAINLESS STEEL 316L or DUPLEX COATING (HDG + PAINT COATING) - ref. NOTE below

TABLE NOTES

- THIS TABLE - STRUCTURAL STEEL MEMBERS (LINTELS) THAT ARE BUILT INTO MASONRY WALLS - ref. AS2699.3:2020
- THIS TABLE INCLUDES A BASIC DESCRIPTION OF THE NECESSARY REQUIREMENTS, THE RELEVANT CURRENT AUSTRALIAN STANDARDS SHOULD BE REFERENCED FOR MORE DETAILED INFORMATION
- AS2699.3:2020 BUILT-IN COMPONENTS FOR MASONRY CONSTRUCTION, PART 3: LINTELS & SHELF ANGLES (DURABILITY REQUIREMENTS)
- ADDITIONAL DECORATIVE COATINGS CAN BE APPLIED, BUT NOT BE CONSIDERED AS PART TO SATISFYING THE REQUIREMENTS OF THIS TABLE.
- ANY LINTEL WITH A COATING THAT IS MODIFIED BY CUTTING, WELDING, OR WHERE DAMAGED, MUST HAVE THE COATING RESTORED TO PROVIDE AN EQUIVALENT LEVEL OF PROTECTION PROVIDED BY THE ORIGINAL COATING
- DUPLEX COATING: HDG + PAINT COATING - ref. AS4680 + AS2312.2
- HDG - HOT DIPPED GALVANISED
- R4 MATERIAL OR PROTECTIVE REQUIREMENTS - STANLESS STEEL 316L OR DUPLEX COATING (HOT DIP GALVANIZED PLUS PAINT COATING) CONSISTING OF AS/NZS 4680 HDG 600 (MINIMUM AVERAGE COATING THICKNESS = 85 µm) FOLLOWED BY SWEEP BLAST CLEANING & A PAINT COATING CONSISTING OF EITHER: a) 350 µm OF HIGH BUILD EPOXY PAINT TO AS/NZS 3750.14; OR b) 250 µm OF HIGH BUILD EPOXY PAINT TO AS/NZS 3750.14 FOLLOWED BY 100 µm OF POLYURETHANE TO AS/NZS 3750.6 OR 100 µm OF ACRYLIC GLOSS TO AS/NZS 3750.5

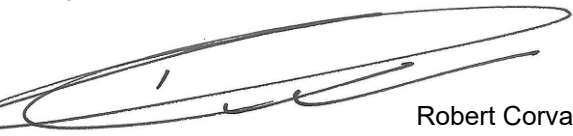3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	



www.civplex.com.au

ABN: 38 151 321 247

Mobile: 0411 864 076 Fax: (02) 9753 0112

Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: CONSTRUCTION NOTES - SHEET 3		SHEET: 3 of 10
CLIENT:	AAMIR SHAHZAD & NAEELAM SHAHZAD	SCALE:	DESIGNED BY: R.C.	DRAWN BY: D.M.B.
LOCATION:	LOT 4039 (No.6) BELMONT STREET, WILTON	JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3

NOTE:
IT IS A CONDITION OF CERTIFICATION OF THIS DESIGN THAT PIER HOLES & SLAB REINFORCEMENT BE INSPECTED PRIOR TO POURING OF CONCRETE BY AN ENGINEER FROM THIS OFFICE.

NOTE:
THIS SITE IS SALINITY AFFECTED. REFER TO 'MANDATORY REQUIREMENTS FOR SALINITY AFFECTS' NOTES ON THIS SHEET

NOTE:
AT PIER LOCATIONS, PROVIDE ADDITIONAL 1N12 (1500 LONG) - BOTH WAYS FIXED TO UNDERSIDE OF THE TOP FABRIC MESH.

MANDATORY REQUIREMENTS FOR SALINITY AFFECTS


Reference: LDC-25403
Date: 08/07/2026
Complying Development Certificate
George Lindie
Structural Engineer
No. 123456789

- THE FOLLOWING MEASURES MUST BE USED FOR HOUSE SLAB FOOTINGS & BRICKWORK:
- FOR SLAB ON GROUND CONSTRUCTION, A LAYER OF SAND AT LEAST 50mm DEEP UNDER THE SLAB MUST BE PROVIDED.
 - A HIGH IMPACT DAMP PROOF MEMBRANE (RATHER THAN A VAPOUR PROOF MEMBRANE) MUST BE LAID UNDER SLAB (NSW BCA 3.2.2.6).
 - THE DAMP PROOF MEMBRANE MUST EXTEND TO THE OUTSIDE FACE OF THE EXTERNAL EDGE BEAM UP TO THE FINISHED GROUND LEVEL.
 - CLASS 32MPa(N32) CONCRETE MUST BE USED OR A SULPHATE RESISTING. TYPE SR CEMENT WITH A WATER CEMENT RATIO OF 0.5 MUST BE USED.
 - WATER, WHICH WILL REDUCE THE CONCRETE STRENGTH BELOW 32MPa MUST NOT BE ADDED TO THE CONCRETE AT THE CONSTRUCTION SITE.
 - SLABS MUST BE VIBRATED AND CURED FOR A MINIMUM OF THREE DAYS. CARE MUST BE TAKEN NOT TO OVER VIBRATE THE CONCRETE DURING PLACEMENT, AS SEGREGATION OF THE CONCRETE AGGREGATES WILL OCCUR.
 - THE MINIMUM COVER TO REINFORCEMENT MUST BE 50mm FROM UNPROTECTED GROUND. CHAIRS INCLUDING LATERAL SUPPORTS SHOULD BE IN POSITION PRIOR TO INSPECTION AND SUBSEQUENTLY DURING POURING OF THE CONCRETE.
 - THE MINIMUM COVER TO REINFORCEMENT MUST 30mm FROM THE MEMBRANE IN CONTACT WITH THE GROUND.
 - THE MINIMUM COVER TO REINFORCEMENT MUST BE 50mm FOR STRIP FOOTINGS AND BEAMS IRRESPECTIVE OF WHETHER A DAMP PROOF MEMBRANE IS USED.
 - APPROVED ADMIXTURES FOR WATERPROOFING AND/ OR CORROSION PREVENTION MAY BE USED.
 - THE FOLLOWING MEASURES MUST BE USED FOR BRICKWORK:
 - THE DAMP PROOF COURSE MUST CONSIST OF POLYETHYLENE OR POLYETHYLENE COATED METAL AND BE CORRECTLY PLACED. (NSW BCA 3.3.4.4).
 - EXPOSURE CLASS MASONRY UNITS MUST BE USED BELOW THE DAMP PROOF COURSE LEVEL. (CLAUSE 3.3.1.5(b) AND TABLE 3.3.1.1 OF THE BCA).
 - APPROPRIATE MORTAR AND MIXING RATIO MUST BE USED WITH EXPOSURE CLASS MASONRY UNITS. (CLAUSE 3.3.1.6 OF THE BCA).
 - APPROVED ADMIXTURES FOR WATERPROOFING AND/ OR CORROSION PREVENTION MAY BE USED.

"EFFECTS OF TREES + 'ABNORMAL' FOUNDATION MOISTURE CONDITIONS"

THIS SLAB LAYOUT DESIGN DOES NOT INCLUDE THE EFFECTS OF PREVIOUS, EXISTING OR FUTURE TREES, THEREFORE, IF ANY TREES WERE REMOVED OR ARE PRESENT WITHIN THE VICINITY OF THIS PROPOSED RESIDENCE OR ARE CONSIDERED FOR FUTURE PLANTING, THE DESIGN ENGINEER MUST BE ADVISED FOR RE-CONSIDERATION OF THIS DESIGN. ALSO, THIS SLAB LAYOUT DESIGN DOES NOT ACCOMMODATE GROUND MOVEMENTS GENERATED BY "ABNORMAL" FOUNDATION MOISTURE CONDITIONS. FOR A BETTER UNDERSTANDING OF THESE REQUIREMENTS, THE BUILDERS/OWNERS ATTENTION IS DRAWN TO:

- APPENDIX CH OF AS2870-2011 "GUIDE TO DESIGN OF FOOTINGS FOR TREES.
- APPENDIX B OF AS2870-2011 "PERFORMANCE REQUIREMENTS AND FOUNDATION MAINTENANCE"
- CSIRO PAMPHLET "GUIDE TO HOME OWNERS ON FOUNDATION MAINTENANCE AND FOOTING PERFORMANCE".

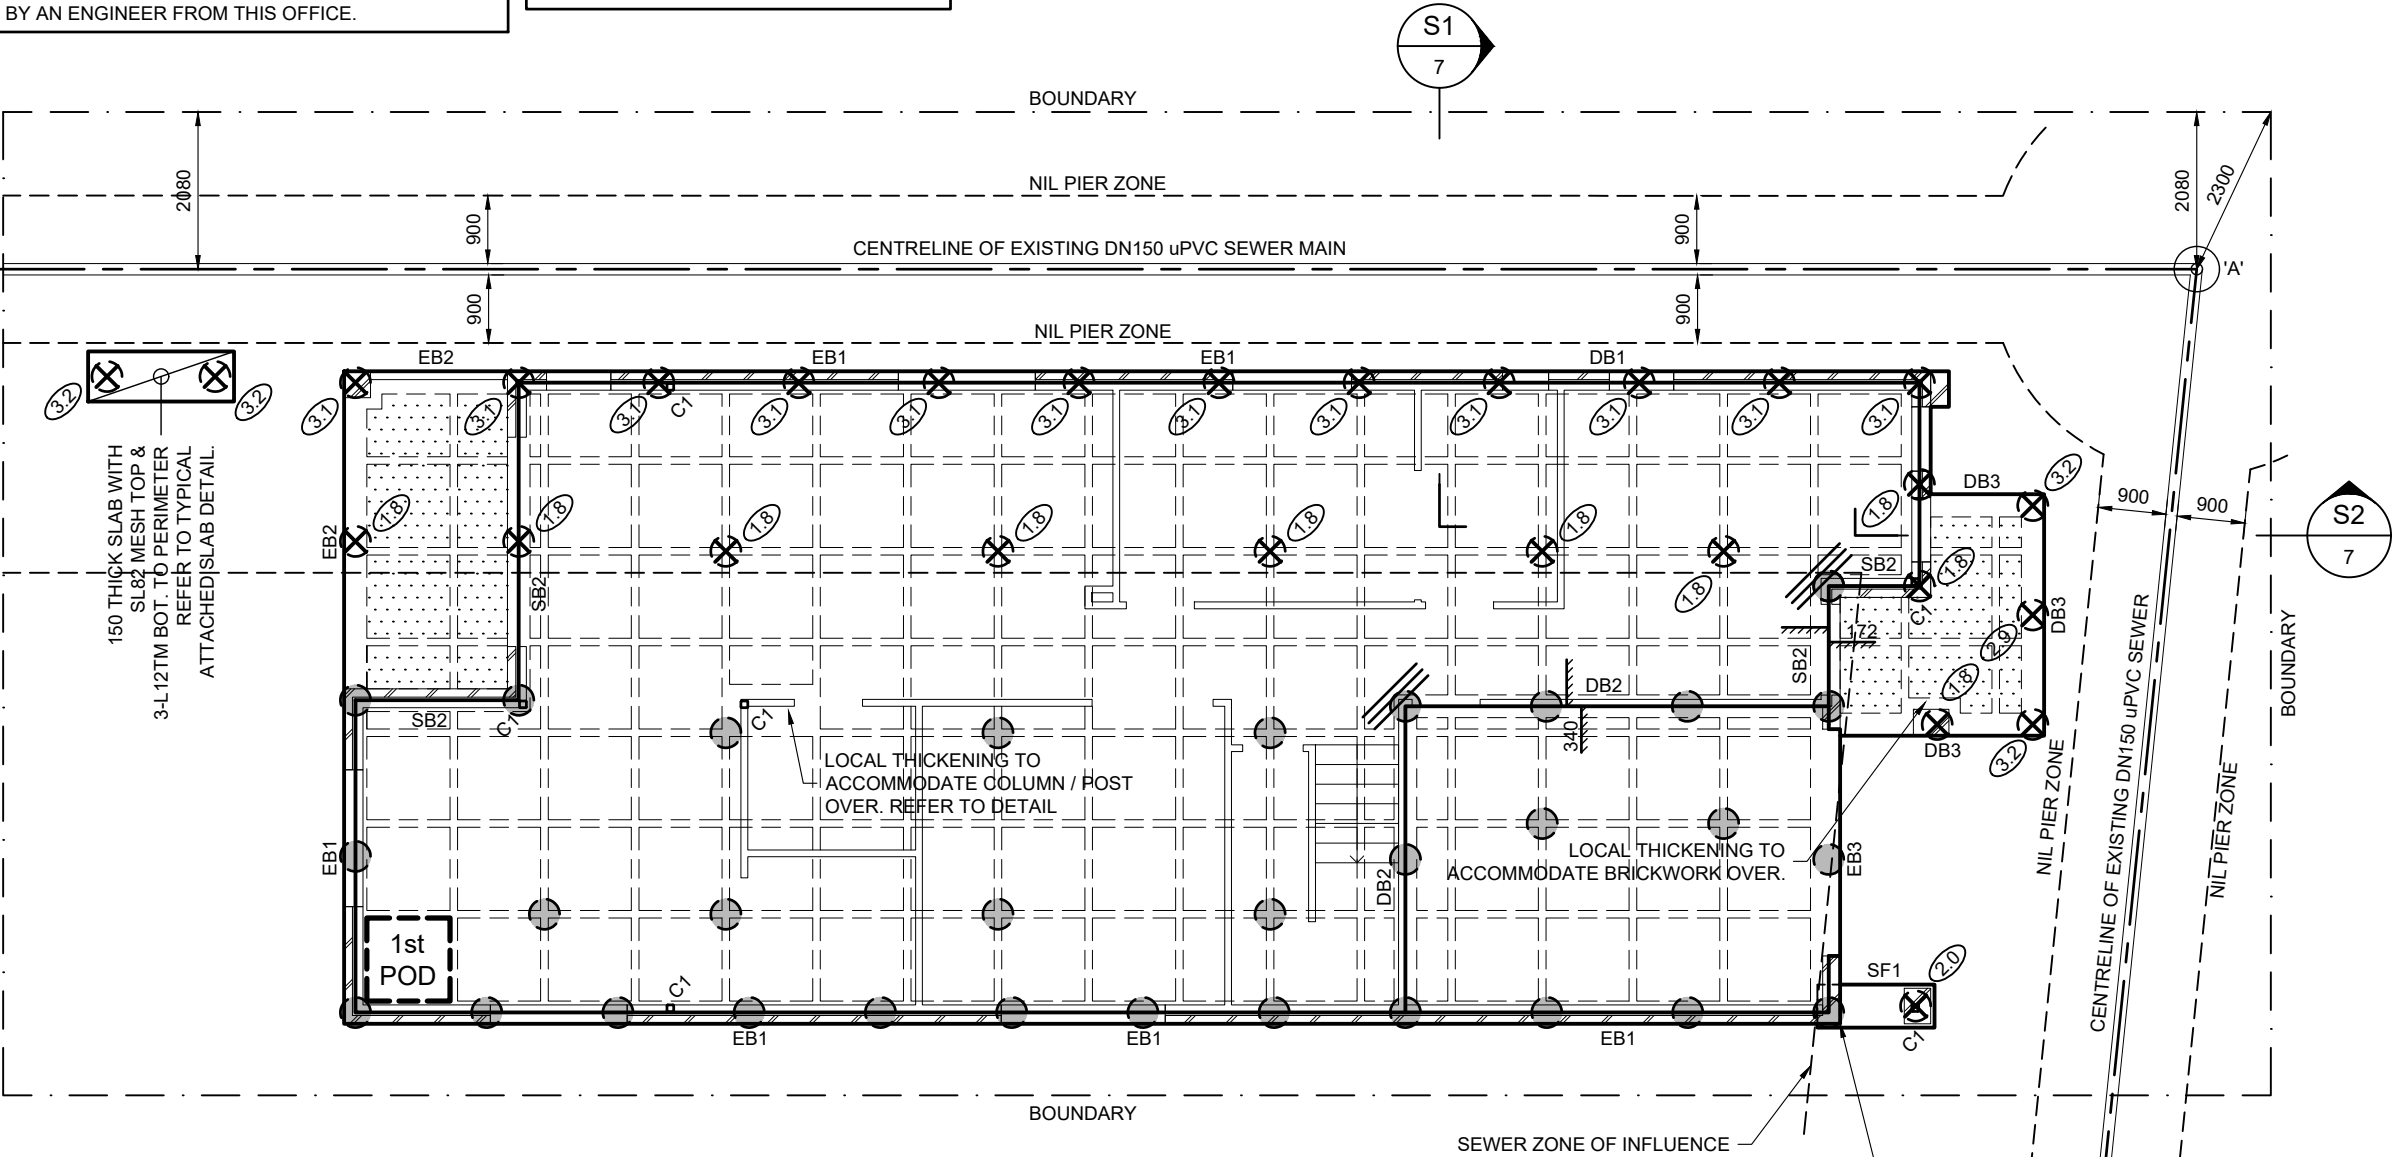

GROUND WAFFLE POD SLAB LAYOUT PLAN


SCALE 1:100
225mm / 300mm DEEP PODS U.N.O. + SLAB THICKNESS = 85mm
SL82 TOP MESH (20 COVER)
CONCRETE STRENGTH $f_c = 32 \text{ MPa}$ MINIMUM AT 28 DAYS U.N.O.

LEGEND

- 3N12-2000 LONG TIED UNDER TOP MESH.
- DENOTES LOCATION OF **300 DEEP PODS**.
POD SIZE: 1090 x 1090 (CUT PODS AS REQUIRED)
- DENOTES LOCATION OF **225 DEEP PODS**.
POD SIZE: 1090 x 1090 (CUT PODS AS REQUIRED)
- DENOTES **400 DIA.** MASS CONCRETE PIERS (250 kPa BEARING CAPACITY) TO UNIFORM BEARING ON NATURAL STRATA THROUGHOUT. PIERS: **1.8m** MIN. DEEP (OR ROCK - WHICHEVER IS LESSER).
- DENOTES **400 DIA.** CONC. PIERS ADJACENT SEWER (**250 kPa** BEARING CAPACITY) TO UNIFORM BEARING ON NATURAL STRATA THROUGHOUT. MIN. PIER DEPTH NOTED ON PLAN.

FOUNDATION TABLE	
SITE CLASSIFICATION:	CLASS 'P'
SLAB DESIGN:	CLASS 'M'
GEO-TECH:	IDEAL GEOTECH
REPORT NUMBER:	16033-84937
REPORT DATE:	18/02/2026
WIND CLASSIFICATION:	'N2' W33N (TBC BY BUILDER)

SEWER NOTE:
THE SEWER LOCATION & DEPTH IS IN ACCORDANCE WITH SERVICE PROTECTION REPORT BY SYDNEY WATER
- CASE No. 202481WW - DATED 16/07/2024 and
- CASE No. 202484WW - DATED 20/06/2025
- SEWER MANHOLE AT 'A' - 2.74m TO INVERT
- EXISTING SEWER MAINS: DN150 u.P.V.C.

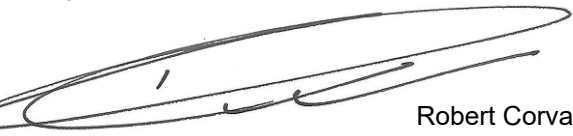
3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	

Civplex
Structural Engineers Pty Ltd
www.civplex.com.au
ABN: 38 151 321 247
Mobile: 0411 864 076 Fax: (02) 9753 0112
Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: GROUND SLAB LAYOUT PLAN		SHEET: 4 of 10	
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD		SCALE: 1:100 U.N.O.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.	
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON		JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3	


NOTE:
AT PIER LOCATIONS, PROVIDE ADDITIONAL 1N12 (1500 LONG) -
BOTH WAYS FIXED TO UNDERSIDE OF THE TOP FABRIC MESH.

Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BDC2729
Liability limited by a scheme approved under Professional Standards Legislation.

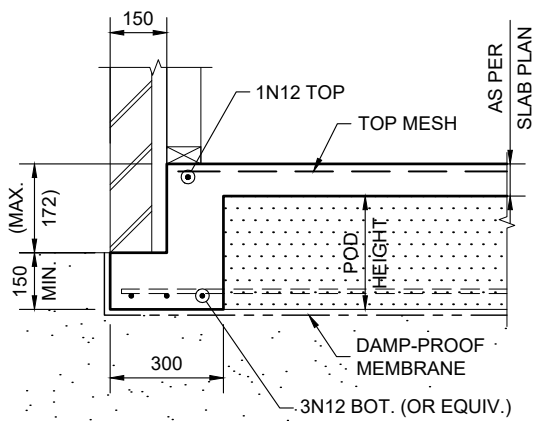


EDGE BEAM 'EB1'

1:20
ALTERNATIVELY REFER TO 'DB1' FOR DETAILS

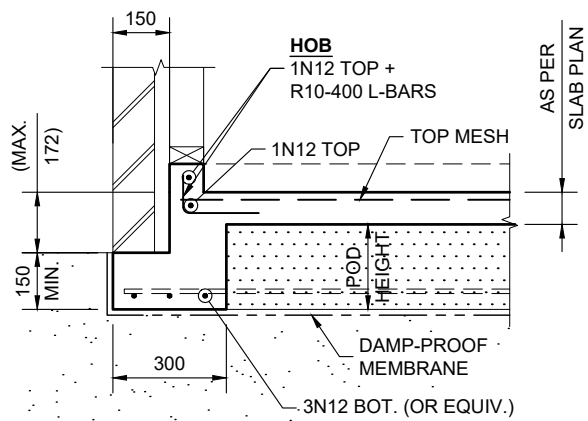


EDGE BEAM 'EB1' + HOB

1:20

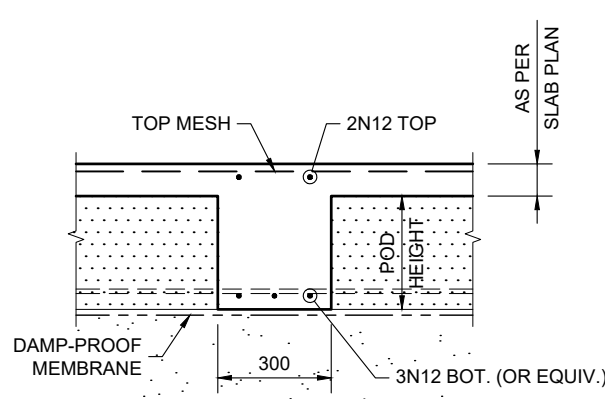


STIFFENING BEAM 'SB1'

1:20

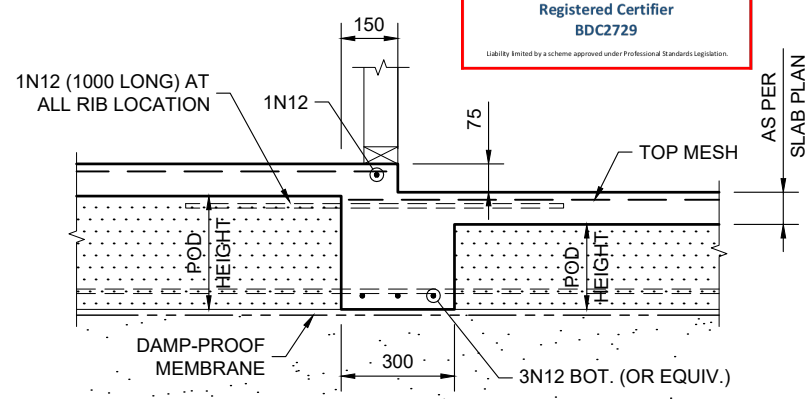


STIFFENING BEAM 'SB2'

1:20

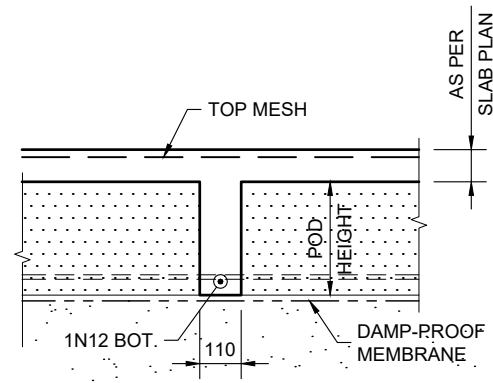


STIFFENING RIB

1:20

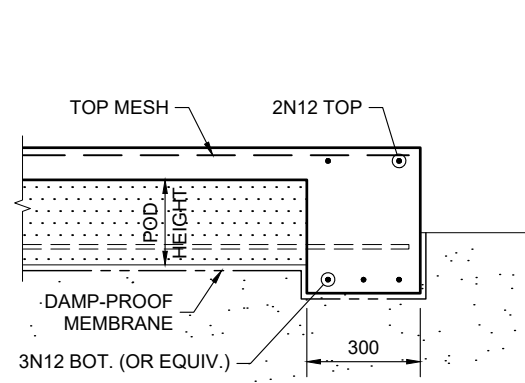


EDGE BEAM 'EB2'

1:20
ALTERNATIVELY REFER TO 'DB3' FOR DETAILS

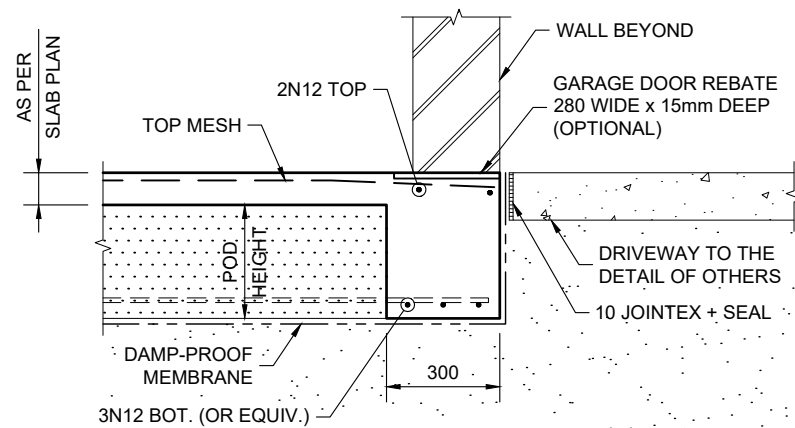


EDGE BEAM 'EB3'

1:20

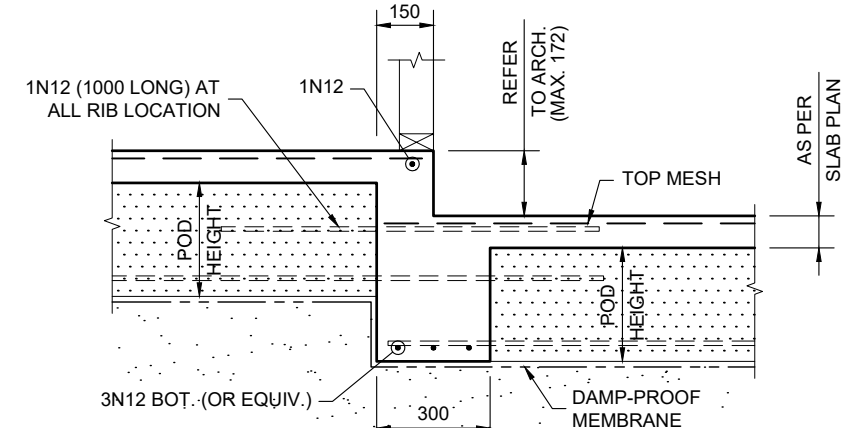


STIFFENING BEAM 'SB3'

1:20
ALTERNATIVELY REFER TO 'DB2' FOR DETAILS

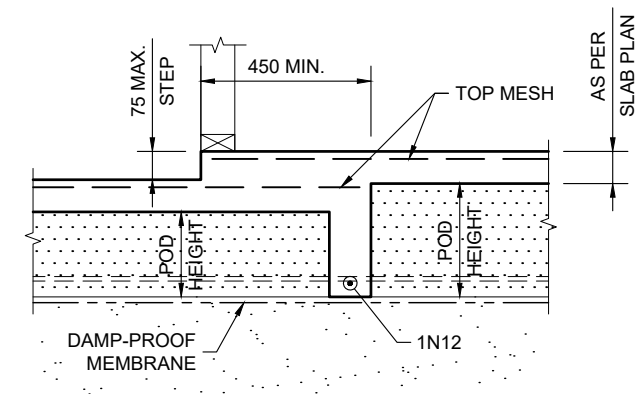


WET AREA - STEP DETAIL 1

1:20

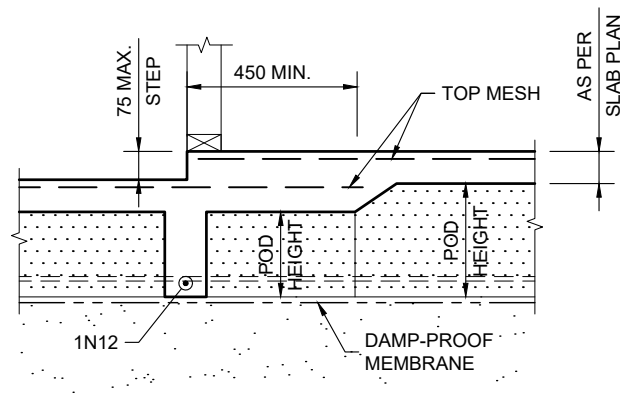


WET AREA - STEP DETAIL 2

1:20

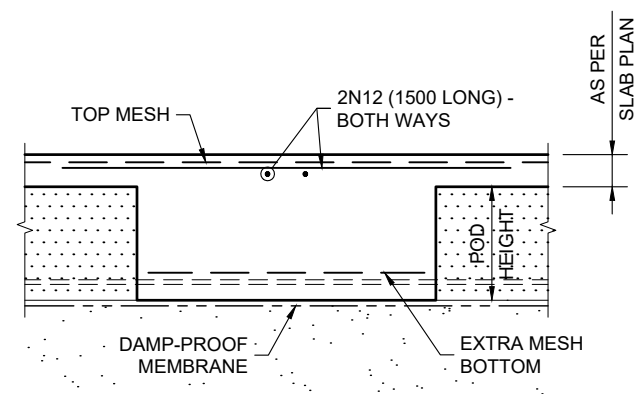


LOCAL THICKENING DETAIL

1:20

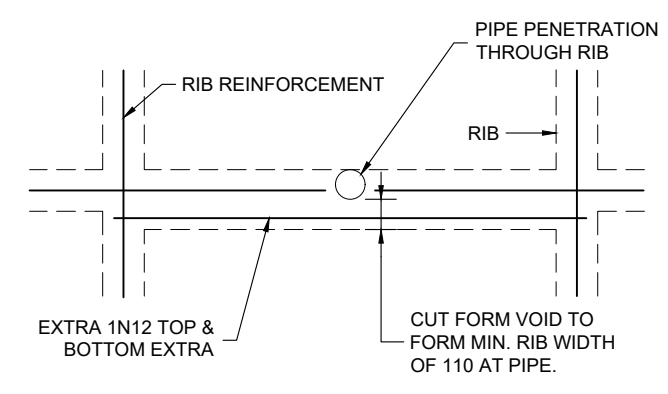


PIPE PENETRATION THROUGH RIB

1:20

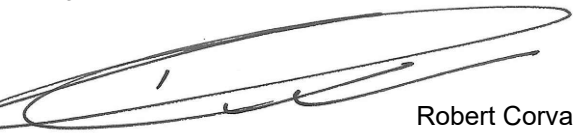
3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	
ISSUE	DESCRIPTION	DATE	

Civplex
Structural Engineers Pty Ltd
www.civplex.com.au
ABN: 38 151 321 247
Mobile: 0411 864 076 Fax: (02) 9753 0112
Email: admin@civplex.com.au


PROPOSED RESIDENCE		TITLE: GROUND DETAILS SHEET 1		SHEET: 5 of 10
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD		SCALE: 1:20 U.N.O.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON		JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3

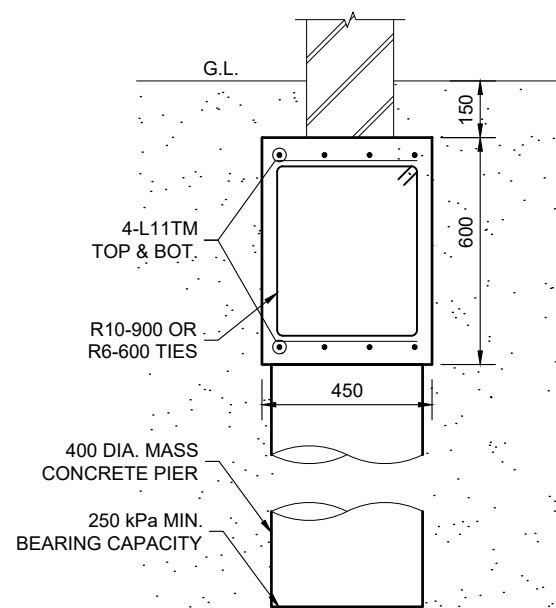

STRIP FOOTING - 'SF1'
1:20

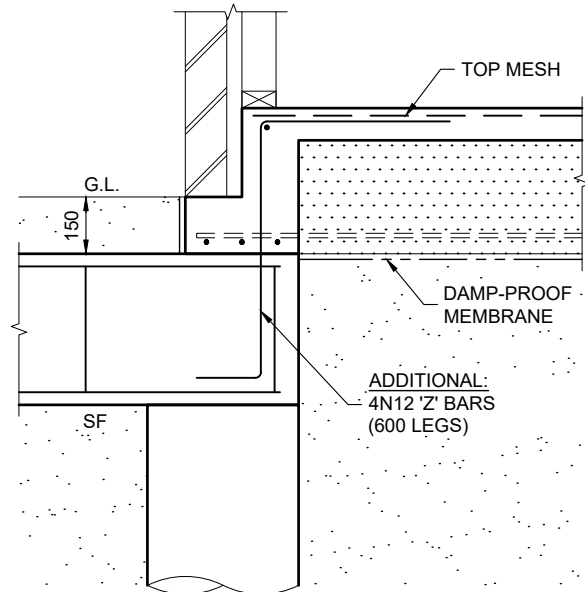

TYPICAL STRIP FOOTING & EDGE BEAM CONNECTION
1:20

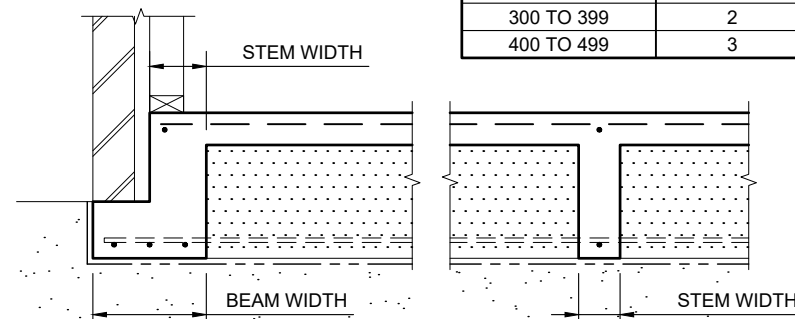


ADDITIONAL STEEL FOR EDGE & INTERNAL BEAMS
1:20


ADDITIONAL STEEL FOR EDGE & INTERNAL BEAMS		
STEM WIDTH OR BEAM WIDTH	TOP STEEL (No. N12 BARS)	BTM STEEL (No. N12 BARS)
110 TO 199	0	1
200 TO 299	1	2
300 TO 399	2	3
400 TO 499	3	4

PROVIDE 2N12 'L' BARS 600 LEGS TO ALL CORNERS. IF TRENCH MESH IS USED 1N12 (EXTERNAL) ONLY.


RIB REINFORCEMENT TO LAP OVER EDGE REINFORCEMENT. TYPICAL.

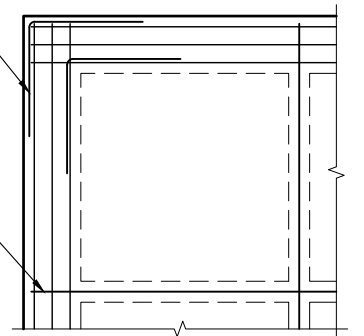

WAFFLE POD LAP DETAILS
1:20

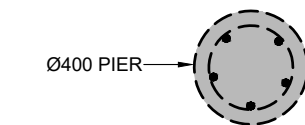


PLAN


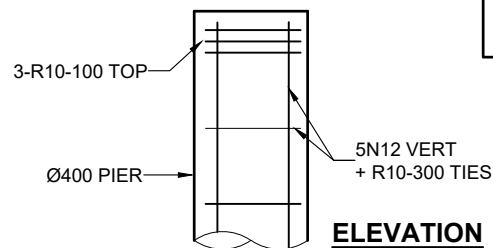


ELEVATION



IMPORTANT NOTE:
IF PIERS EXCEED 4.0m CONTACT STRUCTURAL ENGINEER FOR ADVICE.

REINFORCEMENT DETAIL FOR Ø400 PIERS EXCEEDING 2500mm DEPTH N.T.S.

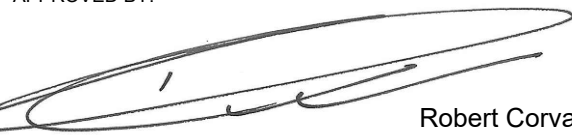3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust	Civplex <i>Structural Engineers Pty Ltd</i> www.civplex.com.au ABN: 38 151 321 247 Mobile: 0411 864 076 Fax: (02) 9753 0112 Email: admin@civplex.com.au	PROPOSED RESIDENCE		TITLE: GROUND DETAILS SHEET 2		SHEET: 6 of 10	
2	ISSUED FOR CONSTRUCTION	07.05.26			CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD	SCALE: 1:20 U.N.O.		DESIGNED BY: R.C.	DRAWN BY: D.M.B.	
1	ISSUED FOR CONSTRUCTION	16.04.26			LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON		JOB NUMBER: 26-0226-04		ISSUE: 3	SHEET SIZE: A3
0	ISSUED FOR CONSTRUCTION	21.03.26								
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD							
ISSUE	DESCRIPTION	DATE								

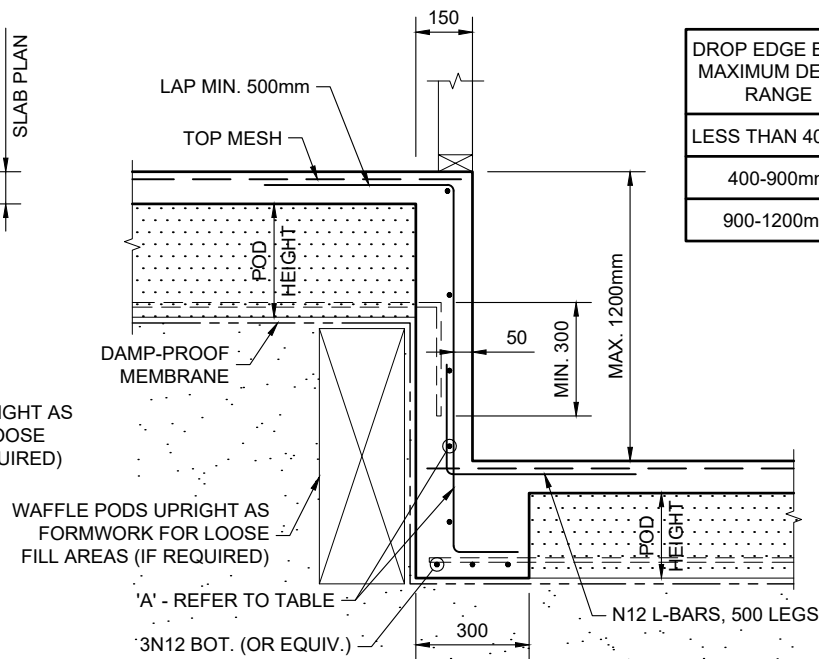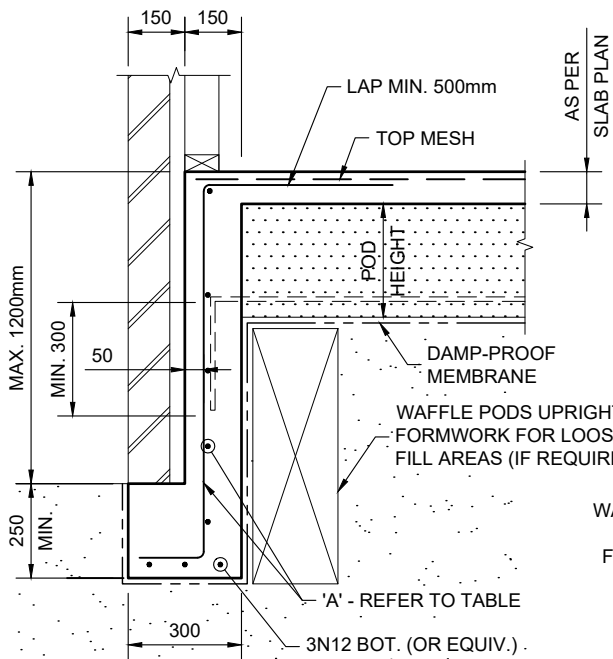

DROP EDGE BEAM MAXIMUM DEPTH RANGE	'A'	
	HORIZONTAL	VERTICAL
LESS THAN 400mm	1N12	N12-900 CTS
400-900mm	N12-300 CTS	N12-300 CTS
900-1200mm	N12-200 CTS	N12-200 CTS

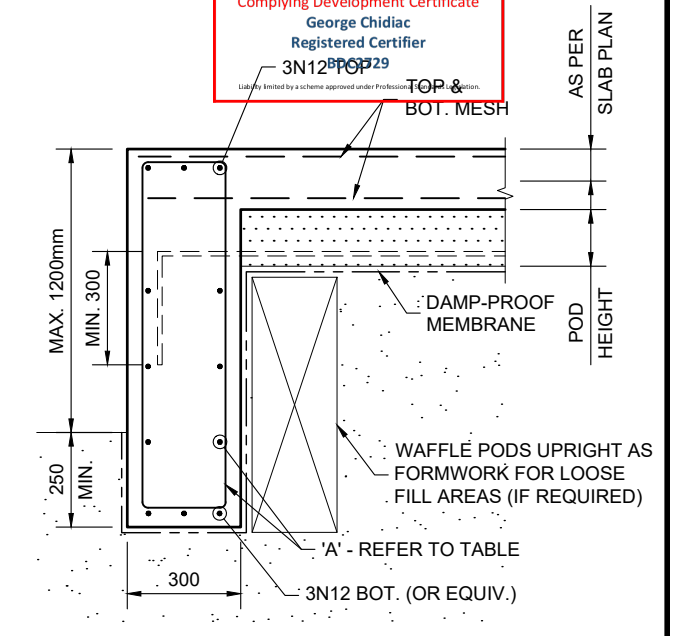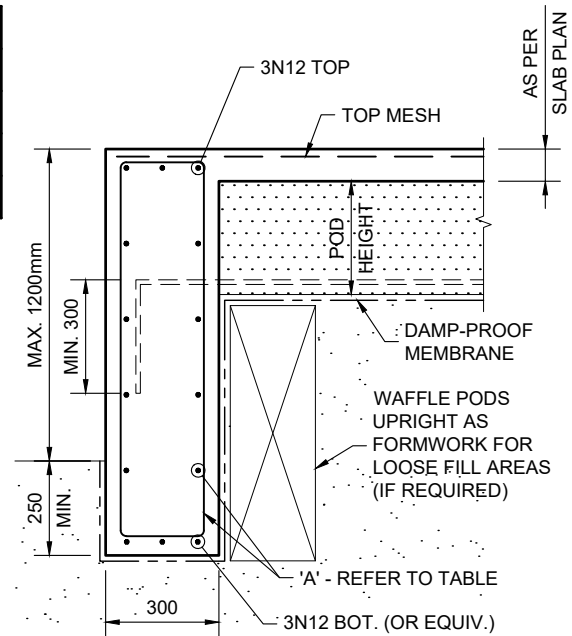


Keystone Building Certifiers
Reference: CDC-25403
Date: 08/07/2026
Complying Development Certificate
George Chidiac
Registered Certifier
BPC 1729
Limited by a scheme approved under Professional Regulation Act 2002

'EXTERNAL' DROP BEAM - 'DB1'
1:20


'INTERNAL' DROP BEAM - 'DB2'
1:20

'EXTERNAL' DROP BEAM - 'DB3'
1:20


'EXTERNAL' DROP BEAM - 'DB4'
1:20

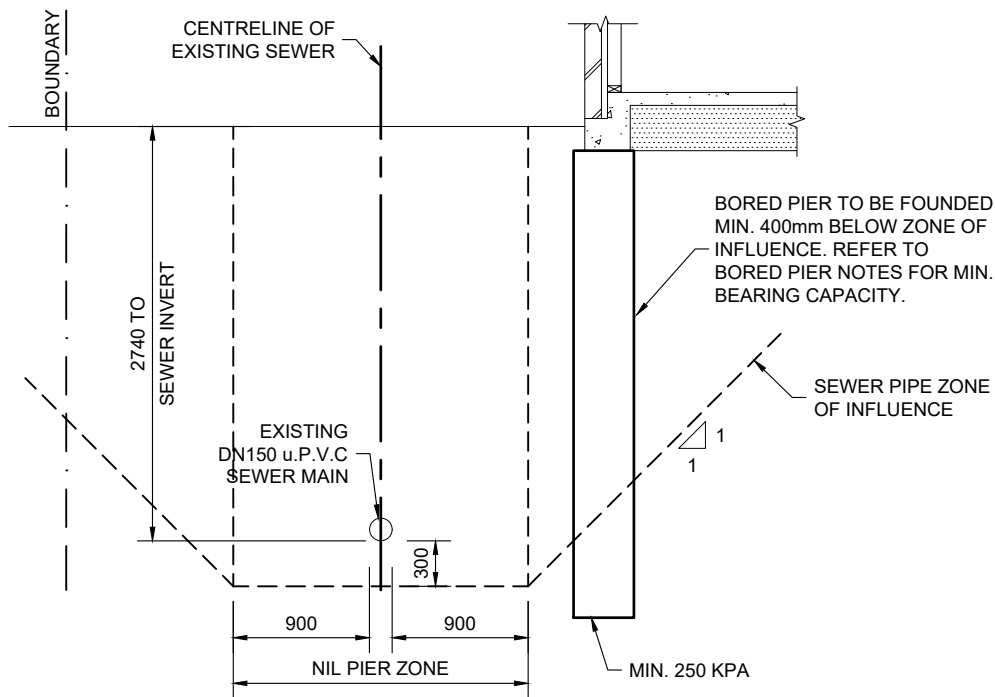

SECTION S1
1:50

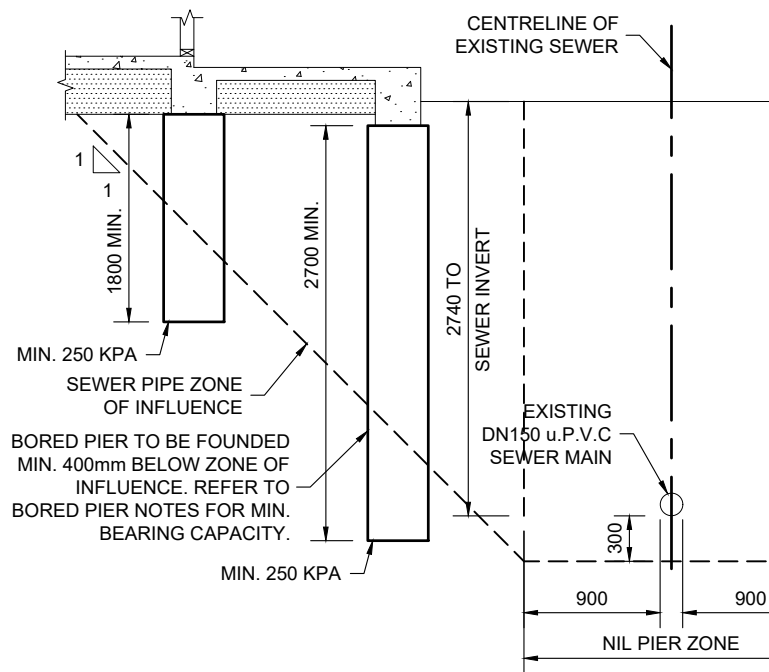

SECTION S2
1:50

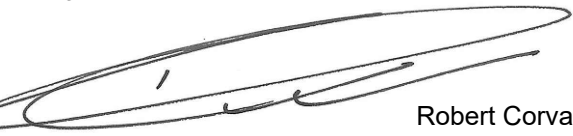3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	

www.civplex.com.au

Civplex

Structural Engineers Pty Ltd

ABN: 38 151 321 247

Mobile: 0411 864 076 Fax: (02) 9753 0112

Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: GROUND DETAILS SHEET 3		SHEET: 7 of 10
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD	SCALE: 1:20 U.N.O.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.	
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON	JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3	

NOTE:
IT IS A CONDITION OF CERTIFICATION OF THIS DESIGN THAT THE STRUCTURAL STEEL BE INSPECTED PRIOR TO SHEETING BY AN ENGINEER FROM THIS OFFICE.

IMPORTANT NOTE:
THIS DESIGN CONSIDERS THE USE OF PRE-FABRICATED WALL & ROOF TRUSSES.
ALL BRACING TO THE DETAILS OF THE TRUSS FABRICATOR.

STEEL PROTECTION INFORMATION

STRUCTURAL STEEL MEMBERS THAT ARE NOT BUILT IN TO A MASONRY WALL (AS4312-2008)	ENVIRONMENTAL EXPOSURE CLASS	INTERNAL	C1
STRUCTURAL STEEL MEMBERS THAT ARE BUILT IN TO A MASONRY WALL (AS4312-2008)	DURABILITY CLASS	EXTERNAL	R1 & R2
REFER TO PROTECTIVE COATING SPECIFICATION TABLES IN CONSTRUCTION NOTES			


IMPORTANT NOTE:
STRUCTURAL STEEL SUPPLIER TO PROVIDE CERTIFICATION THAT PROTECTIVE COATINGS TO ALL STRUCTURAL STEEL BEAMS + SUPPORT POSTS ARE IN ACCORDANCE WITH THE RECOMMENDATIONS OF THESE STRUCTURAL PLANS AND THE REQUIREMENTS OF THE CURRENT RELEVANT AUSTRALIAN STANDARDS AND NCC.

IMPORTANT NOTE:
TIMBER FRAMING AND BRACING TO VOID AREA TO TRUSS MANUFACTURERS DETAILS

NOTE:
350x470 BRICK PIER
B2 SUPPORTED
ON BRICK PIER

IMPORTANT NOTE:
BUILDER TO ENSURE NIL GROUND FLOOR ROOF LOAD ON B6/B7

FIRST FLOOR MARKING PLAN
SCALE 1:100

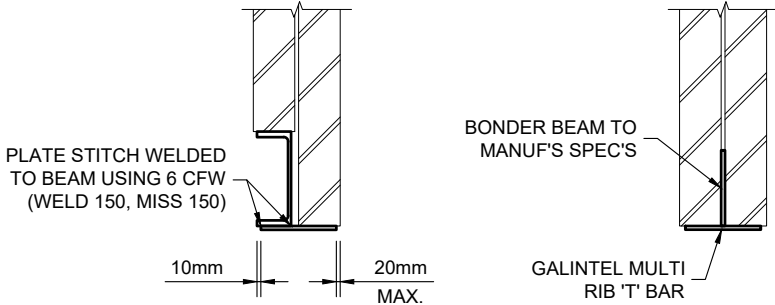


DETAIL 'A'
1:20

DETAIL 'B'
1:20

STRUCTURAL MEMBER SCHEDULE

MEMBER	SIZE	COMMENTS
FJ1	300 DEEP ENGINEERED FLOOR JOISTS	TO MANUF'S SPEC'S
FJ2	200 DEEP ENGINEERED FLOOR JOISTS	TO MANUF'S SPEC'S
TB	STRUCTURAL TIMBER BEAM	TO MANUF'S SPEC'S
B1	200 x 200 x 10 GALINTEL 'T' BAR TO MANUF'S SPEC'S (MIN. 5 BRICK COURSES)	150mm END BEARING + DETAIL 'B'
B2	250 PFC + 10 PL.	150mm END BEARING + DETAIL 'A'
B3	200 x 200 x 7 GALINTEL 'T' BAR TO MANUF'S SPEC'S (MIN. 5 BRICK COURSES)	150mm END BEARING + DETAIL 'B'
B4	REMOVED	-
B5	310 UB 32.0	-
B6	250 UB 25.7	-
B7	250 UB 25.7	-
C1	75 x 75 x 4.0 SHS < 2.7m HIGH 2.7m HIGH < 89 x 89 x 5.0 SHS < 3.3m HIGH 3.3m < CONSULT ENGINEER	- - -
C2	89 x 89 x 6.0 SHS	-

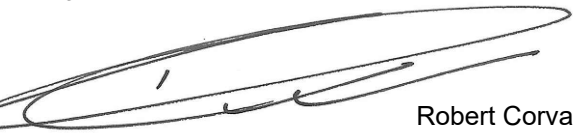3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	


Civplex
Structural Engineers Pty Ltd
www.civplex.com.au
ABN: 38 151 321 247
Mobile: 0411 864 076 Fax: (02) 9753 0112
Email: admin@civplex.com.au

PROPOSED RESIDENCE


CLIENT:
AAMIR SHAHZAD & NAEELAM SHAHZAD

LOCATION:
LOT 4039 (No.6) BELMONT STREET,
WILTON


TITLE: FIRST FLOOR MARKING PLAN	SHEET: 8 of 10
SCALE: 1:100 U.N.O.	DESIGNED BY: R.C.
JOB NUMBER: 26-0226-04	ISSUE: 3
	SHEET SIZE: A3

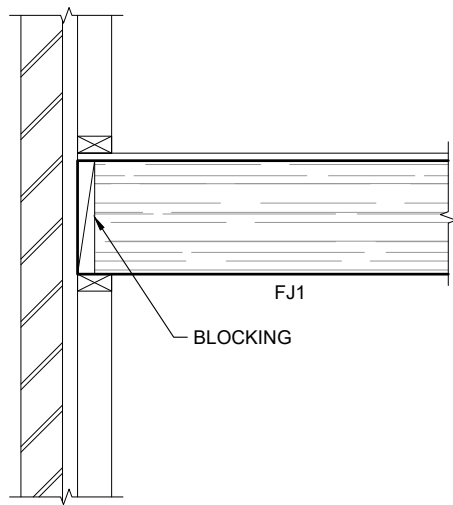


SECTION 1
1:20

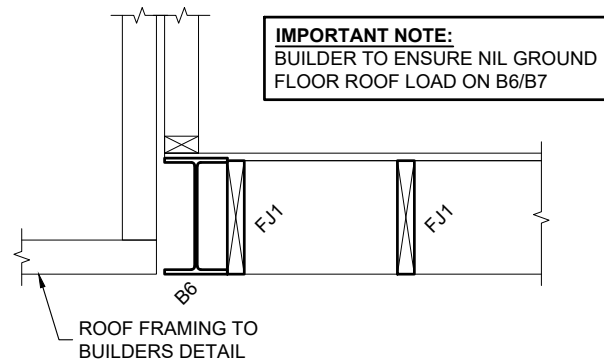


SECTION 2
1:20

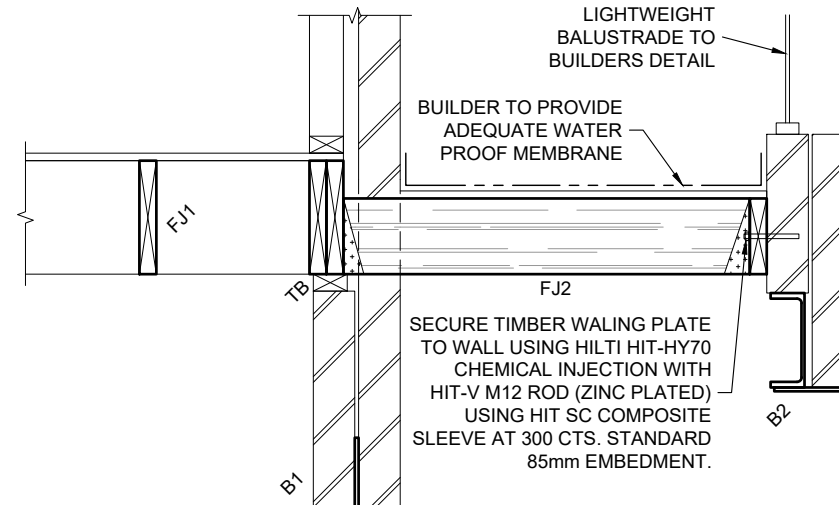



SECTION 3
1:20

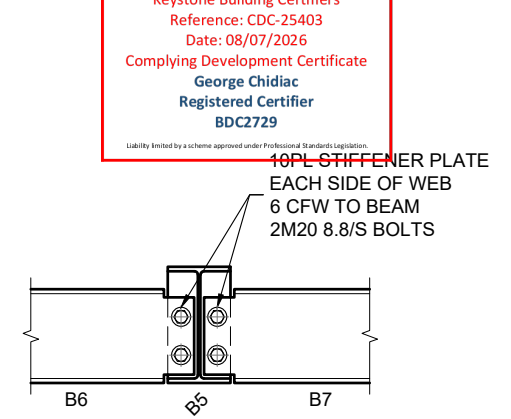


DETAIL D1
1:20

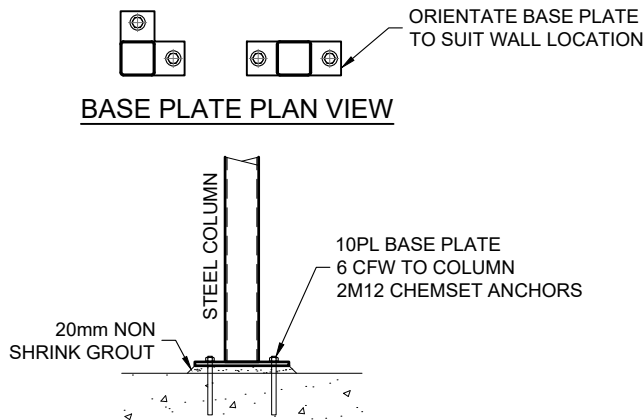


TYPICAL COLUMN BASE DETAIL
1:20

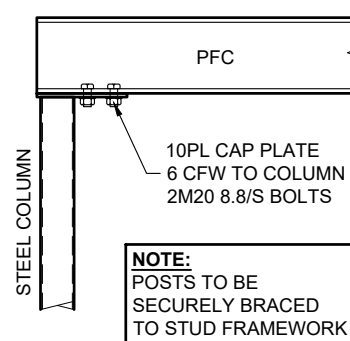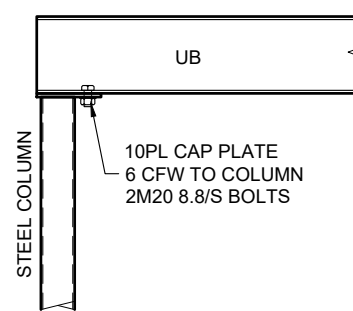


NOTE:
POSTS TO BE
SECURELY BRACED
TO STUD FRAMEWORK

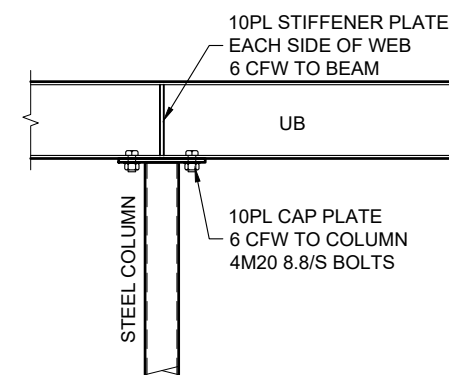

TYPICAL COLUMN CAP DETAILS
SCALE 1:20
BEAMS TO BE LOCATED CENTRALLY OVER COLUMN TYPICAL
ALTERNATIVELY SITE WELD USING 6 CFW ALL ROUND

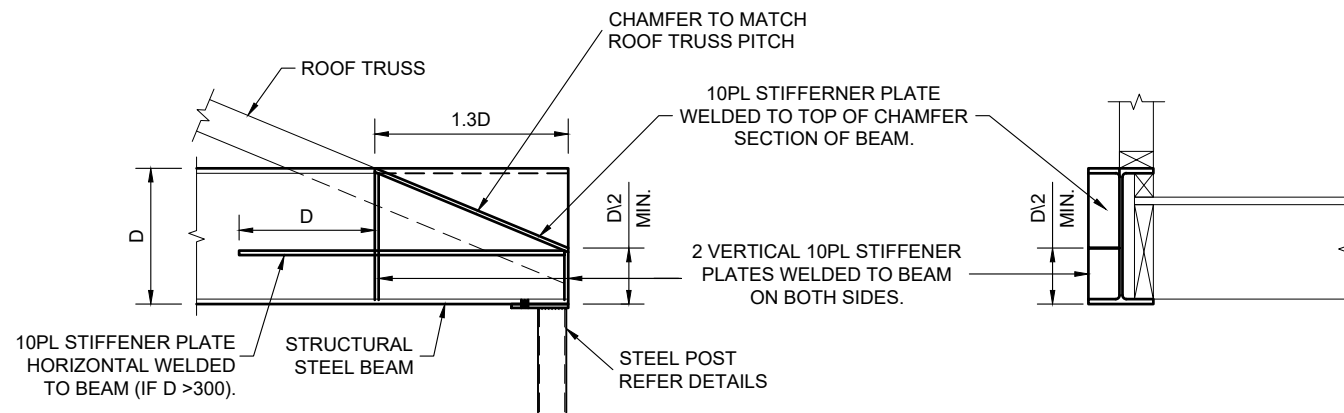

TYPICAL END DETAIL FOR HALF FLANGE TAPER
1:20

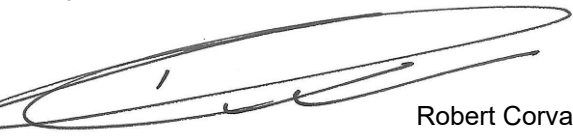3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	

www.civplex.com.au

Civplex


Structural Engineers Pty Ltd

ABN: 38 151 321 247

Mobile: 0411 864 076 Fax: (02) 9753 0112


Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: FIRST FLOOR DETAILS SHEET 1		SHEET: 9 of 10
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD		SCALE: 1:20 U.N.O.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON		JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3

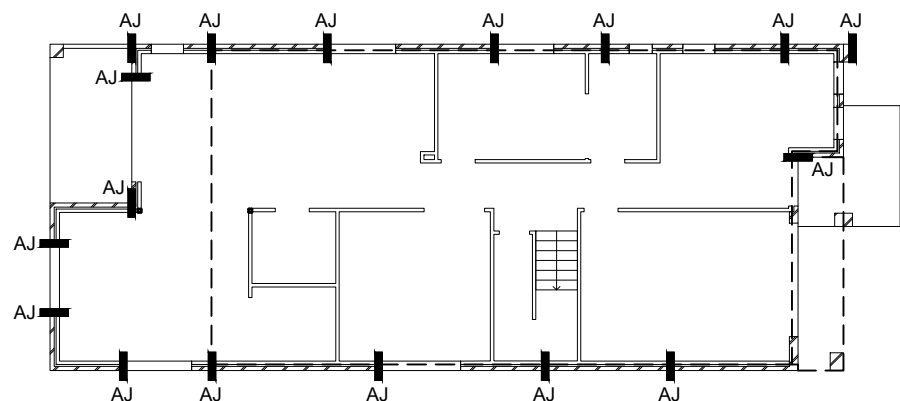

GROUND FLOOR VERTICAL ARTICULATION JOINTS LAYOUT PLAN

SCALE 1:200

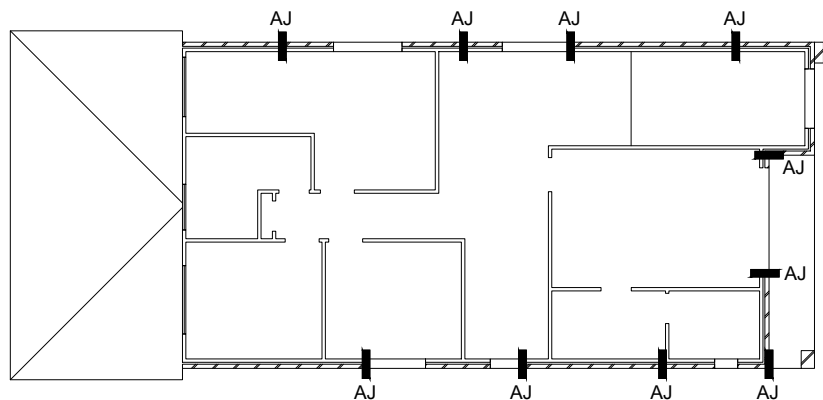

FIRST FLOOR VERTICAL ARTICULATION JOINTS LAYOUT PLAN


SCALE 1:200

NOTES:

1. AJ DENOTES APPROX. LOCATION OF VERTICAL ARTICULATION JOINT. EXACT POSITION MUST BE DETERMINED BY BUILDER ON SITE. LOCATION MUST CONSIDER WATER PROOFING, TERMITE PROTECTION & OVERALL AESTHETICS.
2. VERTICAL ARTICULATION JOINTS TO COMPLY WITH PART 3.3.1.8 OF THE BUILDING CODE OF AUSTRALIA


VERTICAL ARTICULATION JOINT DETAILS CONSTRUCTION NOTES

1. ARTICULATION JOINTS MUST HAVE A WIDTH NO LESS THAN 10mm
2. MASTIC SEALANT IS OPTIONAL IN CAVITY BRICK CONSTRUCTION, HOWEVER, IS RECOMMENDED
- 3- FLEXIBLE MASONRY ANCHORS MUST BE BUILT IN AT EVERY FOURTH (4TH) COURSE
- 4- ARTICULATION JOINTS MUST BE PROVIDE
 - A- AT NO MORE THAN 6m CENTERS IN STRAIGHT, CONTINUOUS WALLS HAVING NO OPENINGS
 - B- AT THE POSITION WHERE THE WALL HEIGHT CHANGES BY MORE THAN 20%
 - C- AT NO MORE THAN 5m CENTERS, WHERE OPENINGS GREATER THAN 900x900 OCCUR
 - D- WHERE WALLS CHANGE IN THICKNESS
 - E- AT CONTROL OR CONSTRUCTION JOINTS IN FOOTINGS/ SLAB
 - F- AT JUNCTIONS OF WALLS CONSTRUCTED OF DIFFERENT MASONRY MATERIALS
- 5- FOR SINGLE LEAF MASONRY WALLS STABILIZED WITH RETURN WALLS, OR ENGAGED PIERS, ANY ARTICULATION JOINTS MUST BE WITHIN 300mm OF THE VERTICAL SUPPORT ELEMENT THESE JOINTS MUST BE SEALED WITH A FLEXIBLE, COMPRESSIBLE MATERIAL

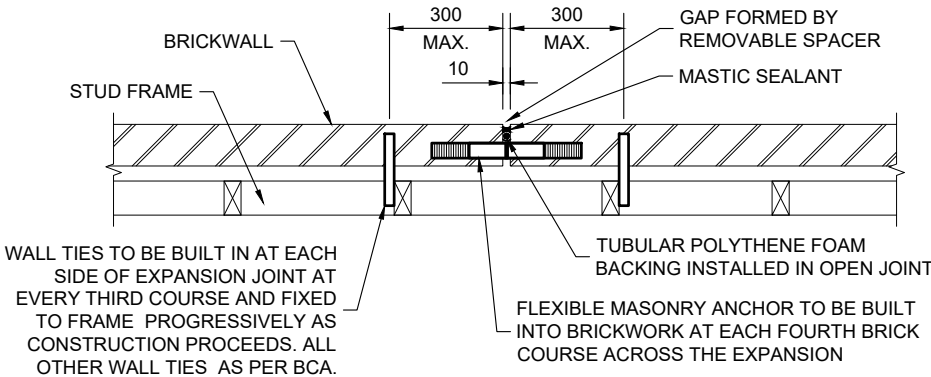


BRICK VENEER WALL EXPANSION JOINT DETAIL

REFER TO PLAN FOR LOCATIONS

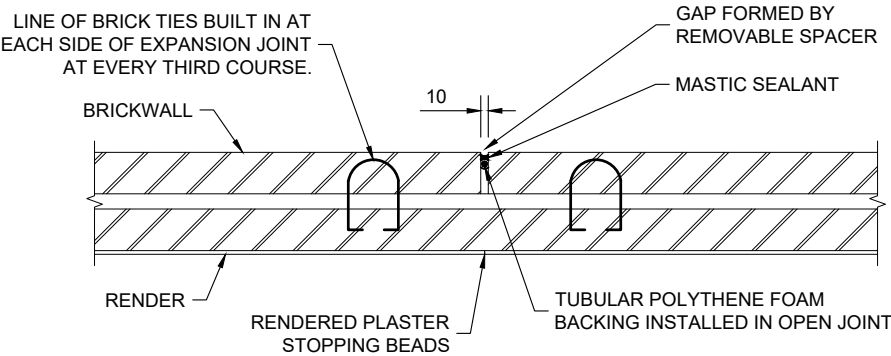


CAVITY BRICK WALL EXPANSION JOINT DETAIL

REFER TO PLAN FOR LOCATIONS

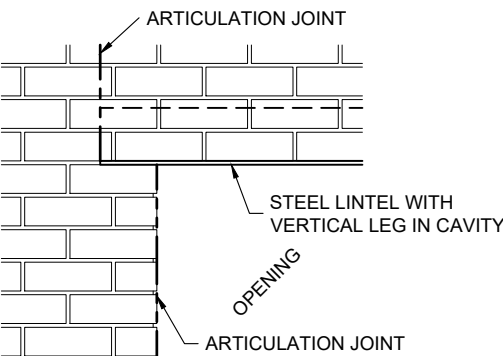

ARTICULATION JOINT OFFSET TO END OF STEEL (OR OTHER) LINTEL OVER OPENING

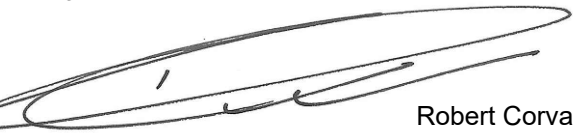3	ISSUED FOR CONSTRUCTION	21.05.26	APPROVED BY:  Robert Corvaia BE (Civil) MIE Aust
2	ISSUED FOR CONSTRUCTION	07.05.26	
1	ISSUED FOR CONSTRUCTION	16.04.26	
0	ISSUED FOR CONSTRUCTION	21.03.26	
A	ISSUED FOR REVIEW	15.03.26	COPYRIGHT. THE DESIGN AND DETAILS CONTAINED ON THIS DRAWING ARE SUPPLIED IN CONFIDENCE. THEY ARE NOT TO BE USED FOR ANY OTHER PURPOSE EXCEPT THAT AUTHORISED BY CIVPLEX - STRUCTURAL ENGINEER'S PTY LTD
ISSUE	DESCRIPTION	DATE	



Civplex
Structural Engineers Pty Ltd

www.civplex.com.au

ABN: 38 151 321 247

Mobile: 0411 864 076 Fax: (02) 9753 0112

Email: admin@civplex.com.au

PROPOSED RESIDENCE		TITLE: ARTICULATION JOINTS PLAN		SHEET: 10 of 10
CLIENT: AAMIR SHAHZAD & NAEELAM SHAHZAD		SCALE: 1:200 U.N.O.	DESIGNED BY: R.C.	DRAWN BY: D.M.B.
LOCATION: LOT 4039 (No.6) BELMONT STREET, WILTON		JOB NUMBER: 26-0226-04	ISSUE: 3	SHEET SIZE: A3