

GENERAL

- G1 THESE DRAWINGS ARE INCLUDED IN THE 'PARTICULAR OF WORKS' FOR INFORMATION PURPOSES ONLY. THEY ARE DIAGRAMMATIC ONLY.
- G2 STRUCTURAL DRAWINGS SHALL BE READ IN CONJUNCTION WITH THE SPECIFICATION, ARCHITECTURAL, CIVIL & RELEVANT ENGINEERING SERVICES DOCUMENTS AND WITH OTHER SUCH WRITTEN INSTRUCTIONS AS MAY BE ISSUED.
- G3 ALL DIMENSIONS SHOWN SHALL BE VERIFIED ON SITE. ENGINEERS DRAWINGS MUST NOT BE SCALED.
- G4 DURING CONSTRUCTION THE STRUCTURE SHALL BE MAINTAINED IN A STABLE CONDITION & NO PART SHALL BE OVERSTRESSED.
- G5 ALL MATERIALS & WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE SPECIFICATION.
- G6 UNLESS OTHERWISE NOTED ALL LEVELS ARE IN METRES & ALL DIMENSIONS ARE IN MILLIMETRES.
- G7 U.N.O. DENOTES UNLESS NOTED OTHERWISE.

FOOTINGS

- F1 REQUIRED MINIMUM SAFE BEARING CAPACITY OF MATERIAL SHALL BE 200kPa FOR PAD, STRIP FOOTING AND PILES.
- F2 THIS SITE HAS BEEN CLASSIFIED IN ACCORDANCE WITH AS2870 -2011
- F3 FOUNDATION MATERIAL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER FOR SAFE BEARING CAPACITY BEFORE CONSTRUCTION OF THE FOOTINGS.

SUBGRADE PREPARATION

- SP1 THE SITE SHALL BE EXCAVATED TO THE LEVELS SHOWN ON THE RELEVANT DRAWINGS.
- SP2 SELECTED FILLINGS/HARDCORE ETC. & SAND BLINDING UNDER SLABS SHOWN ON DRAWINGS SHALL BE PLACED IN LOOSE LAYERS NOT EXCEEDING 150mm & COMPACTED TO 98% OF MAXIMUM DRY DENSITY IN ACCORDANCE WITH AS 1289 E1.1 (DENOTED AS STRUCTURAL FILLING).
- SP3 ALL STRUCTURAL FILL TO BE APPROVED BY THE ENGINEER.

BRICKWORK AND BLOCKWORK

- B1 ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT SAA MASONRY CODE, AS 3700 EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.
- B2 ALL LOAD BEARING BRICKS SHALL BE LAID FROGS UP EXCEPT FOR THE TOP COURSE,WHICH SHALL BE LAID FROGS DOWN. WHEN SUPPORTING A CONCRETE SLAB OR BEAM BRICKWORK SHALL HAVE A LAYER OF MORTAR PLACED ON THE TOP AND TROWELLED SMOOTH, THE TOP 2 COURSES OF BRICKS SHALL BE LAID WITH REINFORCEMENT IN THE JOINTS.
- B3 WHERE WALLS ARE NON LOAD BEARING AT EITHER HORIZONTAL OR VERTICAL FACES THEY SHALL BE SEPERATED FROM THE CONCRETE BY 20mm THICK 'CANEITE' OR EXPANDED POLYSTYRENE U.N.O.
- B4 NO HOLES OR CHASES SHALL BE CUT IN LOAD BEARING BRICKWORK OR BLOCKWORK WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- B5 ALL CONCRETE BLOCK WALLS SHALL BE BUILT TO A GAUGE CONCRETE BLOCK SUCH THAT BLOCK-PLANS-JOINT DIMENSIONS ARE MULTIPLES OF 100mm USING STRETCHER BOND UNLESS SPECIFIED OTHERWISE.
- B6 CONCRETE BLOCKS SHALL BE GRADE 12 UNITS CONFORMING TO AS 2733
- B7 MORTAR SHALL BE FRESHLY PREPARED AND COMPOSED OF CEMENT: LIME:SAND IN THE RATIO OF 1:1:6 AND SHALL CONFORM TO AS AS3700.
- B8 CORES TO BE FILLED WHERE REQUIRED WITH CONCRETE OF STRENGTH $f'c = 20$ MPa, 10mm MAX. AGGREGATE SIZE AND A MAX. SLUMP OF 230mm, IN LIFTS NOT MORE THAN 1200 mm HIGH.
- B9 CLEAN OUT OPENINGS ARE REQUIRED AT THE BASE OF ALL REINFORCED WALLS AND ABOVE HORIZONTAL CONSTRUCTION JOINTS.
- B10 REINFORCEMENT SHALL BE POSITIONED AS SHOWN AND HAVE A MINIMUM CONCRETE COVER OF 20mm U.N.O.
- B11 JOINT REINFORCEMENT SHALL BE IN ACCORDANCE WITH AS 3700.
- B12 VERTICAL CONTROL JOINTS IN BLOCK RETAINING WALLS TO BE SPACED AS SHOWN OR AT 8000mm MAX. APART.
- B13 A 300mm WIDE STRIP OF COARSE GRAINED MATERIAL IS TO BE PLACED BEHIND ALL RETAINING WALLS.

CONCRETE

- C1 ALL CONCRETE, CONCRETE WORK AND REINFORCEMENT SHALL BE IN ACCORDANCE WITH THE SPECIFICATION.
- C2 REFER TO INDIVIDUAL CONCRETE DRAWINGS FOR CONCRETE QUALITY
- C3 ALL REINFORCEMENT TO BE AS FOLLOWS:

SYMBOL	TYPE
R	STRUCTURAL GRADE PLAIN BARS TO AS 1302 (230 MPa)
RF	FABRIC TO AS 1304 (500 MPa)
N	HOT ROLLED DEFORMED BARS TO AS 1302 (500 MPa)

NOTE THE NUMBER FOLLOWING R OR Y INDICATES THE BAR DIAMETER IN MILLIMETRES.

- C4 CLEAR COVER TO REINFORCEMENT (INCLUDING FITMENTS) SHALL BE AS FOLLOWS U.N.O. WHERE NOT SPECIFICALLY DESIGNATED COVER IS TO BE IN ACCORDANCE WITH AS3600.

CONCRETE CHARACTERISTIC STRENGTH $f'c$	CAST AGAINST FORMWORK NOT EXPOSED TO WATER*	EXPOSED TO WATER OR WEATHER	PROTECTED BY WATERPROOF MEMBRANE	NOT PROTECTED BY MEMBRANE
20	20	—	60	70
25	20	60	40	50
32	20	40	35	45
40	20	30	30	40
50	20	25	30	40

*ADD EXTRA 20mm COVER FOR COLUMNS (U.N.O.)

- C5 SIZES OF CONCRETE ELEMENTS DO NOT INCLUDE THICKNESS OF ANY APPLIED FINISHES.
- C6 BEAM DEPTHS ARE NOTED FIRST AND INCLUDE THE THICKNES OF THE SLAB IF ANY.
- C7 CONSTRUCTION JOINTS WHERE NOT SHOWN ON THE DRAWINGS SHALL BE LOCATED TO THE APPROVAL OF THE ENGINEER.
- C8 FORMS SHALL BE CHAMFERED FOR RE-ENTRANT ANGLES AND FILLETED FOR CORNERS. WHERE THESE WILL BE EXPOSED TO VIEW IN THE COMPLETED PROJECT THE FACE OF THE BEVEL IN EACH CASE SHALL BE 25mm WIDE U.N.O.
- C9 NO HOLES,CHASES OR EMBEDMENTS OF PIPES OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE MADE WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- C10 DISTRIBUTION BARS TO MAIN REINFORCEMENT IN SLABS SHALL BE N12 AT 300mm CENTRES U.N.O.
- C11 NO REINFORCEMENT SPLICES SHALL BE MADE IN POSITIONS OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWINGS WITHOUT THE PRIOR APPROVAL OF THE ENGINEER.
- C12 MINIMUM LAP FOR FABRICS SHALL BE TWO TRANSVERSE WIRES PLUS 25mm MINIMUM LAP LENGTHS FOR DEFORMED BARS INCLUDING DISTRIBUTION REINFORCEMENT SHALL BE AS FOLLOWS U.N.O.

BAR TYPE AND SIZE	VERTICAL BARS	HORIZONTAL BARS MORE THAN 300mm OF CONC. BELOW BAR	OTHER LOCATIONS	90° COG LENGTH	135° or 180° COG LENGTH
12	450	550	450	170	70
16	700	800	700	200	70
20	1000	1250	1000	250	80
24	1200	1500	1200	300	95
28	1400	1750	1400	350	115
32	1550	1900	1550	400	130
36	1700	2150	1700	450	145

*COG LENGTH MEASURED FROM END OF BEND.

WELDING OF REINFORCEMENT IS NOT PERMITTED UNLESS SHOWN ON THE DRAWINGS OR APPROVED BY THE ENGINEER.

135° HOOKS

CLOSED FITMENTS U.N.O. SHALL HAVE CORNER SPLICES THUS:

TOP AND BOTTOM REINFORCEMENT IN SLABS SHALL BE SUPPORTED ON APPROVED PLASTIC TIPPED CHAIRS,IN BOTH DIRECTIONS AT MAXIMUM CENTRES OF 600mm FOR 10mm DIA BARS, 900mm FOR 12mm AND 16mm DIA BARS, 1200mm FOR 20mm DIA BARS AND 750mm CENTRES FOR FABRIC.

ALL FORMWORK AND PROPS UNDER SUSPENDED CONCRETE WORK SHALL BE REMOVED BEFORE ANY BRICKWORK OR BLOCKWORK IS BUILT ABOVE.

THE MINIMUM CLEAR SPACING BETWEEN CONDUITS, CABLES, PIPES AND BARS SHALL BE AS REQUIRED BY AS 3600 BUT NOT LESS THAN THREE DIAMETERS HORIZONTALLY FOR HORIZONTAL CONDUITS ETC IN SLABS WALLS, AND FOOTINGS AND NOT LESS THAN ONE DIAMETER FOR ALL OTHER CONDUITS ETC.

- C18 TYPICAL REINFORCEMENT NOTATION :- 23N24-200.2
23.....DENOTES NUMBER OF BARS REQUIRED
N.....DENOTES GRADE OF REINFORCEMENT
24.....DENOTES BAR DIAMETER IN MILLIMETRES
200.....DENOTES BAR SPACINGS IN MILLIMETRES
2DENOTES SECOND LAYER OF REINFORCEMENT LAID
TYPICAL ABBREVIATIONS :-
B.....DENOTES BARS IN BOTTOM
T.....DENOTES BARS IN TOP
ALTDENOTES BARS ALTERNATING
STAGDENOTES BARS STAGGERED
NF.....DENOTES BARS IN NEAR FACE
FF.....DENOTES BARS IN FAR FACE
EF.....DENOTES BARS IN EACH FACE
NSOP.....DENOTES NOT SHOWN ON PLAN
NSOE.....DENOTES NOT SHOWN ON ELEVATION

- C19 CONCRETE TO BE KEPT FREE OF SUPPORTING BRICKWORK BY 'SWAN' SLIDING JOINT OR EQUAL U.N.O.

- C20 VERTICAL FACES OF CONCRETE SHALL BE SEPERATED BY 12mm THICK 'CANEITE' OR EXPANDING CORK U.N.O.

- C21 PLACING OF REINFORCEMENT SHALL BE CO-ORDINATED TO SUIT PLACING OF PRESTRESSING TENDONS.

STRUCTURAL STEELWORK NOTES

- S1 ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538, AS1554 AND THE SPECIFICATION.
- S2 UNLESS SHOWN OTHERWISE, ALL STEEL SHALL BE IN ACCORDANCE WITH AS1204 GRADE 300. ALL STEEL HOLLOW SECTIONS SHALL BE GRADE 350 U.N.O. AND SHALL BE IN ACCORDANCE WITH AS1163. ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 STEEL IN ACCORDANCE WITH AS1538
- S3 UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
(i) ALL WELDS SHALL BE 6MM CONTINUOUS FILLET WELDS ALL ROUND.
(ii) ALL BOLTS SHALL BE M20 - 8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION.
PURLIN BOLTS TO BE M12 - 4.6/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END.
(iii) ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK. (U.N.O.)
(iv) ALL CAP PLATES SHALL BE 10 mm THICK. (U.N.O.)
(v) ALL BASE PLATES SHALL BE 10 mm THICK. (U.N.O.)

- S4 BOLT DESIGNATION:
4.6/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.6 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION.

8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION.

8.8/TB REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A BEARING JOINT.

8.8/TF REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A FRICTION JOINT.

- S5 HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE "PART TURN" METHOD OF TIGHTENING.

- S6 ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.

- S7 SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER.

- S8 ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE ENCASED IN 75mm MIN. CONCRETE ALL ROUND.

- S9 ALL STEELWORK, EXCEPT THAT WHICH IS TO BE CONCRETE ENCASED, FIRE SPRAYED OR CONTACT SURFACES OF FRICTION TYPE JOINTS, SHALL BE SURFACE CLEANED AND PAINTED IN ACCORDANCE WITH THE SPECIFICATION.

- S10 STEELWORK THAT IS CONCRETE ENCASED, FIRE SPRAYED OR FACING SURFACES OF FRICTION TYPE JOINTS SHALL BE LEFT UNPAINTED AND FREE FROM SCALE.

- S11 THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND DRILL ALL HOLES NECESSARY FOR FIXING STEEL, TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS.

- S12 THE FABRICATION AND ERECTION OF THE STRUCTURAL STEELWORK SHALL BE SUPERVISED BY QUALIFIED PERSONNEL EXPERIENCED IN SUCH SUPERVISION TO ENSURE THAT ALL REQUIREMENTS OF THE DESIGN ARE MET. DETAILS OF ERECTION SEQUENCE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ERECTION.

- S13 COLUMNS AND MULLIONS SHALL HAVE THEIR BASE PLATES FULLY GROUTED IN ACCORDANCE WITH THE SPECIFICATIONS AFTER PLUMBING AND LEVELLING ON STEEL PACKERS.

- S14 THREE (3) SETS OF STEELWORK SHOP DETAIL DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ANY FABRICATION. THE CHECK SHALL NOT COVER LAYOUT AND MEMBER DIMENSIONS.

- S15 CONCRETE ENCASED STRUCTURAL STEELWORK TO BE ENCLOSED BY F41 MESH PLACED CLEAR OF STEELWORK, ENCASING TO PROVIDE 50mm MIN. COVER TO STEELWORK U.N.O. ON THE DRAWINGS. COVER TO MESH TO BE 20mm MIN. MAXIMUM AGGREGATE SIZE = 10mm, CONCRETE $f'c = 20$ MPa.


- S16 UNLESS SPECIFIED OTHERWISE, STEELWORK SHALL BE PREPARED TO CLASS 2.5 FINISH IN ACCORDANCE WITH AS1627.4 AND GIVEN TWO (2) COATS OF ZINC PHOSPHATE TO A TOTAL DRY FILM THICKNESS OF 70 MICRONS.

SHOTCRETE

- SC1. WHERE DIRECTED ON SITE, THE CONTRACTOR SHALL PROVIDE SHOTCRETE PROTECTION TO AREAS OF THE ROCK FACE AS EXCAVATION PROCEEDS. REFER TO DETAILS.

- SC2. THE SHOTCRETE SHALL BE CONTINUOUSLY APPLIED IN ONE CONTINUOUS OPERATION (TARGET STRENGTH 25MPa) AND SHALL BE FINISHED WITH A SMOOTH WOOD FLOAT FINISH. CURE FOR 7 DAYS BY COVERING WITH PLASTIC OR BY SPRAYING WITH CALCURE CR CHLORINATED RUBBER CURING COMPOUND.

CONCRETE STRENGTH
GRADE FOR SLAB AND
FOOTINGS : 25MPa

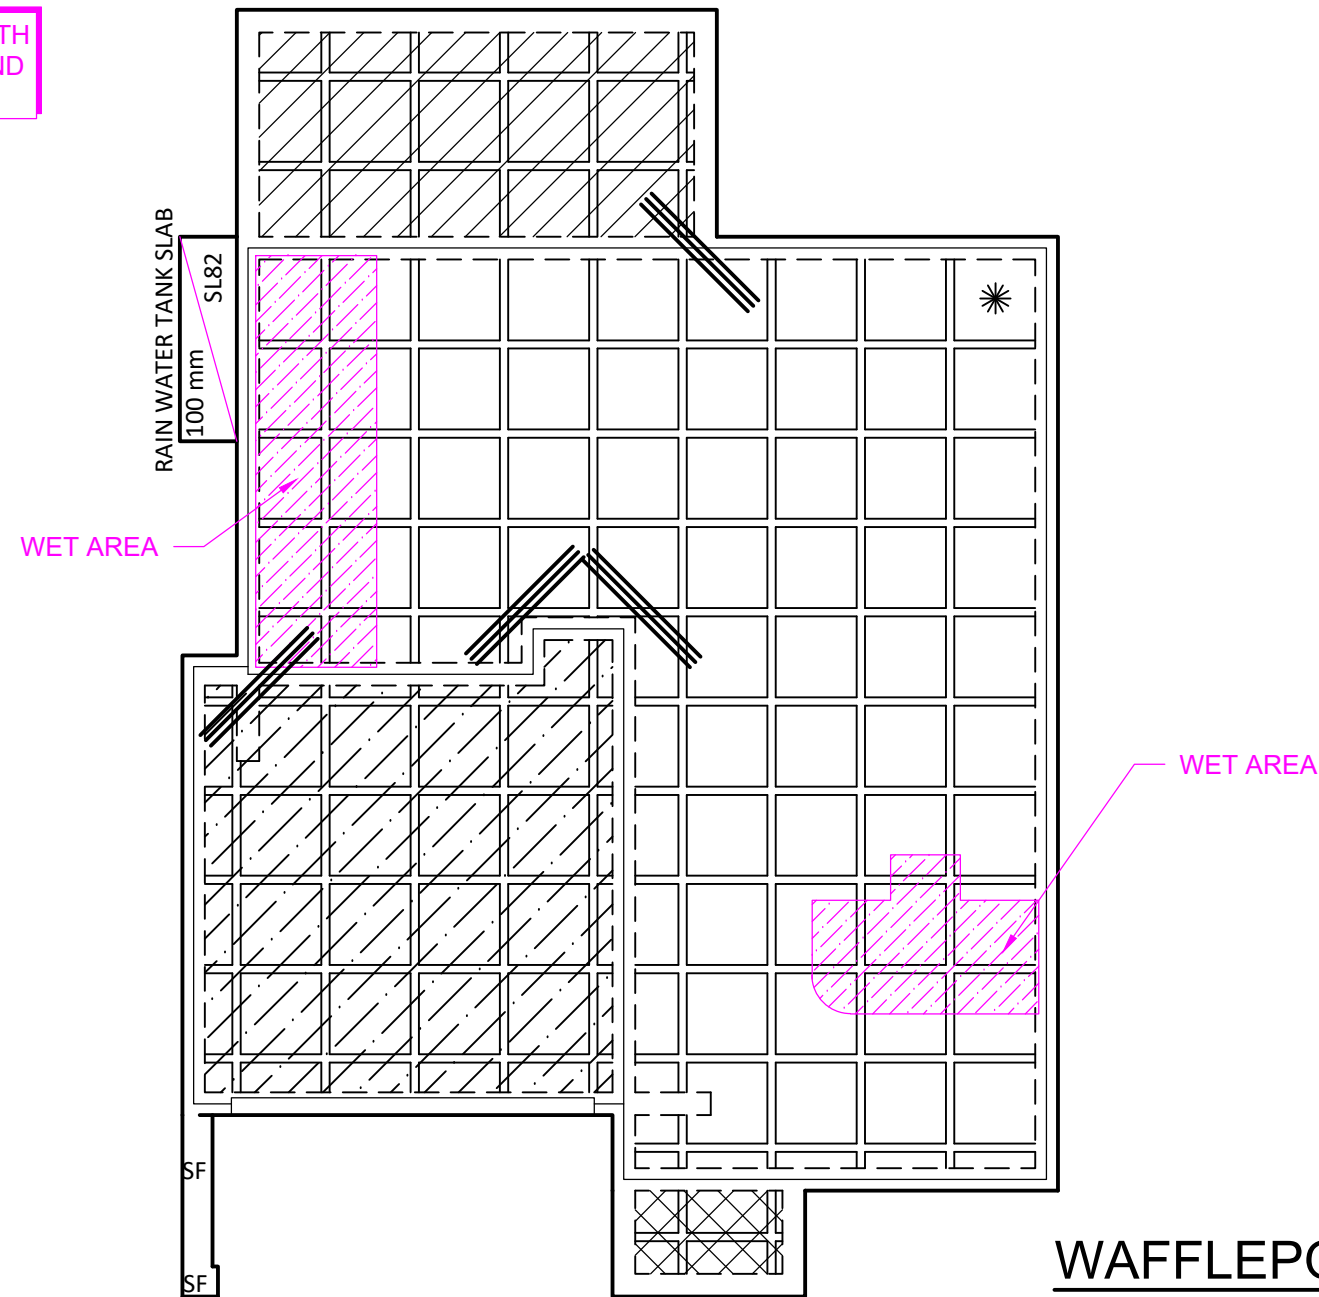

NOTE:

FILL TO BE COMPACTED IN
ACCORDANCE
WITH CLAUSE 6.4.2, AS2870 -2011


VERTICAL ARTICULATION JOINTS IN
ACCORDANCE
WITH PART 5.6.8 MASONRY UNITS
OF A.B.C.B OF THE NATIONAL
CONSTRUCTION CODE, AS3700 &
AS4773 PARTS 1 & 2




3 X N12 BARS, **2000** LONG
TIED TO UNDERSIDE OF
FABRIC TYPICAL BARS MAY
BE DELETED IF FABRIC LAPS
AT INTERNAL CORNERS
(TYPICAL).




STARTING POINT
STRIP FOOTING



HATCHED AREA INDICATES
ALFRESCO AREA



HATCHED AREA INDICATES
GARAGE



HATCHED AREA INDICATES
FRONT PORCH

WAFFLE TYPE

POD HEIGHT	300mm
SLAB THICKNESS	85mm
OVERAL DEPTH	385mm
RIB SPACING (Max.)	1090mm
RIB WIDTH	110mm

REINFORCEMENT

EXTERNAL RIB	3N12
INTERNAL RIB	1N12
SLAB MESH	SL82
COVER (Min.)	20mm

THIS PLAN IS DONE IN
ACCORDANCE WITH AS2870 -2011
SOIL CLASS: **H1**
SITE CLASS: **P**
SYSTEM: **WR**
BUILDING: **VENEER (ARTICULATED)**

NOTE:

PLANS IN COMPLIANCE WITH SITE
CLASSIFICATION REPORT PREPARED
BY CORE GEOTECH

REF NO: CG26-1218-A Rev 0
DATED: 28 AUGUST 2026

WAFFLEPOD SLAB PLAN

SCALE - 1:100

Patrick J. Meares

Patrick J. Meares
BE, Grad Dip LGE MIEAust CPEng
EngExec NER APEC Engineer IntPE(Aus)

MEARES

CONSULTING

ABN 41 154 140 002

suite 3.16, 5 Celebration Dr, Bella Vista
all mail: PO box 7063 Baulkham Hills 2153
Ph: 02 8883 2891
email: info@mearesconsulting.com.au

WhatsApp-0497235283-(Inspection Photos only)

STRUCTURAL

DRAINAGE

CIVIL

Project

22 SCENERY STREET
BOX HILL

YOUR PROPERTY EXPERT

Designed by

PJM

Drawn by

KM

Checked by

PKM

Date

27/8/2026

Title

TWO STOREY DWELLING
SLAB PLAN

Scale

1:100

Job No.


13347

Drawing No.

Rev.

SHEET 2

13347 22 Scenery St, Box Hill (H1).dwg

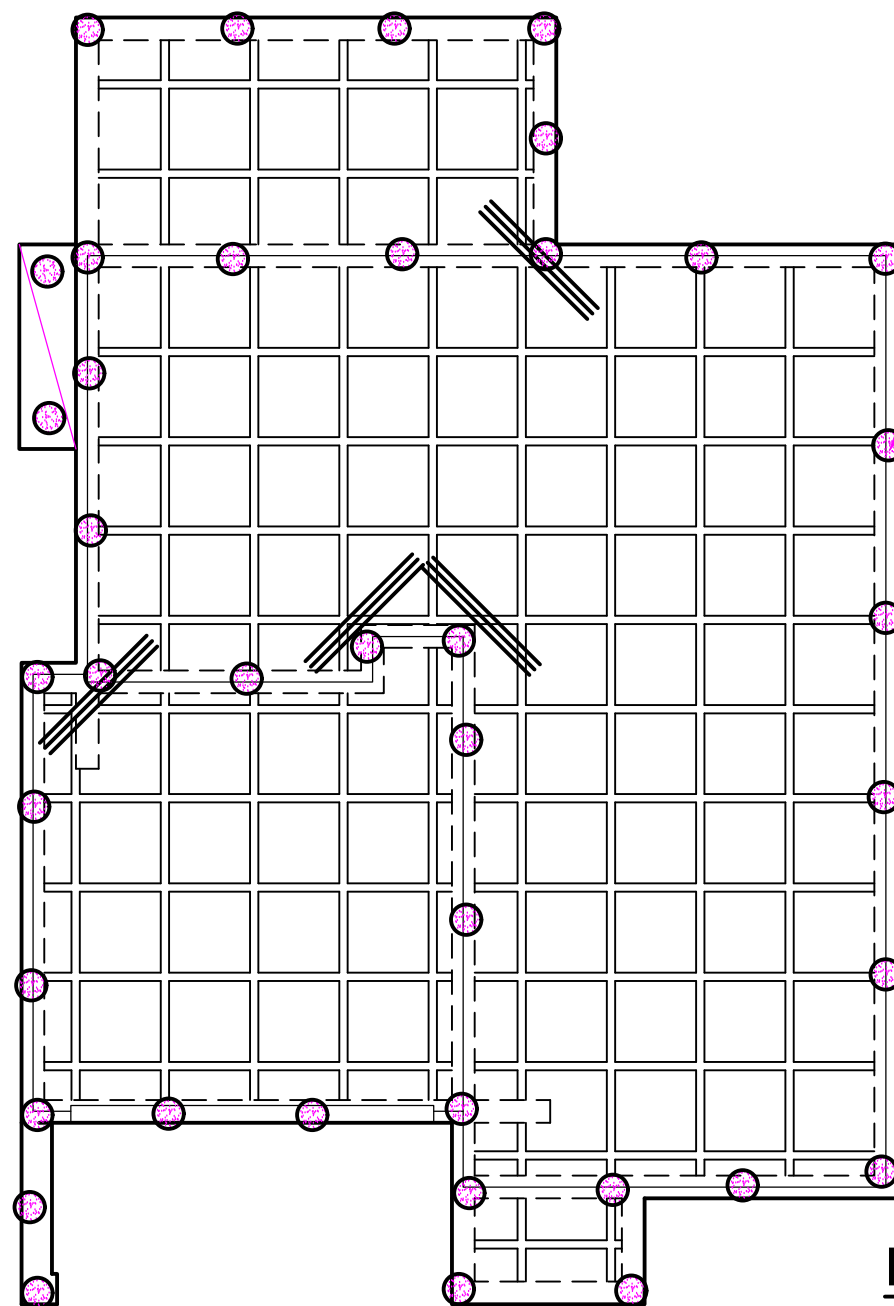

4000 MASS CONCRETE
PIERS TO EVEN
BEARING GROUND

PIERING PLAN

SCALE - 1:100

PJ Meares

Patrick J. Meares
BE, Grad Dip LGE MIEAust CPEng
EngExec NER APEC Engineer IntPE(Aus)


NOTE:

PLANS IN COMPLIANCE WITH SITE
CLASSIFICATION REPORT PREPARED
BY CORE GEOTECH

REF NO: CG26-1218-A Rev 0
DATED: 28 AUGUST 2026

CONCRETE STRENGTH
GRADE FOR PIERING :
25MPa

"If resistance or shale is hit, then the pier
depth doesn't need to go any further."

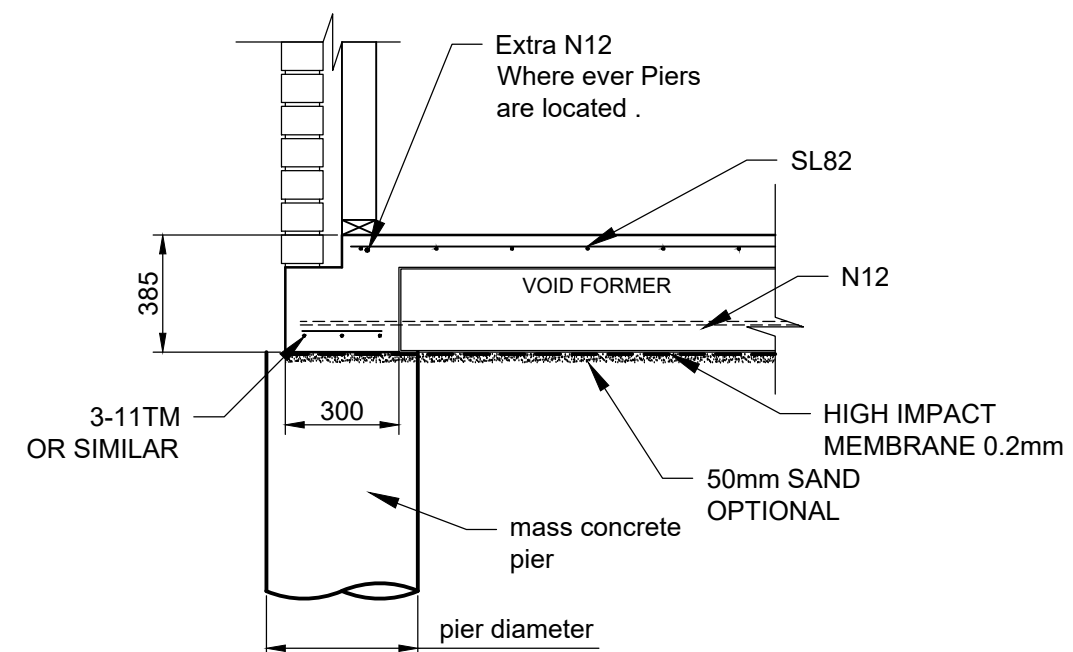

PIER SECTION

MEARES

CONSULTING

ABN 41 154 140 002

PTY LTD

suite 3.16, 5 Celebration Dr, Bella Vista

all mail: PO box 7063 Baulkham Hills 2153

Ph: 02 8883 2891

email: info@mearesconsulting.com.au

WhatsApp-0497235283-(Inspection Photos only)

STRUCTURAL

DRAINAGE

CIVIL

Project

22 SCENERY STREET
BOX HILL

YOUR PROPERTY EXPERT

Designed by

PJM

Drawn by

KM

Checked by

PJM

Date

27/08/2026

Title

TWO STOREY DWELLING
PIERING PLAN

Scale

1:100

Job No.


13347

Drawing No.


Rev.

SHEET 3


13347 22 Scenery St, Box Hill (H1).dwg

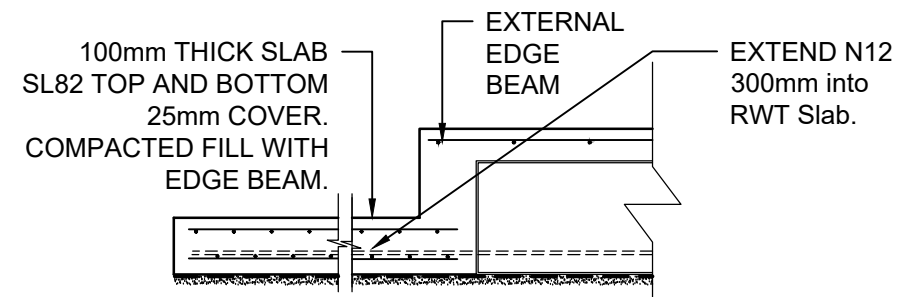


CONCRETE PAD DETAIL

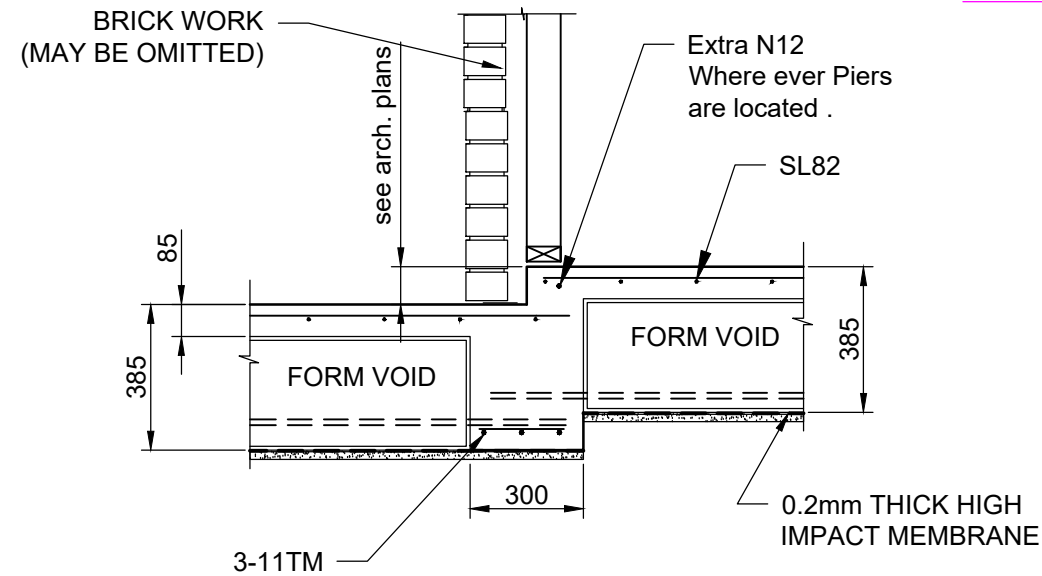

STEP DOWN DETAIL

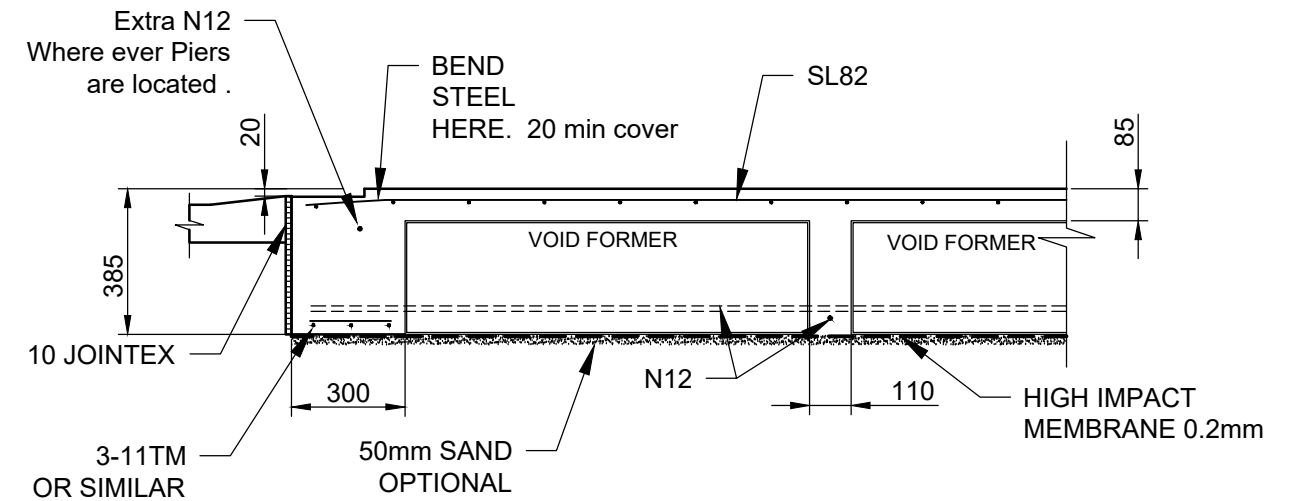


GARAGE DOOR DETAIL

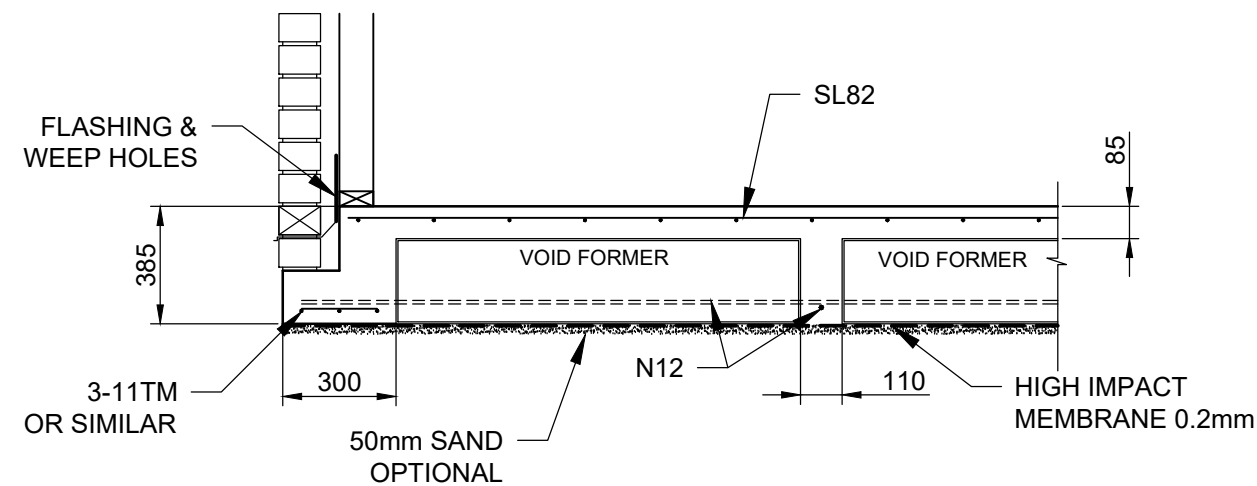

EDGE BEAM

INTERNAL RIB

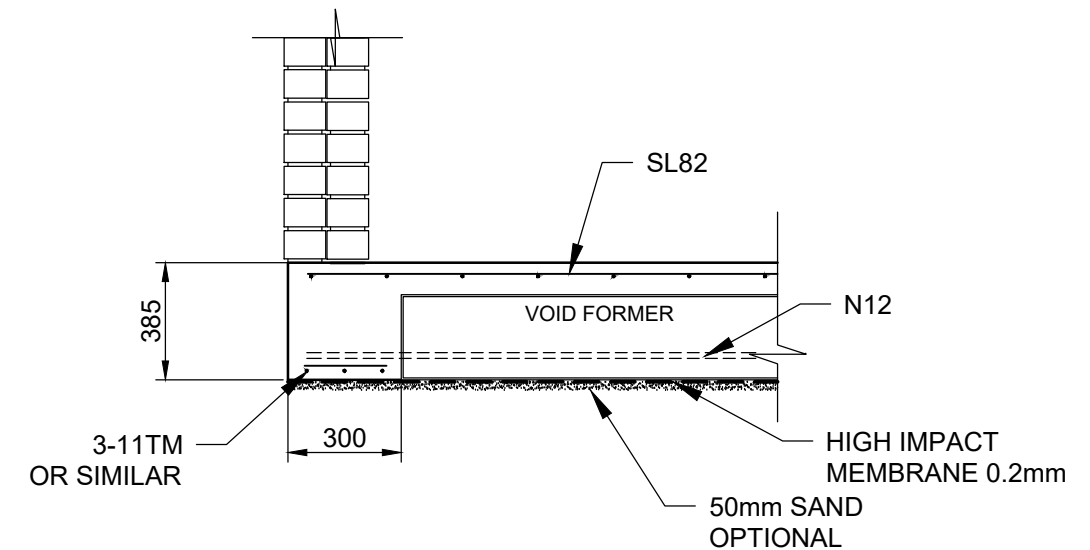

VERANDAH EDGE BEAM

MEARES

CONSULTING

ABN 41 154 140 002

STRUCTURAL

suite 3.16, 5 Celebration Dr, Bella Vista
all mail: PO box 7063 Baulkham Hills 2153
Ph: 02 8883 2891
email: info@mearesconsulting.com.au

WhatsApp-0497235283-(Inspection Photos only)

DRAINAGE

CIVIL

Project

22 SCENERY STREET
BOX HILL

YOUR PROPERTY EXPERT

Designed by

PJM

Drawn by

KM

Checked by

[Signature]

Date

27/08/2026

Title

SLAB AND FOOTING DETAILS
TWO STOREY DWELLING

Scale

N.T.S

Job No.

13347


Drawing No.

Rev.


SHEET 4

REINFORCEMENT FOR EXTERNAL BEAMS where width exceeds 300mm


WIDTH	TOP STEEL	BOTTOM STEEL
270-330	1 x N12	3 x N12
331-440	2 x N12	4 x N12
441-550	3 x N12	5 x N12
551-660	4 x N12	6 x N12

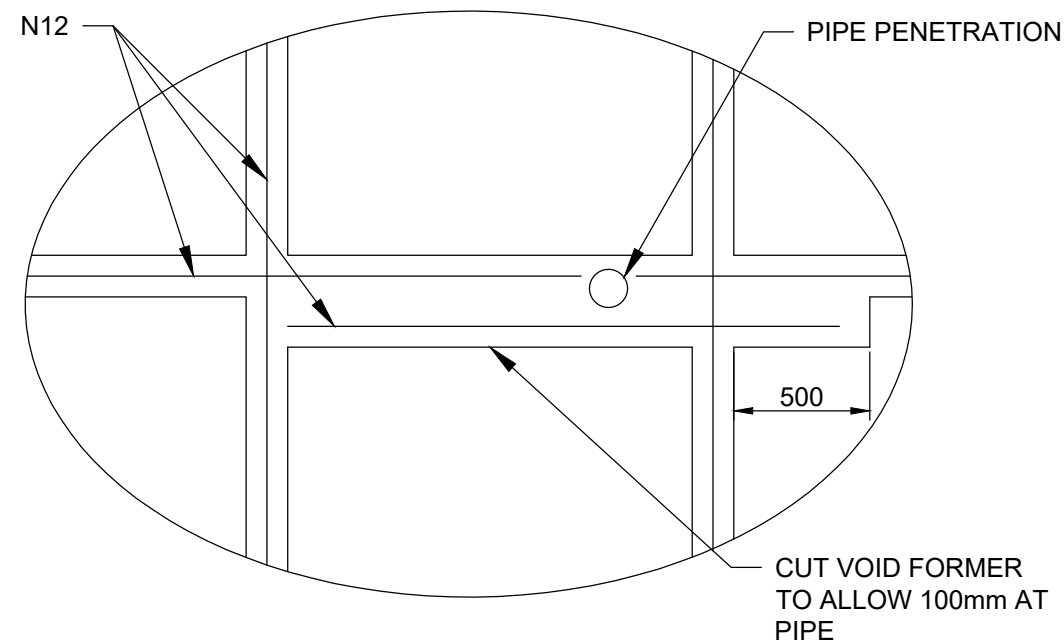

PIPE PENETRATION THROUGH RIB

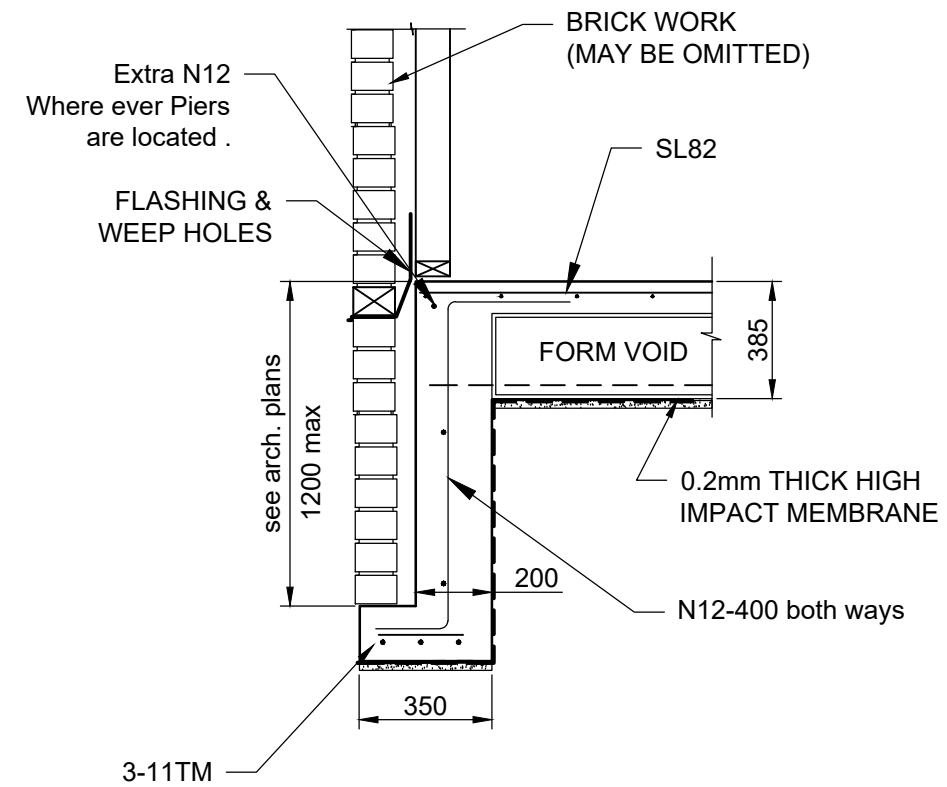

EXTERNAL DROPPED BEAM

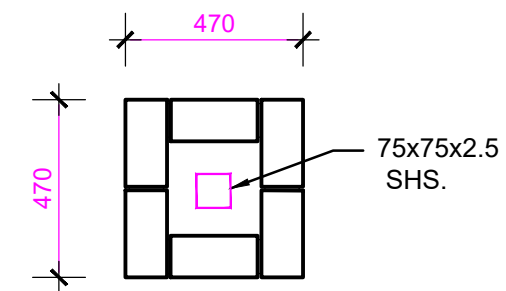

BRICK PIER DETAILS

75 x75 x 2.5 SHS

Fix to slab using
2 / M12 x 100 GALV Truebolt
or similar , 60mm penetration.

MEARES

CONSULTING

ABN 41 154 140 002

suite 3.16, 5 Celebration Dr, Bella Vista
all mail: PO box 7063 Baulkham Hills 2153

Ph: 02 8883 2891
email: info@mearesconsulting.com.au

WhatsApp-0497235283-(Inspection Photos only)

Project

22 SCENERY STREET
BOX HILL

YOUR PROPERTY EXPERT

Designed by

PJM

Drawn by

KM

Checked by

[Signature]

Date

27/08/2026

Title

SLAB AND FOOTING DETAILS

Scale

N.T.S



Job No.

13347

Drawing No.

Rev.

SHEET 5

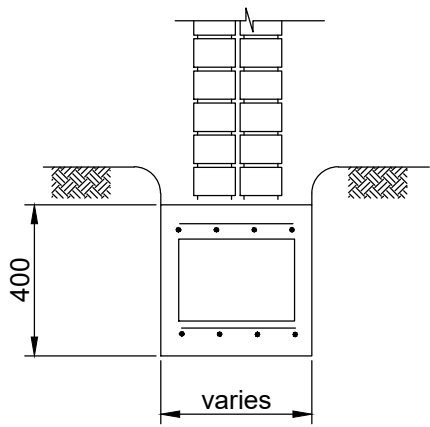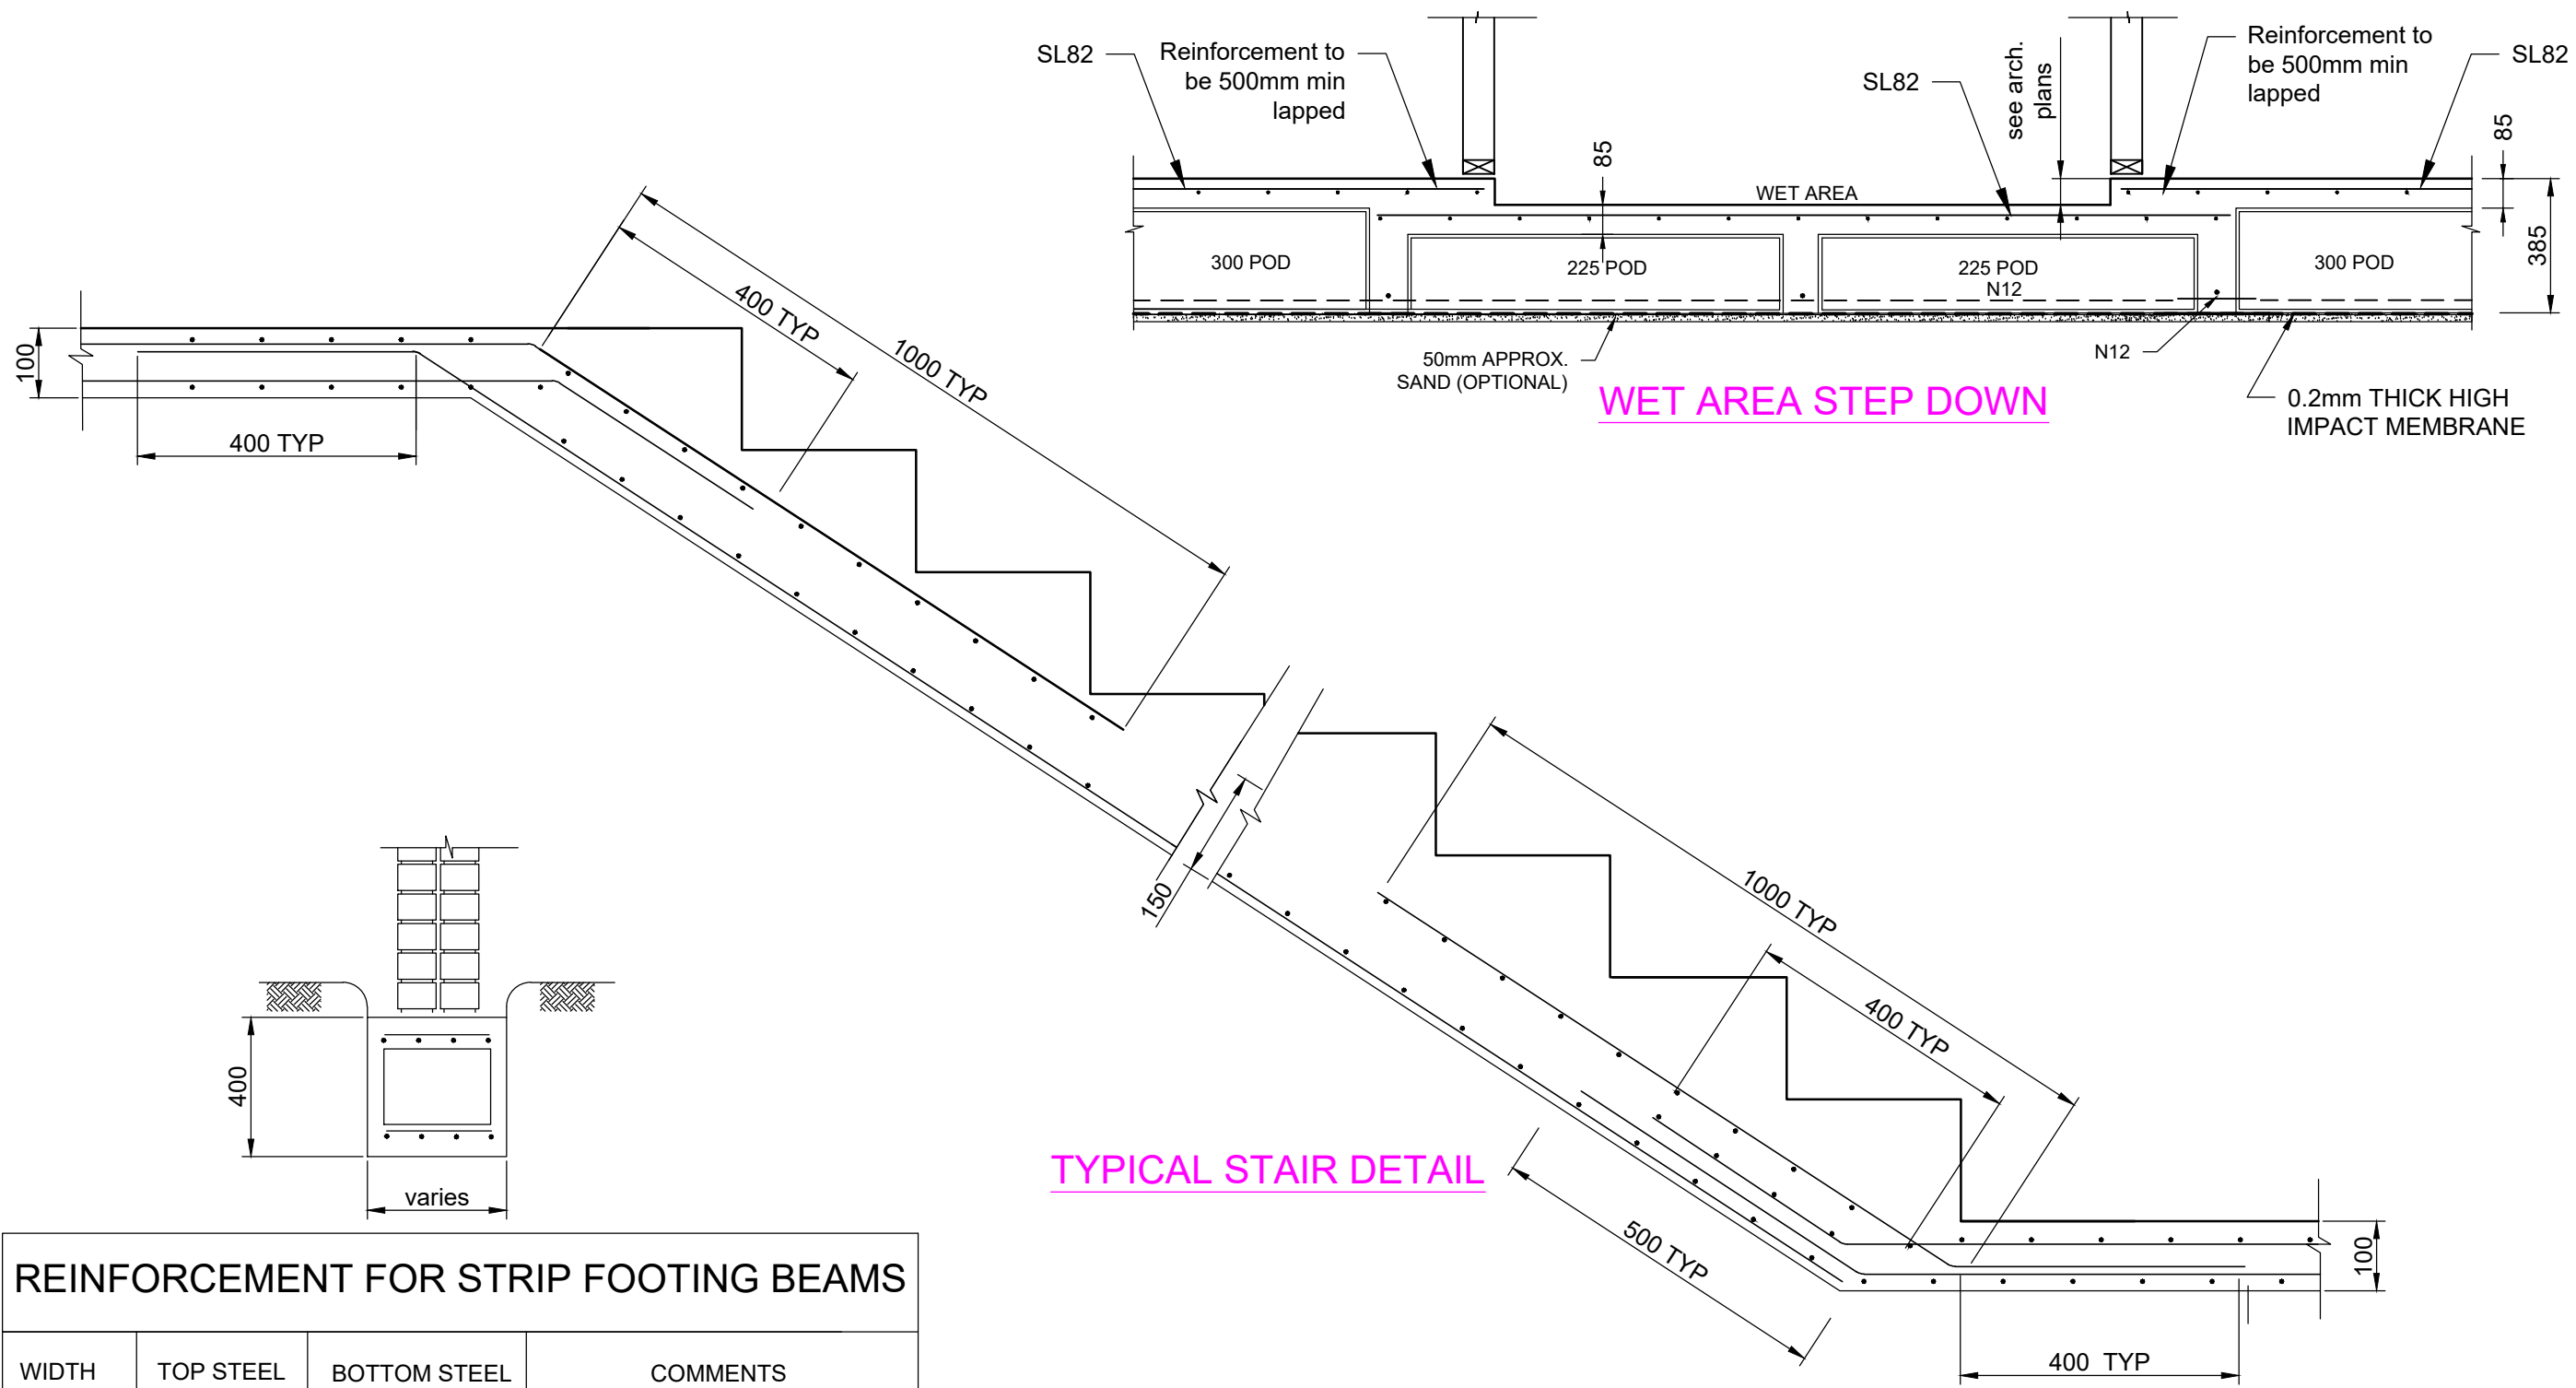


REINFORCEMENT FOR STRIP FOOTING BEAMS

WIDTH	TOP STEEL	BOTTOM STEEL	COMMENTS
400	4-L11TM	4-L11TM	2 SKINS OF BRICKWORK
500	4-L11TM	4-L11TM	3 SKINS OF BRICKWORK

STRIP FOOTING (SF)

- SP - 89x89x4mm SHS
- BB - Brick Bearing (230mm min.)
- (1) - No Masonry loading on this beam
- TB - timber beam by others
- TP - Timber Post by others
- FJ - floor joists by others

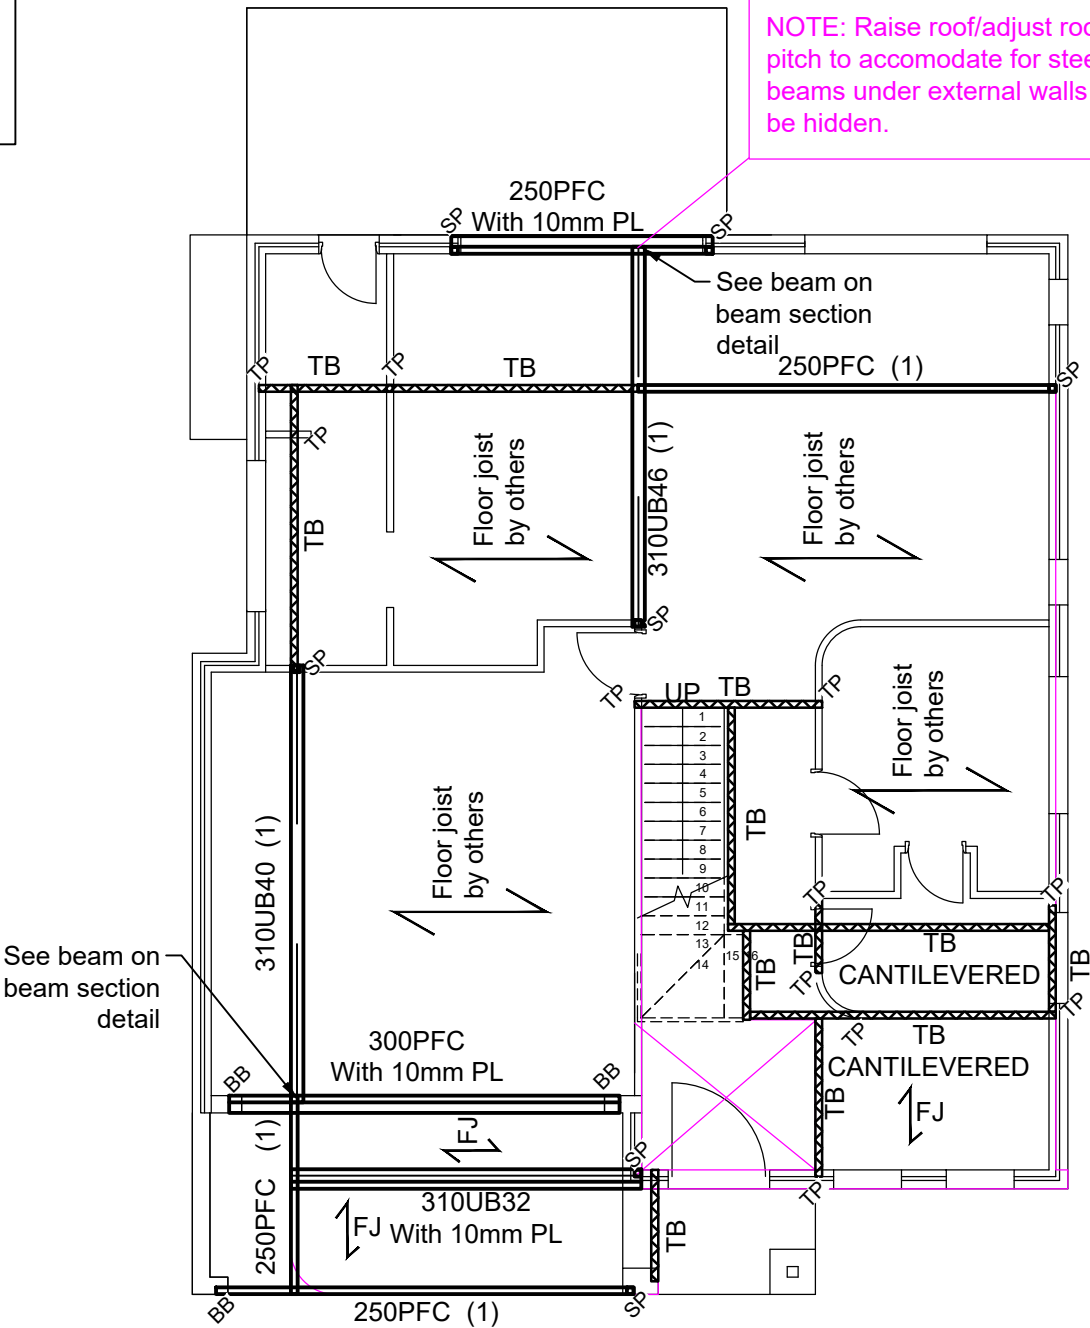

PLAN NOTES:

- 1-Steel beams sizes & locations based on expected loading pattern. If additional steel beams are required please contact engineer.
- 2-T-BAR, ANGLES and timber beams from others and to be installed to manufacturers specification and guidelines U.N.O.
- 3-Expected roof loadings are used. Notify engineer if girder truss point load will fall on any steel beam.
- 4-The layout is considered a diagrammatic layout only
- 5-Layout to be read and constructed in conjunction with architectural and timber supplier layout. Builder/client to confirm that the proposed setup of the layout is correct for the project.

ANGLE(S) & T-BAR NOTES:

All angles and T-BAR's to be installed in accordance with manufacturer's specifications and guidelines.

GENERAL GUIDELINES:

End bearing for all angles and T-Bars:
<1000mm: 100mm end bearing on adequate brickwork
1000-5700mm: 150mm end bearing on adequate brickwork

Installation notes:
All T-Bars and Angles to have minimum 3 courses of bricks and where applicable the same number of courses must be laid both internally and externally.

They should be propped no further than 1.2m apart and the props must not be removed until the mortar has fully cured.

All mortar shall be applied at a minimum of 1:4 to all brick faces in contact with the Angle/ T-Bar.

BEAM PLAN

SCALE - 1:100

PJ Meares

Patrick J. Meares
BE, Grad Dip LGE MIEAust CPEng
EngExec NER APEC Engineer IntPE(Aus)

MEARES
CONSULTING
ABN 41 154 140 002


suite 3.16, 5 Celebration Dr, Bella Vista
all mail: PO box 7063 Baulkham Hills 2153
Ph: 02 8883 2891
email: info@mearesconsulting.com.au
WhatsApp-0497235283-(Inspection Photos only)

Project
**22 SCENERY STREET
BOX HILL**
YOUR PROPERTY EXPERT

Designed by
PJM
Drawn by
KM
Checked by
PJM
Date
27/08/2026


Title
STEEL BEAM LAYOUT

Scale
1:100
Job No.
13347
Drawing No. Rev.
SHEET 7

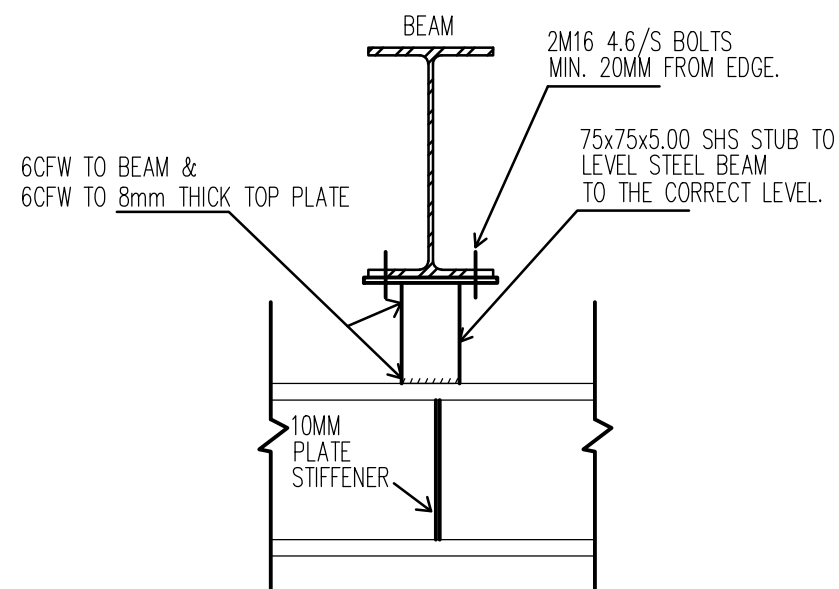

TYPICAL BEAM ON BEAM DETAIL




N.T.S.

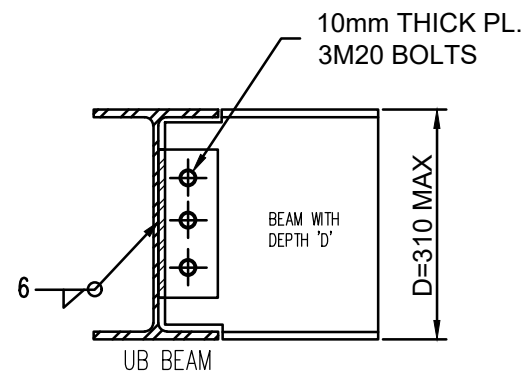

TYPICAL BEAM TO BEAM CONNECTION


N.T.S.

—A CORROSIVE RESISTANT PRIMER IS TO BE APPLIED TO STEEL WORK. IF WITHIN 1KM OF SEVER MARINE CONDITIONS THEN THE STEELWORK IS TO BE GALVANISED.

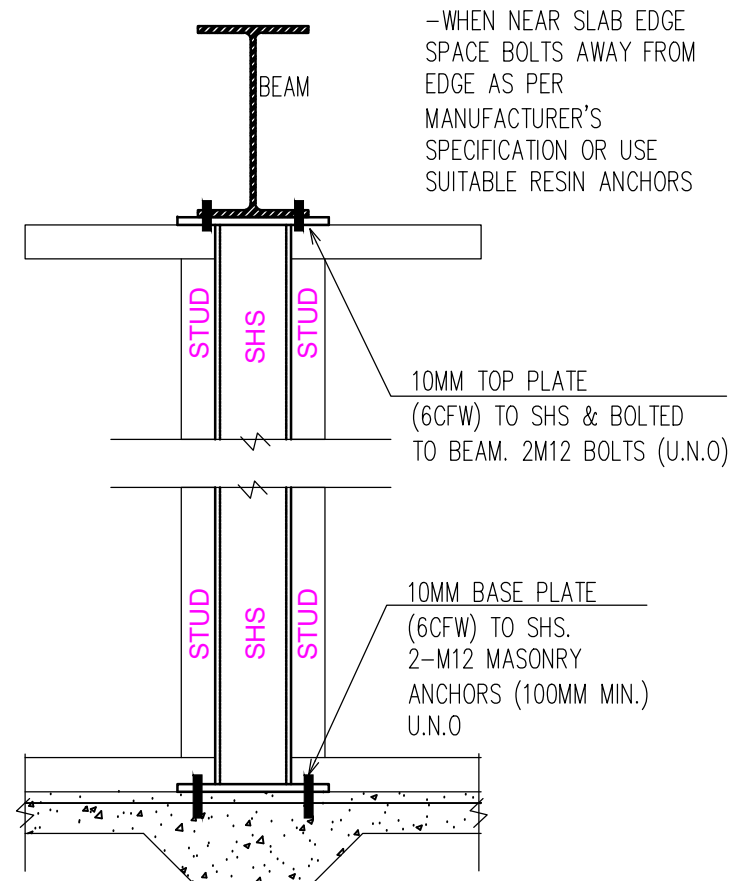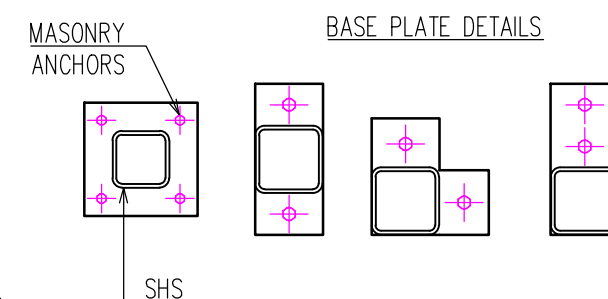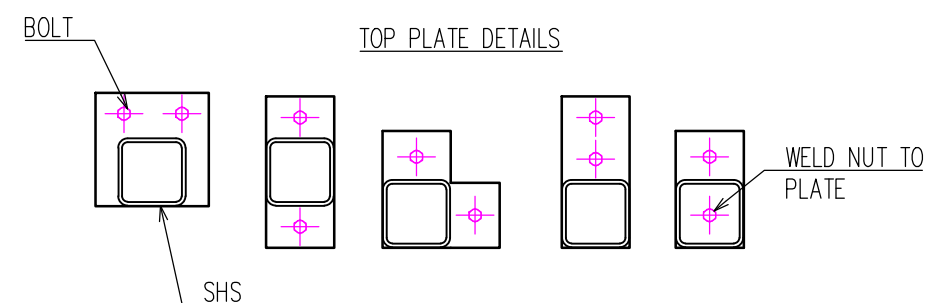


TYPICAL COLUMN(SP) & BEAM DETAIL

N.T.S.

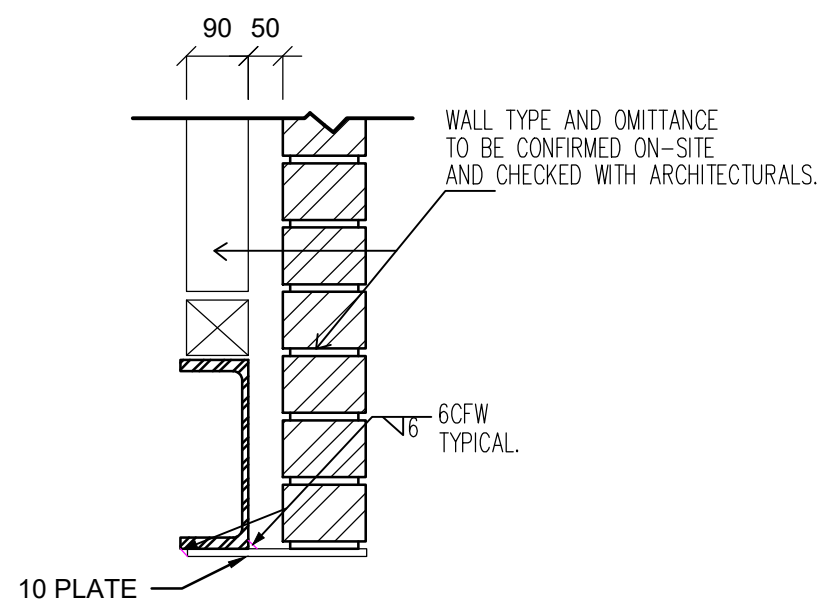

TYPICAL BEAM WITH PLATE DETAIL.

N.T.S.

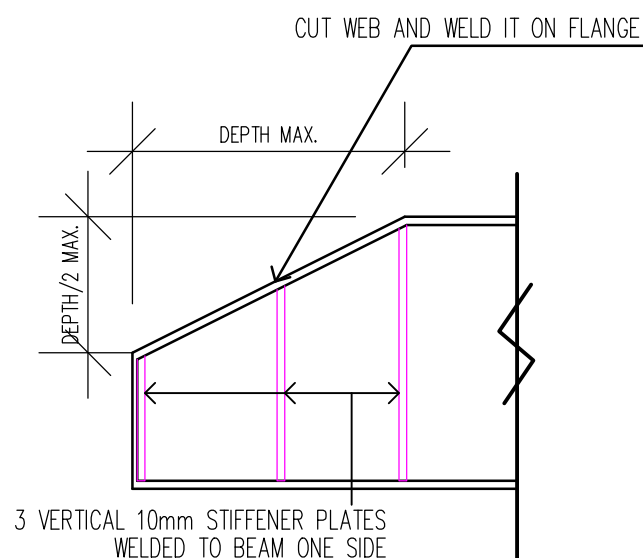

TYPICAL CUT IN BEAM DETAIL

N.T.S.



suite 3.16, 5 Celebration Dr, Bella Vista
all mail: PO box 7063 Baulkham Hills 2153
Ph: 02 8883 2891
email: info@mearesconsulting.com.au
WhatsApp-0497235283-(Inspection Photos only)

STRUCTURAL DRAINAGE CIVIL

Project

22 SCENERY STREET
BOX HILL

YOUR PROPERTY EXPERT

Designed by

PJM

Drawn by

KM

Checked by

[Signature]

Date

27/08/2026

Title

STEEL BEAM DETAILS

Scale

N.T.S

Job No.

13347

Drawing No.

Rev.

SHEET 8