

CONSTRUCTION NOTES

UNLESS NOTED OTHERWISE ON PLAN, FOLLOWING NOTES TO BE USED

GENERAL

- G1 THESE DRAWING SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANT DRAWING AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTION AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ALL DISCREPANCIES SHALL BE REFERRED TO THE ARCHITECT FOR DECISION BEFORE PROCEEDING WITH THE WORK
- G2 DIMENSIONS SHALL NOT BE OBTAINED BY SCALING THE STRUCTURAL DRAWING
- G3 SETTING OUT DIMENSIONS SHOWN ON THE DRAWINGS SHALL BE VERIFIED BY THE BUILDER
- G4 DURING CONSTRUCTION THE STRUCTURE SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVERSTRESSED
- G5 ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH REQUIREMENTS OF THE SAA AND CODES AND THE LOWS AND ORDINANCES OF THE RELEVANT BUILDING AUTHORITY ALL CODES SHALL BE CURRENT EDITIONS
- G6 ANY CONFLICT BETWEEN THESE NOTES. THE SPECIFICATION OR THE DRAWINGS SHALL BE RESOLVED BY THE ENGINEER
- G7 WEBCON PTY LTD DOES NOT HOLD ANY LIABILITY OR IMPLIED LIABILITY FOR ANY OTHER PART OF THE STRUCTURE THAT IS NOT INCLUDED IN THESE DRAWINGS OR ANY OTHER WRITTEN SITE INSTRUCTIONS.

FOUNDATIONS

- F1 FOOTINGS HAVE BEEN DESIGNED FOR AN ALLOWABLE BEARING PRESSURE OF ..300.....KPa ON UNIFORM VIRGIN MATERIAL
- F2 FOUNDATION MATERIAL SHALL BE APPROVED BY THE ENGINEER FOR THIS PRESSURE BEFORE PLACING REINFORCEMENT OR CONCRETE
- F3 ALL EXCAVATIONS SHALL BE FINISHED CLEAN AND HORIZONTAL

REINFORCEMENT

- R1 ALL UNSUPPORTED BARS SHALL BE TIED IN TRANSVERSE DIRECTION TO N12 AT 400 CRS
- R2 MINIMUM LAP TO FABRIC TO CONSIST OF TWO CROSSWIRES PLUS 25mm AND EXTEND 90mm WITH CROSSWIRE ONTO WALLS UNLESS NOTED OTHERWISE.
- R3 TRENCH MESH 600mm MINIMUM LAP UNLESS NOTED OTHERWISE.

REINFORCEMENT			MINIMIUM YIELD STRENGTH(fsy) Mpa
TYPE	GRADE		
(a) PLAIN BARS	250R	R	250
(b) DEFORMED BARS TO AS 1302	500N	N	500
STEEL WIRE PLAIN AND DEFORMED TO AS 1303	450W	W	450
WELDED WIRE FABRIC TOAS 1304	450F	F	450

TOTAL REINFORCEMENT REQUIREMENTS WITHIN BEAMS			
STEM WIDTH (mm)	TOP STEEL	BEAM BASE WIDTH (mm)	BTM STEEL
110 TO 150	0	110 TO 150	1
151 TO 220	1	151 TO 220	2
221 TO 330	2	221 TO 330	3
331 TO 440	3	331 TO 440	4

BEARING STRATA	DESIGN BEARING CAPACITY	SINGLE STOREY	DOUBLE STOREY
SAND	100 kPa	800MM X 300 BUCKET PIERS @ 1800 MAX C/C	CONTINUOUS EDGE BEAM DEEPINING
CONTROLLED CLAY FILL	150 kPa	700MM X 300 BUCKET PIERS @ 1800 MAX C/C	CONTINUOUS EDGE BEAM DEEEPING OR 800MM X 300MM BUCKET PIERS @1200 MAX C/C.
STIFF NATURAL CLAY	250 kPa	400MM ø BORED PIERS @ 1800 MAX C/C	400MMø BORED PIERS @ 1800 MAX C/C.
SHALE/ROCK	450 kPa	300MM ø BORED PIERS @ 1800 MAX C/C	400MMø BORED PIERS @ 1800 MAX C/C.

STANDARD TO AS 3600 CURRENT EDITION WITH AMENDMENTS				
ELEMENT	FC 28 DAYS	SLUMP	MAX. SIZE AGG	ADMIXTURE
FOOTINGS + SLABS (U.N.O)	40 MPa	80 mm	20 mm	NIL
PIERS (U.N.O)	40 MPa	80 mm	20 mm	NIL

CONCRETE

- C1 ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS 3600 CURRENT EDITION WITH AMENDMENTS
- C2 CONCRETE QUALITY
- C3 CLEAR CONCRETE COVER TO REINFORCEMENT SHALL BE AS FOLLOWS UNLESS NOTED OTHERWISE
- C4 ALL CONCRETE PLACED SHALL BE WELL VIBRATED AND COMPACTED USING AN APPROVED VIBRATOR AND TECHNIQUE
- C5 SIZES OF CONCRETE ELEMENTS DO NOT INCLUDE THICKNESS OF APPLIED FINISHES
- C6 CONSTRUCTION JOINTS WHERE NOT SHOWN SHALL BE LOCATED TO THE APPROVAL OF THE ENGINEER
- C7 NO HOLES OR CHASES OTHER THAN THOSE SHOWN ON THE STRUCTURAL DRAWING SHALL BE MADE IN CONCRETE MEMBERS WITHOUT THE PRIOR APPROVAL OF THE ENGINEER
- C8 REINFORCEMENT IS REPRESENTED DIAGRAMMATICALLY. IT IS NOT NECESSARY SHOWN IN TRUE PROJECTION.
- C9 SPLICES IN REINFORCEMENT SHALL BE MADE ONLY IN THE POSITION SHOWN. THE WRITTEN APPROVEL OF THE ENGINEER SHALL BE OBTAINED FOR ANY OTHER SPLICE IN ACCORDANCE WITH THE REQUIREMENTS OF AS 3600.

ELEMENT	CAST AGAINST FORMS COMPLYING WITH AS 1509		CAST AGAINST FORM WORK OR THE GROUND
	IN SHELTERED LOCATIONS	EXPOSED TO GROUND WEATHER OR WATER	
AS3600 EXPOSURE CONDITION	1	2	3
COLUMNS & PEDESTALS	40mm	50mm	75mm
BEAMS	25mm	40mm	65mm
FOOTINGS	–	65mm	75mm
SLABS	20mm	30 mm	65mm
WALLS	20mm	30 mm	65mm

- C10 WELDING OF REINFORCEMENT WILL BE PERMTTIED ONLY AFTER THE WRITTEN APPROVAL OF THE ENGINEER.
- C11 REINFORCEMENT SYMBOLS.
- C12 FABRIC TO BE IN ACCORDANCE WITH AS 1304.
- C13 THE CONTRACTOR SHALL NOTIFY THE ENGINEER 24 HOURS BEFORE REINFORCEMENT IS COMPLETED. THE CONTRACTOR SHALL ALLOW, AFTER THE COMPLETION OF THE REINFORCEMENT, TWO HOURS FOR THE ENGINEERS INSPECTION.
- C14 CONCRETE SHALL NOT BE ORDERED UNTIL REINFORCEMENT IS APPROVED BY THE ENGINEER
- C15 THE CONTRACTOR SHALL NOTIFY THE ENGINEER 24 HOURS BEFORE POURING OF CONCRETE
- C16 CONCRETE CURING AND STRIPPING TO BE IN ACCORDANCE WITH THE RELEVANT ASS CODS. CONCRETE TO BE CURED A MINIMUM OF 7 DAYS AFTER POURING.
- C17 BRICKWORK TO BEAMS AND SLABS SPANNING GREATER THEN 5m SHALL BE PRECAMBERED UPWARDS BY 1/500 OF CLEAR SPAN IN EACH SPAN UNLESS NOTED DIFFERENTLY ON THE DRAWINGS.

BRICKWORK(OR BLOCKWORK)

- B1 SLIP JOINTS TO BE USED ON ALL LOAD-BEARING MASONRY WALLS USING 2 LAYERS OF GALVANIZED FLAT STEEL WITH GRAPHITE GREASE SANDWISHED BETWEEN, U.N.O ON PLAN.
- B2 WALLS SHOWN ON STRUCTURAL DRAWINGS ARE BEARING WALLS. NON LOAD BEARING WALLS SHALL BE SEPARATED FROM THE SLABS IN AN APPROVED MANNER.
- B3 NO BRICKWORK WHICH IS SUPPORTED BY THE SLAB SHALL BE ERECTED UNTIL FORMWORK HAS BEEN REMOVED.
- B4 BRICK MORTER TO BE 1:1/4:3 PROPORTIONS BY VALUME CEMENT, LIME & SAND.
- B5 BRICK STRENGTH FOR LOAD BEARING BRICKWORK TO BE A MINIMUM OF C= 20 Mpa
- B6 BLOCKWORK QUALITY; BLOCKWORK STRENGTH 20Mpa
BLOCKWORK GROUT;
F'C (28 DAYS) 20
SLUMP 230
MAX. SIZE AGG 10
- B7 PROVIDE 10mm POLYSTYRENE EXPANSION JOINT BETWEEN ALL BRICK & CONCRETE BUTTING FACES ON ALL LEVELS.
- B8 PROVIDE VERTICAL JOINTS IN BRICKWORK AT 6M MAXIMUM CENTRES

STEEL NOTES

- S 1 MATERIALS FABRICATIONS AND ERECTION TO BE STRICTLY IN ACCORDANCE WITH AS 4100 THE COMPANIION AUSTRALIAN STANDARDS CITED IN AS 4100 AND WITH THE SPECIFICATIONS.
- S 2 UNLESS NOTED OTHERWISE ALL STEEL SHALL BE IN ACCORDANCE WITH BHP 300 PLUS TO ASNZ3679.1 (1996)– HOT ROLLED SECTIONS
GRADE 300 TO AS3679.2 (1991)– WELDED SECTIONS
GRADE 250 TO AS3678 (1996)– HOT ROLLED PLATES & SLABS.
GRADE 350 TO AS1163 (1993)– HOLLOW SECTIONS
- S 3 WELDING SHALL COMPLY WITH AS 1554.
- S 4 WELDS SHALL BE 6mm CONTINUOUS FILLET UNLESS NOTED OTHERWISE. WELDS TO PURLIN CLEATS SHALL BE 4mm cfw.
- S 5 ELECTRODES SHALL BE E41XX OR E48XX.
- S 6 BOLTS DENOTED 46/S – ARE COMMERCOAL BOLTS OF STRENGTH GRADE 46 TO AS1111 – SNUG TIGHT.
- S 7 BOLTS DENOTED 8.8/S,8.8/TB AND 8.8/TF ARE HIGH STRENGTH STRUCTURAL BOLTS OF STRENGTH GRADE 8.8 TO AS 1252; 8.8/S DENOTED BOLTS SNUG TIGHT; 8.8/TB AND 8.8/TF DENOTES BOLTS FULLY TENSIONED TO AS1511; 8.8/TB DENOTES BEARING JOINT; 8.8/TF DENOTES FRICTION JOINT
- S 8 LOAD INDICATOR WASHERS SHALL BE USED UNDER THE THE BOLT HEAD FOR ALL 8.8/TF 8.8/TB BOLTS.
- S 9 BOLTS SHALL BE M20 UNLESS NOTED NOTED OTHERWISE. BOLTS SHALL BE 4.6/S UNLESS NOTED OTHERWISE.
- S10 BOLT HOLES SHALL BE BOLT DIAMETER.
+2mm FOR STEEL TO STEEL CONNECTIONS.
+4mm FOR STEEL TO CONCRETE CONNECTIONS.
+6mm FOR BASE PLATES.
- S11 ALL PLATES AND STIFFENERS SHALL BE 10mm THICK UNLESS NOTED OTHERWISE.
- S12 CORROSION PROTECTION.

MEMBER SURFACE PRIMER R.O.Z.C.

PREPARATION POWER WIRE BRUSH

ALL U.N.O. TO AS 1627:2 CLASS 3.

EMBEDDED ITEMS, SHELF ANGLES HOT DIPPED GALVANISED
& EXPOSED STEELWORK TO AS1650

- S13 CONCRETE ENCASED STEELWORK TO BE WRAPPED IN ACCORDANCE WITH AS 4100 AND TO HAVE 50mm MINIMUM COVER TO CONCRETE.
- S14 LOCATION OF PURLINS AND GIRTS TO BE OBTAINED FROM ARCHITECTS DRAWINGS OR ROOFING CONTRACTORS.
- S15 PROVIDE SEAL PLATES TO ENDS OF HOLLOW SECTIONS.
- S16 ALL STRUCTURAL STEELWORK WHICH IS EXPOSED OR IN CONTACT WITH EXPOSED BRICKWORK OR BLOCKWORK AND ALL LINTELS, SHALL BE HOT DIP GALVANIZED UNLESS NOTED OTHERWISE.
- S17 ALL STEELWORK TO BE TEMPORARILY BUT SECURELY BRACED UNTIL ALL FINAL BRACING, CLADDING,AND STABILISING BRICKWORK OR BLOCKWORK HAVE BEEN COMPLETED.
- S18 THREE COPIES OF ALL SHOP DETAILS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL OF STRUCTURAL SUFFICIENCY BEFORE FABRICATION.



SUITE 303/29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK, BELLA VISTA

- PH. 02 8814 6191 •FAX. 02 8814 5301
•EMAIL. andrew@camconsulting.com.au

JOB NUMBER:	C25094
PROJECT:	PROPOSED RESIDENCE 64 OAKS AVENUE SHELLY BEACH, NSW
CLIENT :	REWARD

D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026							
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025							
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025							
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025							
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE				

SUITE 303 / 29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK,
BELLA VISTA N.S.W. 2153

ALL CORRESPONDENCE TO:
P.O. BOX 6080 BAULKHAM HILLS BC
BAULKHAM HILLS NSW 2153
PH: 8814 6191 FAX: 8814 5301
EMAIL: andrew@camconsulting.com.au

COPYRIGHT

THIS DRAWING REMAINS
THE PROPERTY OF CAM
CONSULTING AND MAY NOT
BE ALTERED IN ANY WAY
WITHOUT CAM CONSULTING
WRITTEN CONSENT

PROJECT
PROPOSED DEVELOPMENT
64 OAKS AVENUE,
SHELLY BEACH, NSW

CLIENT
REWARD

DRAWING TITLE
COVER

SCALES
A3 - 1:100

DESIGNED
A.C.

DRAFTED
N.K

DRAWING NO.
C25094 E00

APPROVED
A.C.

REVISION
D

WAFFLE POD SLAB $f_c = 40 \text{ MPa}$

-SITE IN ACCORDANCE WITH AW GEOTECHNICS SITE CLASSIFICATION REPORT AWT 85250, CLASS M.

-FOOTINGS HAVE BEEN DESIGNED FOR A S.B.C. OF 150 kPa MIN BEARING ON V DENSE SAND.

-IN LOCATIONS WHERE BEARING IS INADEQUATE OR NON UNIFORM, PROVIDE PIERS IN ACCORDANCE WITH ENGINEERS INSTRUCTIONS ON SITE. IT IS THE BUILDERS RESPONSIBILITY TO ADVISE THE ENGINEER OF ANY SUCH CONDITION PRIOR TO PLACING REINFORCEMENT.

-ALL TOPSOIL AND GRASS ROOTS TO BE REMOVED FROM THE AREA ON WHICH THE SLABS ARE TO REST. FILLING TO BE INERT (NON REACTIVE) GRANULAR MATERIAL, WHERE REQUIRED, WELL WATERED AND COMPACTED IN 200 mm. MAX. LAYERS IN ACCORDANCE WITH AS2870.

-INTERNAL SLABS TO BE 90 THICK WITH SL82 MESH TOP
-PATIO SLABS TO BE 90 THICK WITH SL82 MESH TOP
-GARAGE SLABS TO BE 100 THICK WITH SL82 MESH TOP
-DRIVEWAY SLABS TO BE 100 THICK WITH SL82 MESH TOP

-RAFT SLAB LAID ON Min. 50 THICKNESS OF CONSOLIDATED SAND COVERED WITH A 0.2 THICK POLYTHENE MEMBRANE WITH ALL JOINTS PROPERLY LAPPED AND TAPED

-A 1 METRE WIDE APRON WITH 25 CROSS FALL AWAY FROM SLAB EDGE, IS TO BE FORMED ALL ROUND THE RAFT SLAB

-ALL CONCRETE IS TO BE PLACED BY PUMPING AND COMPACTED WITH A VIBRATOR.

-SLAB TO BE CURED BY ONE OF THE FOLLOWING METHODS:

(i) WETTING TWICE DAILY FOR THE FIRST THREE DAYS.

(ii) USING AN APPROVED CURING COMPOUND

-V.J. DENOTES VERTICAL JOINT IN BRICKWORK

-K.J. DENOTES KEY JOINT IN CONCRETE

-AT L-INTERSECTIONS, ONE OUTER BAR SHALL BE BENT AND CONTINUED 500MM, OR A BENT BAR 500MM LONG ON EACH LEG SHALL BE PROVIDED TOP AND BOTTOM

- PODS LESS THAN 400MM WIDE CAN BE TAPED - IF EDGE BEAM EXCEEDS 300MM.(REFER TO TABLE FOR ADDITIONAL REINFORCEMENT REQUIREMENTS) POD TAPING DETAIL IS ONLY PERMISSIBLE FOR AN ENTIRE LENGTH OF EDGE BEAM OR STEP BEAM ALL INTERNAL RIBS MUST BE CONTINUOUS.

LEGEND



DENOTES STARTING POINT

■ DENOTES STEEL POST POSITION




DENOTES FULL SIZE WAFFLE POD

○ DENOTES SCREW PIERS TO MANUF. SPEC.



DENOTES TRIMMER BARS

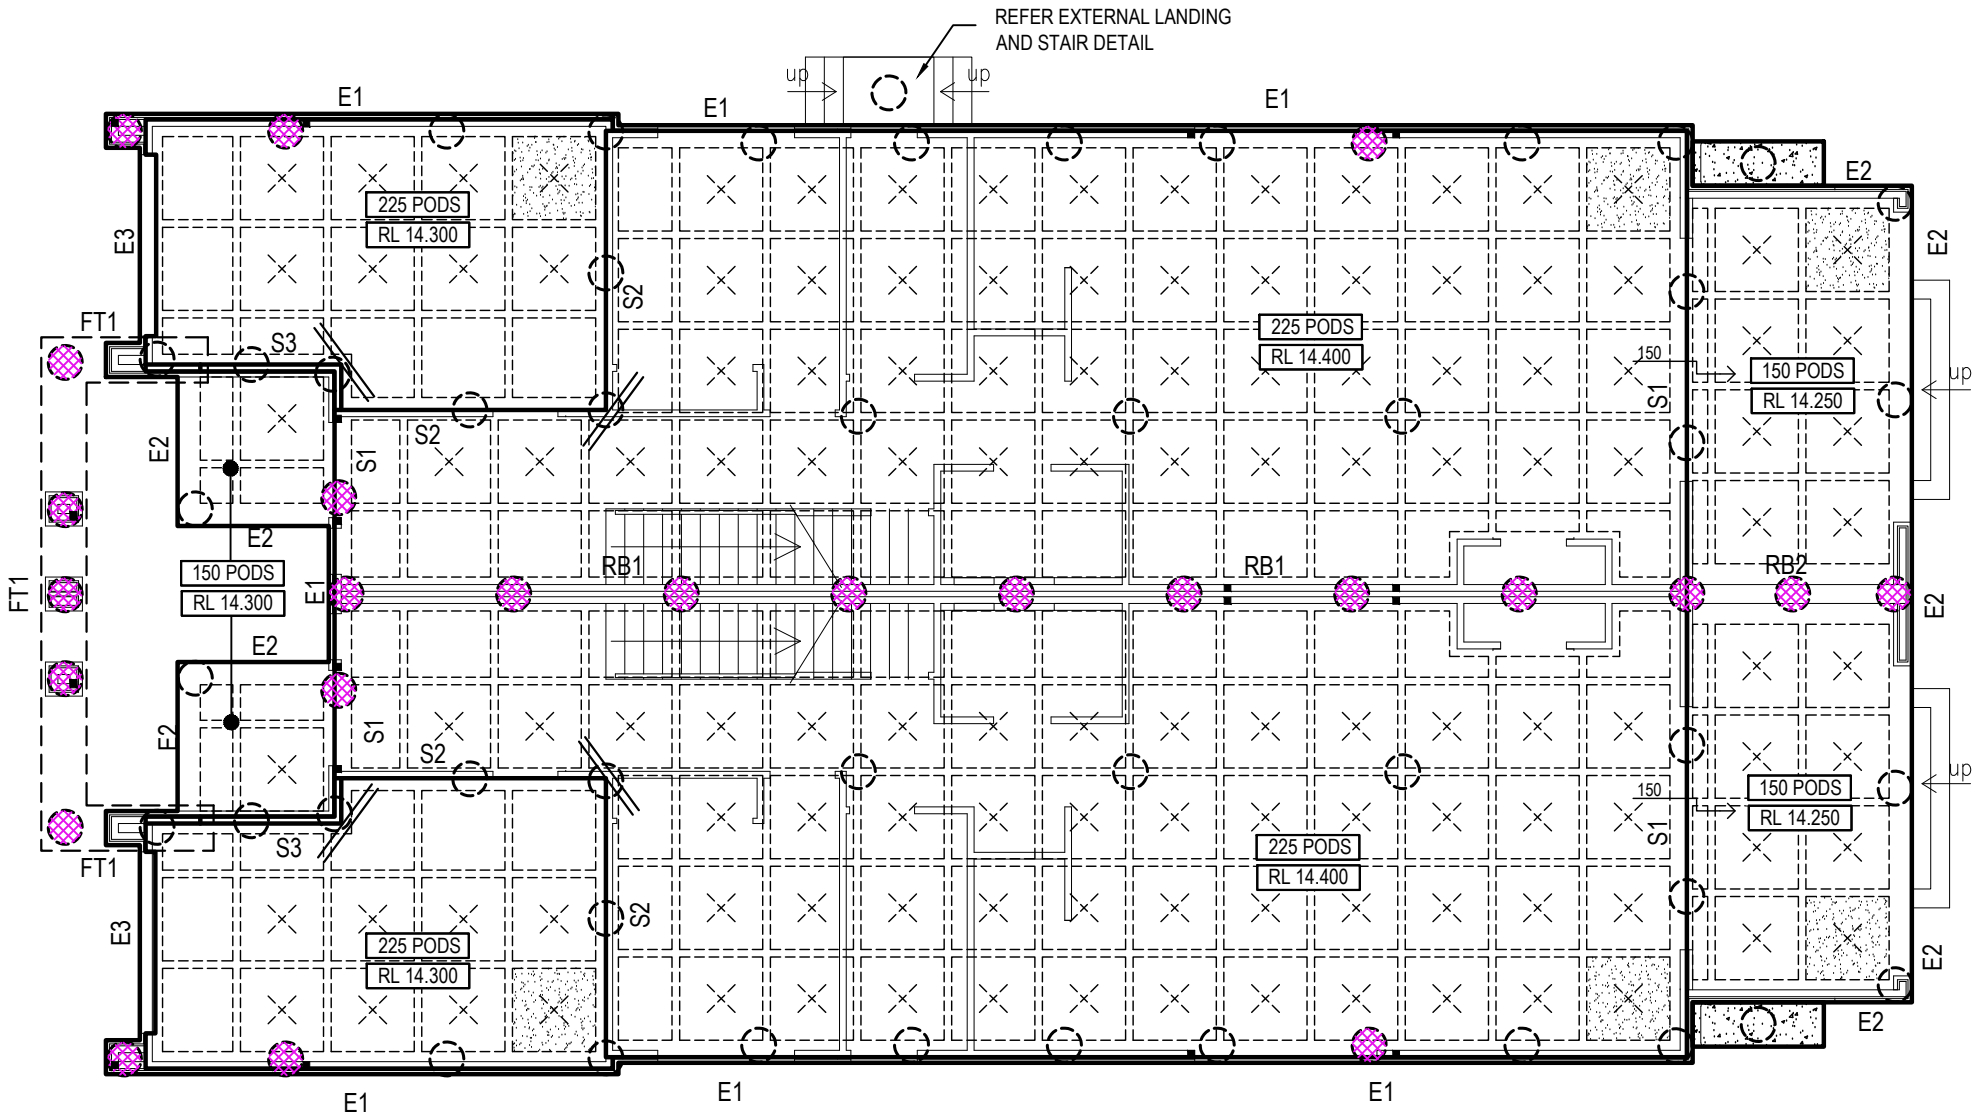


SCREW PIER LOADING CAPACITY

- - 85kN WORKING LOAD
- - 120kN WORKING LOAD

SCREW PILES TO BE DESIGNED FOR 50 YEARS

TYPICAL TRIMMERS AT RE-ENTRANT CORNERS

2N12-1200LG
TIED UNDER TOP
MESH TYPICAL ALL
RE-ENTRANT CORNERS

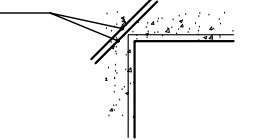

G


WAFFLE POD

SITE CLASSIFICATION NOTES:

- B2 EXPOSURE CLASSIFICATION - COASTAL (AS3600)
- SEVERE MARINE COASTAL CLASSIFICATION (AS3700)

- ALL CONCRETE ELEMENTS TO BE 40MPa
- 45mm COVER TO ALL REINFORCEMENT
- ALL CONCRETE MUST BE ALLOWED TO CURE CONTINUOUSLY FOR AT LEAST 7 DAYS
- EXPOSURE GRADE BRICKWORK TO BE USED FOR ALL EXTERIOR WALLS
- M4 MORTAR TO BE USED IN ALL MASONRY WALLS
- DURABILITY CLASS R4 FOR BUILT IN COMPONENTS - STAINLESS STEEL BRICK TIES ETC.
- ALL EXPOSED STEEL BEAMS, POSTS, LINTELS ETC TO BE GALVANISED

REFER TO SLAB PLAN

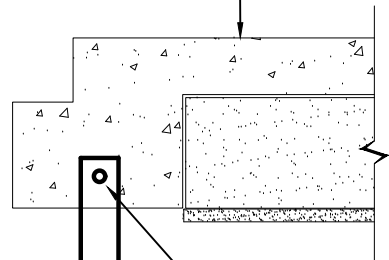

PLACE N12-200 LONG
THROUGH HOLE

TO MANUFACTURER SPECS.

TYPICAL SCREW PIER DETAIL

REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026			
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025			
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025			
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025			



SUITE 303 / 29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK,
BELLA VISTA N.S.W. 2153

ALL CORRESPONDENCE TO:
P.O. BOX 6080 BAULKHAM HILLS BC
BAULKHAM HILLS NSW 2153
PH: 8814 6191 FAX: 8814 5301
EMAIL: andrew@camconsulting.com.au

COPYRIGHT
THIS DRAWING REMAINS
THE PROPERTY OF CAM
CONSULTING AND MAY NOT
BE ALTERED IN ANY WAY
WITHOUT CAM CONSULTING
WRITTEN CONSENT

PROJECT
PROPOSED DEVELOPMENT
64 OAKS AVENUE,
SHELLY BEACH, NSW

CLIENT
REWARD

DRAWING TITLE
WAFFLE POD LAYOUT

SCALES
A3 - 1:100


DRAWING NO.
C25094 E01

DESIGNED
A.C.









APPROVED
A.C.

DRAFTED
N.K

REVISION
D

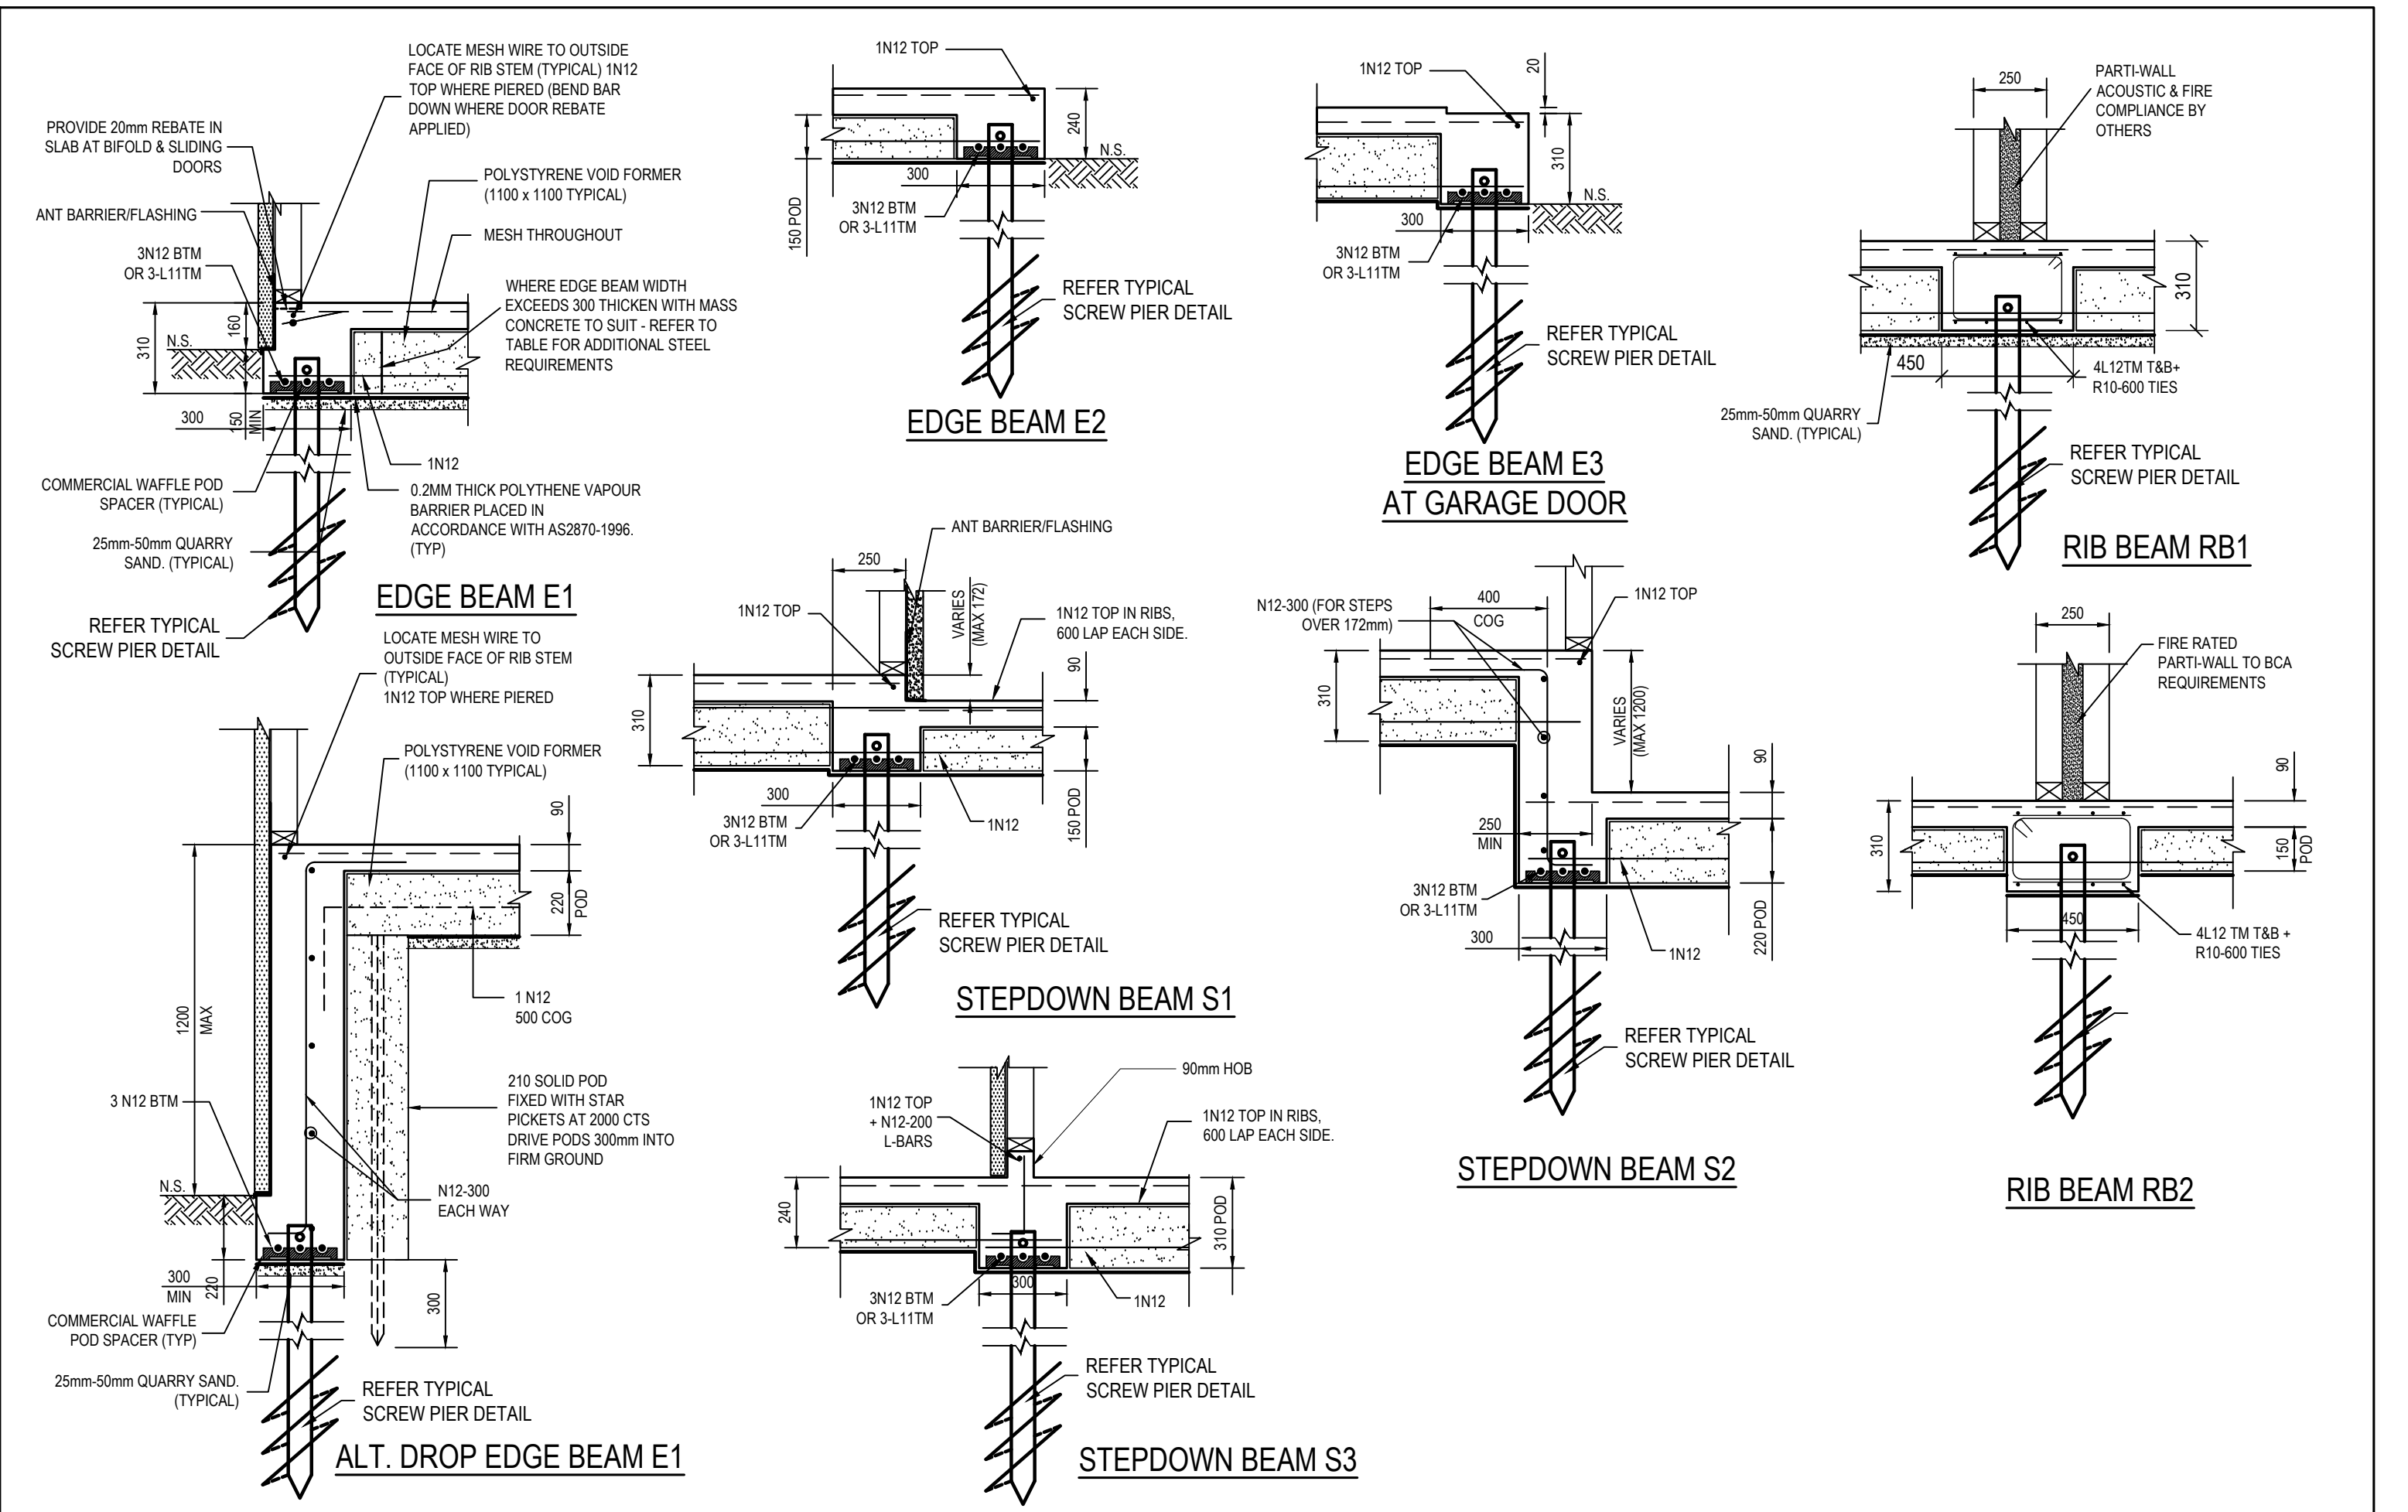

						 SUITE 303 / 29-31 LEXINGTON DRIVE NORWEST BUSINESS PARK, BELLA VISTA N.S.W. 2153 ALL CORRESPONDENCE TO: P.O. BOX 6080 BAULKHAM HILLS BC BAULKHAM HILLS NSW 2153 PH: 8814 6191 FAX: 8814 5301 EMAIL: andrew@camconsulting.com.au	COPYRIGHT THIS DRAWING REMAINS THE PROPERTY OF CAM CONSULTING AND MAY NOT BE ALTERED IN ANY WAY WITHOUT CAM CONSULTING WRITTEN CONSENT	PROJECT PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW	DRAWING TITLE WAFFLE POD SECTIONS AND DETAILS		
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026							CLIENT REWARD	SCALES A3 - 1:100	DESIGNED A.C.
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025						DRAWING NO. C25094 E02		APPROVED A.C.	REVISION D
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025									
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025									
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE						

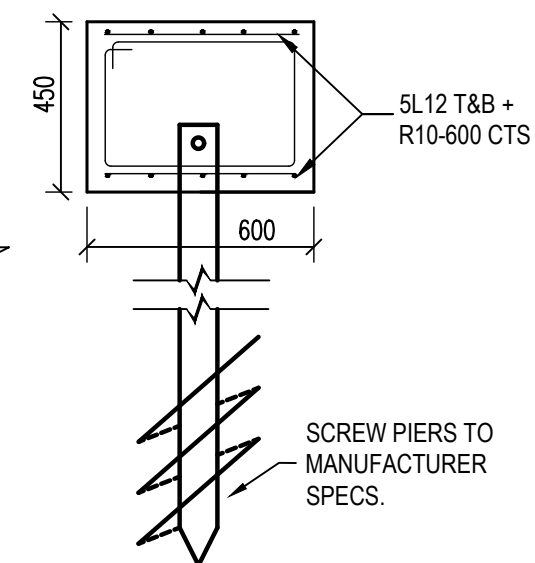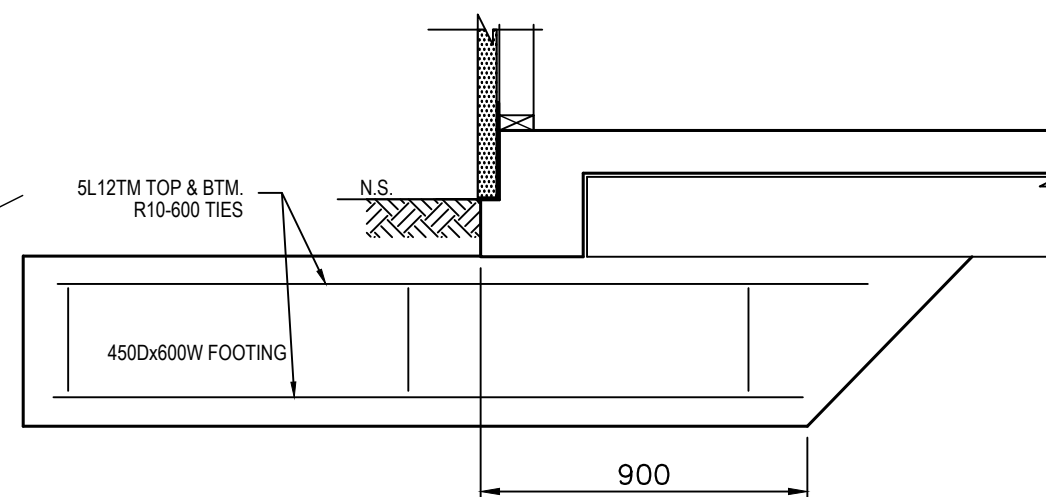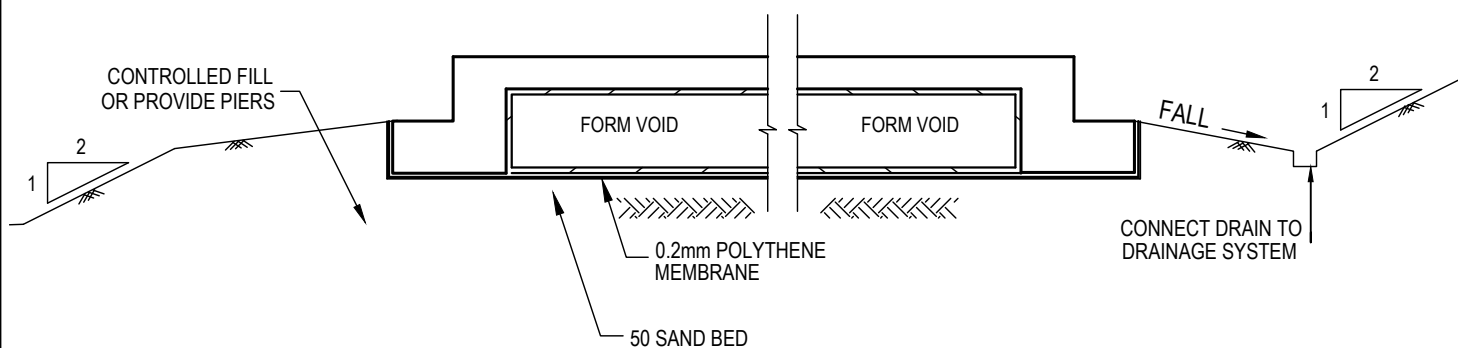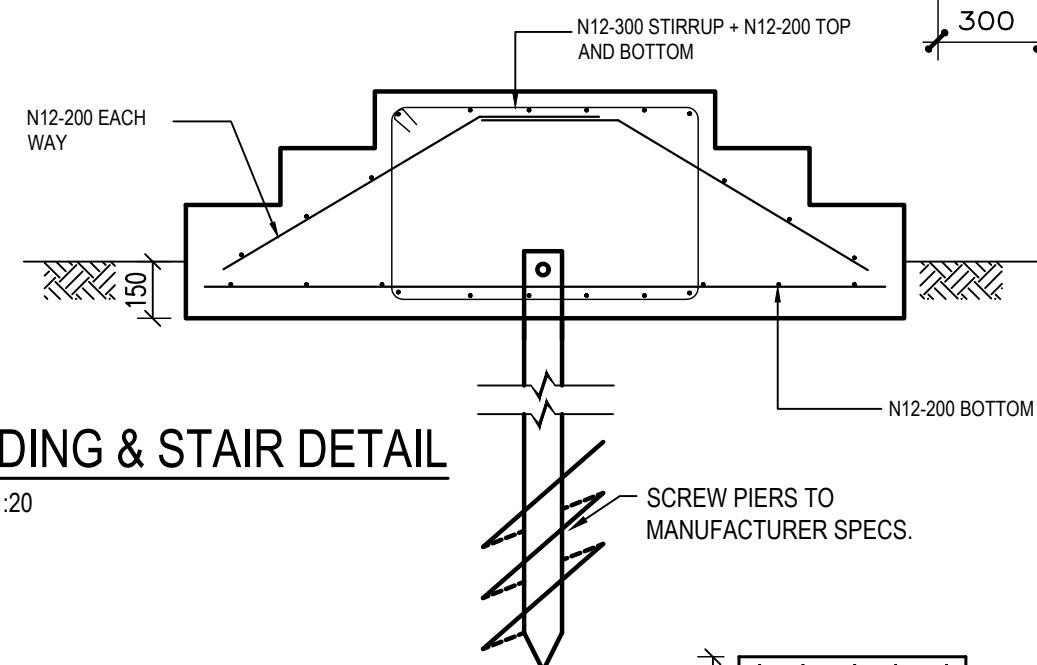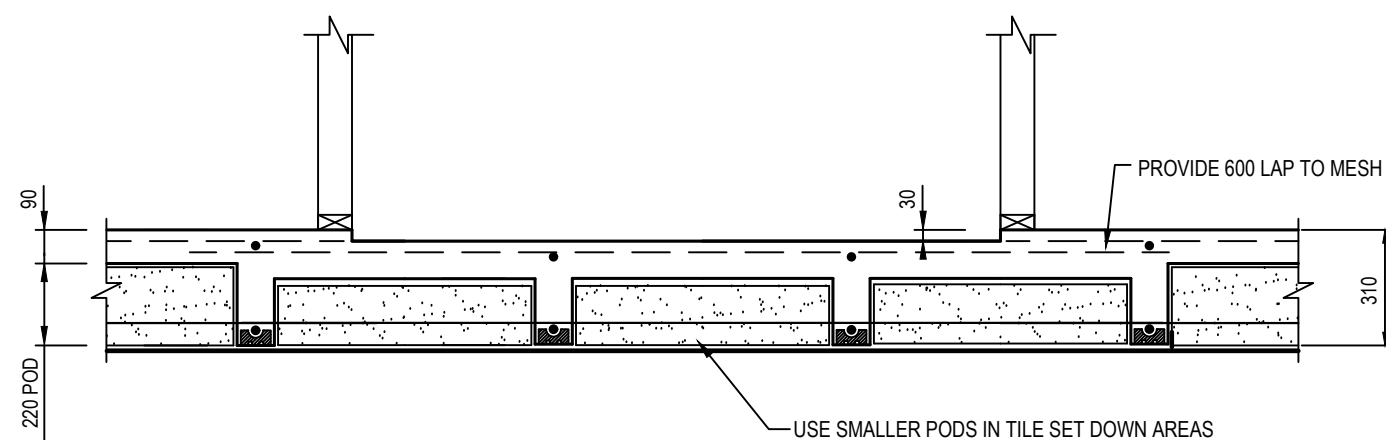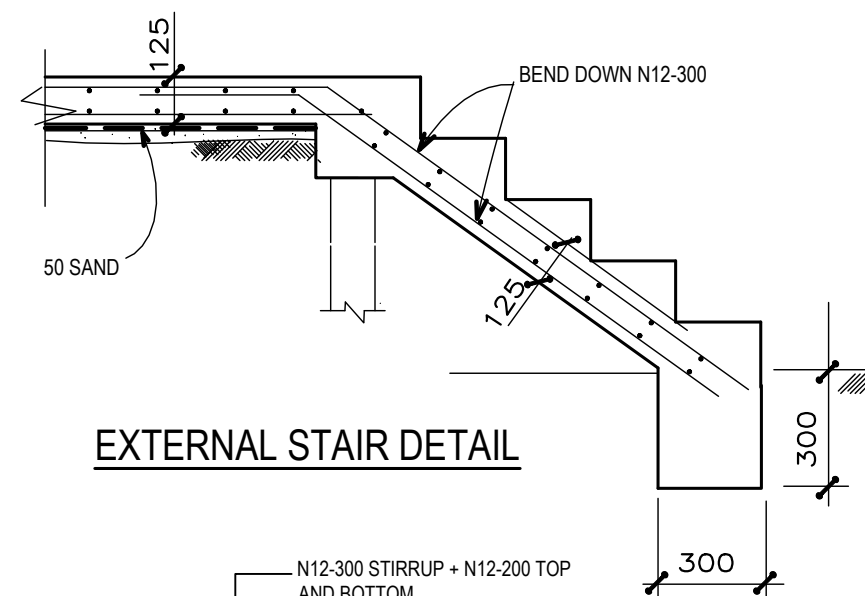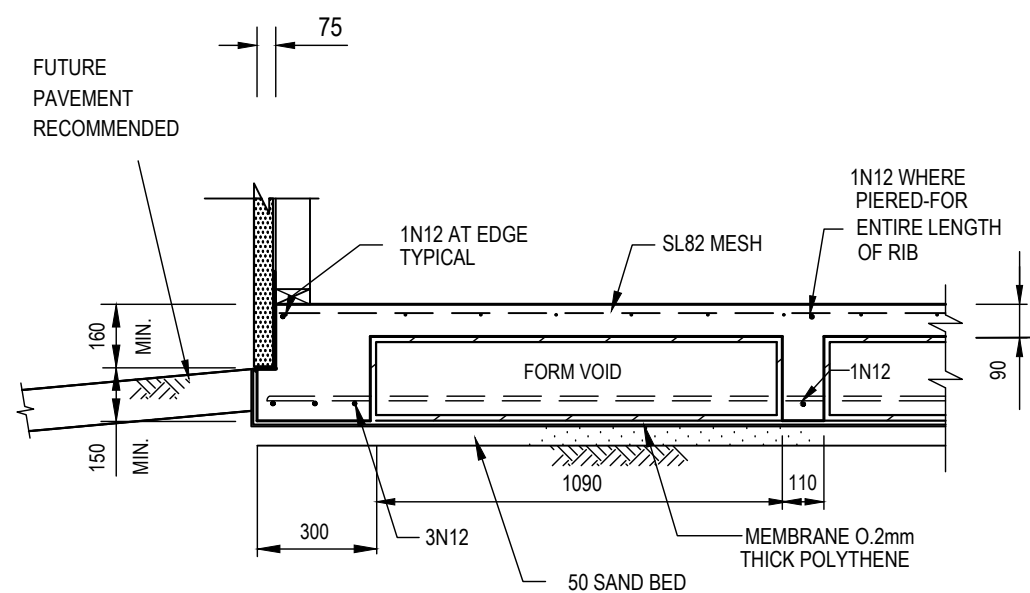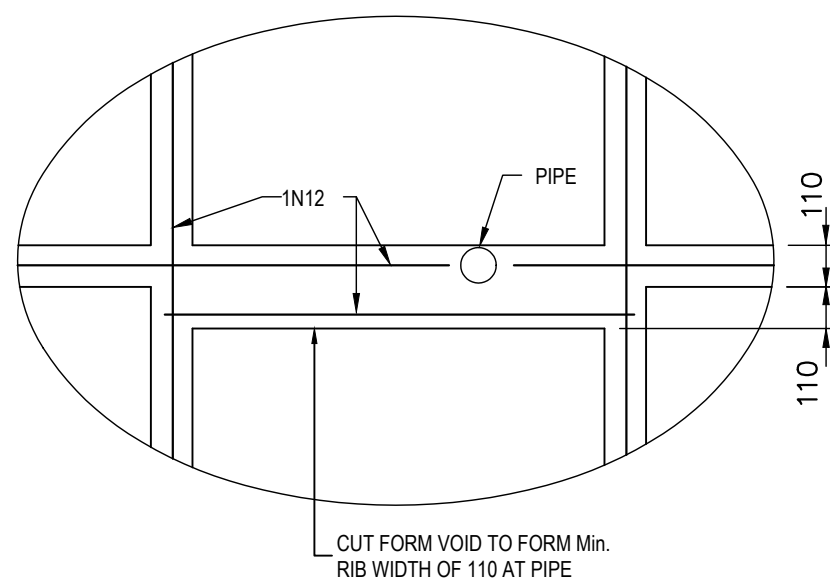

D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026			
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025			
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025			
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025			
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE



SUITE 303 / 29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK,
BELLA VISTA N.S.W. 2153

ALL CORRESPONDENCE TO:
P.O. BOX 6080 BAULKHAM HILLS BC
BAULKHAM HILLS NSW 2153
PH: 8814 6191 FAX: 8814 5301
EMAIL: andrew@camconsulting.com.au

COPYRIGHT
THIS DRAWING REMAINS
THE PROPERTY OF CAM
CONSULTING AND MAY NOT
BE ALTERED IN ANY WAY
WITHOUT CAM CONSULTING
WRITTEN CONSENT

PROJECT	PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW
CLIENT	REWARD

DRAWING TITLE	WAFFLE POD SECTIONS AND DETAILS
---------------	---------------------------------

SCALES

A3 - 1:100

DESIGNED	
A.C.	


DRAFTED
N.K

DRAWING NO. C25094 E

	APPROVE A.C.
--	-----------------

REVISION
D

PLEASE NOTE:
N2 WIND LOADING

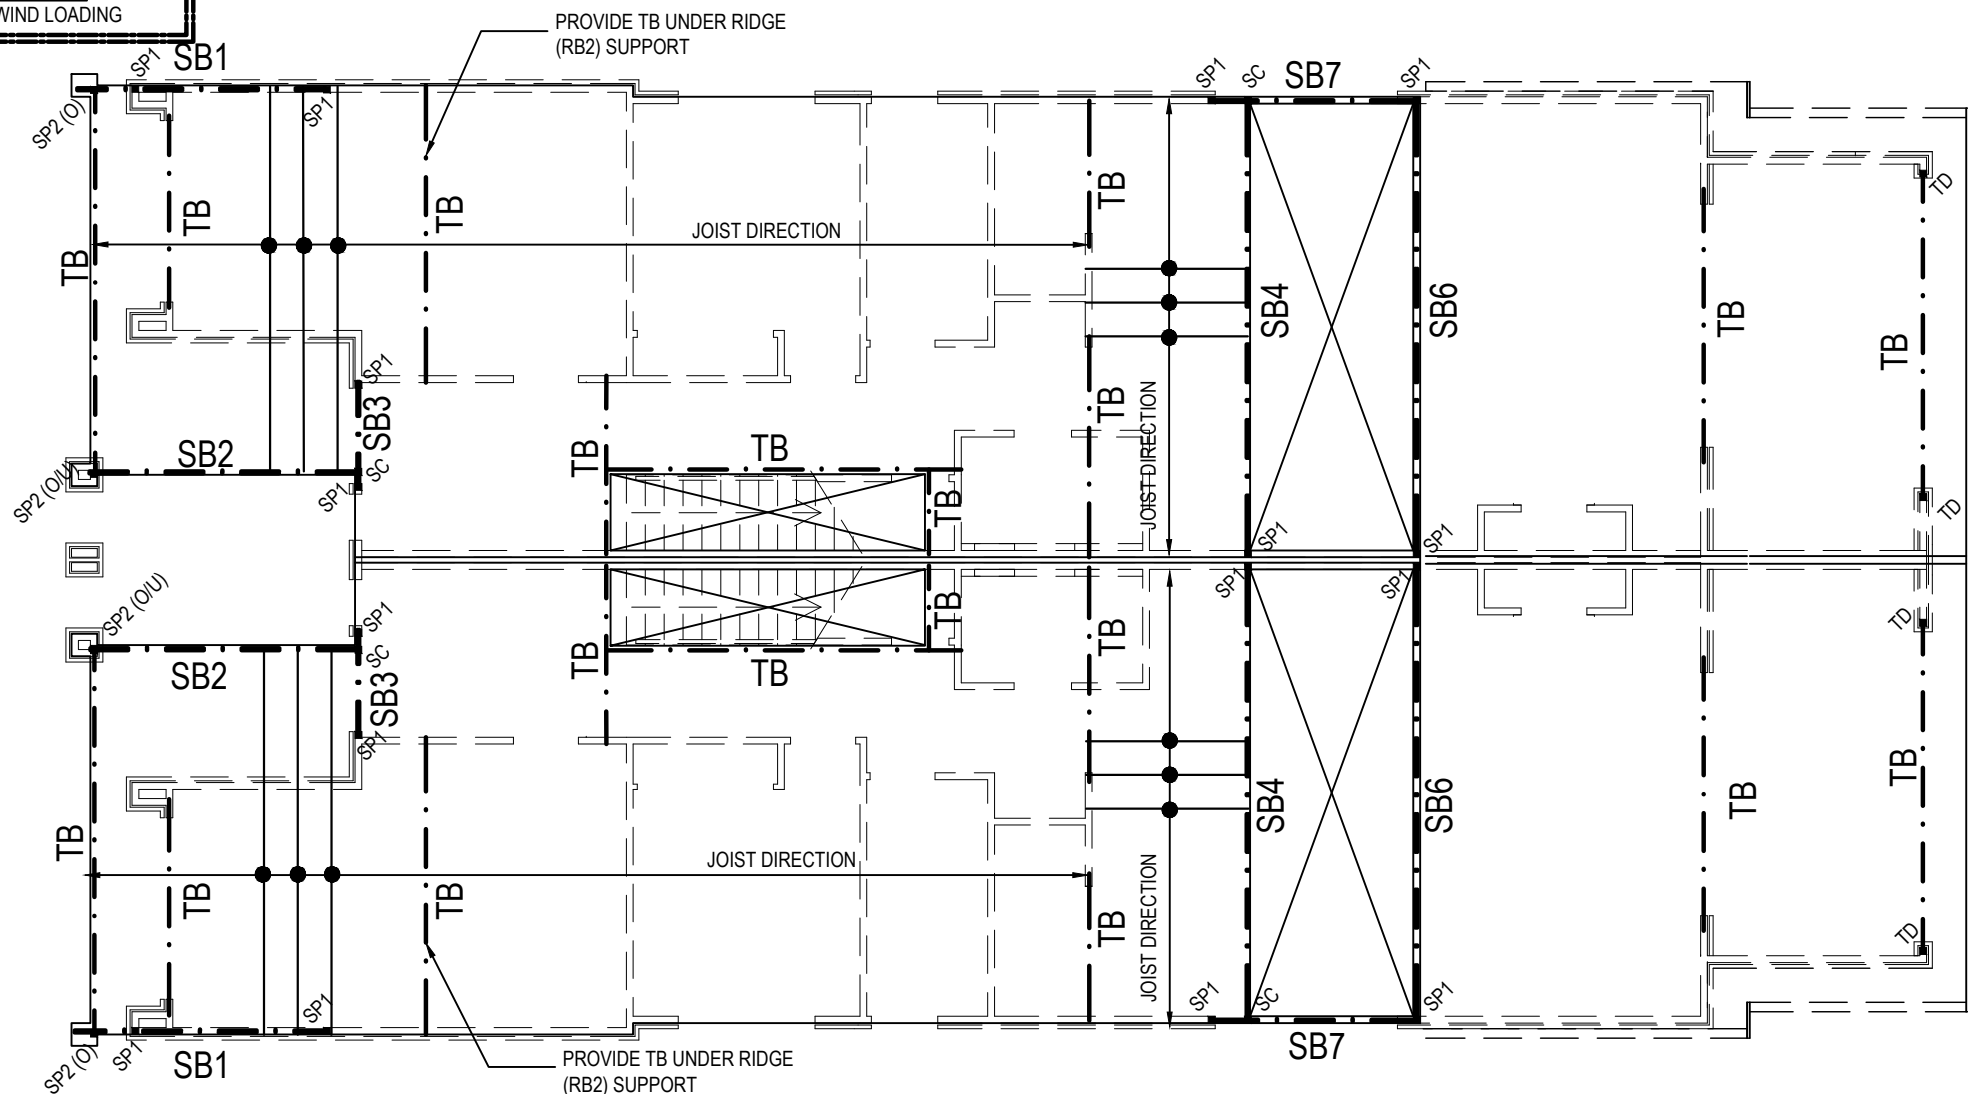

LEGEND

- DENOTES WALLS UNDER
- DENOTES FIRST FLOOR OVER
- DENOTES FLOOR JOIST DIRECTION
- DENOTES STEEL BEAM POSITION
- DENOTES TIMBER BEAM POSITION
- DENOTES STEEL POST
- DENOTES TIE DOWN
- DENOTES STUBBY COLUMN
- DENOTES STEEL POST OVER
- DENOTES STEEL POST OVER & UNDER

NOTE: ENSURE JOIST/RAFT DIRECTION FOLLOWED
OTHERWISE CONTACT ENGINEER


MEMBER SCHEDULE

ITEM	SIZE
SB1	250 PFC
SB2	200 PFC
SB3	200 PFC
SB4	250 UB 31.4
SB5	REMOVED
SB6	250 UB 31.4
SB7	200 PFC
SP1	89 x 89 x 5 SHS
SP2	89 x 89 x 6 SHS
SC	75 x 75 x 5 SHS
TP1	BY FRAME MANUFACTURE
TB	BY FRAME MANUFACTURE
JOIST	BY FRAME MANUFACTURE
ROOF	TO COMPLY WITH AS 1684.2

S STEEL BEAM LAYOUT

NOTE: ENSURE JOIST/RAFT DIRECTION FOLLOWED
OTHERWISE CONTACT ENGINEER

NOTE : IF STEEL & TIMBER LAYOUT
DOES NOT CORRELATE WITH FRAMING
DESIGN, CONTACT ENGINEER TO
AMEND DESIGN. ASSUMED TRUSS
ROOF SYSTEM USED, BEARING ON
EXTERNAL WALLS ONLY, OTHERWISE
INTERNAL LOAD BEARING WALLS TO
BE PROVIDED TO ENGINEER PRIOR TO
CONSTRUCTION.

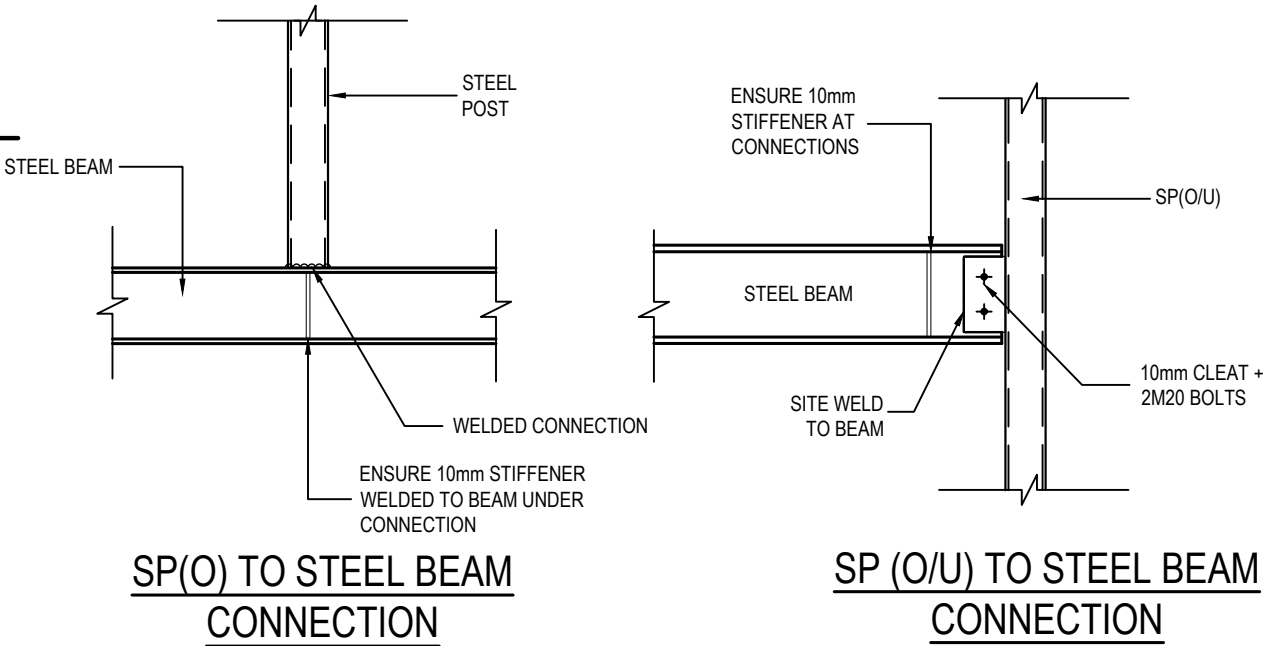

REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026			
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025			
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025			
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025			




SUITE 303 / 29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK,
BELLA VISTA N.S.W. 2153
ALL CORRESPONDENCE TO:
P.O. BOX 6080 BAULKHAM HILLS BC
BAULKHAM HILLS NSW 2153
PH: 8814 6191 FAX: 8814 5301
EMAIL: andrew@camconsulting.com.au


COPYRIGHT
THIS DRAWING REMAINS
THE PROPERTY OF CAM
CONSULTING AND MAY NOT
BE ALTERED IN ANY WAY
WITHOUT CAM CONSULTING
WRITTEN CONSENT

PROJECT	PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW
CLIENT	REWARD


DRAWING TITLE	STEEL BEAM LAYOUT
SCALES	A3 - 1:100
DESIGNED	A.C.
DRAFTED	N.K.
DRAWING NO.	C25094 E04
APPROVED	A.C.
REVISION	D

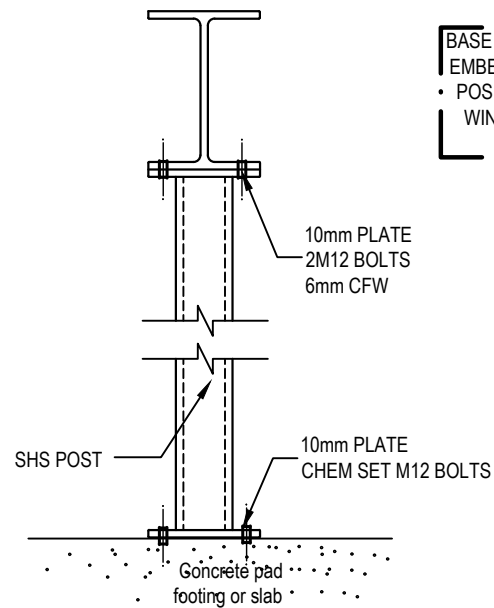


SHS POST WITH BEAM DETAIL

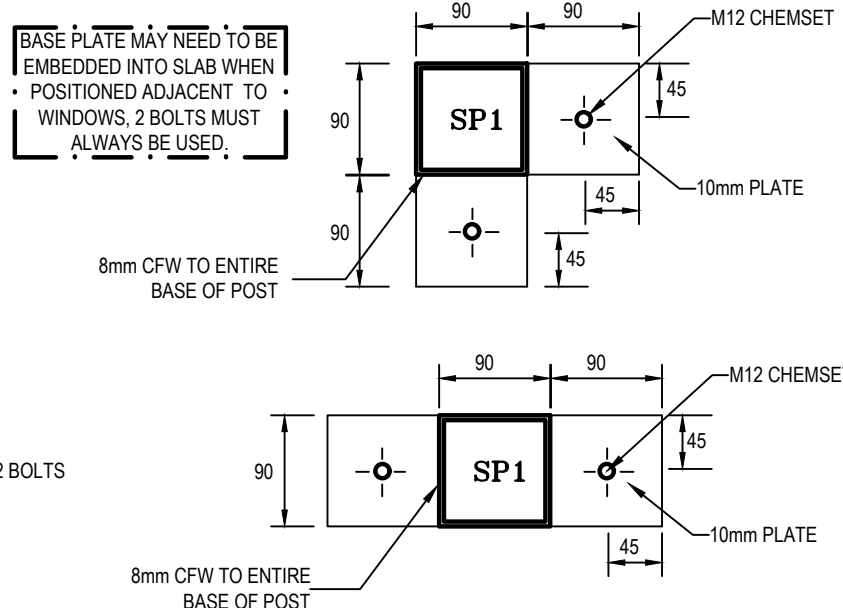


BASE PLATE DETAIL OPTIONS

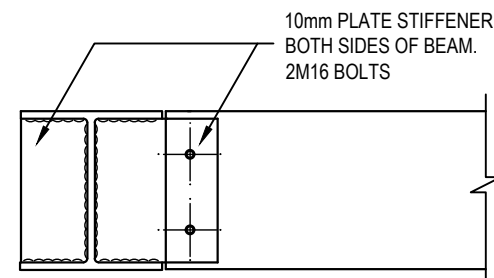


BEAM TO BEAM CONNECTION

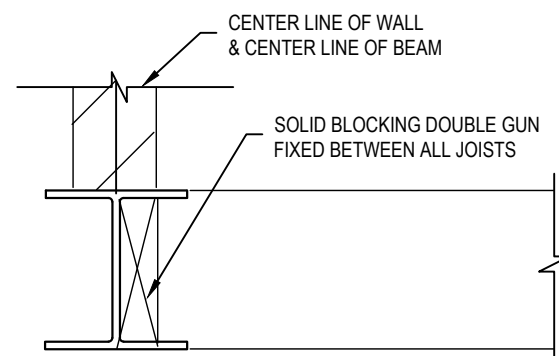


RAFTERS & JOISTS AT BEAMS

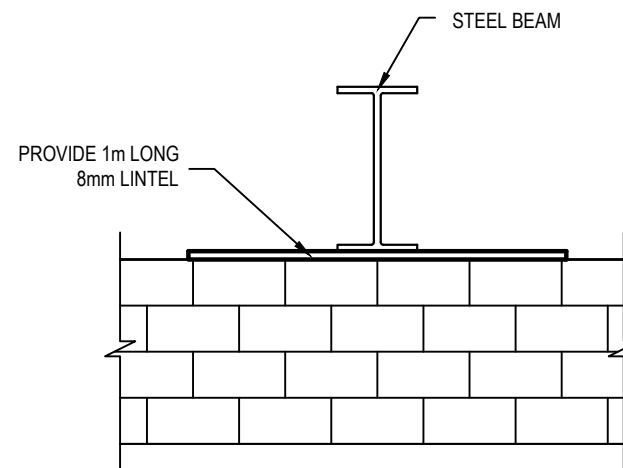


TYPICAL BEAM BEARING DETAIL

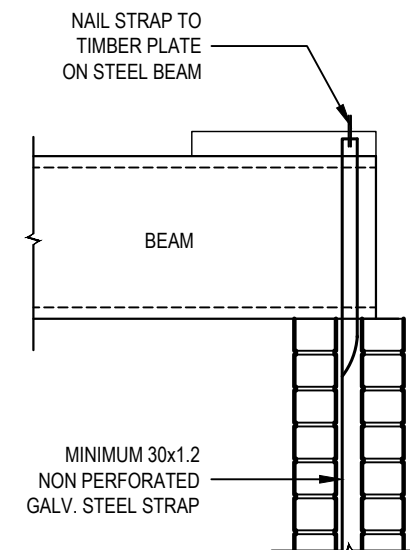


TYPICAL TIE DOWN DETAIL (TD)

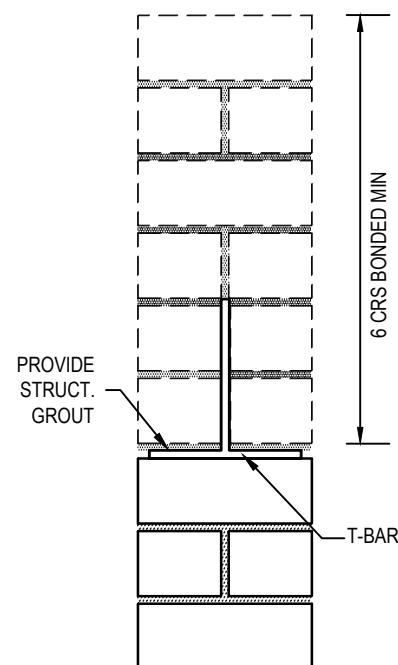

TYPICAL T-BEAM DETAIL

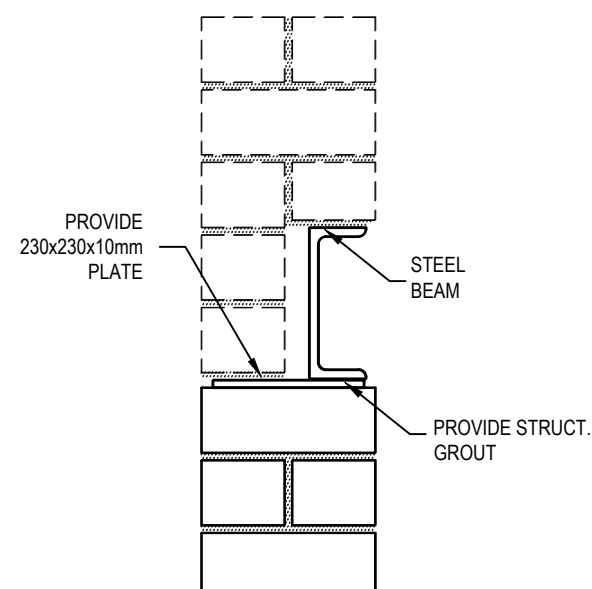

TYPICAL BEAM BEARING DETAIL

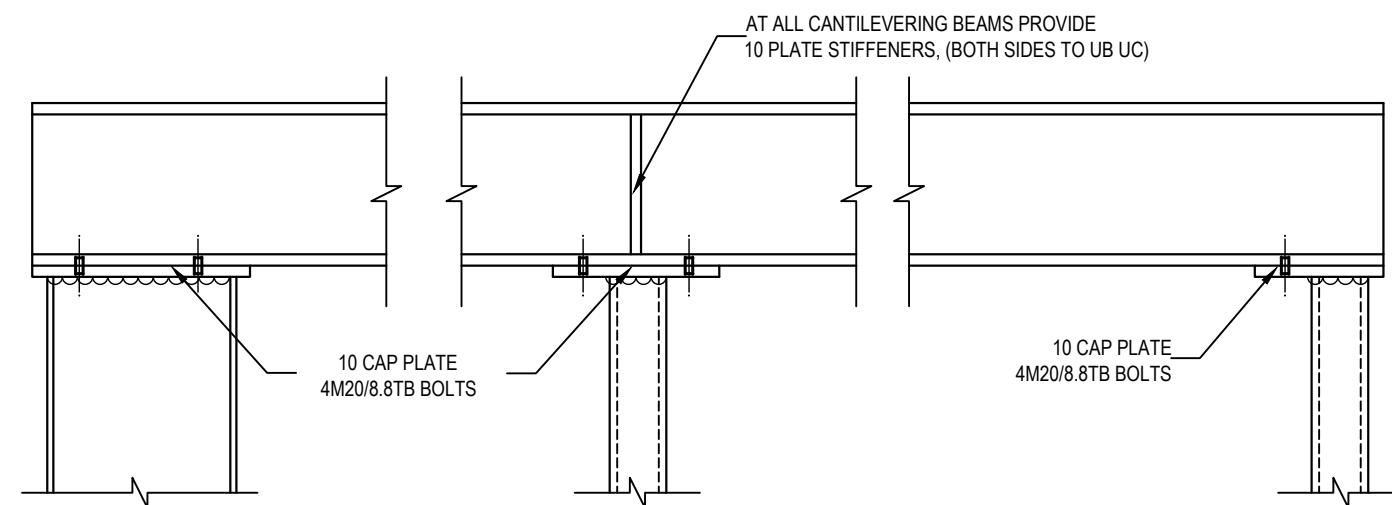

TYPICAL BEAM TO COLUMN CONNECTIONS

(IF REQUIRED ALL CONNECTIONS MAY BE WELDED USING 6mmCFW)

NOTE: TYPICAL SECTIONS ARE "TYPICAL" AND MAY NOT SPECIFICALLY REFLECT EXACT DETAIL REQUIRED.

REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026			
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025			
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025			
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025			




SUITE 303 / 29-31 LEXINGTON DRIVE
NORWEST BUSINESS PARK,
BELLA VISTA N.S.W. 2153
ALL CORRESPONDENCE TO:
P.O. BOX 6080 BAULKHAM HILLS BC
BAULKHAM HILLS NSW 2153
PH: 8814 6191 FAX: 8814 5301
EMAIL: andrew@camconsulting.com.au

COPYRIGHT
THIS DRAWING REMAINS
THE PROPERTY OF CAM
CONSULTING AND MAY NOT
BE ALTERED IN ANY WAY
WITHOUT CAM CONSULTING
WRITTEN CONSENT

PROJECT
PROPOSED DEVELOPMENT
64 OAKS AVENUE,
SHELLY BEACH, NSW
CLIENT
REWARD

DRAWING TITLE		
STEEL BEAM SECTIONS AND DETAILS		
SCALES	DESIGNED	DRAFTED
A3 - 1:100	A.C.	N.K.
DRAWING NO.	APPROVED	REVISION
C25094 E05	A.C.	D

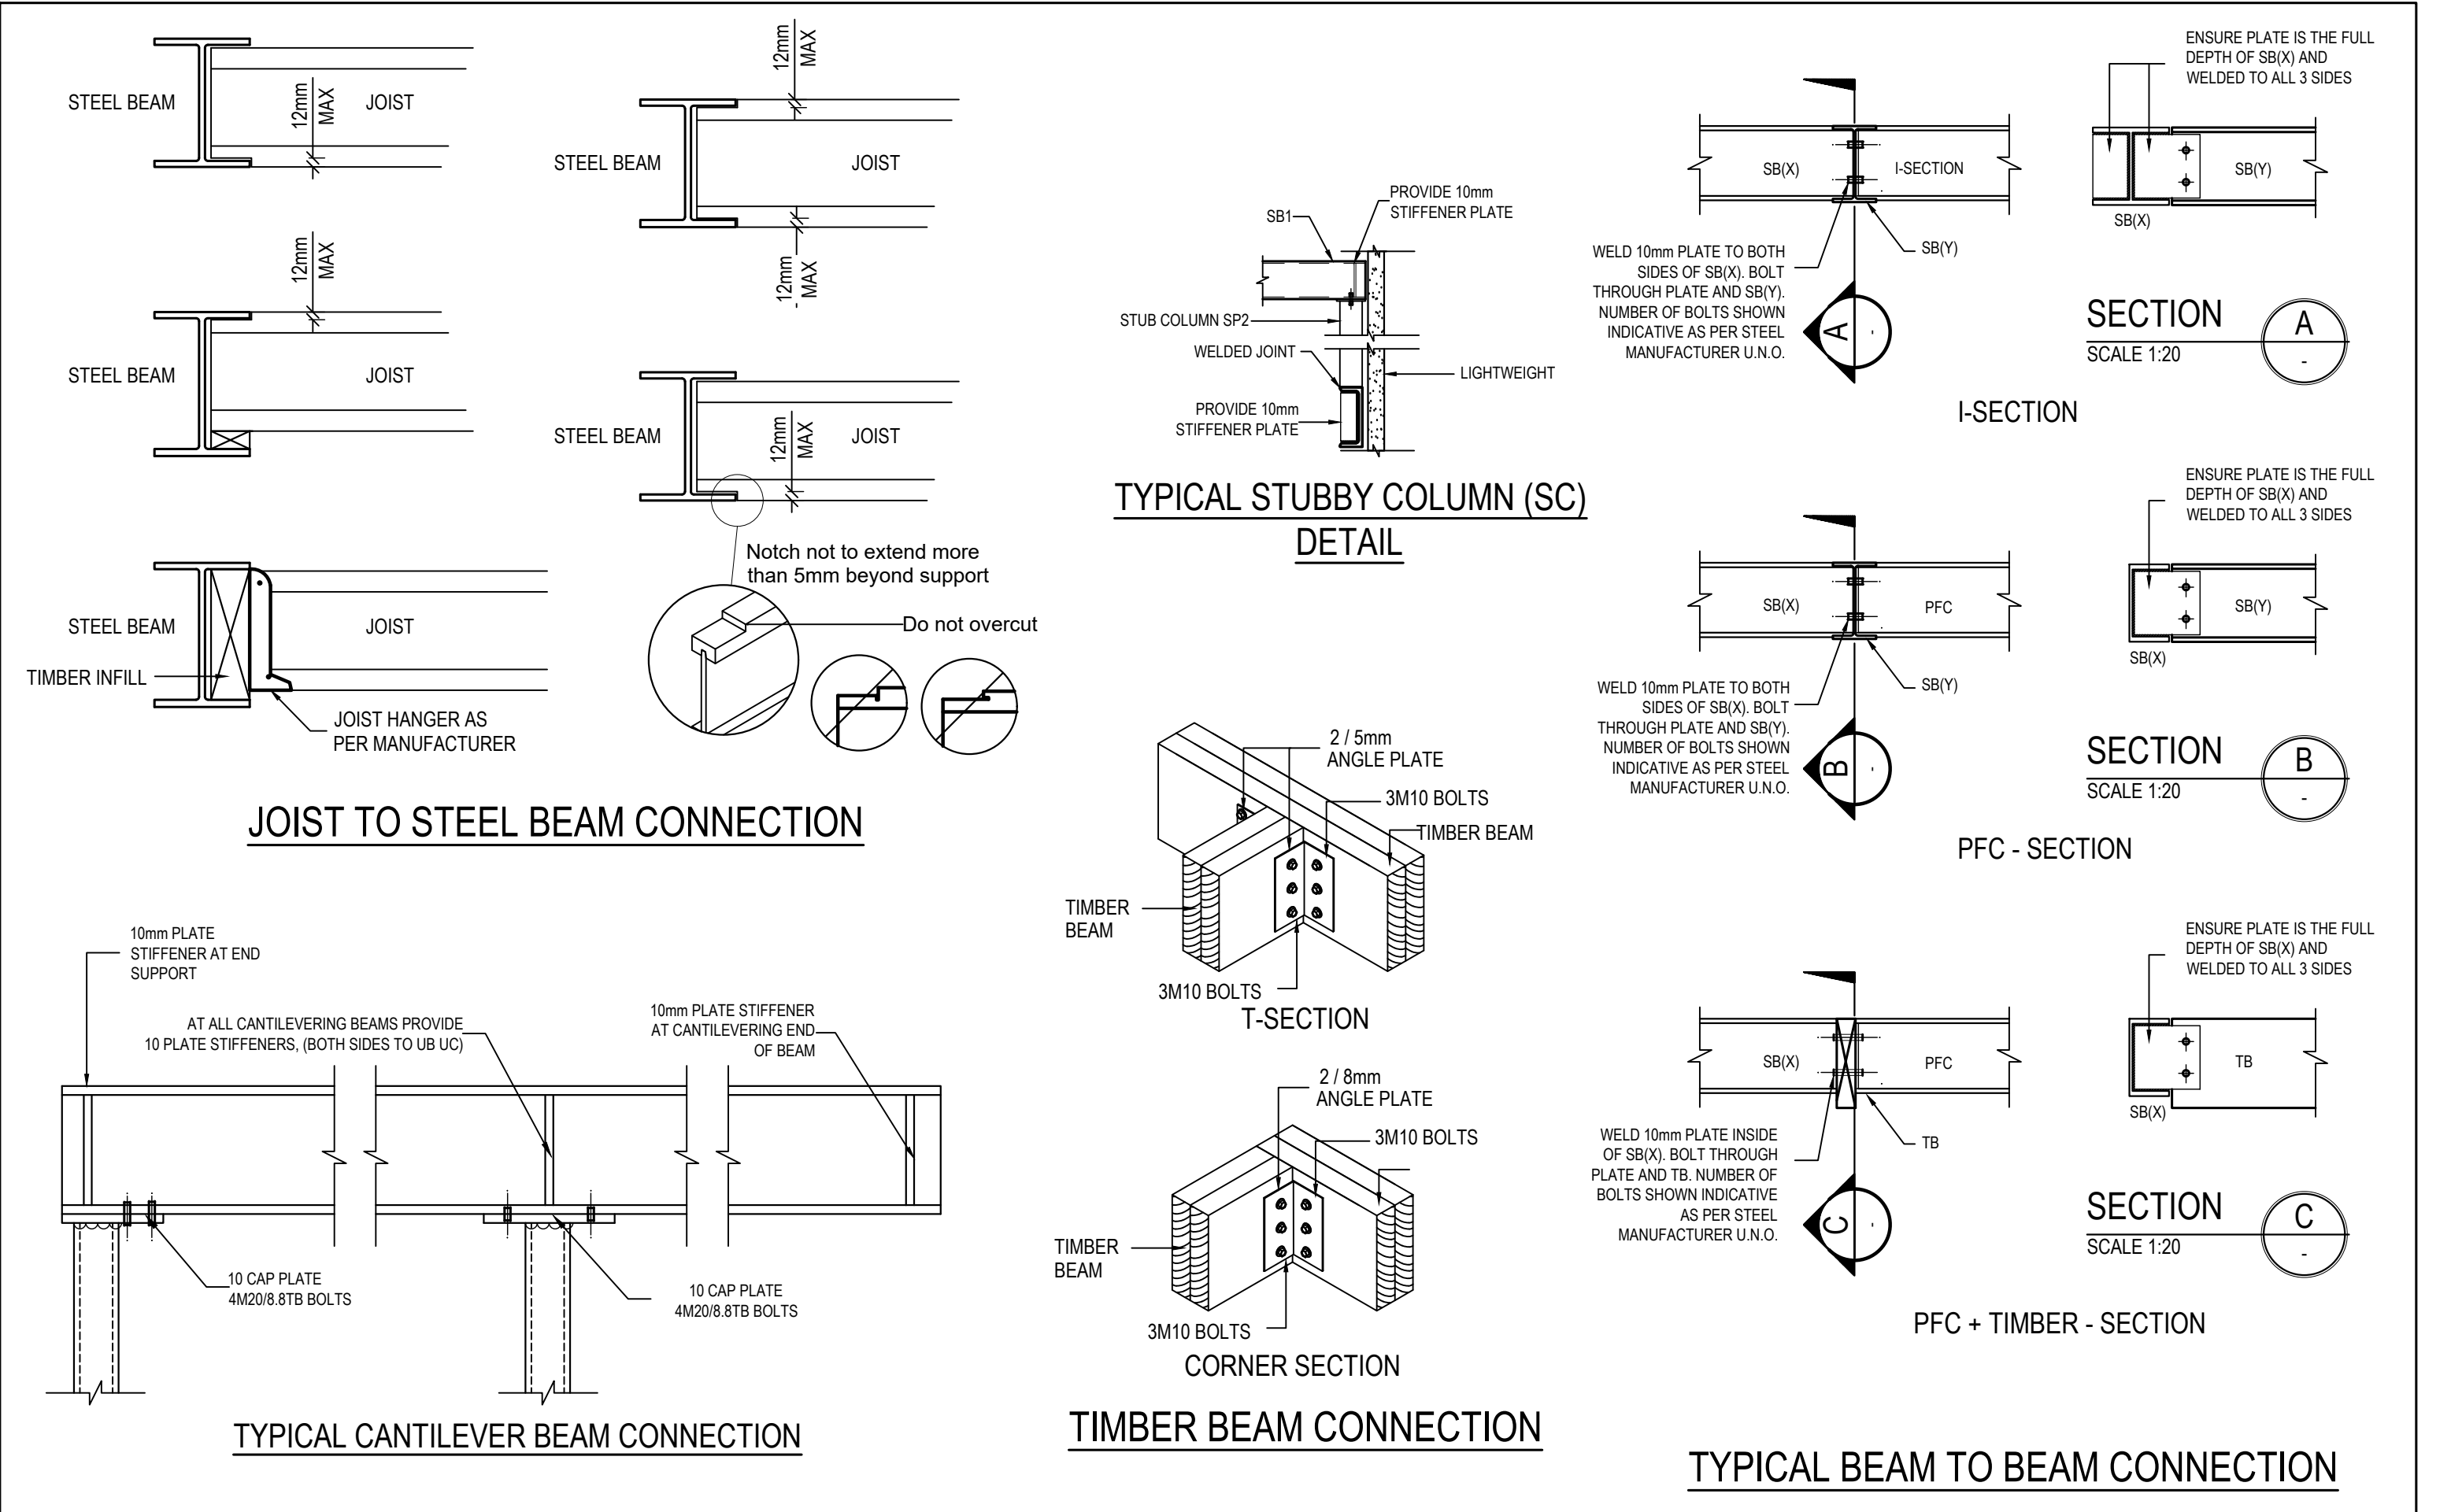

						 STRUCTURAL & CIVIL ENGINEERS	SUITE 303 / 29-31 LEXINGTON DRIVE NORWEST BUSINESS PARK, BELLA VISTA N.S.W. 2153 ALL CORRESPONDENCE TO: P.O. BOX 6080 BAULKHAM HILLS BC BAULKHAM HILLS NSW 2153 PH: 8814 6191 FAX: 8814 5301 EMAIL: andrew@camconsulting.com.au		COPYRIGHT THIS DRAWING REMAINS THE PROPERTY OF CAM CONSULTING AND MAY NOT BE ALTERED IN ANY WAY WITHOUT CAM CONSULTING WRITTEN CONSENT	PROJECT PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW		DRAWING TITLE TYPICAL BEAM SECTIONS & DETAILS		
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026					CLIENT REWARD	SCALES A3 - 1:100		DESIGNED A.C.	DRAFTED N.K.			
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025						DRAWING NO. C25094 E06		APPROVED A.C.	REVISION D			
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025												
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025												
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE									



	DENOTES WALLS UNDER
	DENOTES ROOF OVER
	DENOTES RAFTER DIRECTION
	DENOTES ROOF BEAM POSITION
	DENOTES TIMBER BEAM POSITION
	DENOTES STEEL POST
	DENOTES TIE DOWN

MEMBER SCHEDULE

ITEM	SIZE
RB1	250 UB 25.7 (A-FRAME)
RB2	2/200x63 MEYSPAN 13 LVL
SP2	89 x 89 x 6 SHS
HP1	3 x 90 x 45 STUD
R1	140x45 F7 AT 600 CTS
TB	BY FRAME MANUFACTURE
ROOF	TO COMPLY WITH AS 1684.2

						 CAM CONSULTING STRUCTURAL & CIVIL ENGINEERS	SUITE 303 / 29-31 LEXINGTON DRIVE NORWEST BUSINESS PARK, BELLA VISTA N.S.W. 2153 ALL CORRESPONDENCE TO: P.O. BOX 6080 BAULKHAM HILLS BC BAULKHAM HILLS NSW 2153 PH: 8814 6191 FAX: 8814 5301 EMAIL: andrew@camconsulting.com.au	COPYRIGHT THIS DRAWING REMAINS THE PROPERTY OF CAM CONSULTING AND MAY NOT BE ALTERED IN ANY WAY WITHOUT CAM CONSULTING WRITTEN CONSENT	PROJECT	DRAWING TITLE		
									PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW	ROOF BEAM LAYOUT		
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026							CLIENT	SCALES	DESIGNED	DRAFTED
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025								A3 - 1:100	A.C.	N.K
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025										
A	ISSUED FOR PRELIMINARY REVIEW	18/06/2025										
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE		REWARD	DRAWING NO.	APPROVED	REVISION		
								C25094 E07	A.C.	D		



						 CAM CONSULTING STRUCTURAL & CIVIL ENGINEERS	SUITE 303 / 29-31 LEXINGTON DRIVE NORWEST BUSINESS PARK, BELLA VISTA N.S.W. 2153 ALL CORRESPONDENCE TO: P.O. BOX 6080 BAULKHAM HILLS BC BAULKHAM HILLS NSW 2153 PH: 8814 6191 FAX: 8814 5301 EMAIL: andrew@camconsulting.com.au	COPYRIGHT THIS DRAWING REMAINS THE PROPERTY OF CAM CONSULTING AND MAY NOT BE ALTERED IN ANY WAY WITHOUT CAM CONSULTING WRITTEN CONSENT	PROJECT	DRAWING TITLE		
									PROPOSED DEVELOPMENT 64 OAKS AVENUE, SHELLY BEACH, NSW	ROOF SECTIONS		
D	ISSUED FOR PRELIMINARY REVIEW	13/01/2026							CLIENT REWARD	SCALES	DESIGNED	DRAFTED
C	ISSUED FOR PRELIMINARY REVIEW	17/07/2025								A3 - 1:100	A.C.	N.K
B	ISSUED FOR PRELIMINARY REVIEW	18/06/2025								DRAWING NO.	APPROVED	REVISION
A	ISSUED FOR PRELIMINARY REVIEW	16/06/2025								C25094 E08	A.C.	D
REVISION	AMENDMENT	ISSUE DATE	REV	AMENDMENT	ISSUE DATE							