



DRAWING TRANSMITTAL	
A01	COVER PAGE
A02	BASIX
A03	PROPOSED SITE PLAN
A04	SITE SURROUNDING PLAN
A05	PROPOSED GROUND FLOOR
A06	PROPOSED FIRST FLOOR
A07	PROPOSED ROOF PLAN & WINDOW SCHEDULE
A08	AREA CALCULATIONS PLAN
A09	NORTH & WEST ELEVATION
A10	SOUTH & EAST ELEVATION
A11	SECTION
A12	CONCEPTUAL LANDSCAPE PLAN
A13	CONCEPTUAL STORMWATER PLAN
A14	SEDIMENTATION CONTROL & WASTE MANAGEMENT PLAN
A15	SITE ANALYSIS
A16	SITE SAFETY NOTE

BUILDING SPECIFICATIONS
National Construction Code - Volume 2-
Building Code of Australia 2022 & Housing Provisions Standard 2022

SITE PREPARATION
- PART 3.1 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

EARTHWORKS
-TO BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE ENVIRONMENTAL PLANNING & ASSESSMENT ACT 1979 AND DEVELOPMENT CONSENT CONDITIONS
-PART 3.2 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4678:2002 - EARTH-RETAINING STRUCTURES

DRAINAGE
- PART 3.3 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS 3500.1:2021 - PLUMBING & DRAINAGE - WATER SERVICES
- AS/NZS 3500.2:2021 - PLUMBING & DRAINAGE - SANITARY PLUMBING & DRAINAGE
- AS/NZS 3500.3:2021 - PLUMBING & DRAINAGE STORMWATER DRAINAGE
- AS/NZS 3500.4:2021 - PLUMBING & DRAINAGE - HEATED WATER SERVICES

STRUCTURAL WORK
- Part 2.2 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 4100-2020-STEEL STRUCTURES CODES
-AS/NZS 1170.0-2002 - GENERAL PRINCIPLES
-ASNZS 1170.1-2002 - PARTS 1 PERMANENT, IMPOSED AND OTHER ACTIONS
- AS/NZS 1170.2-2021 - PART 2 WIND ACTIONS
- AS 3700-2018-SAA MASONRY CODE
-AS 1684.3-2021-RESIDENTIAL TIMBER FRAMED CONSTRUCTION

FOOTINGS & SLABS
- PART 4 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 2159:2009 - PILING-DESIGN & INSTALLATION
-AS 2870:2011 - RESIDENTIAL SLABS & FOOTINGS -AS 3600:2018 - CONCRETE STRUCTURES MASONRY
-PART 5 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 3700:2018 - MASONRY STRUCTURES

FRAMING
-PART 6 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1684.2:2021 - RESIDENTIAL TIMBER- FRAMED CONSTRUCTION - NON-CYCLONIC AREAS
-AS 1720.1:2010 - TIMBER STRUCTURES - DESIGN METHODS
- AS 4100:2020-STEEL STRUCTURES
- AS 3660.1-2014- TERMITE MANAGEMENT SYSTEM

SITE AREA: 317.51 m ²	
Ground Floor	101.56
Porch	1.58
Garage	26.35
Alfresco	5.79
First Floor	93.43
Balcony	3.37
TOTAL	232.08 m ²
	24.98 sq

CDC	
(max ALLOWABLE coverage 235 m ²) Calculated to internal face of external wall	
Main House: 115.30 - 18 (single garage excluded)	
First Floor (excluding voids): 79.87	
CDC AREA = 177.17 M ²	
MAX ALLOWABLE = 235 M ² .	

Design Facts:
Site Area : 317.51 m²
Site Coverage Allowed : 235 m²
Site Coverage Proposed : 180.50 m²

Landscape Area Required 15% : 47.62 m²
Landscape Area Proposed 56.94% : 124.38 m²

Landscape Area Behind Building line : 91.51 m²

ROOF & WALL CLADDING
- PART 7 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1273:1991 - UNPLASTICIZED PVC (UPVC) DOWNPIPES & FITTINGS FOR RAINWATER
- AS 1562.1:2018 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - METAL
- AS/NZS 1562.2:1999 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING-CORRUGATED FIBRE-REINFORCED CEMENT
-AS/NZS 1562.3:2006 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - PLASTIC
- AS 2049:2002 - ROOF TILES
-AS 2050:2018 - INSTALLATION OF ROOF TILES
- AS 4285:2019 - ROOFLIGHTS

GLAZING
-PART 8 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 1288:2021 - GLASS IN BUILDINGS-SELECTION & INSTALLATION
-AS 2047:2014- WINDOWS & EXTERNAL GLAZED DOORS IN BUILDINGS
- AS/NZS 2208:1996 - SAFETY GLAZING MATERIALS IN BUILDINGS

FIRE SAFETY
-PART 9 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3786:2014 - SMOKE ALARMS USING SCATTERED LIGHT, TRANSMITTED LIGHT OR IONIZATION

HEALTH & AMENITY
- PART 10 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS ISO 717.1:2004-ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - AIRBORNE SOUND INSULATION
-AS ISO 717.2:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - IMPACT SOUND INSULATION
-AS 1668.2:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - MECHANICAL VENTILATION IN BUILDINGS
-AS 1668.4:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - NATURAL VENTILATION OF BUILDINGS
- AS/NZS 1680.0:2009 - INTERIOR LIGHTING
-SAFE MOVEMENT
- AS 3740:2021 - WATERPROOFING OF DOMESTIC WET AREAS
-AS 3000-2018 - ELECTRICAL INSTALLATION

WATERPROOFING
- AS 3740-2021-WATERPROOFING TO WET AREA
-AS 4654-2012 - EXTERNAL WET AREAS

SAFE MOVEMENT & ACCESS
- PART 11 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1428.1:2009 - DESIGN FOR ACCESS & MOBILITY-GENERAL REQUIREMENTS FOR ACCESS - NEW BUILDING WORK
- AS 1657:2018 - FIXED PLATFORMS, WALKWAYS, STAIRWAYS & LADDERS - DESIGN, CONSTRUCTION & INSTALLATION

HANDRAILS & BALUSTRADE
- PART 11.3.3 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.4 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.5 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 1170.1-2002 - BALUSTRADE INSTALLATION

PROTECTION OF OPENABLE WINDOW
PART 11.3.7 AND 11.3.8 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

DEMOLITION
-AS 2601-2001-DEMOLITION WORK

SWIMMING POOL
- PART 12.1.1 (H7D2) OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022
- AS 1926 PART 1-2012 - SWIMMING POOL SAFETY-SAFETY BARRIERS FOR SWIMMING POOLS
- AS 1926 PART 2-2007-SWIMMING POOL SAFETY-LOCATION OF SAFETY BARRIERS FOR SWIMMING POOLS (INCORPORATING AMENDMENTS 1 AND 2)
-AS 1926 PART 3-2010 - SWIMMING POOL SAFETY-WATER RECIRCULATION SYSTEMS (INCORPORATING AMENDMENT 1)

ENERGY EFFICIENCY
- PART 13 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022 & BASIX Certificate.



32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohtar.homes
 www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mohar Designs and must not be used in anyway, wholly or in part without the written consent of the designer.




Drawing Title

Title Page


Lodged at:	The Hills Shire	Scale	
Drawn By	vs	Checked	vs
Date	10 th July 2026		

Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Job # 00024		A01	
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26
Issue	Description	By	Date

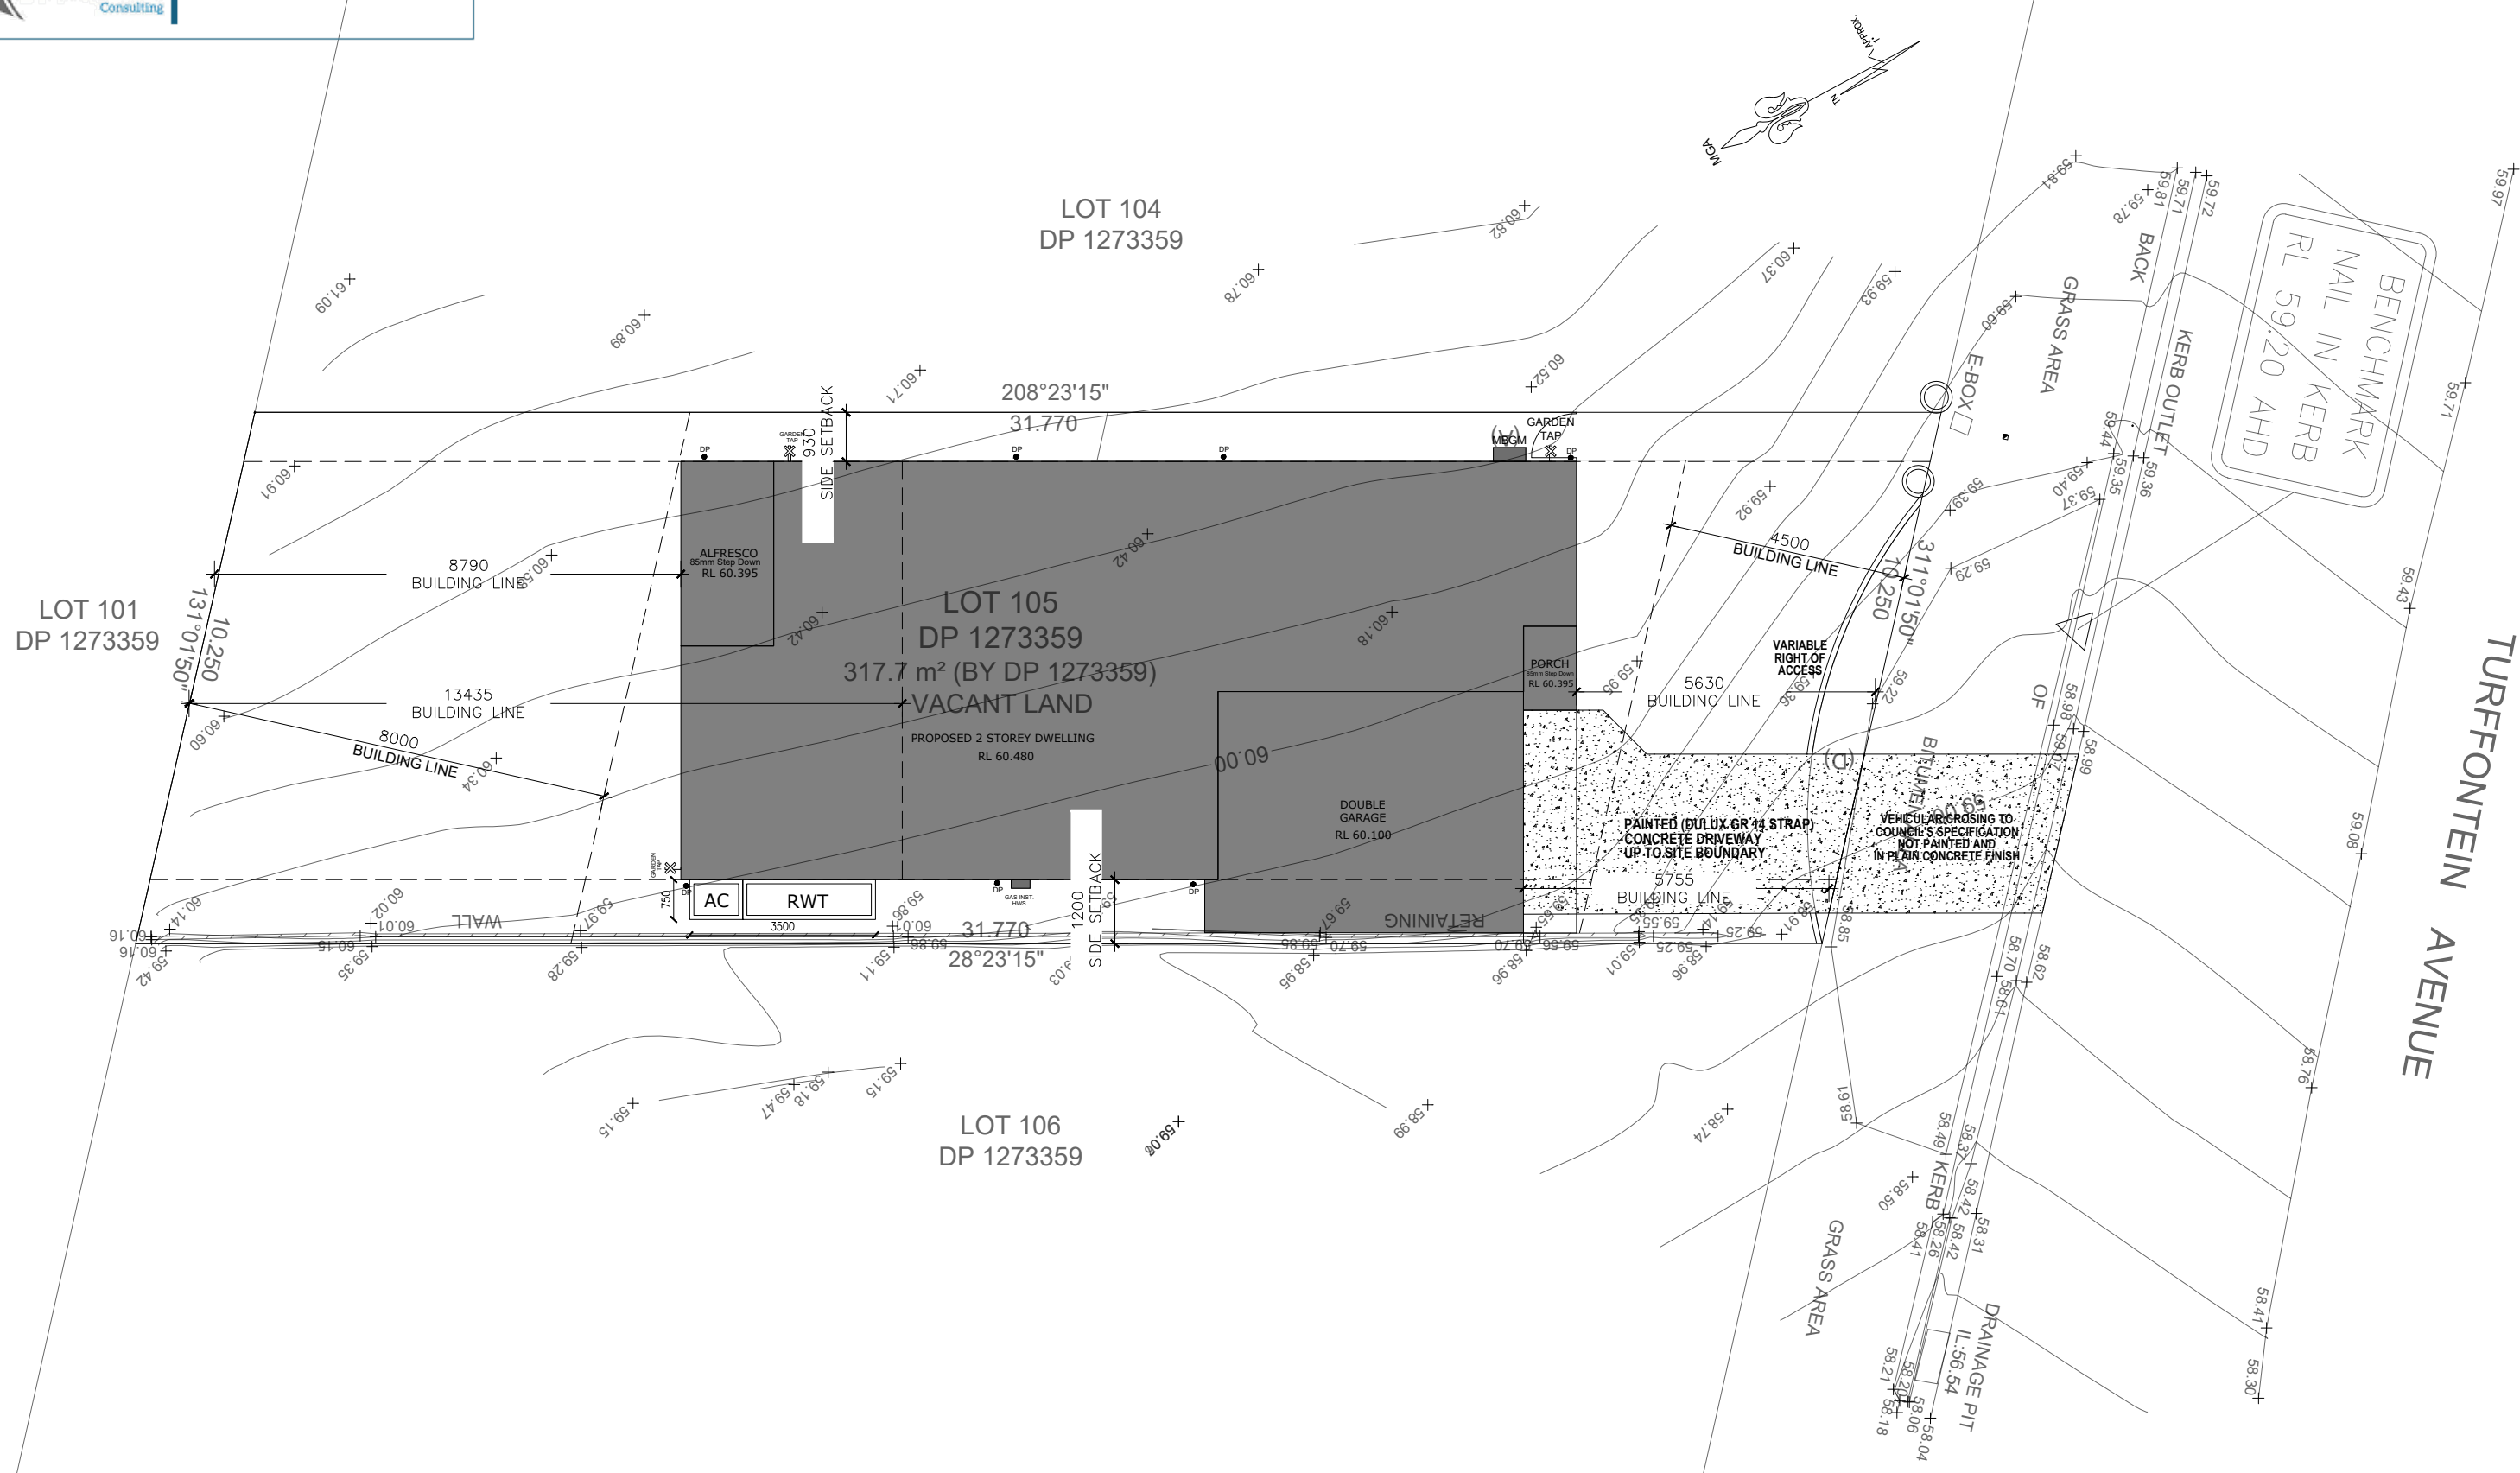

D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26
Issue	Description	By	Date

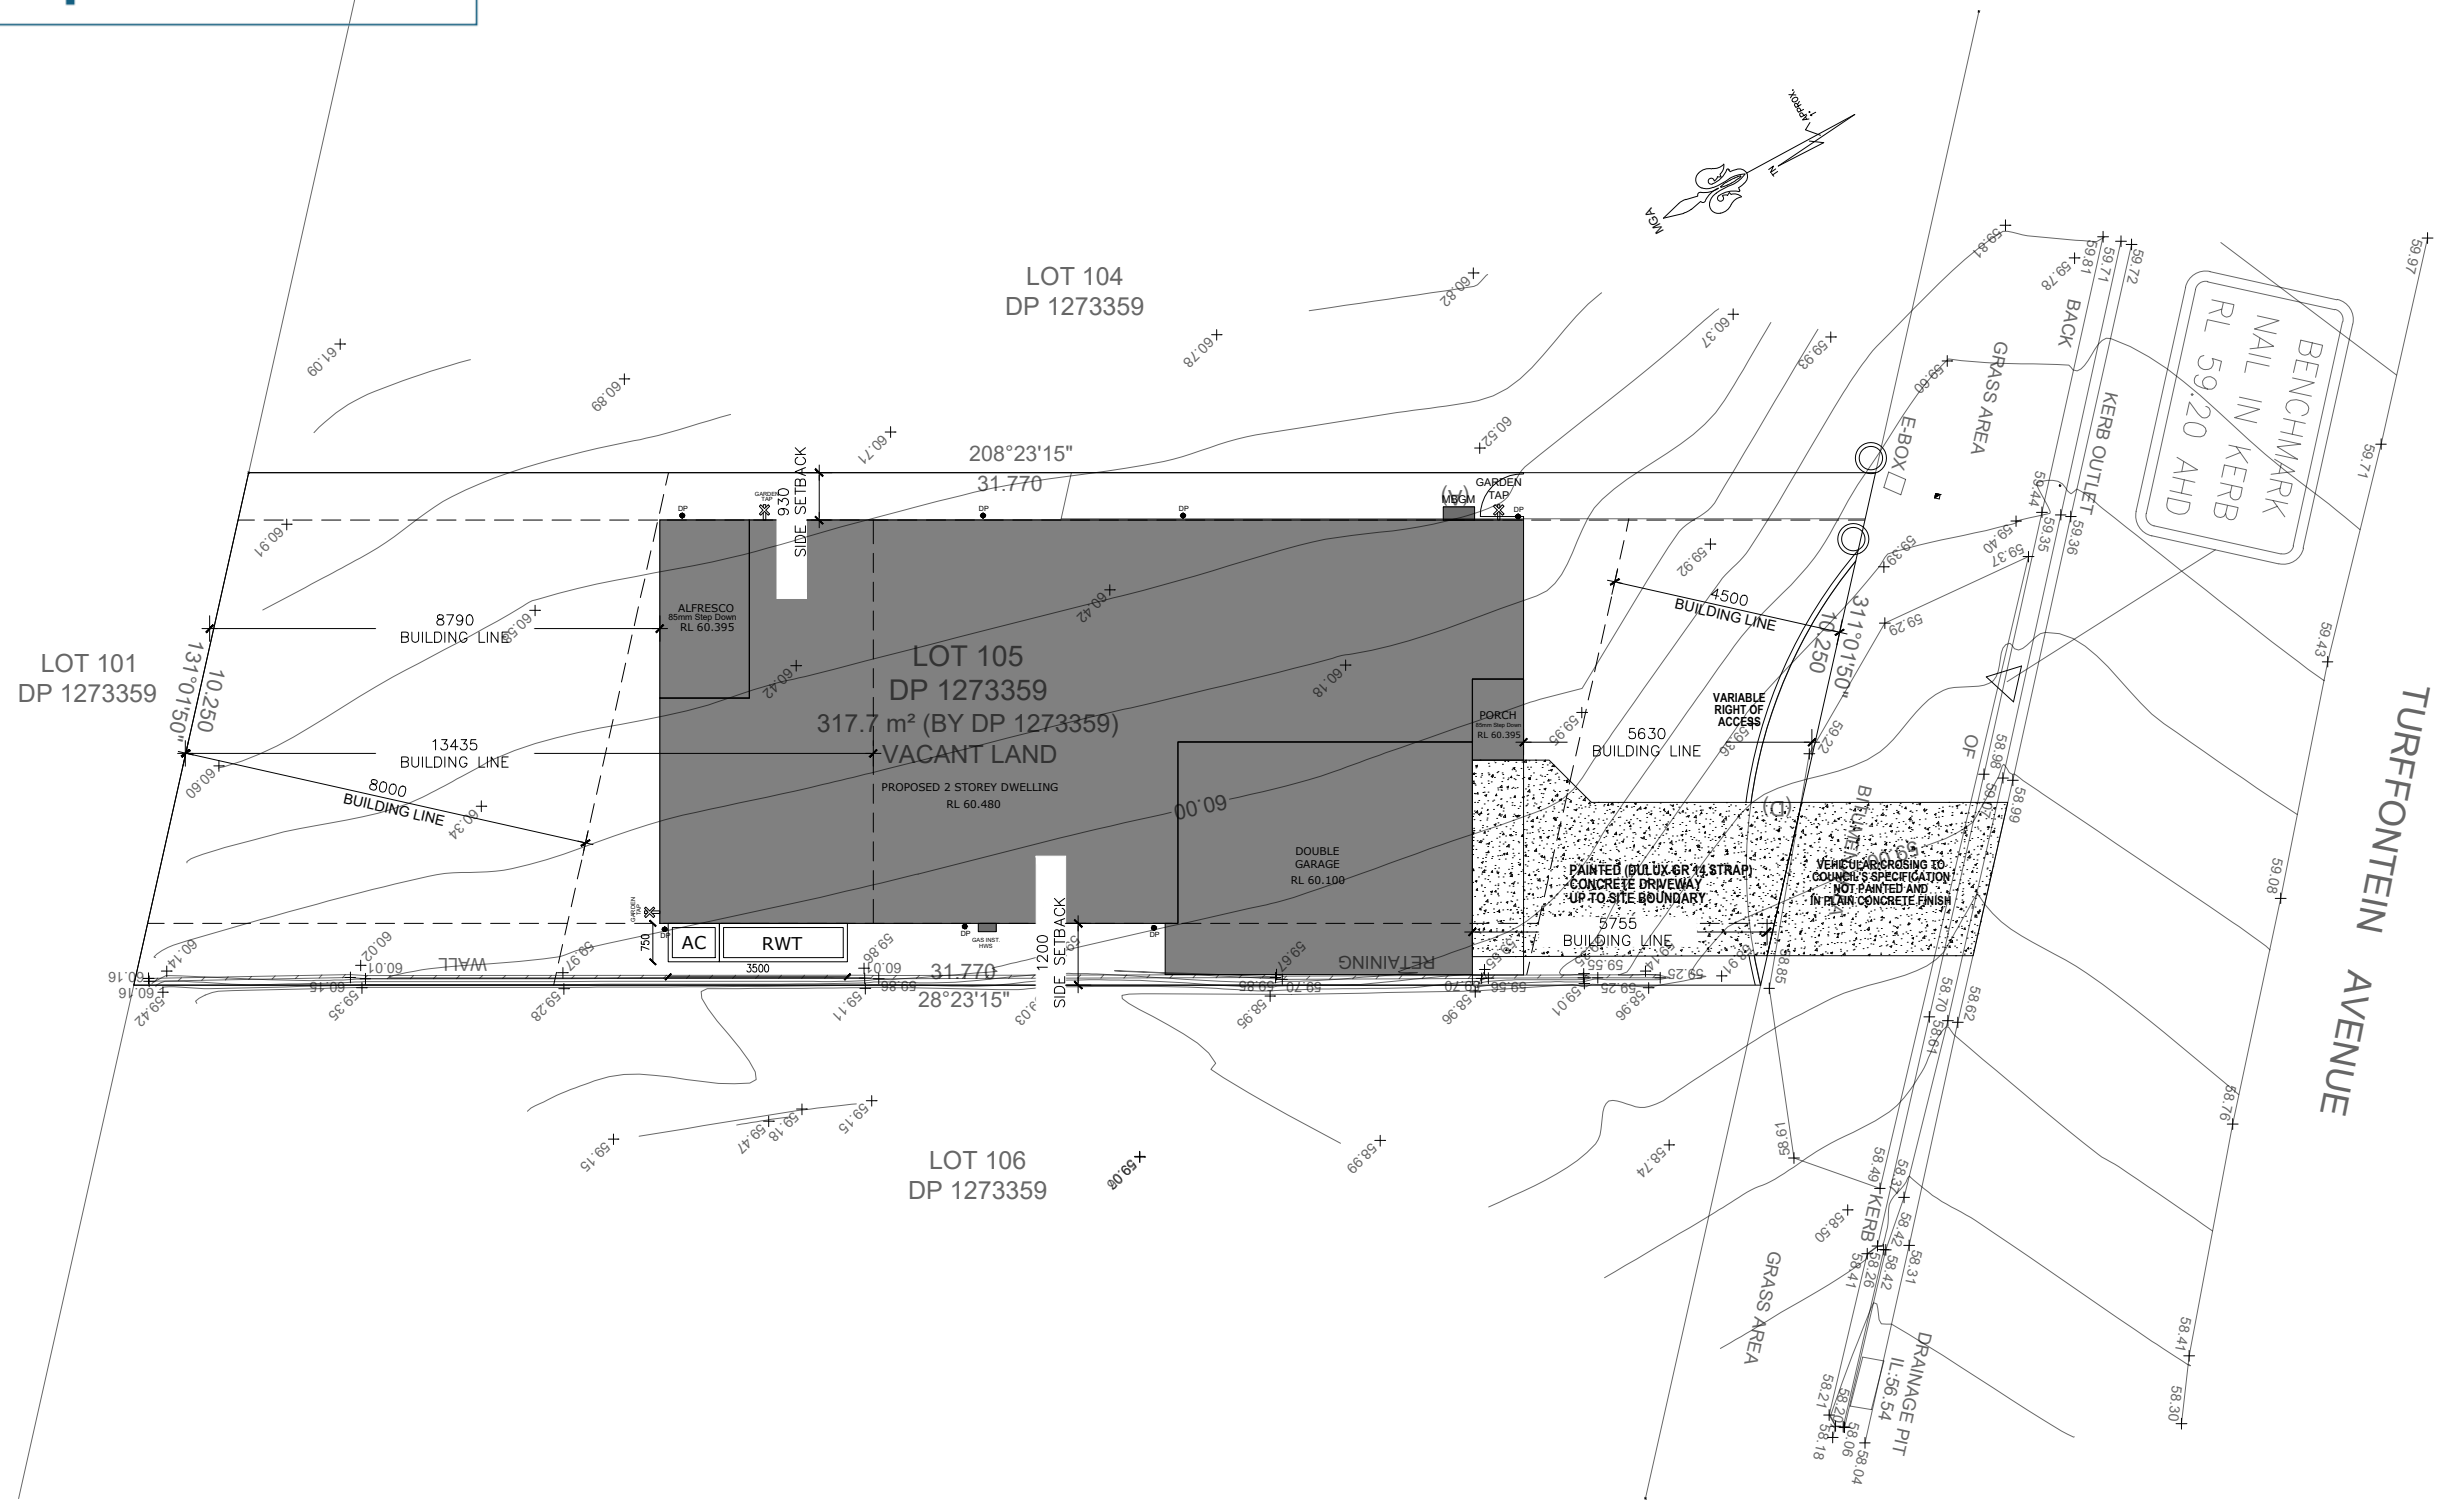

Drawing Title

Site Surroundings

Lodged at: The Hills Shire

Drawn By VS

Scale 1:150 (A3)

Checked VS

Date 10th July 2026

Project


Dwelling House

Lot : 105 DP: 1273359

Address:

7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

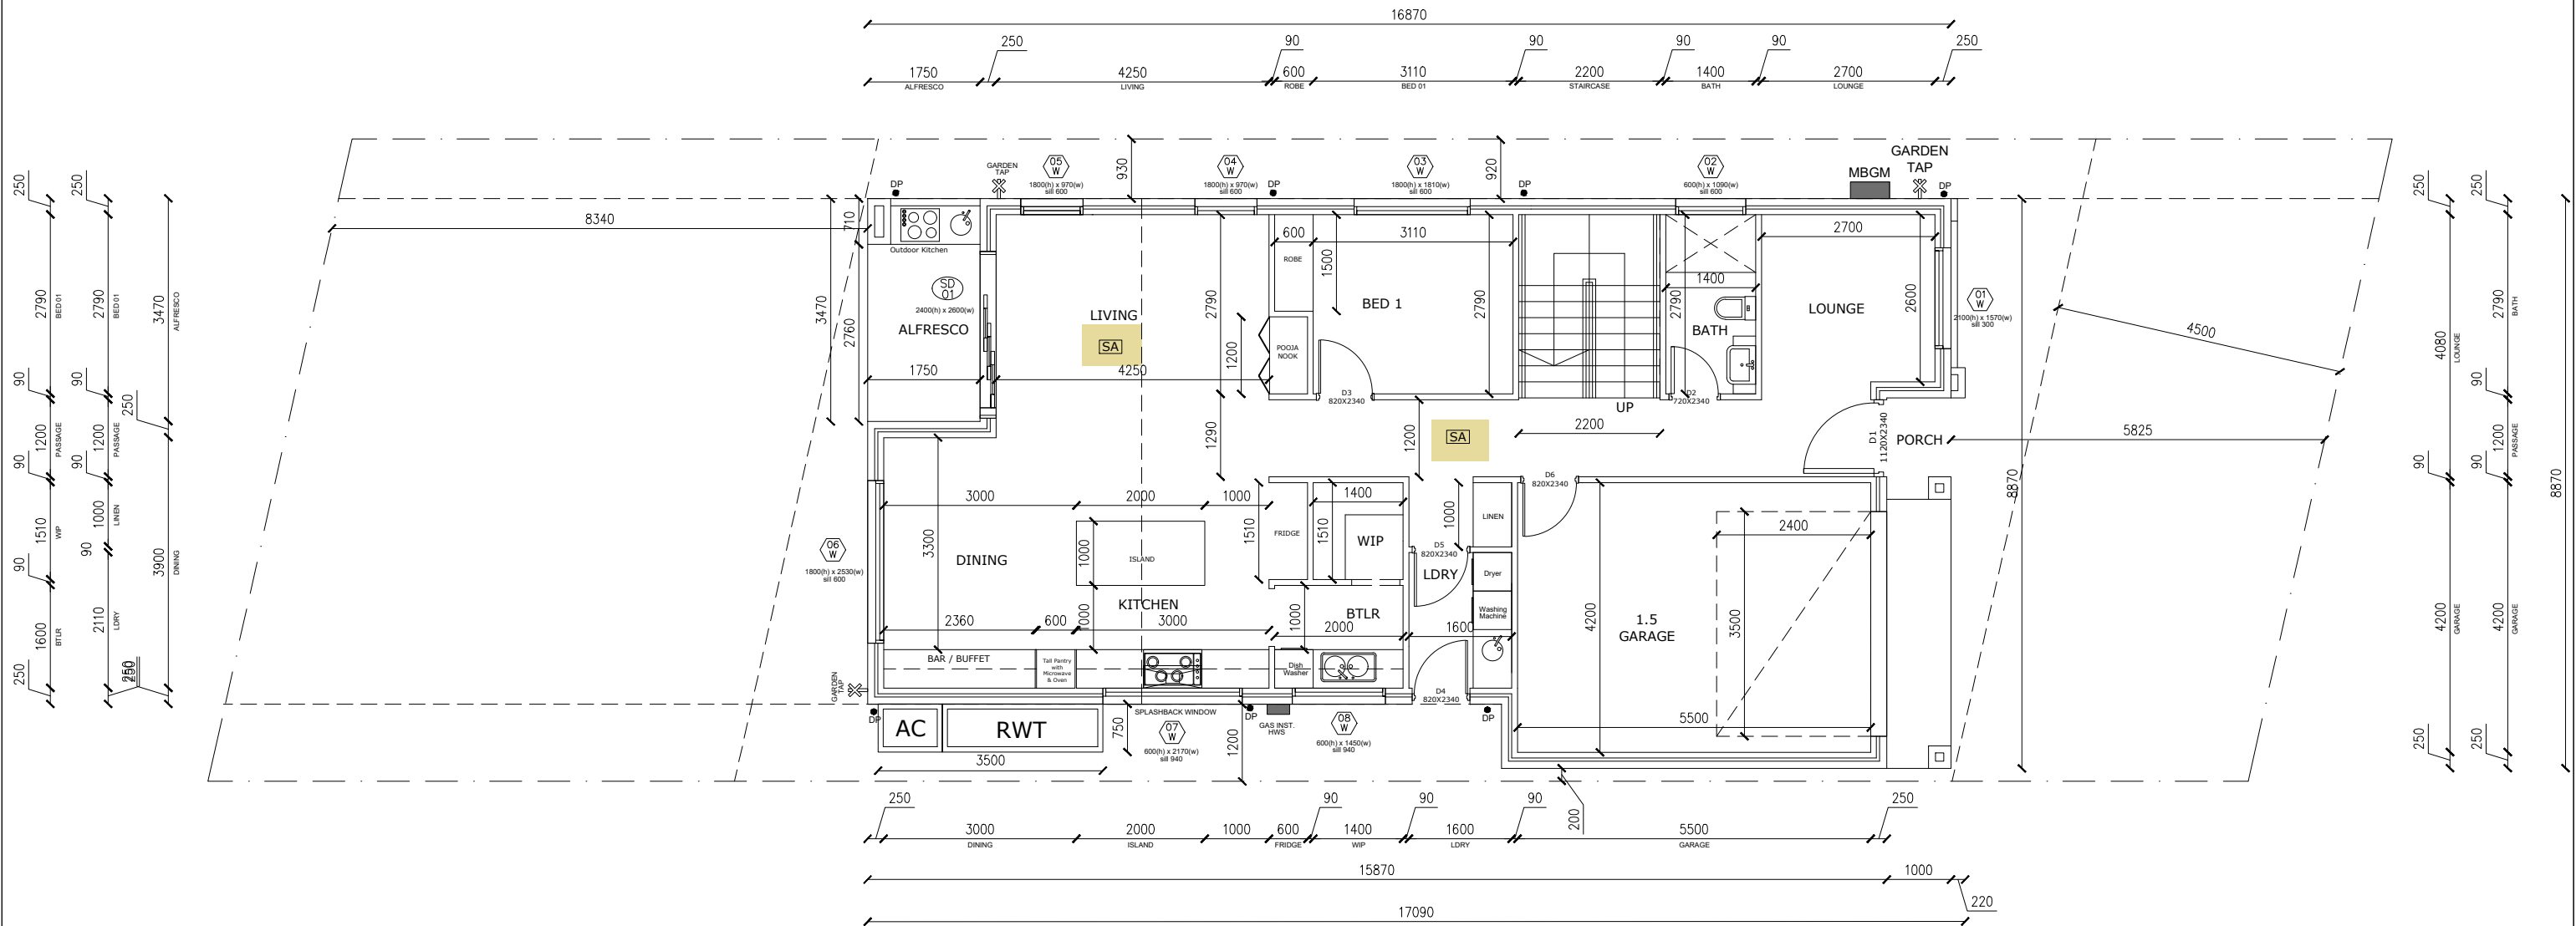

- SA** SMOKE ALARM
- DP** DOWN PIPE
- MBGM** ELECTRIC METER
- GAS INST. HWS** GAS INSTANTANEOUS HOT WATER SYSTEM



Drawing Title
Ground Floor Plan


Lodged at: The Hills Shire
Drawn By: VS
Checked By: VS
Scale: 1:100 (A3)
Date: 10th July 2026

Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26



This is the plan/spec referred to the Certificate No.
CDC215/2026
Accredited Certifier: **David Chacko**
Accreditation Number: **BDC2304**

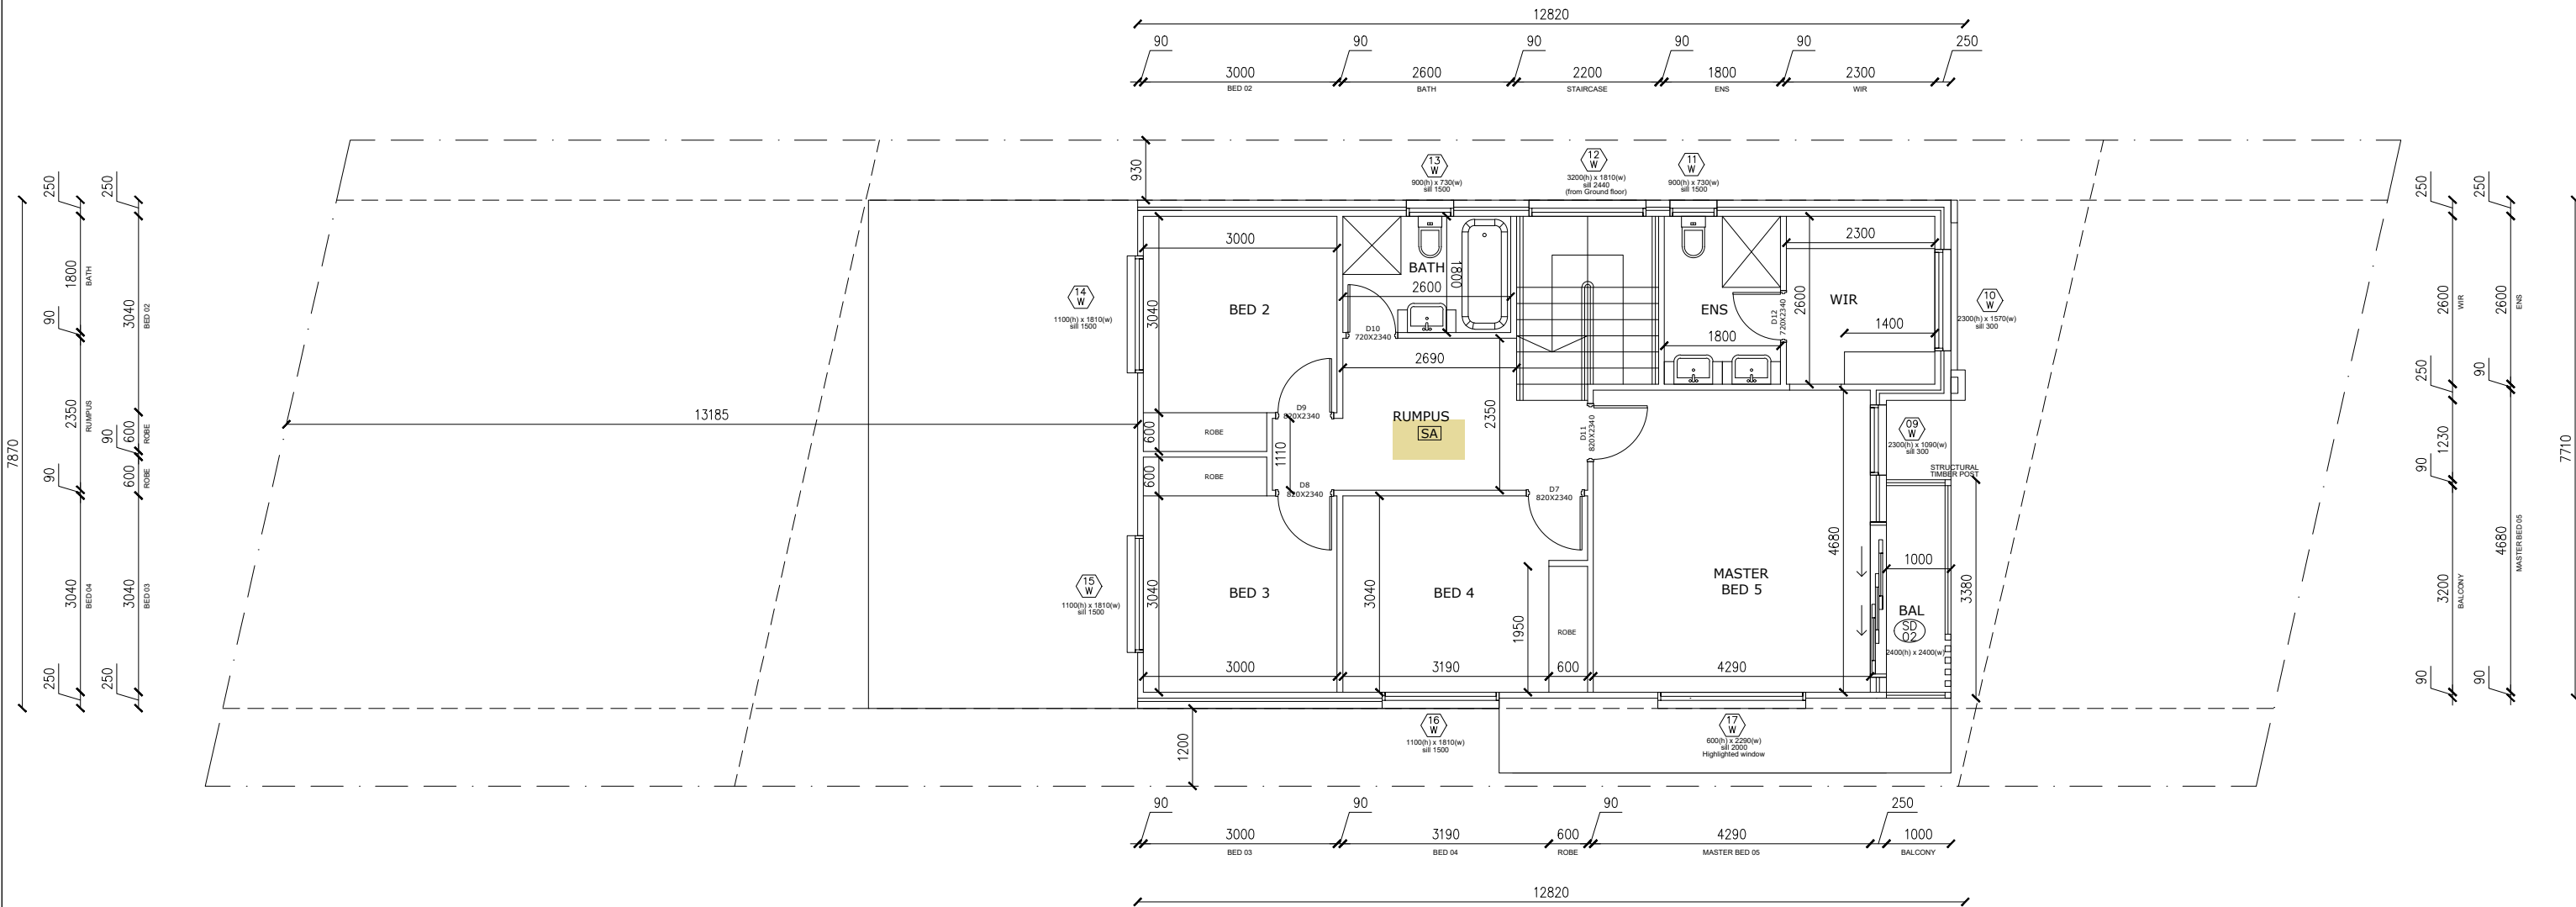

- SA** SMOKE ALARM
- DP** DOWN PIPE
- MBGM** ELECTRIC METER
- GAS INST. HWS** GAS INSTANTANEOUS HOT WATER SYSTEM



32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@moihar.homes



Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of
Mihir Designs and must not be used in anyway, wholly or in part without the
written consent of the designer.



Drawing Title
First Floor Plan

Lodged at: The Hills Shire
Drawn By: vs
Checked: vs
Scale: 1:100 (A3)
Date: 10th July 2026

Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

A06

Job # 00024

WINDOW SCHEDULE

Window #	Dimensions WxH	Sill	Window Type
W 01	2100(h) x 1570(w)	300	S-F_F
W 02-OP	600(h) x 1090(w)	600	S-F
W 03	1800(h) x 1810(w)	600	S-F-S_F
W 04	1800(h) x 970(w)	600	A_F
W 05	1800(h) x 970(w)	600	A_F
W 06	1800(h) x 2530(w)	600	S-F-S_F
W 07	600(h) x 2170(w)	940	SPLASHBACK
W 08	600(h) x 1450(w)	940	S-F
W 09	2300(h) x 1090(w)	300	A_F
W 10	2300(h) x 1570(w)	300	S-F_F
W 11-OP	900(h) x 730(w)	1500	A_F
W 12-OP	3200(h) x 1810(w)	2440	FIXED
W 13-OP	900(h) x 730(w)	1500	A_F
W 14	1100(h) x 1810(w)	1500	S-F-S
W 15	1100(h) x 1810(w)	1500	S-F-S
W 16	1100(h) x 1810(w)	1500	S-F-S
W 17	600(h) x 2290(w)	2000	HIGHLIGHTED


Sliding #	Dimensions WxH	
SD 01	2400(h) x 2600(w)	S-S-F - SLIDER
SD 02	2400(h) x 2400(w)	S-S-F - SLIDER

S = Sliding
F = Fix
A = Awning
OP = Opaque

Door#	Dimensions WxH	
D 01	1120 x 2340	
D 02	720 x 2340	
D 03	820 x 2340	
D 04	820 x 2340	
D 05	820 x 2340	
D 06	820 x 2340	
D 07	820 x 2340	
D 08	820 x 2340	
D 09	820 x 2340	
D 10	720 x 2340	
D 11	820 x 2340	
D 12	720 x 2340	



This is the plan/spec referred to the Certificate No.
CDC215/2026
Accredited Certifier: **David Chacko**
Accreditation Number: **BDC2304**

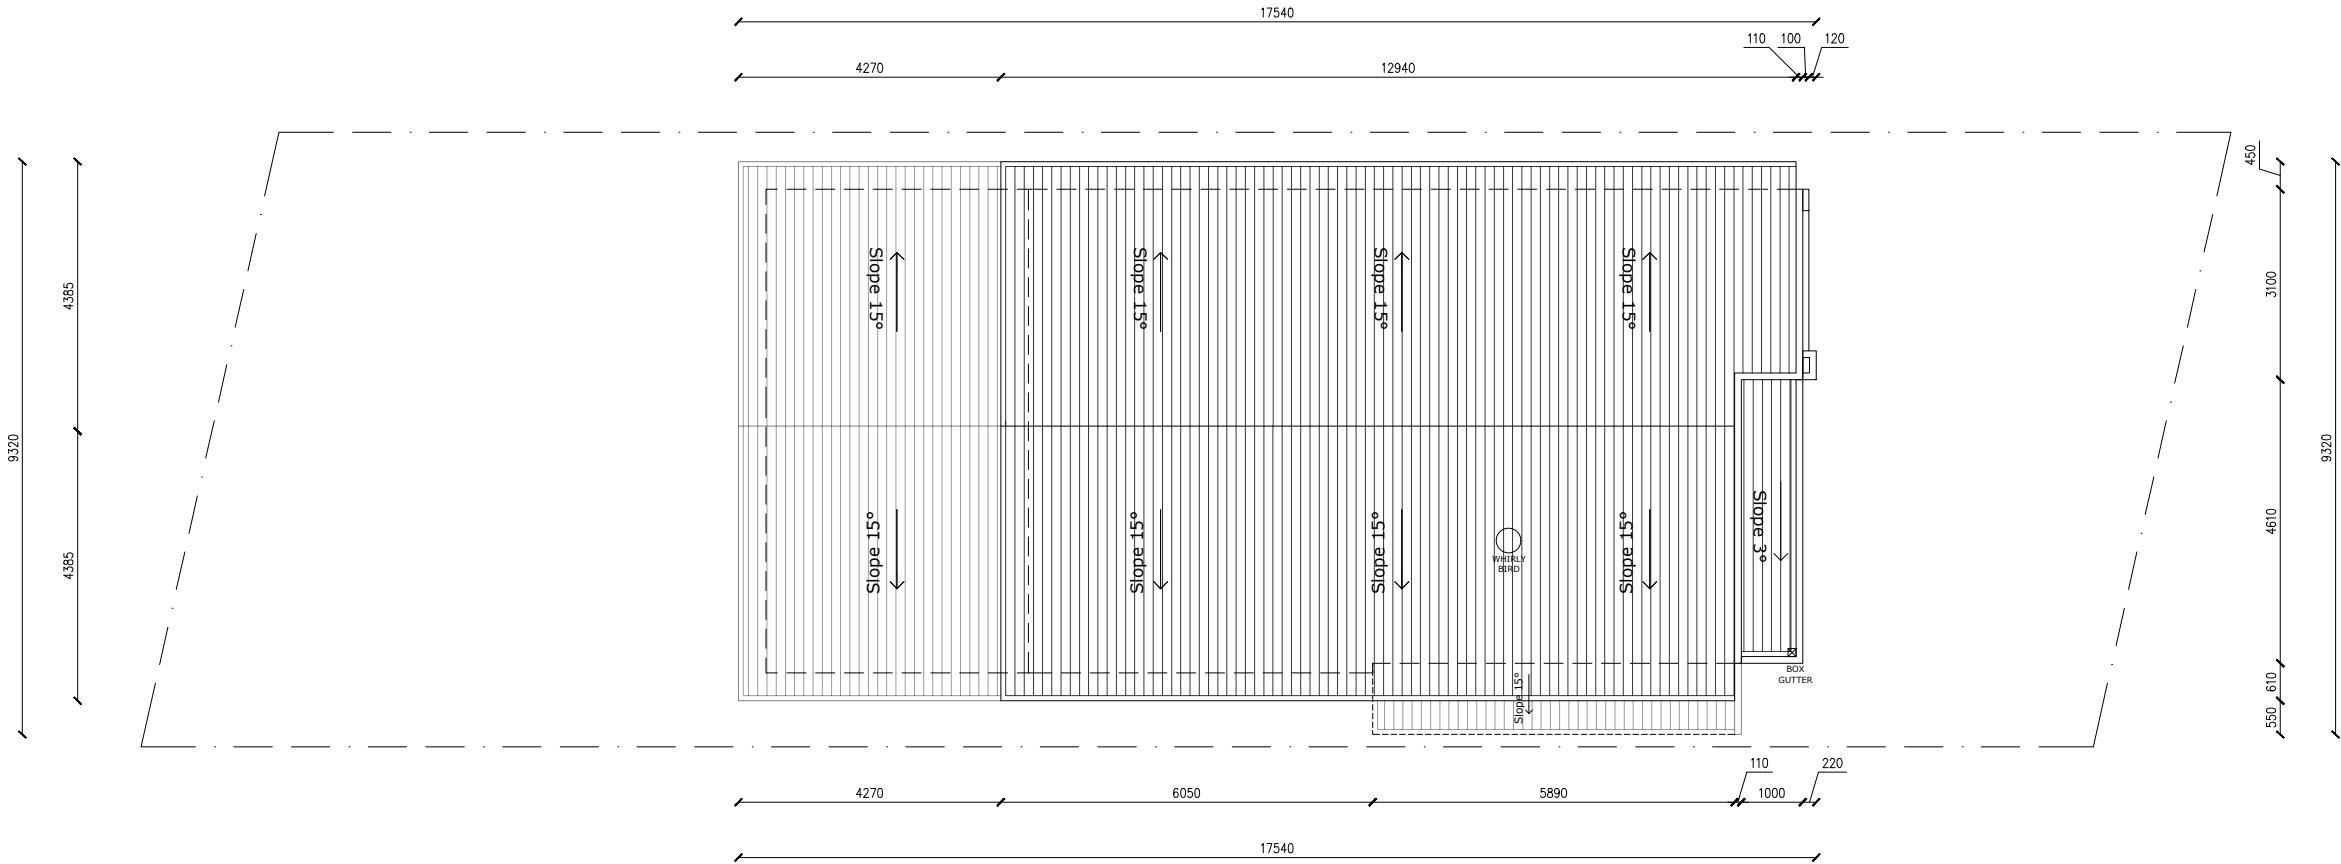

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes



www.1100.cdm.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of
Mistry Desings and must not be used in anyway, wholly or in part without the
written consent of the designer.



Drawing Title
Roof Plan

Lodged at: The Hills Shire
Drawn By: VS
Checked: VS
Date: 10th July 2026
Scale: 1:100 (A3)



Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

Job # 00024

A07

Total Area Calculation

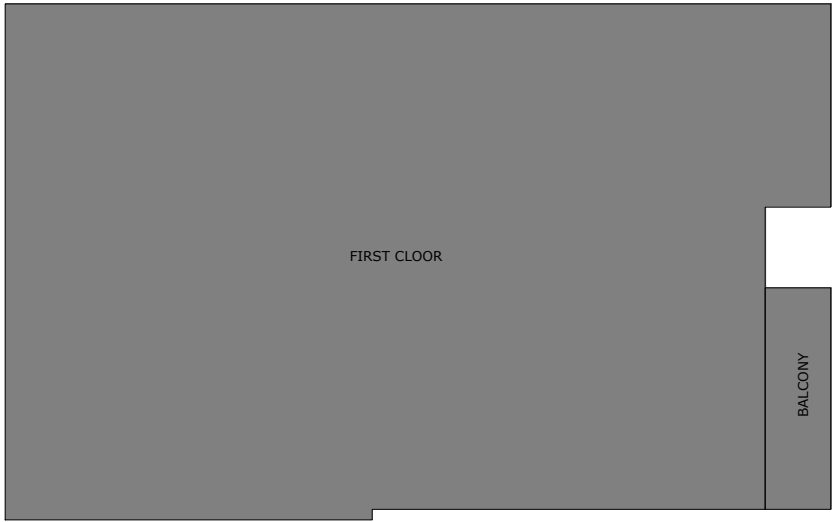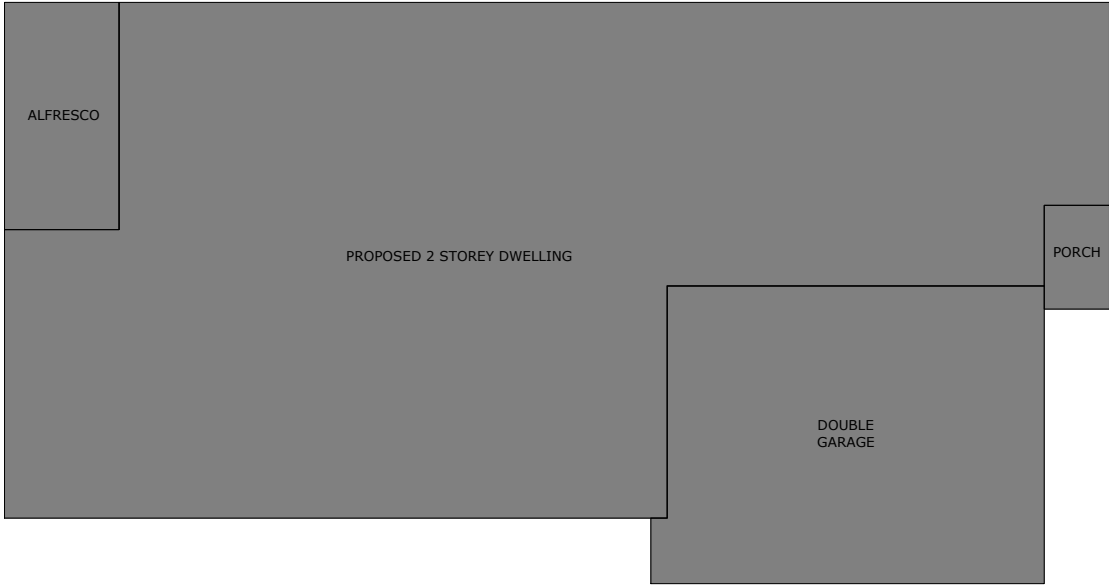

SITE AREA: 317.51 m ²	
Ground Floor	101.56
Porch	1.58
Garage	26.35
Alfresco	5.79
First Floor	93.43
Balcony	3.37
TOTAL	232.08
	24.98sq





This is the plan/spec referred to the Certificate No. **CDC215/2026**

Accredited Certifier: **David Chacko**


Accreditation Number: **BDC2304**

CDC Area Calculation

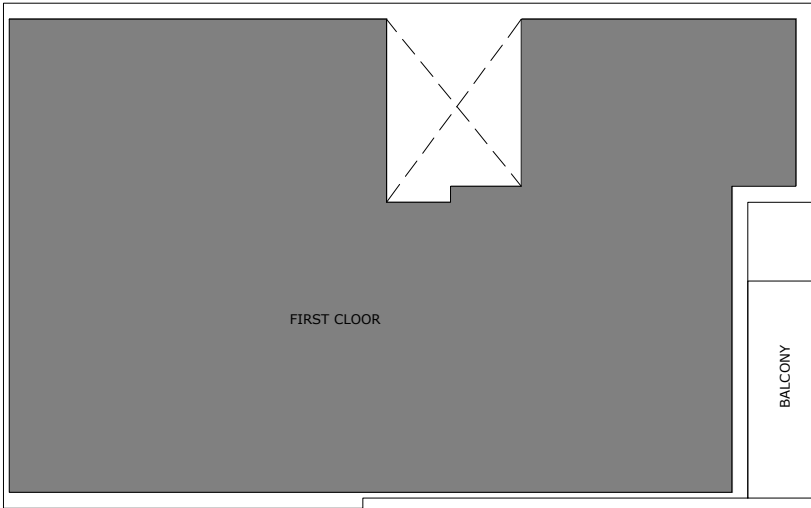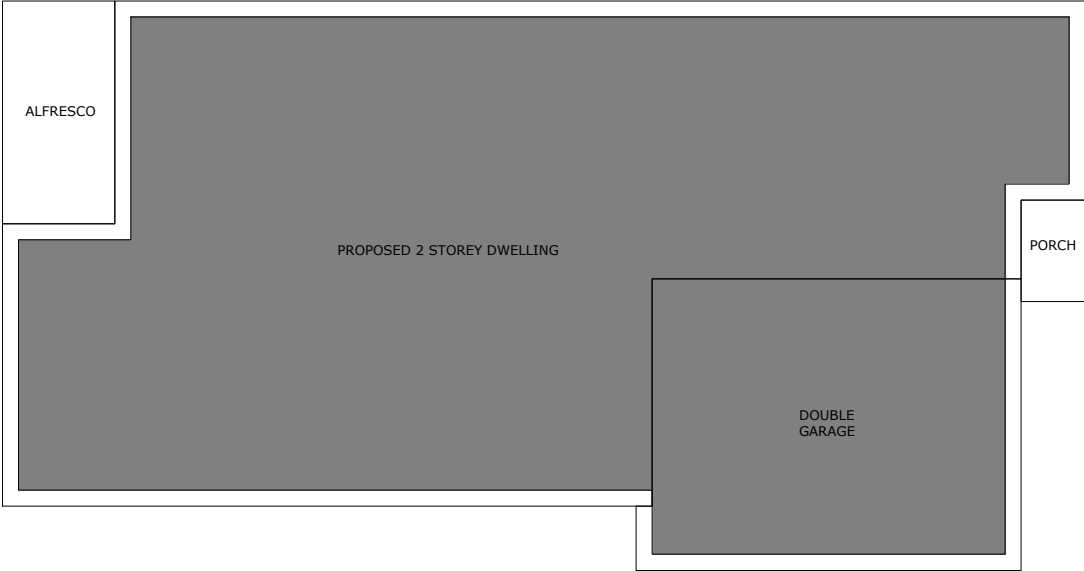


CDC	
(max ALLOWABLE coverage 235 m ²)	
Calculated to internal face of external wall	
Main House: 115.30 - 18 (single garage excluded)	
First Floor (excluding voids) : 79.87	
CDC AREA = 177.17 M ²	
MAX ALLOWABLE = 235 M ² .	


Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

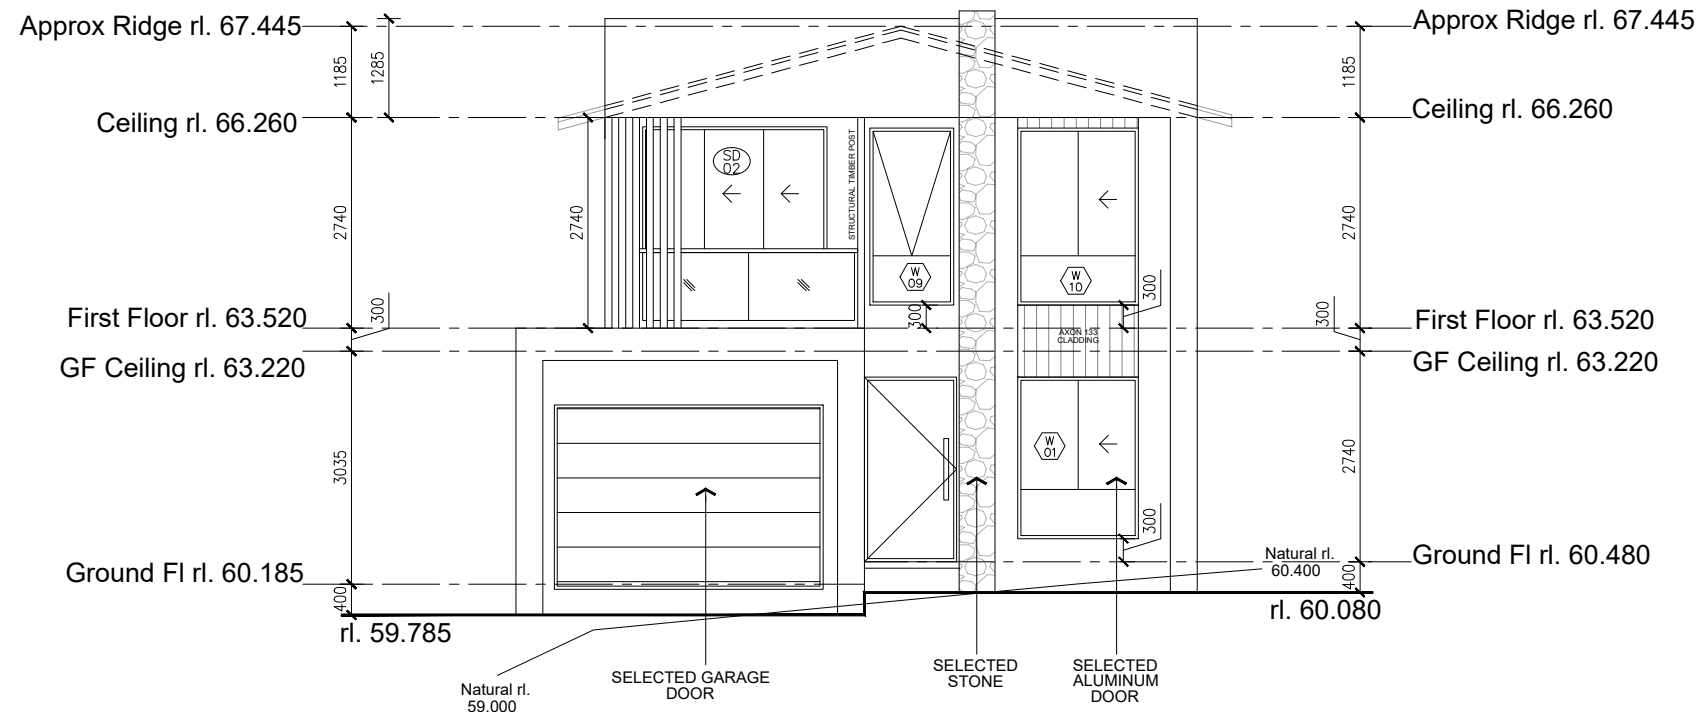


South-West Elevation

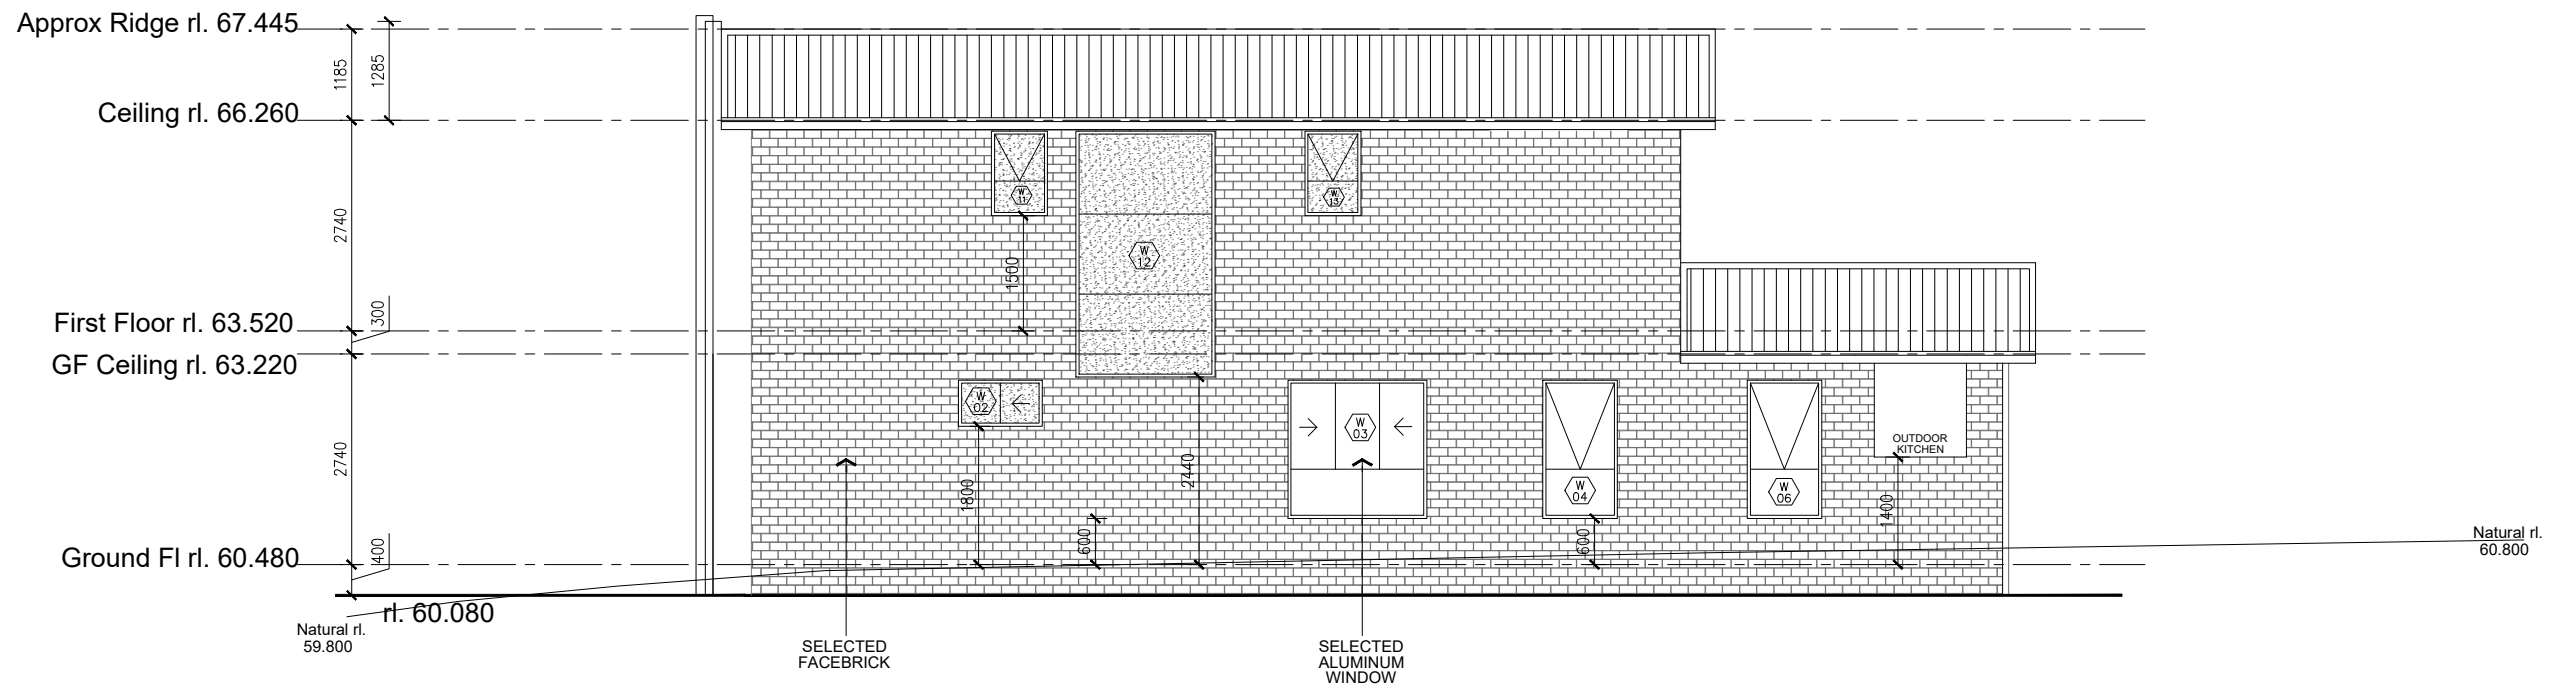


South-East Elevation

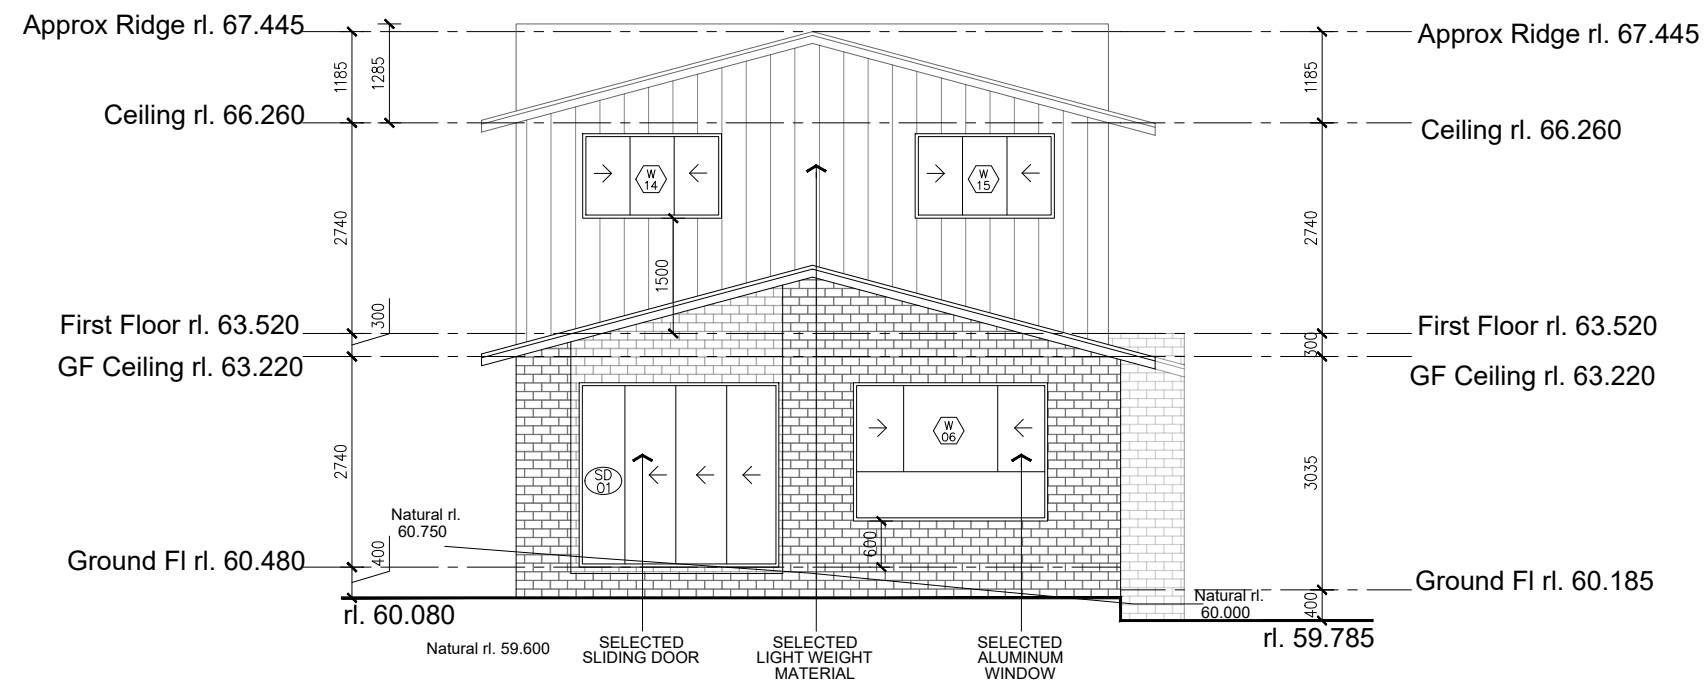


North-East Elevation

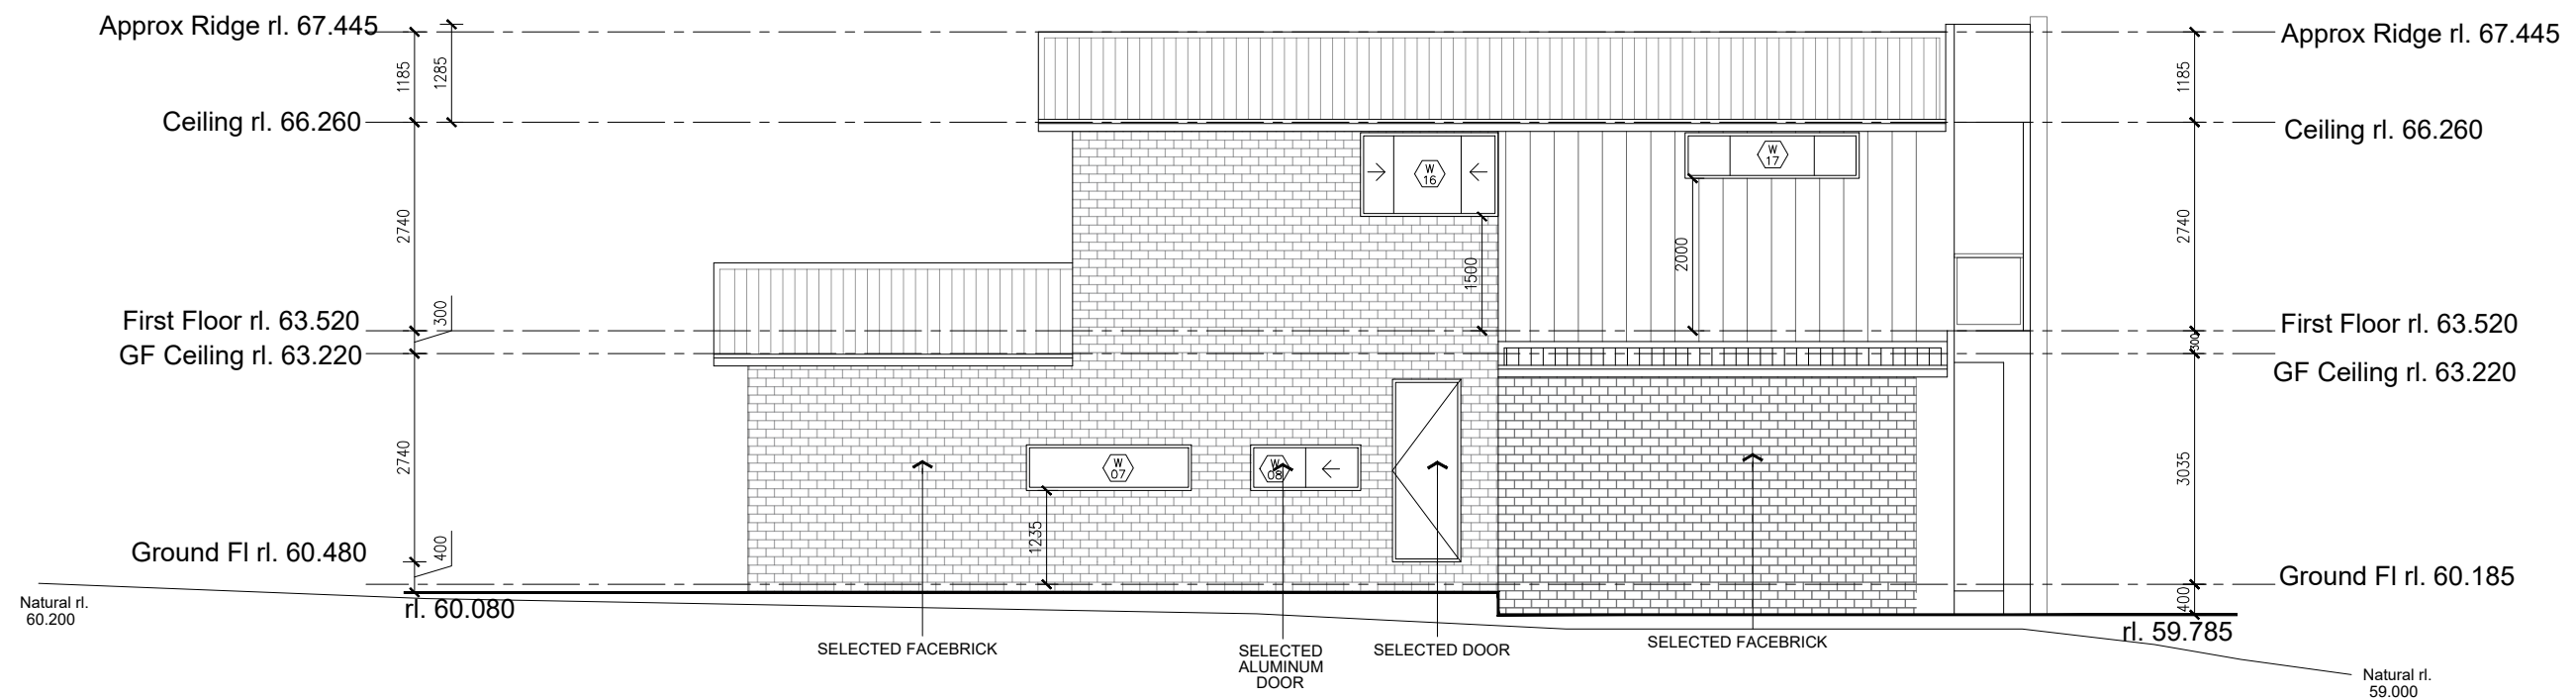

North-West Elevation

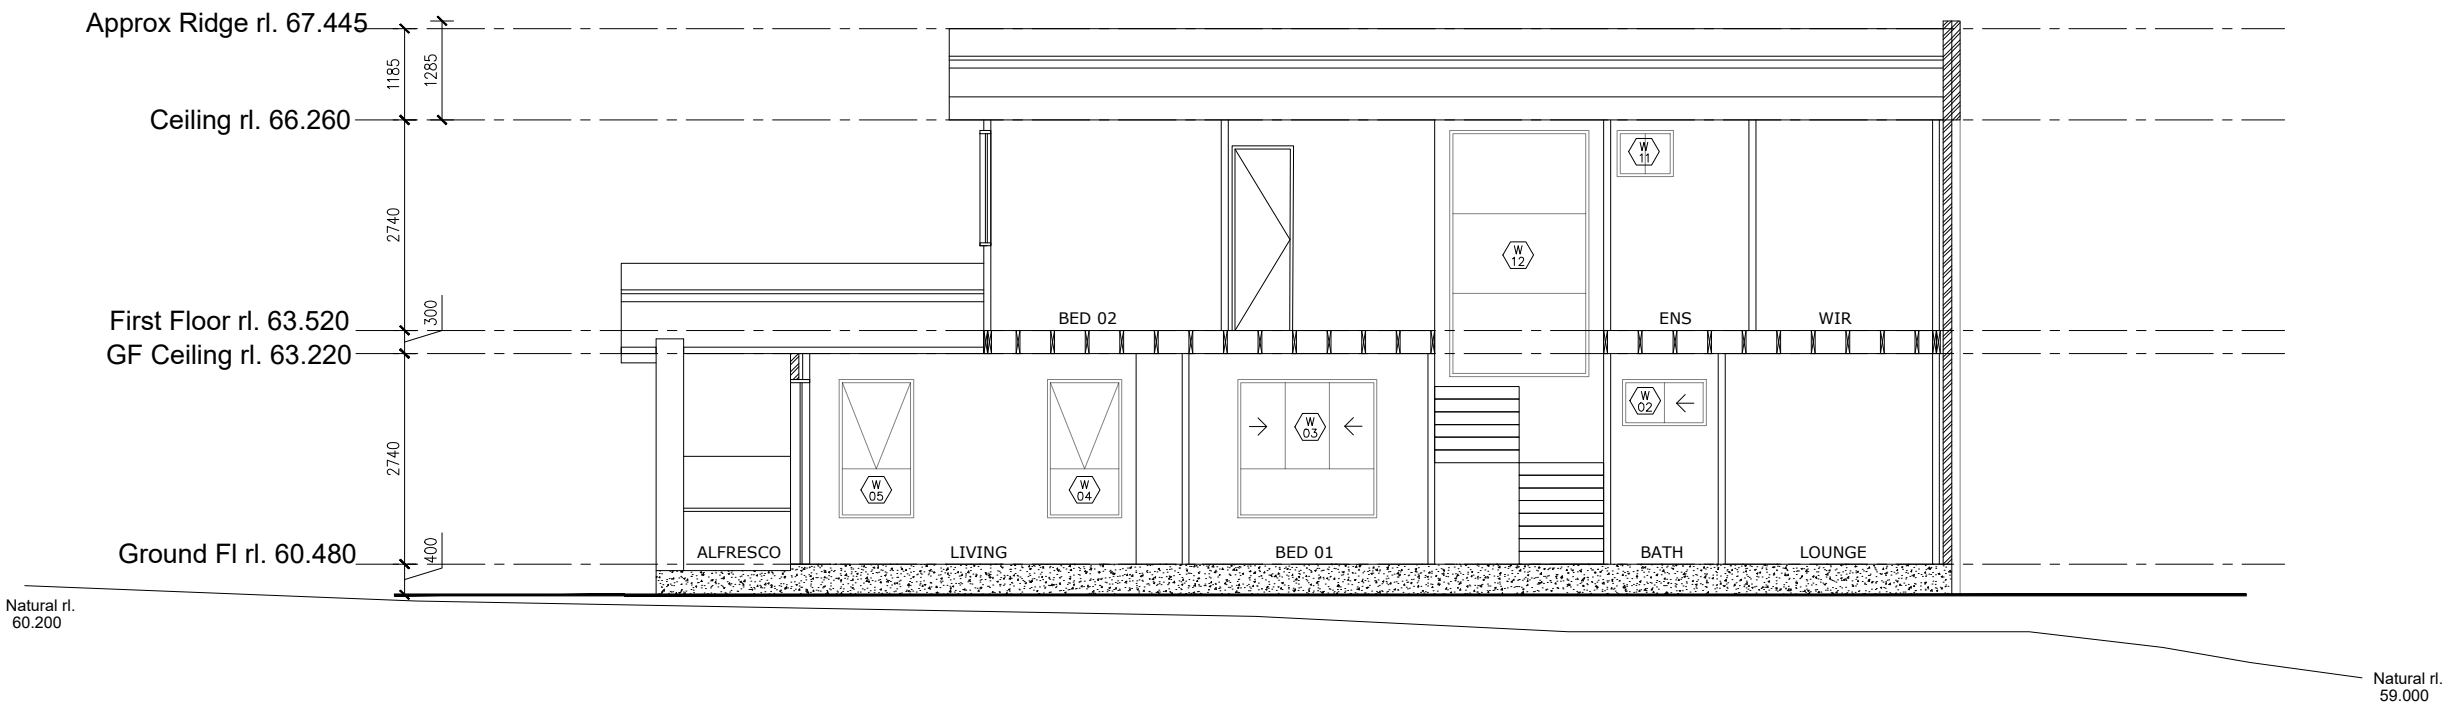

Section

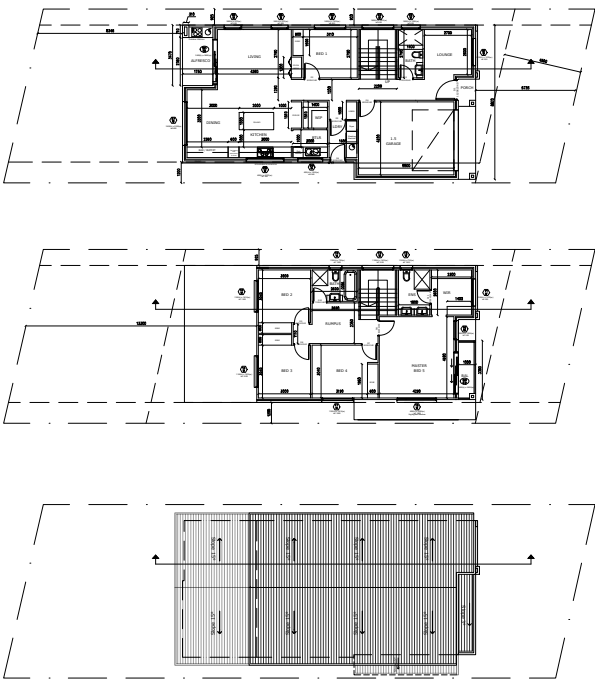

Key Plans



This is the plan/spec referred to the Certificate No.
CDC215/2026
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

LOT 101
DP 1273359

LOT 104
DP 1273359

LOT 105
DP 1273359
317.7 m² (BY DP 1273359)
VACANT LAND
PROPOSED 2 STOREY DWELLING
FFL 60.400
RL 60.480

LOT 106
DP 1273359

LEGEND



Turf



Selected brick garden edging
Lay a single course of brick paver in a mortar haunch.




Selected Pebbles
50mm selected pebbles on firm compacted base

TB - TRISTANIOPSIS
BURGUNDY BLUSH PBR


IS - INDIAN SUMER WHITE WEEPING
CREPE MYRTLE

Landscape Design Facts

Proposed Landscape Area -
124.38 m² (56.94%)

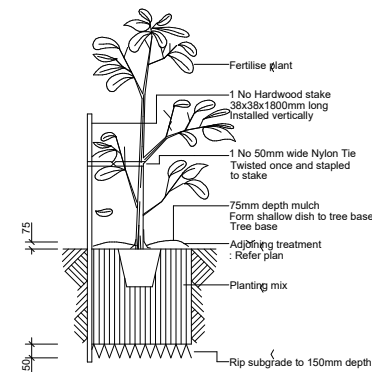

45 litre Tree planting
Detail. Not To Scale.

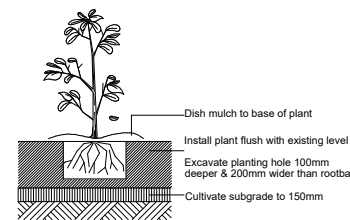

Planting in garden beds
Detail. Not To Scale.

MOHAR
STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mo-har.homes



Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of
Mo-har Designs and must not be used in anyway, wholly or in part without the
written consent of the designer.



Drawing Title
Conceptual Landscape Plan

Lodged at: The Hills Shire
Drawn By: VS
Checked By: VS
Scale: 1:125 (A3)
Date: 10th July 2026

Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

A12
Job # 00024

LOT 101
DP 1273359

LOT 104
DP 1273359

LOT 105
DP 1273359
317.7 m² (BY DP 1273359)
VACANT LAND
PROPOSED 2 STOREY DWELLING
FFL 60.400

LOT 106
DP 1273359

TURFFONTAIN AVENUE

BENCHMARK
NAIL IN KERB
RL 59.20 AHD

KERB OUTLET

BACK

GRASS AREA

BITUMEN AREA

GRASS AREA

DRAINAGE PIT

IL-56.54

58.21

58.04

58.06

58.26

58.41

58.42

58.31

58.37

58.49

58.70

58.62

58.76

58.41

58.30

58.08

59.43

59.71

59.97

59.72

59.81

59.78

59.84

59.87

59.92

60.01

60.06

60.11

60.16

60.21

60.26

60.31

60.36

60.41

60.46

60.51

60.56

60.61

60.66

60.71

60.76

60.81

60.86

60.91

60.96

61.01

61.06

61.11

61.16

61.21

61.26

61.31

61.36

61.41

61.46

61.51

61.56

61.61

61.66

61.71

61.76

61.81

61.86

61.91

61.96

62.01

62.06

62.11

62.16

62.21

62.26

62.31

62.36

62.41

Drawing Title
**Sedimentation Control &
Waste Management**

Lodged at: The Hills Shire
Drawn By: VS
Checked: VS
Date: 10th July 2026

Scale: 1:125 (A3)
Date: 10th July 2026

Project
Dwelling House
Lot : 105 DP: 1273359
Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

Issue	Description	By	Date
D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26

A14

Job # 00024

MOHAR
STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mo-har.homes



Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.
Design & documentation thereof are copyright and remain the property of
Mo-har Designs and must not be used in anyway, wholly or in part without the
written consent of the designer.



1. FALLS, SLIPS, TRIPS

a) WORKING AT HEIGHTS

DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of worker's falling more than two metres. However, construction of this building will require workers to be working at heights where a fall in excess of two metres is possible and injury is likely to result from such a fall. The builder should provide a suitable barrier wherever a person is required to work in a situation where falling more than two metres is a possibility.

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings where scaffolding is appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation.

For buildings where scaffold, ladders, trestles are not appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, fall barriers with Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislation.

ROOF ANCHORAGE POINTS

Anchorage points for portable scaffold or fall arrest devices have been included in the design for use by maintenance workers. Any persons engaged to work on the building after completion of construction work should be informed about the anchorage points.

b) SLIPPERY OR UNEVEN SURFACES

FLOOR FINISHES SPECIFIED

If finishes have been specified by designer, these have been selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to the specified finish should be made in consultation with the designer or, if this is not practical, surfaces with an equivalent or better slip resistance should be chosen.

FLOOR FINISHES BY OWNER

If designer has not been involved in the selection of surface finishes, the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with AS HB 197:1999 and AS/NZ 4586:2004

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for this building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace.

Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways.

Contractors should be required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be stored in designated areas away from access ways and work areas.

2. FALLING OBJECTS

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the work is being carried out onto persons below.

Prevent or restrict access to areas below where the work is being carried out.

Provide toeboards to scaffolding or work platforms.

Provide protective structure below the work area.

Ensure that all persons below the work area have Personal Protective Equipment (PPE).

BUILDING COMPONENTS

During construction, renovation or demolition of this building, parts of the structure including prefabricated steel work, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times when collapse which may injure persons in the area is a possibility.

Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

3. TRAFFIC MANAGEMENT

For building on a major road, narrow road or steeply sloping road:

Parking of vehicles or loading/unloading of vehicles on this roadway may cause a traffic hazard. During construction, maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the supervision of these areas.

For building where on-site loading/unloading is restricted:

Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading areas.

For all buildings:

Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

4. SERVICES

GENERAL

Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are identified on the plans but the exact location and extent of services may vary from that indicated. Services should be located using an appropriate service (such as Dial Before You Dig), appropriate excavation practice should be used and, where necessary, specialist contractors should be used.

Locations with underground power:

Underground power lines MAY be located in or around this site. All underground power lines must be disconnected or care located and adequate warning signs used prior to any construction, maintenance or demolition commencing.

Locations with overhead power lines:

Overhead power lines MAY be near or on this site. These pose a risk of electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5. MANUAL TASKS

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass.

All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methods in all areas where lifting may occur.

Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturer's specifications and not used where faulty or (in the case of electrical equipment) not carrying a current electrical safety tag.

All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in accordance with manufacturer's specification.

6. HAZARDOUS SUBSTANCES ASBESTOS

For alterations to a building constructed prior to 1990:

If this existing building was constructed prior to 1990 - it therefore may contain asbestos

1986 - it therefore is likely to contain asbestos

either in cladding material or in fire retardant insulation material, either case, the builder should check and, if necessary, take appropriate action before demolishing, cutting, sanding, drilling or otherwise disturbing the existing structure.

POWDERED MATERIALS

Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

TREATED TIMBER

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this may be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation of harmful material when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS

Many types of glues, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Fibreglass, rockwool, ceramic and other material used for thermal sound insulation may contain synthetic mineral fibre which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts of the body. Personal Protective Equipment including protection against inhalation of harmful material should be used when installing, removing or working near bulk insulation material.

TIMBER FLOORS

This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

7. CONFINED SPACES

EXCAVATION

Construction of this building and some maintenance on the building will require excavation and installation of items within excavations. Where practical, installation should be carried out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated area should be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations should be provided.

ENCLOSED SPACES

For buildings with enclosed spaces where maintenance or other access may be required:

Enclosed spaces within this building may present a risk to persons entering for construction, maintenance or any other purpose. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal Protective Equipment should be provided.

SMALL SPACES

For buildings with small spaces where maintenance or other access may be required:

Some small spaces within this building will require access by construction or maintenance workers. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces.

8. PUBLIC ACCESS

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secured when not fully supervised.

9. OPERATIONAL USE OF BUILDING

RESIDENTIAL BUILDINGS

This building has been designed as a residential building. If it, at a later date, is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new use.

10. OTHER HIGH RISK ACTIVITY

All electrical work should be carried out in accordance with Code of Practice: Managing Electrical Risks at the Workplace, AS/NZ 3012 and all licensing requirements.

All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace.

All work should be carried out in accordance with Code of Practice:

Managing Noise and Preventing Hearing Loss at Work.

Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement. All the above applies.

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN THE PROJECT.

THIS INCLUDES (but is not excluded to): OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTENORS, DEMOLISHERS.

A16

Job # 00024




32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes



Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site.
Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of
Mistry Designs and must not be used in anyway, wholly or in part without the
written consent of the designer.



Drawing Title

Site Safety Note

Lodged at:	The Hills Shire	Scale	1:100 (A3)
Drawn By	VS	Checked	VS
Date	10 th July 2026		

Project

Dwelling House
Lot : 105 DP: 1273359

Address:
7, Turffontein Avenue, Box Hill,
NSW 2765

D	Issued for CDC	VS	10.07.26
C	Issued for CDC	VS	25.06.26
B	Issued for CDC	VS	15.06.26
A	Issued for Tender	VS	02.06.26
Issue	Description	By	Date