

PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

1.0 GENERAL

- 1.01 TECHNICAL SPECIFICATIONS OR SPECIFIC INSTRUCTIONS ON DRAWINGS TAKE PRECEDENCE OVER THESE NOTE.
- 1.02 THE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ANY DISCREPANCY SHALL BE REFERRED TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK. CONSTRUCTION FROM THESE DRAWINGS, AND THEIR ASSOCIATED CONSULTANTS' DRAWINGS, IS NOT TO COMMENCE UNTIL APPROVED BY THE LOCAL AUTHORITIES.
- 1.03 ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE RELEVANT AND CURRENT STANDARD AUSTRALIA CODES AND WITH BY-LAWS AND ORDINANCES OF THE RELEVANT BUILDING AUTHORITIES ACCEPT WHERE VARIED BY THE PROJECT SPECIFICATION.
- 1.04 ALL DIMENSIONS SHOWN SHALL BE VERIFIED BY THE BUILDER ON SITE. ENGINEER'S DRAWINGS SHALL NOT BE SCALED FOR DIMENSIONS.
- 1.05 DURING CONSTRUCTION THE STRUCTURE, AND ANY ASSOCIATED EXCAVATIONS, SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED. TEMPORARY BRACING SHALL BE PROVIDED BY THE BUILDER TO KEEP THE WORKS AND EVACUATIONS STABLE AT ALL TIME.
- 1.06 UNLESS NOTED OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETRES (mm) AND ALL LEVELS ARE IN METRE (m) TO AUSTRALIAN HEIGHT DATUM (AHD).
- 1.07 ALL ABBREVIATIONS ARE IN ACCORDANCE WITH AS 1100. ADDITIONAL ABBREVIATIONS USED AS FOLLOWS:
- | | | | |
|------|-------------------|-----|------------------------|
| CTRS | CENTRES | UNO | UNLESS NOTED OTHERWISE |
| BTM | BOTTOM | US | UNDERSIDE |
| NF | NEAR FACE | QL | GROUND LEVEL |
| FF | FAR FACE | RL | REDUCED LEVEL |
| EF | EACH FACE | FFL | FINISHED FLOOR LEVEL |
| EW | EACH WAY | SSL | STRUCTURAL SLAB LEVEL |
| STAG | STAGGERED BARS | RC | REINFORCED CONCRETE |
| ALT | ALTERNATING BARS | MC | MASS CONCRETE |
| LV | LENGTH VARIES | C/S | BRICKWORK COURSES |
| NSOP | NOT SHOWN ON PLAN | | |

2.0 FOUNDATIONS

- 2.01 FOUNDATIONS HAVE BEEN DESIGNED FOR A TYPICAL BEARING PRESSURE OF 250kPa UNLESS OTHERWISE NOTED
- 2.02 THE FOUNDATION MATERIAL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER FOR THE BEARING CAPACITY BEFORE PLACING ANY MEMBRANE, REINFORCEMENT OR CONCRETE. WHERE NECESSARY, THE FOOTING DESIGN MAY BE ALTERED.
- 2.03 REFER TO GEOTECHNICAL INVESTIGATION REPORT BY IDEALGEOTECH DATED 12 MARCH 2025, REF NO. 9134 - 75873
- 2.04 THE BUILDER SHALL BE RESPONSIBLE FOR MAINTAINING ANY EXCAVATIONS IN A STABLE CONDITION WITHOUT ADVERSELY AFFECTING SURROUNDING PROPERTIES INCLUDING SERVICES. THIS INCLUDES OBTAINING ALL NECESSARY APPROVALS FOR SHORING AND ANCHORING SYSTEMS.
- 2.05 FOOTINGS SHALL BE LOCATED CENTRALLY UNDER WALLS AND COLUMNS UNLESS NOTED OTHERWISE.
- 2.06 FOOTINGS NEAR BOUNDARIES MUST NOT BE LOCATED HIGHER OR LOWER THAN THE FOOTINGS OF ADJACENT PROPERTIES UNLESS APPROVED.
- 2.07 OBTAIN THE APPROVAL OF THE ENGINEER FOR ALL EXCAVATIONS PRIOR TO CONCRETING.
- 2.08 WHERE FOOTINGS ARE OVER-EXCAVATED, FILL OVER-EXCAVATED AREAS WITH BUNDLING CONCRETE GRADE SAME AS FOOTING TO A MINIMUM THICKNESS OF 50mm.
- 2.09 KEEP FOOTING CLEAN AND FREE OF LOOSE MATERIAL BEFORE INSPECTION. IMMEDIATELY PRIOR TO POURING OF CONCRETE, AND DURING POURING.
- 2.10 DO NOT EXCEED RISE OF 1000mm IN A RUN OF 3000MM FOR THE LINE OF SLOPE BETWEEN ADJACENT FOOTINGS OR EXCAVATIONS.
- 2.11 DO NOT BACKFILL RETAINING WALLS (OTHER THAN CANTILEVER WALLS) UNTIL FLOOR CONSTRUCTION AT TOP AND BOTTOM IS COMPLETED. ENSURE FREE DRAINING BACKFILL AND DRAINAGE IS IN PLACE.
- 2.12 FOOTINGS ARE TO BE CONSTRUCTED AND BACKFILLED AS SOON AS POSSIBLE FOLLOWING EXCAVATION TO AVOID SOFTENING OR DRYING OUT BY EXPOSURE.
- 2.13 SOON TEST ALL PAD FOOTINGS FOR BEARING PRESSURE GREATER THAN 3500kPa FOR EACH FOOTING. PROVIDE A 50mm DIAMETER PROVING HOLE TO THE DEPTH OF 1.5 TIMES THE MINIMUM WIDTH OR 2.5m, WHICHEVER IS LESS, BELOW THE BASE OF THE FOOTING.
- 3.0 SLAB ON GROUND
- 3.01 REMOVE ALL TOP SOIL INCLUDING ROOTS AND ANY OTHER ORGANIC MATTER, STORE TOP SOIL AS REQUIRED.
- 3.02 WHERE SHOWN ON DRAWINGS, BASE AND SAND BUILDING ARE TO BE PLACED AND COMPACTED AS SPECIFIED.
- 3.03 EXCAVATE TO THE REQUIRED FORMATION LEVEL AND PROOF ROLL FORMATION WITH 6 PASSES OF A 10 TONNE SMOOTH WHEELED ROLLER. SOFT AREAS ARE TO BE REMOVED AND REPLACED WITH SUITABLE FILL COMPACTED TO THE DENSITY NOMINATED IN THE SPECIFICATION.
- 3.04 FILL MATERIAL SHALL MEET THE REQUIREMENTS OF THE SPECIFICATION. PLACE IN MAXIMUM 150mm THICK LAYERS. MAXIMUM DEPTH OF FILL IS TO BE 750mm UNLESS NOTED OTHERWISE BY THE ENGINEER.
- 3.05 CLAY SUBGRADE FORMATIONS TO BE MAINTAINED AT OPTIMUM MOISTURE CONTENT -0.43% PRIOR TO COVERING.

4.0 REINFORCEMENT

- 4.01 REINFORCEMENT SYMBOLS:
- | | |
|---------|---|
| S | DENOTES GRADE 250S HOT ROLLED DEFORMED BARS TO AS 4671 |
| N | DENOTES GRADE D500 N BARS TO AS 4671 GRADE N |
| SL & RL | DENOTES GRADE 250S HOT ROLLED PLAIN BARS TO AS 4671 SQUARE AND RECTANGULAR MESH RESPECTIVELY. |
| R | DENOTES GRADE 250 HOT ROLLED PLAIN BARS TO AS 4671 |
| W | DENOTES HARD-DRAWN PLAIN WIRE TO AS 4671 |
| DW | DENOTES COLD ROLLED RIBBED WIRE TO AS 4671 |
- NUMBER OF BARS IN GROUP
- BAR GRADE & TYPE
- NOMINAL BAR SIZE IN mm
- BAR SPACING IN mm
- 17N20-250
- THE FIGURE FOLLOWING THE FABRIC SYMBOL IS REFERENCE NUMBER FOR FABRIC TO AS 4671
- 4.02 ALL REINFORCEMENT SHALL BE FIRMLY SUPPORTED ON MILD STEEL PLASTIC TIPPED CHAIRS, PLASTIC CHAIR OR CONCRETE CHAIRS AT NOT GREATER THAN 1 METRE CENTRES BOTH WAYS. BARS SHALL BE TIED AT ALTERNATIVE INTERSECTIONS. IN EXPOSURE CONDITIONS GREATER THAN B1 USE ONLY PLASTIC CHAIR.
- 4.03 REINFORCEMENT IS REPRESENTED DIAGRAMMATICALLY AND NOT NECESSARILY IN TRUE PROJECTION.
- 4.04 SLAB REINFORCEMENT SHALL EXTEND AT LEAST 75mm ONTO MASONRY SUPPORT WALLS AND 50 PERCENT OF BOTTOM REINFORCEMENT SHALL BE COGGED TO ACHIEVE ANCHORAGE AT SIMPLY SUPPORTED ENDS.
- 4.05 SPICES IN REINFORCEMENT SHALL BE MADE ONLY IN POSITIONS SHOWN OR OTHERWISE APPROVED IN WRITING BY THE ENGINEER. LAPS SHALL BE IN ACCORDANCE THE FOLLOWING:

TENSION LAP LENGTH (mm)				
CONCRETE GRADE ≥ 32MPa				
BAR	LESS THAN 300mm CONCRETE CAST BELOW OR VERTICAL BAR		MORE THAN 300mm CONCRETE CAST BELOW BAR	
	SPACING < 150	SPACING ≥ 150	SPACING < 150	SPACING ≥ 150
N12	450	300	600	400
N16	800	550	950	700
N20	1100	800	1400	950
N24	1500	1100	1900	1350
N28	1950	1400	2450	1750
N32	2400	1700	2950	2100
N36	NOT TO BE USED - REFER TO AS 3600 13.2.1 (a)			

- 4.06 SITE BENDING OF DEFORMED REINFORCING BARS SHALL BE DONE WITHOUT HEATING USING MECHANICAL BENDING TOOLS.
- 4.07 WELDING OF REINFORCEMENT SHALL NOT BE PERMITTED UNLESS SHOWN ON THE STRUCTURAL DRAWINGS OR APPROVED BY THE ENGINEER.
- 4.08 JOGGLES TO BARS SHALL BE 1 BAR DIAMETER OVER A LENGTH OF 12 BARS DIAMETERS.
- 4.09 WHERE TRANSVERSE THE BARS ARE NOT SHOWN PROVIDE N12-300 SLICED WHERE NECESSARY AND LAP WITH MAIN BARS 450mm U.N.O.
- NOTES: THESE LAP LENGTHS ARE BASED ON THE FOLLOWING MINIMUM COVER TO THE BARS:
- SLABS & WALLS: 20mm
- BEAMS: 40mm

5.0 MASONRY NOTES

- 5.01 ALL MASONRY SHALL COMPLY WITH AS3700 AND THE PROJECT SPECIFICATION
- 5.02 CONCRETE MASONRY UNITS TO HAVE A MINIMUM CHARACTERISTIC UNCONFINED STRENGTH OF 20MPa IN ACCORDANCE WITH AS2733.
- 5.03 MASONRY TO BE BEDDED IN FRESHLY PREPARED MORTAR.
- (a) CONCRETE BLOCKS:
- MORTAR MIX TO BE UNIFORMLY MIXED IN A RATIO OF ONE PART CEMENT ONE PART LIME AND SIX PARTS SAND CONFORMING TO AS2701. BRICKIES LOAM SHALL NOT BE USED.
- (b) CLAY BRICKS:
- MORTAR MIX TO BE UNIFORMLY MIXED IN THE RATIO OF ONE PART CEMENT, THREE PARTS SAND AND ONE FOURTH PART LIME, CONFORMING TO AS2701. BRICKIES LOAM SHALL NOT BE USED.
- 5.04 GROUT SHALL HAVE A COMPRESSIVE STRENGTH (f_c) OF 20 MPa AT 28 DAYS. A SLUMP OF 125mm IN A 150mm CONE. A MAXIMUM AGGREGATE SIZE OF 10mm AND BE IN ACCORDANCE WITH AS3700
- 5.05 BEDDING OF MASONRY SHALL BE FULL FACE WITH CROSS JOINTS COMPLETELY FILLED. JOINT THICKNESS SHALL NOT EXCEED 12mm
- 5.06 PROVIDE WALL TIES AT 600mm MAXIMUM CENTRES VERTICALLY AND HORIZONTALLY. REFER TO MASONRY DETAILS FOR WALL TIE SETOUT AT OPENINGS
- 5.07 THE CAVITY SHALL NOT EXCEED 100mm AND SHALL NOT BE SMALLER THAN 40mm UNLESS NOTED OTHERWISE. KEEP CAVITY CLEAN AND CLEAR OF OBSTRUCTIONS
- 5.08 ALL WALLS TO BE KEPT STABLE AT ALL STAGES OF CONSTRUCTION AND NOT BE OVER STRESSED AT ANY TIME.
- 5.09 UNLESS NOTED OR SHOWN OTHERWISE ON DRAWINGS THERE ARE TO BE NO CHASES OR RECESSES PERMITTED IN MASONRY WALL WITHOUT THE PRIOR APPROVAL OF HCT ENGINEERING PTY LTD

BRICK LINTEL SCHEDULE			
OPENING SIZE (mm)	INTERNAL SKIN	EXTERNAL SKIN	END BEARING
UP TO 900mm	100x8mm T-BAR	100x5mm T-BAR	100mm (MIN)
1200	100x10mm T-BAR	100x8mm T-BAR	100mm (MIN)
1500	100x100x8mm ANGLE	100x100x6mm ANGLE	150mm (MIN)
2100	150x100x8mm ANGLE	150x100x6mm ANGLE	150mm (MIN)
2400	150x100x8mm ANGLE	150x100x8mm ANGLE	150mm (MIN)
2700	150x100x10mm ANGLE	150x100x10mm ANGLE	150mm (MIN)
3000	150x100x12mm ANGLE	150x100x12mm ANGLE	150mm (MIN)
4000	150x100x12mm ANGLE + 250x10mm PLATE		200mm (MIN)

ARTICULATION JOINTS

- 6.01 ARTICULATION JOINTS SHALL BE PROVIDED IN UNREINFORCED MASONRY WALLS LONGER THAN 5M LONG.
- 6.02 ARTICULATION JOINTS SHALL NOT BE LOCATED ABOVE GARAGE DOOR OPENINGS HOWEVER ARTICULATION JOINTS IN LINE WITH THE EDGE OF THE OPENING ARE PERMITTED.
- 6.03 ARTICULATION JOINTS SHALL BE VERTICAL (NOT TOOTHED), FULL HEIGHT OF THE MASONRY, AND FREE OF MORTAR.
- 6.04 WHERE ARTICULATION JOINTS ARE REQUIRED TO BE WEATHERPROOF OR INSECT-PROOF, THEY SHALL BE CLOSED BY INCORPORATING EITHER A FLEXIBLE SEALANT AND BACKING ROD, OR MATERIAL THAT WILL BOTH EXPAND AND CONTRACT; OR A PROPRIETARY SYSTEM DESIGNED FOR THIS APPLICATION.

Site Class	Masonry wall construction and surface finish	JOINT SPACING, M		
		Up to 4m high, 10mm joints	4-8.5m high, 10mm joints	4-8.5m high, 15mm joints
M, M-D	External face finish masonry	6.0	4.2	6.0
	External rendered and/or painted masonry	5.5	3.9	5.5
	Internal face finish or sheathed masonry	6.0	4.2	6.0
H1, H1-D	Masonry wall construction and surface finish	5.5	3.9	5.5
	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	5.5	3.9	5.5
H2, H2-D	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	4.5	3.2	4.5
	Internal face finish or sheathed masonry	5.0	3.5	5.0
	Internal rendered and/or painted masonry	4.5	3.2	4.5

TIMBER NOTES

- T1 AS 1684 IS RELEVANT TO DOMESTIC CONSTRUCTION IN SHELTERED LOCATIONS
- T2 SOFTWOOD MINIMUM GRADE F7 U.N.O.
- T3 HARDWOOD MINIMUM GRADE F11 U.N.O.
- EXTERNAL TIMBER TO BE EITHER HARDWOOD
- DURABILITY CLASS 1 OR 2 OR IMPREGNATED GRADE F7, PRESSURE TREATED TO AS 1684 AND RE-DRILLED PRIOR TO USE. SUPPLEMENTARY TREATMENT SHALL BE APPLIED TO ALL CUT SURFACES, PROVIDE DOCUMENTATION.
- T4 ALL BOLTS IN TIMBER CONSTRUCTION TO BE MIN. M16 U.N.O. BOLT HOLES TO BE DRILLED EXACT SIZE, WASHERS UNDER HEADS AND NUTS TO BE AT LEAST 2.5 TIMES BOLT DIAMETER
- T5 FINISHED TIMBER SIZES
- SEASONED SOFTWOOD +5,-0mm
- UNSEASONED SOFTWOOD F7 +3,-3mm; F7+2,-4mm
- SEASONED HARDWOOD +2,-0mm
- UNSEASONED HARDWOOD -3,-3mm (SEE ALSO CLAUSE 1.6.2 IN AS 2082)
- T6 ALL TIMBER JOINTS AND NOTCHES TO BE 100mm MINIMUM FROM LOOSE KNOTS, SEVERE SLOPING GRAIN, GUM VEINS OR OTHER MINOR DEFECTS.
- T7 BLOCKING IS NOT REQUIRED FOR JOISTS SPANNING LESS THAN 3m
- FOR JOISTS SPANNING GREATER THAN 3m AND LESS THAN 4.2m PROVIDE ONE ROW OF BLOCKING MID-SPAN
 - FOR JOISTS SPANNING GREATER THAN 3.2m AND UP TO 6.0m PROVIDE TWO ROWS OF BLOCKING AT 1/3 SPAN
 - FOR DEEP JOISTED FLOORS WHERE A CONTINUOUS TRIMMING JOIST IS NOT PROVIDED AT END OF JOISTS, BLOCKING IS REQUIRED AT 1800 MAXIMUM CENTERS, (REFER TO AS 1684)

STRUCTURAL STEEL WORK NOTES

- S1 ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538 AND THE SPECIFICATION
- S2 UNLESS SHOWN OTHERWISE, ALL STEEL SHALL BE IN ACCORDANCE WITH AS1204 GRADE 300. ALL STEEL HOLLOW SECTIONS SHALL BE GRADE 350 U.N.O. AND SHALL BE IN ACCORDANCE WITH AS1163. ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 STEEL IN ACCORDANCE WITH AS 1538
- S3 UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
- ALL WELDS SHALL BE 6mm CONTINUOUS FILLET WELDS ALL ROUND, "SP" GRADE WITH E48 ELECTRODE
- ALL BOLTS SHALL BE M20-8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION
- PURLIN BOLTS TO BE M12-4.8/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END
- ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK (U.N.O.)
- ALL CAP PLATES SHALL BE 10mm THICK (U.N.O.)
- ALL BASE PLATES SHALL BE 10mm THICK (U.N.O.)
- S4 BOLT DESIGNATION:
- 4.8/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.8 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION
- 8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION
- 8.8/TB REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS A BEARING JOINT
- 8.8/TF REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS A100 AS A FRICTION JOINT
- S5 HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE 'PART TURN' METHOD OF TIGHTENING.
- S6 ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.
- S7 SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER
- S8 ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE ENCASED IN 75mm MIN. CONCRETE ALL ROUND
- S9 ALL STEELWORK, EXCEPT THAT WHICH IS TO BE CONCRETE ENCASED, FIRE SPRAYED OR CONTACT SURFACES OF FRICTION TYPE JOINTS, SHALL BE SURFACE CLEANED AND PAINTED IN ACCORDANCE WITH THE SPECIFICATION
- S10 STEELWORK THAT IS CONCRETE ENCASED, FIRE SPRAYED OR FACING SURFACES OF FRICTION TYPE JOINTS SHALL BE LEFT UNPAINTED AND FREE FROM SCALE
- S11 THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND DRILL AL HOLES NECESSARY FOR FIXING STEEL, TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS
- S12 THE FABRICATION AND ERECTION OF THE STRUCTURAL STEELWORK SHALL BE SUPERVISED BY QUALIFIED PERSONNEL EXPERIENCED IN SUCH SUPERVISION TO ENSURE THAT ALL REQUIREMENTS OF THE DESIGN ARE MET. DETAILS OF ERECTION SEQUENCE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ERECTION
- S13 COLUMNS AND MULLIONS SHALL HAVE THEIR BASE PLATES FULLY GROUTED IN ACCORDANCE WITH THE SPECIFICATIONS AFTER PLUMBING AND LEVELING ON STEEL PACKERS
- S14 THREE SETS OF STEELWORK SHOP DETAIL DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ANY FABRICATION. THE CHECK SHALL NOT COVER LAYOUT AND MEMBER DIMENSIONS.
- S15 CONCRETE ENCASED STRUCTURAL STEELWORK TO BE ENCLOSED BY F41 MESH PLACED CLEAR OF STEELWORK, ENCASING TO PROVIDE 50mm MIN. COVER TO STEELWORK U.N.O. ON THE DRAWINGS, COVER TO MESH TO BE 20mm MIN. MAXIMUM AGGREGATE SIZE = 10mm, CONCRETE f_c ≥ 20MPa.
- S16 UNLESS SPECIFIED OTHERWISE, STEELWORK SHALL BE PREPARED TO CLASS 2.5 FINISH IN ACCORDANCE WITH AS1627.4 AND GIVE TWO COATS OF ZINC PHOSPHATE TO A TOTAL DRY FILM THICKNESS OF 70 MICRONS.

WALL FRAMING SUMMARY		
TYPE	HEIGHT	DETAIL
LOAD BEARING WALL	2700 TO 3000	EXTERNAL / INTERNAL LOAD BEARING WALL
		90x45 MGP10 STUDS @450 MAX CRS, 2 ROWS NOGGINGS @1350 MAX CRS.
NON-LOAD BEARING WALL	2700 TO 3000	INTERNAL NON-LOAD BEARING WALL
		90x45 MGP10 STUDS @600 MAX CRS, SINGLE 45 THICK MGP10 PLATE TOP AND BOTTOM
TOP & BOTTOM PLATES		ALL EXTERNAL / INTERNAL LOAD BEARING STUD ALLS SHALL HAVE TWO (2) 35 THICK MGP10 TOP PLATE AND ONE (1) 45 THICK MGP10 BOTTOM PLATE, NOGGINGS AT 1350 MAX CRS WITH MIN 2 ROWS.
ROOF BATTENS		ALL INTERNAL NON-LOAD BEARING STUDS WALLS SHALL HAVE ONE (1) 45 THICK MGP10 PLATE TOP AND BOTTOM.
		45x70 MGP10 @600 CTR OR TOP HAT 40mm.

SUMMARY DESIGN


SITE CLASSIFICATION	CLASS 'P'
SOIL CLASSIFICATION	'M'
WIND CLASSIFICATION	AS4055 N1
ROOF CONSTRUCTION	TILED ROOF
ROOF FRAME	CONVENTIONAL TO AS 1684 OR ROOF TRUSSES BY OTHERS
ROOF LOAD	90KG/M² FOR TILED ROOF
FIRST FLOOR WALL	BRICK VENEER
FIRST FLOOR WALL LOAD	EX.WALL = 6.89 kN/m
FIRST FLOOR FRAMING	TIMBER BEARER AND JOISTS WITH STEEL BEAM
GROUND FLOOR WALL	BRICK VENEER
GROUND FLOOR WALL LOAD	EX.WALL = 7.24 kN/m
GROUND FLOOR SLAB/FOOTING SYSTEM	WAFFLE SLAB & RAFT SLAB

DRAWING LIST


SHEETNUMBER	SHEETNAME
ST100	GENERAL NOTES
ST100	FOOTING & SLAB PLAN SH.1
ST101	FOOTING & SLAB PLAN SH.2
ST102	FOOTING TYPICAL DETAIL
ST103	SWIMMING POOL SECTION & DETAIL
ST200	GROUND FLOOR LINTEL PLAN
ST201	FIRST FLOOR LINTEL PLAN
ST202	FIRST FLOOR FRAMING PLAN
ST203	ROOF FRAMING PLAN SH.1
ST204	ROOF FRAMING PLAN SH.2
ST205	BEAM & POST TYPICAL DETAIL SH.1
ST206	BEAM & POST TYPICAL DETAIL SH.2
ST207	BEAM & POST TYPICAL DETAIL SH.3
ST208	ROOF TYPICAL DETAIL
ST300	GROUND FLOOR BRACING PLAN
ST301	FIRST FLOOR BRACING PLAN
ST302	TYPICAL BRACING DETAIL
ST400	GROUND FLOOR BRACING PLAN
ST401	FIRST FL. ARTICULATION JOINT PLAN

WALL FRAMING CONNECTION


SINGLE/ UPPER STOREY	STUDS TO BOTTOM/ TOP PLATES	BOTTOM PLATES TO SLAB	BOTTOM PLATES TO FLOOR FRAME	G.I.S. 22, 80 NAILS EACH END OF SEASONED TIMBER x 1 WITH 4/2, 80 NAILS EACH LEG
				M10 CAST IN BOLT 1.2M MAX CRS. (180 MIN. EMBEDMENT)
				2/NO. 14 TYPE 17 SCREWS 900 MAX. CRS. (40MIN. EMBEDMENT INTO JOIST)



SECTION X-X

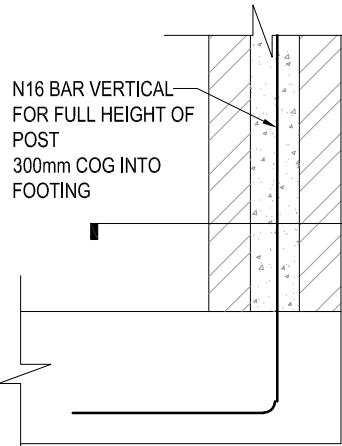

TYPICAL BRICK POST DETAIL


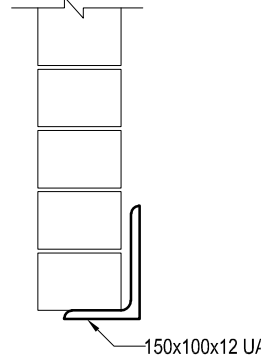


ANGLE LINTEL BEAM DETAIL

GENERAL NOTES

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A		DRG NO.: HCT - 1843 - ST100		

A	ISSUED FOR CC	PD	20.03.2025	
ISSUE	AMENDEMENT	BY	DATE	

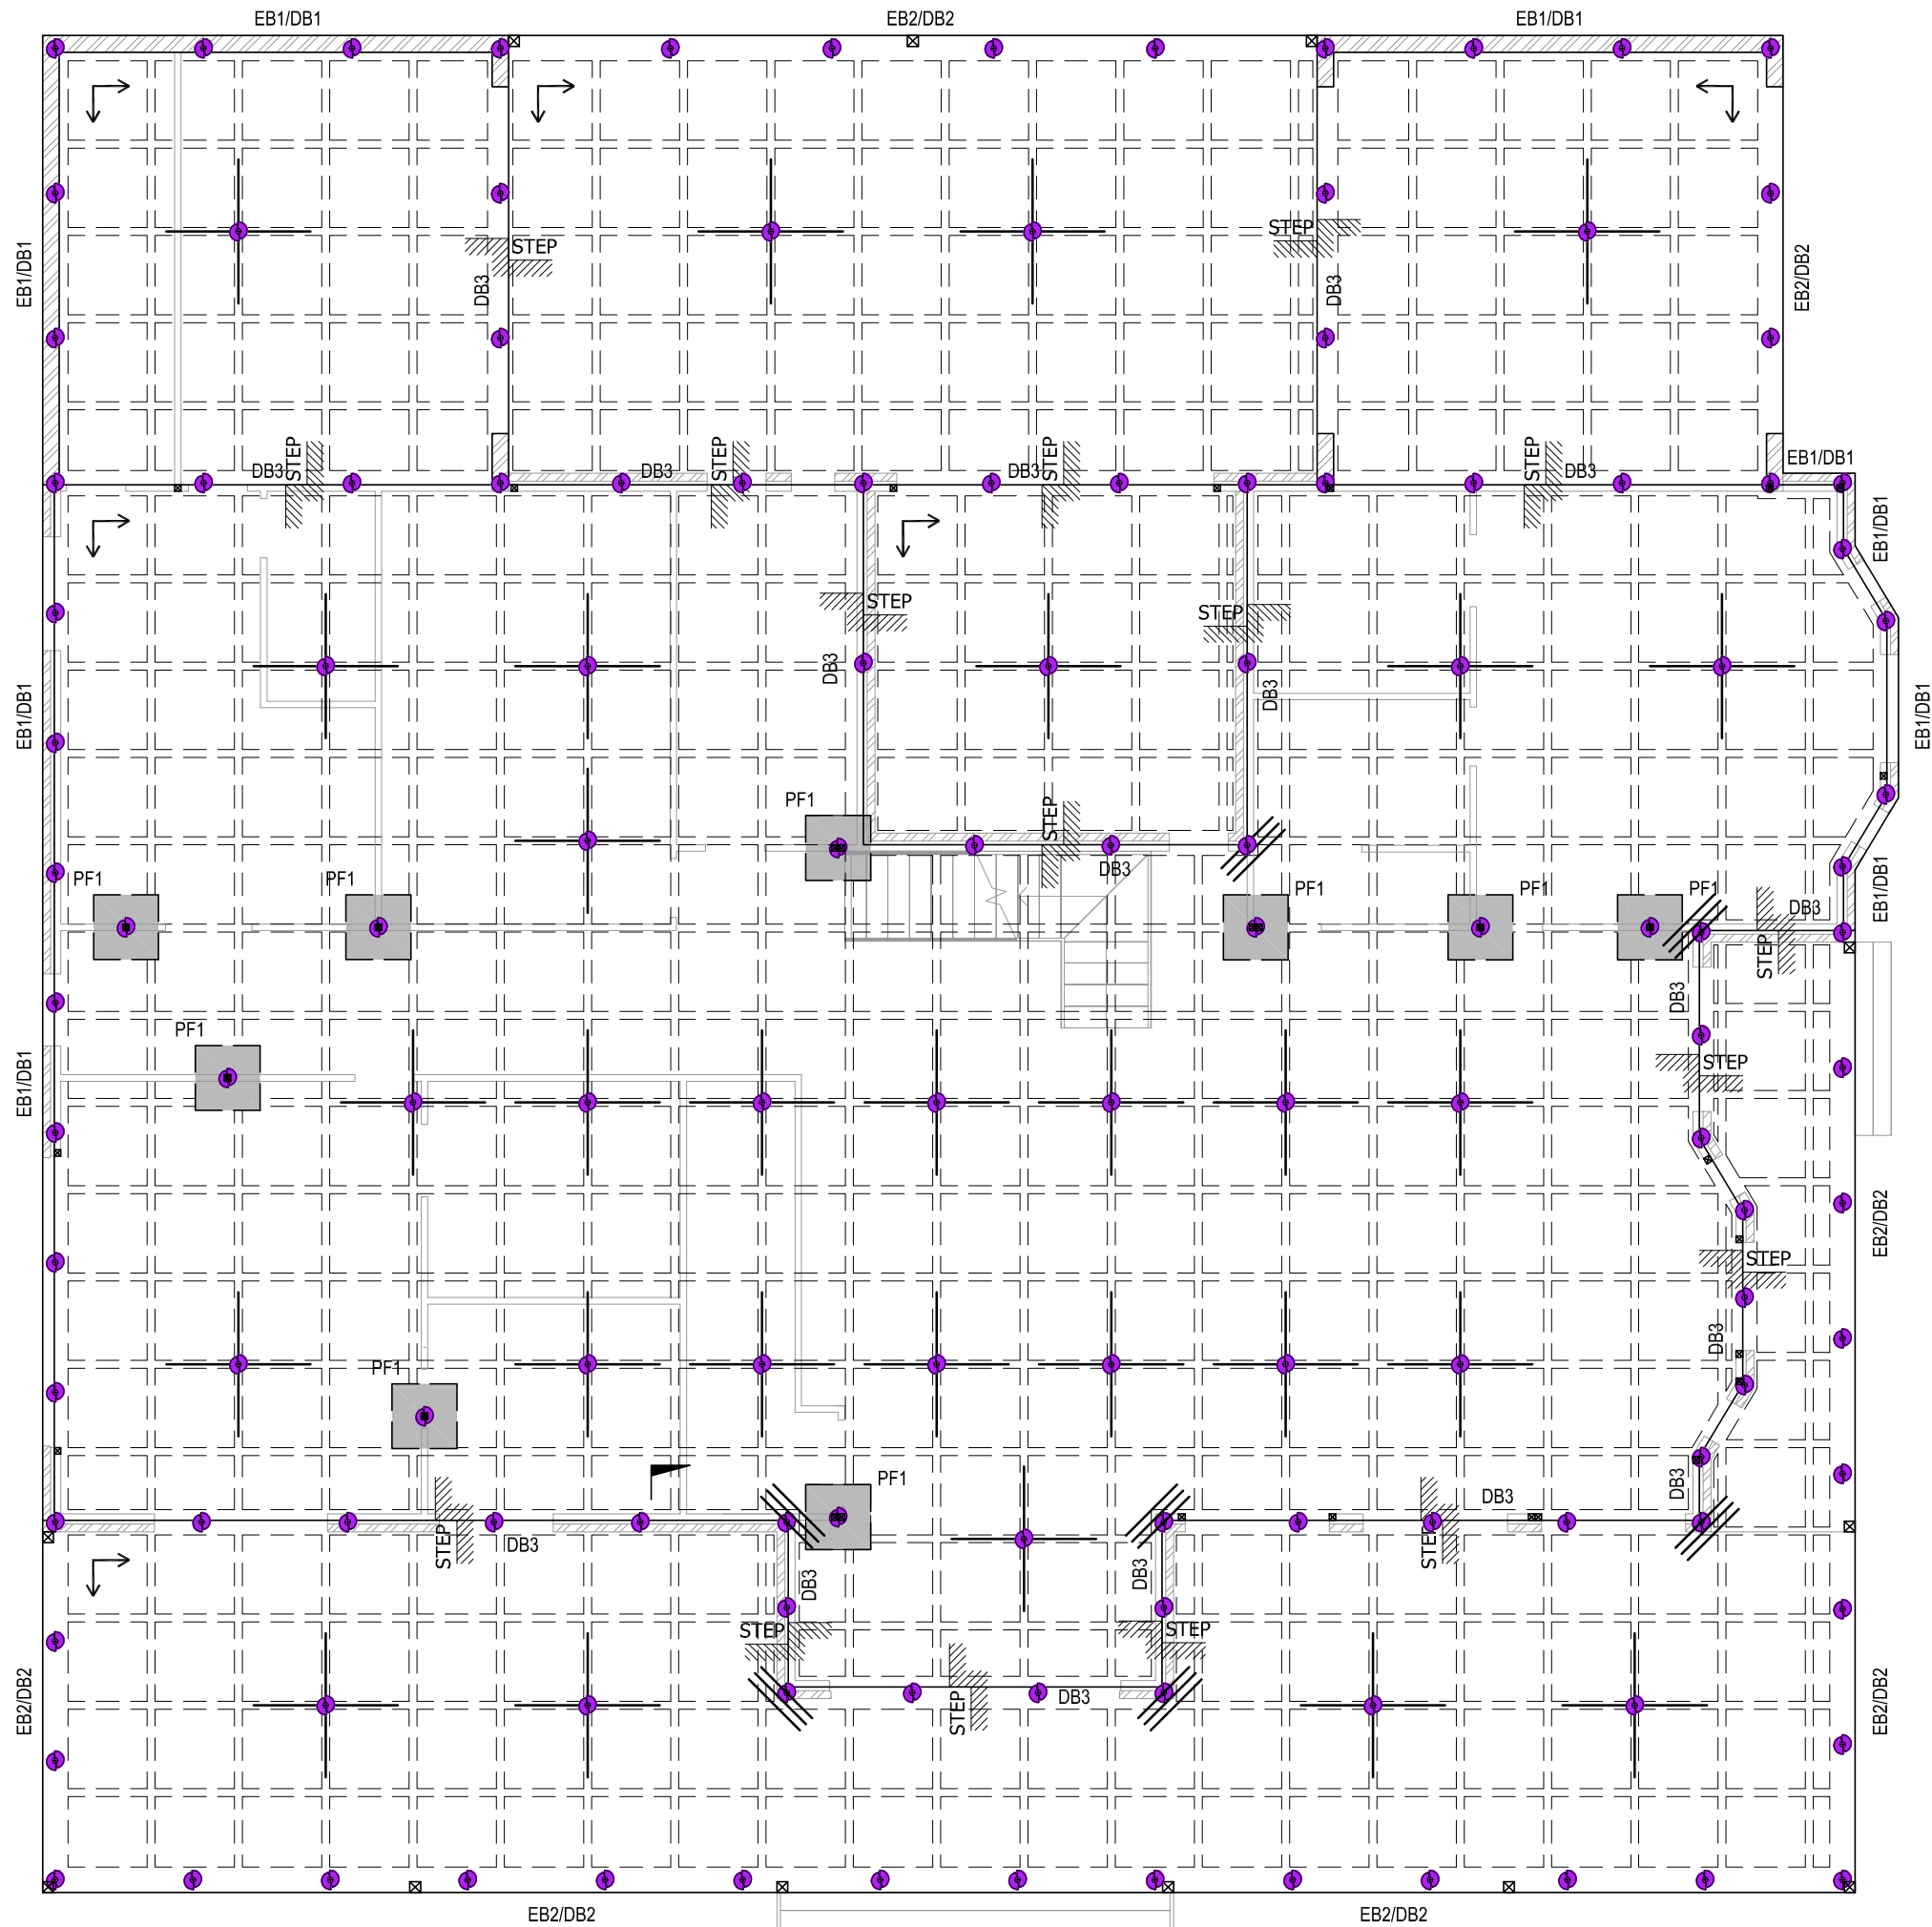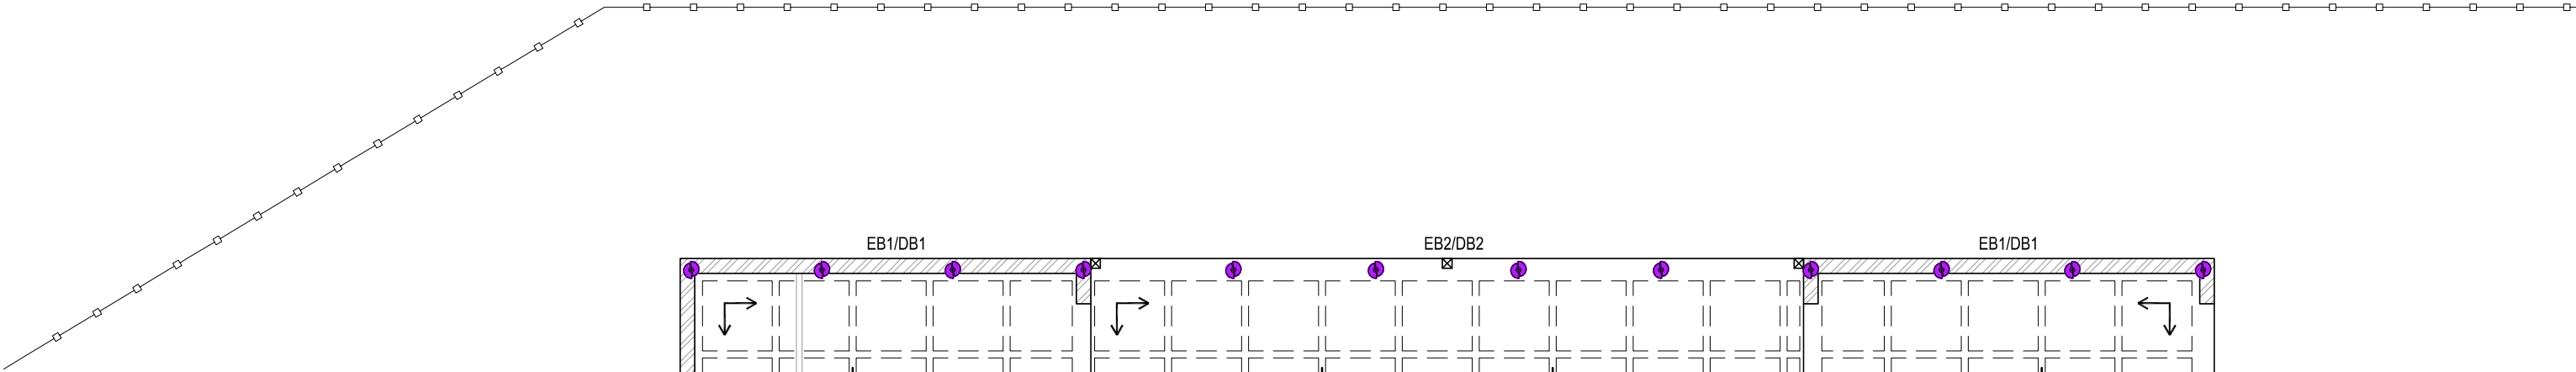

GROUND FLOOR SLAB PLAN

1:100


1. SLAB @100mm DEPTH FOUNDED ON COMPACTED FILL GROUND U.N.O
2. TYPICAL SL82 MESH TOP THROUGHOUT U.N.O
3. REFER TO ARCHITECTURAL DRAWINGS FOR LEVELS, RL's, STEPS AND FOLDS
4. FOR STRUCTURAL NOTES REFER TO DRAWING ST-000

DESIGN SUMMARY					LEGEND				
SITE CLASSIFICATION		CLASS 'P'			ITEM	DESCRIPTION			
SOIL CLASSIFICATION		'M'				DENOTES 80kN KATANA SCREW PILES			
DURABILITY CLASS		NORMAL							
SALINITY SITE - REFER TO GEOTECH REPORT		'NO'							
					CONCRETE QUALITY				
WAFFLE POD HEIGHT		300			ELEMENT	SLUMP	AGGREGATE (MAX.SIZE)	CEMENT TYPE	f _c
WAFFLE POD SIZE		1100x1100			SLAB ON GROUND	80mm	20mm	A	32MPa
SLAB THICKNESS		100mm			FOOTING	80mm	20mm	A	32MPa
TYPICAL BEAM DEPTH		VARIES			COLUMN	80mm	20mm	A	32MPa
SLAB MESH		SL82			SUSPENDED SLAB	80mm	20mm	A	32MPa
PIER SPACING		AS SHOWN ON PLAN (MAX. 2000mm)			PIER	80mm	20mm	A	32MPa
PAD FOOTING SCHEDULE					REINFORCEMENT COVER SCHEDULE				
MARK	B	W	D	REINFORCEMENT	MEMBER	COVER (mm)			EXPOSURE CLASSIFICATION
						TOP	BTM	SIDES	
PF1	600	9000	500	N12-200 TOP & BTM.		INTERNAL SLABS	20mm	25mm	20mm
					EXTERNAL SLABS	45mm	45mm	45mm	B1


*WPM : WATER PROOFING MEMBRANE

REINFORCEMENT NOTES:


1. TYPICAL TRIMMER AT PENETRATION DETAIL:



2. TYPICAL TRIMMER AT RE-ENTRANT CORNER:




3. TYPICAL TRIMMER AT SLAB CORNER:



4. PROVIDE ADEQUATE OVERLAP AT MESH JOINTS AS FOLLOWS:
400 MIN. LAP FOR SL82 MESH
500 MIN. LAP FOR SL92 MESH
600 MIN. LAP FOR SL102 MESH


5. BAR DIA. LAP LENGTH
- N12 : 400
- N16 : 600
- N20 : 800
- N24 : 1050
- N28 : 1300
- N32 : 1600




REINFORCEMENT FOR PIERS DEEPER THAN 2.5m			
FOUNDATIONS	MIN. PIER Ø (mm)	SOCKET DEPTH (mm)	REINFORCEMENT
STIFF CLAY	450	500	4N16, R10-300 TILES
SHALE	400	200	4N12, R10-300 TILES
ROCK	300	100	4N12, R10-300 TILES

REINFORCEMENT NOTES:


1. TYPICAL TRIMMER AT PENETRATION DETAIL:



2. TYPICAL TRIMMER AT RE-ENTRANT CORNER:



3. TYPICAL TRIMMER AT SLAB CORNER:




4. PROVIDE ADEQUATE OVERLAP AT MESH JOINTS AS FOLLOWS:
400 MIN. LAP FOR SL82 MESH
500 MIN. LAP FOR SL92 MESH
600 MIN. LAP FOR SL102 MESH

5. BAR DIA. LAP LENGTH
- N12 : 400 - N24 : 1050
- N16 : 600 - N28 : 1300
- N20 : 800 - N32 : 1600

REINFORCEMENT FOR PIERS DEEPER THAN 2.5m

FOUNDATIONS	MIN. PIER Ø (mm)	SOCKET DEPTH (mm)	REINFORCEMENT
STIFF CLAY	450	500	4N16, R10-300 TILES
SHALE	400	200	4N12, R10-300 TILES
ROCK	300	100	4N12, R10-300 TILES



CONCRETE BORED PIER


CONCRETE QUALITY

ELEMENT	SLUMP	AGGREGATE (MAX.SIZE)	CEMENT TYPE	f _c
SLAB ON GROUND	80mm	20mm	A	32MPa
FOOTING	80mm	20mm	A	32MPa
COLUMN	80mm	20mm	A	32MPa
SUSPENDED SLAB	80mm	20mm	A	32MPa
PIER	80mm	20mm	A	32MPa

REINFORCEMENT COVER SCHEDULE

MEMBER	COVER (mm)			EXPOSURE CLASSIFICATION
	TOP	BTM	SIDES	
INTERNAL SLABS	20mm	25mm	20mm	A1
EXTERNAL SLABS	45mm	45mm	45mm	B1


*WPM : WATER PROOFING MEMBRANE

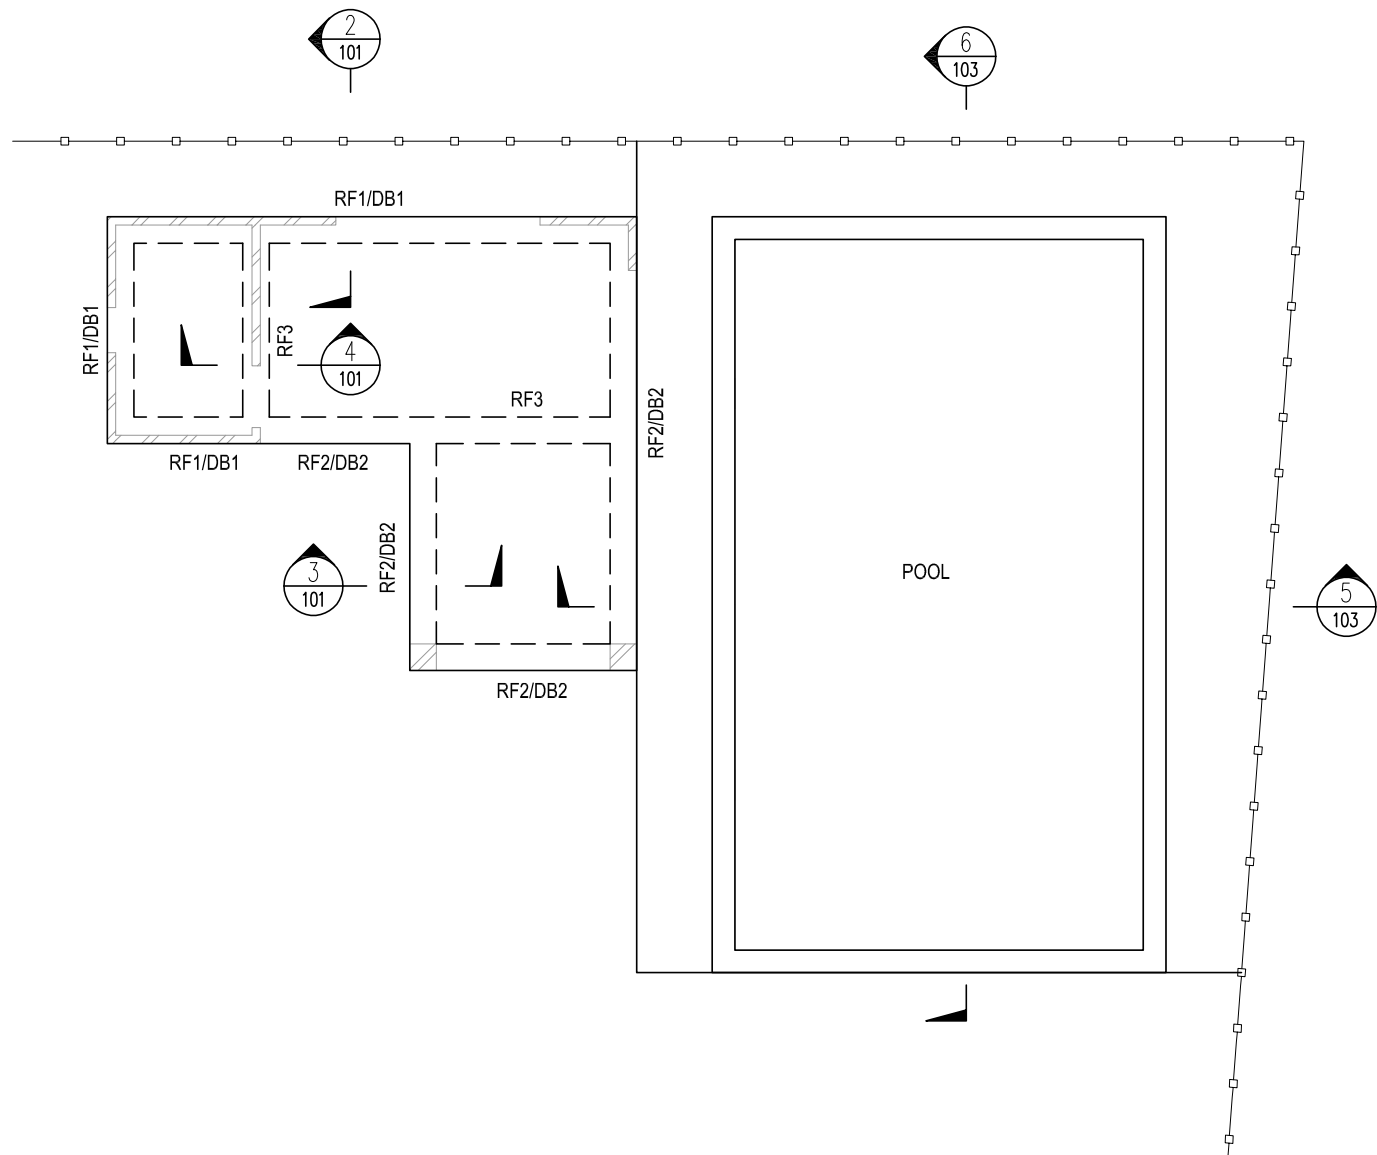


GROUND FLOOR SLAB PLAN - SWIMMING POOL & CABANA PLAN

1:100


- SLAB @125mm DEPTH FOUNDED ON COMPACTED FILL GROUND U.N.O
- TYPICAL SL82 MESH TOP THROUGHOUT U.N.O
- REFER TO ARCHITECTURAL DRAWINGS FOR LEVELS, RL's, STEPS AND FOLDS
- FOR STRUCTURAL NOTES REFER TO DRAWING ST-000

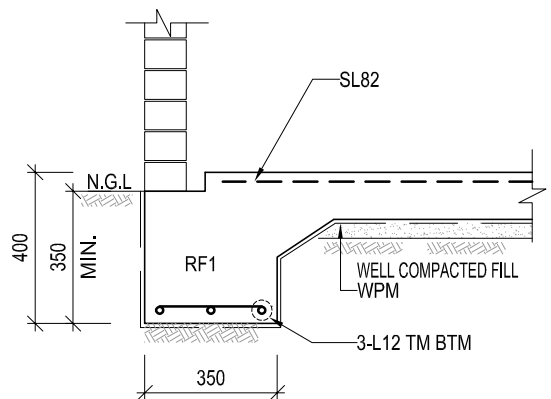


2 SECTION 101 1:20

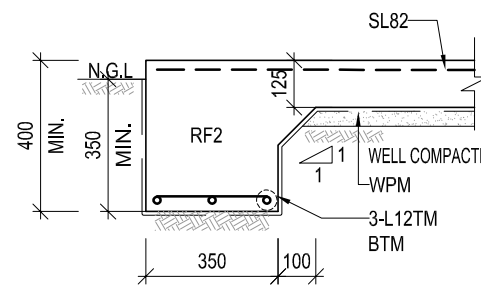


3 SECTION 101 1:20

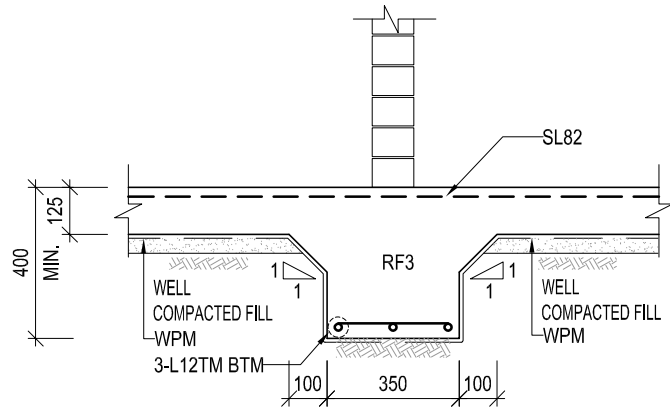

4 SECTION 101 1:20

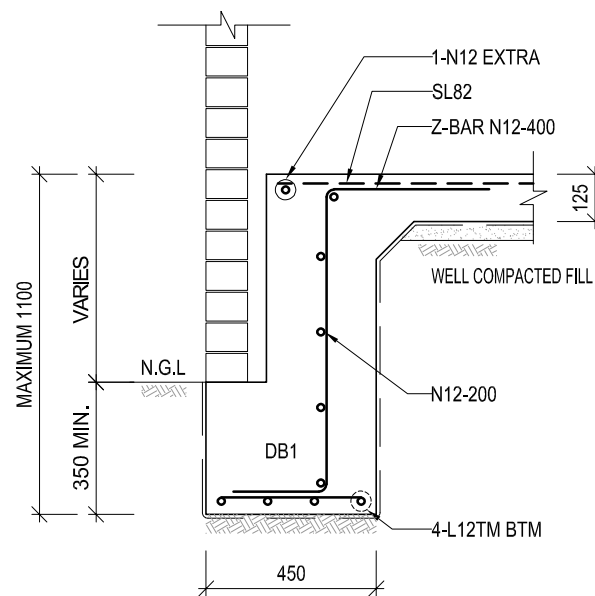

TYPICAL DROP EDGE BEAM DETAIL (DB1) 1:20

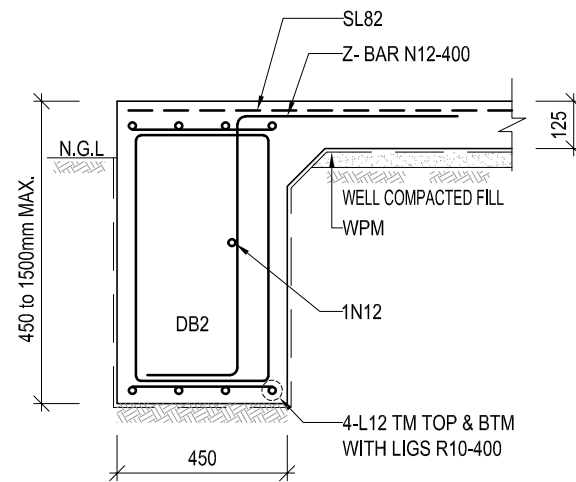

TYPICAL DROP EDGE BEAM DETAIL (DB2) 1:20



HCT ENGINEERING Pty Ltd

PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES


PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd


FOOTING & SLAB PLAN SH.2

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A		DRG NO.: HCT - 1843 - ST101		


A	ISSUED FOR CC	PD	20.03.2025	
ISSUE	AMENDEMENT	BY	DATE	

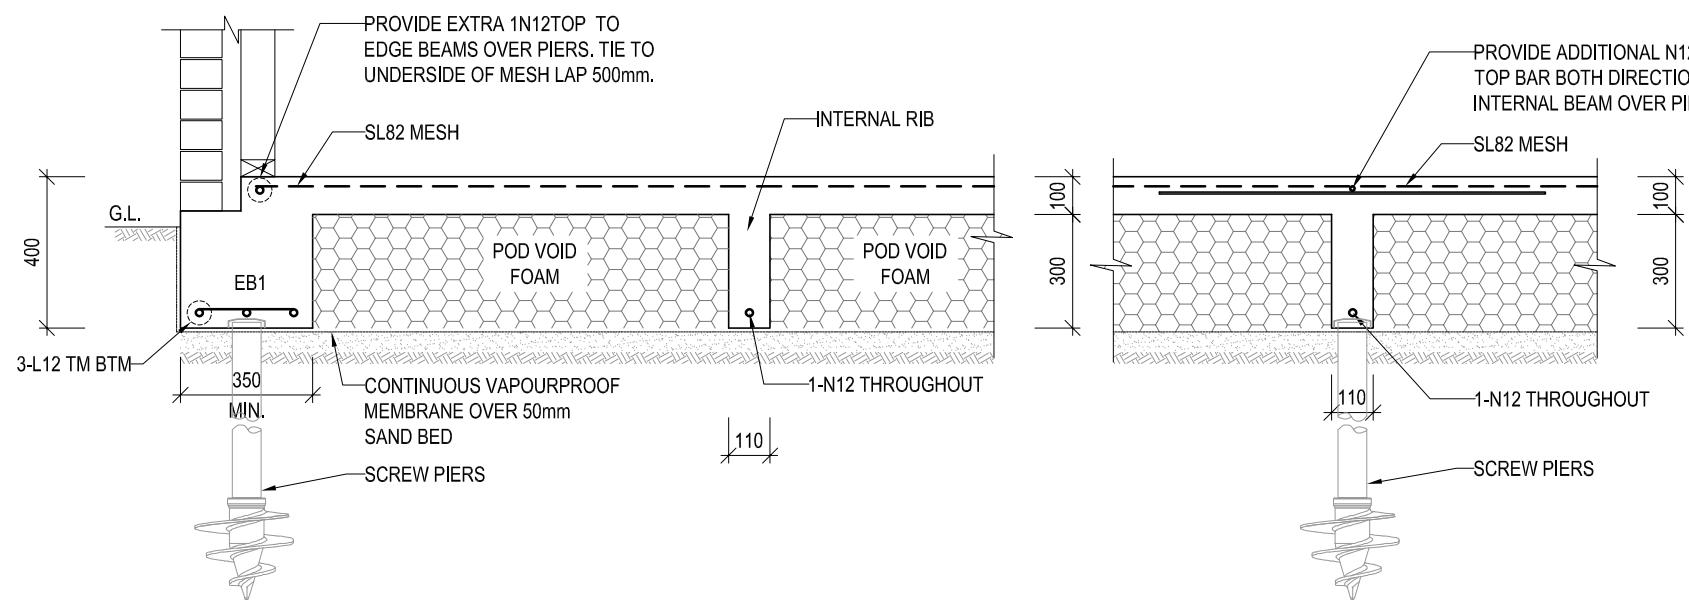


TYPICAL EDGE BEAM DETAIL (EB1)
1:20

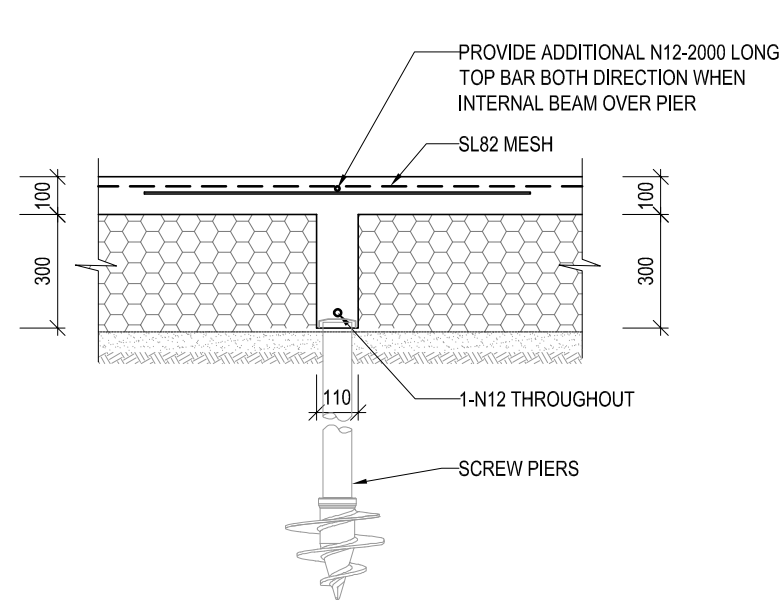


TYPICAL INTERNAL RIB OVER PIER
1:20

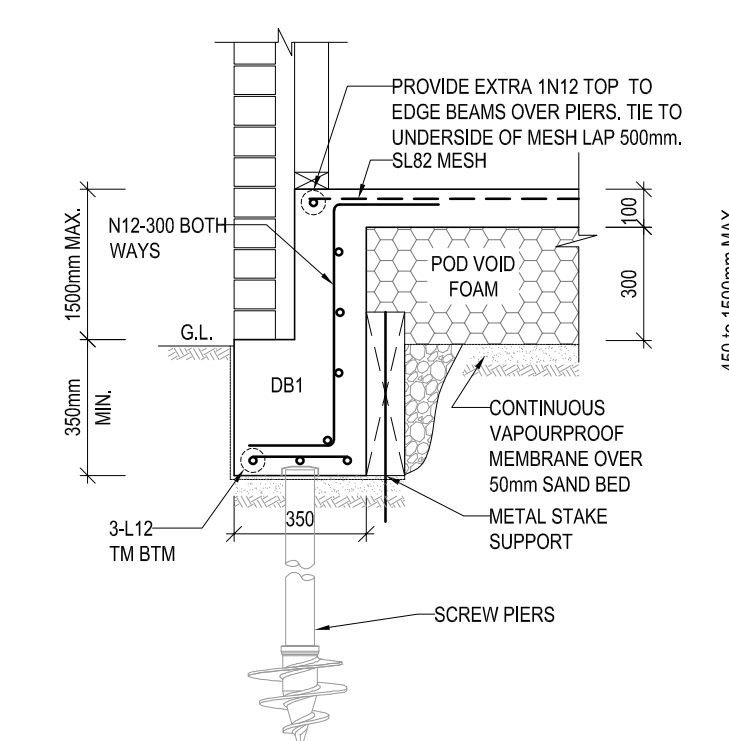


TYPICAL DROP EDGE BEAM DETAIL (DB1)
1:20

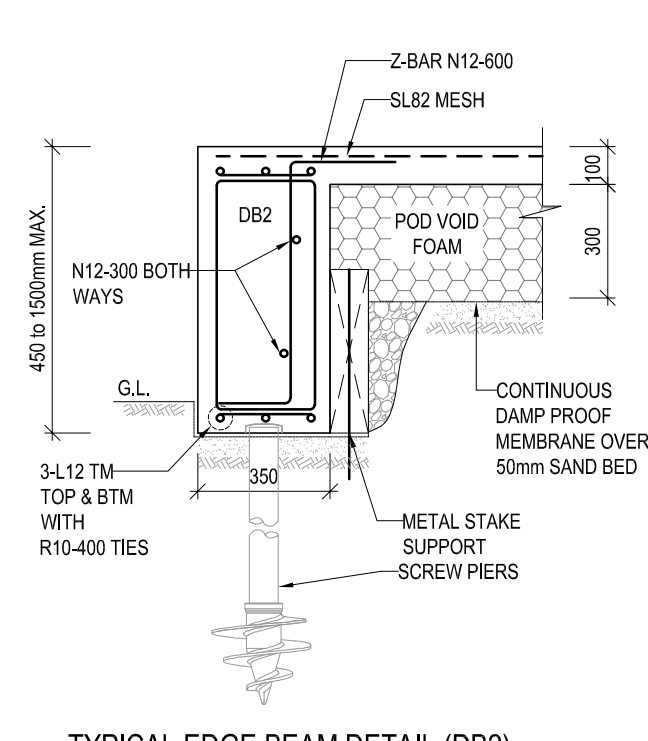


TYPICAL EDGE BEAM DETAIL (DB2)
1:20

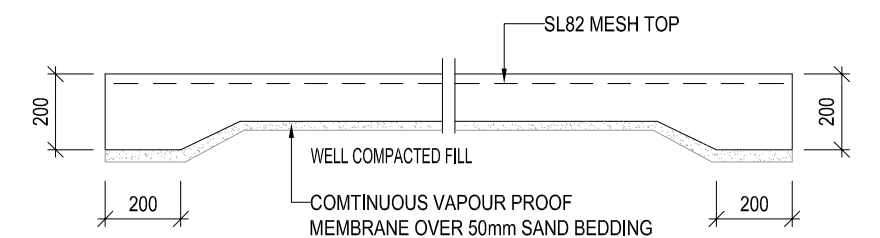


TYPICAL DRIVEWAY SECTION




SAWN/TOOLED JOINT DETAIL - (SJ)

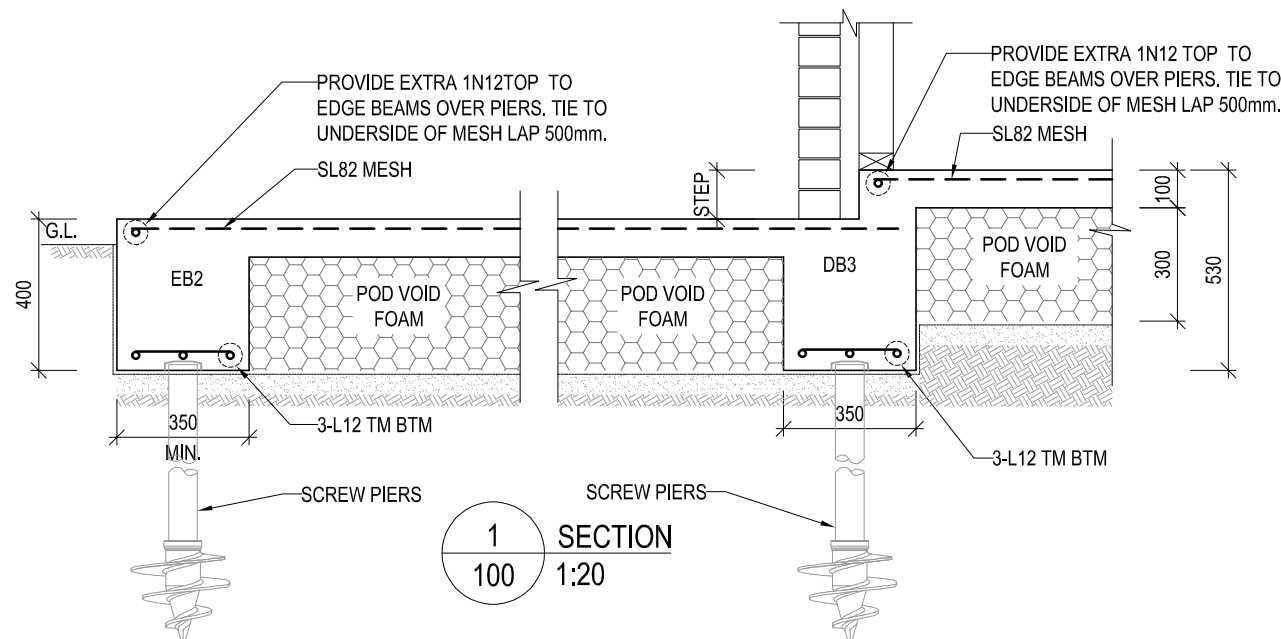


SECTION 1:100

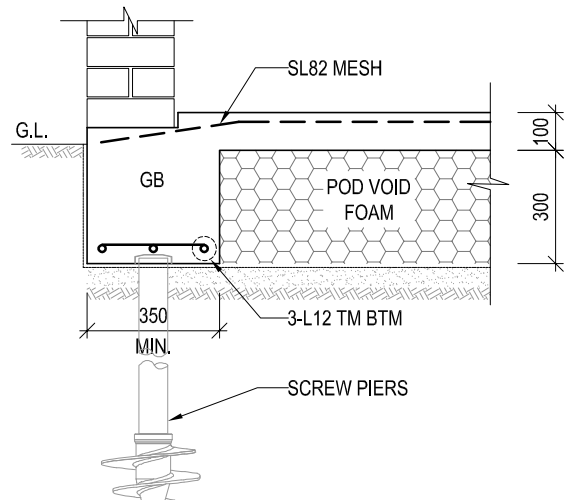


EXTERNAL GARAGE BEAM DETAIL
1:20

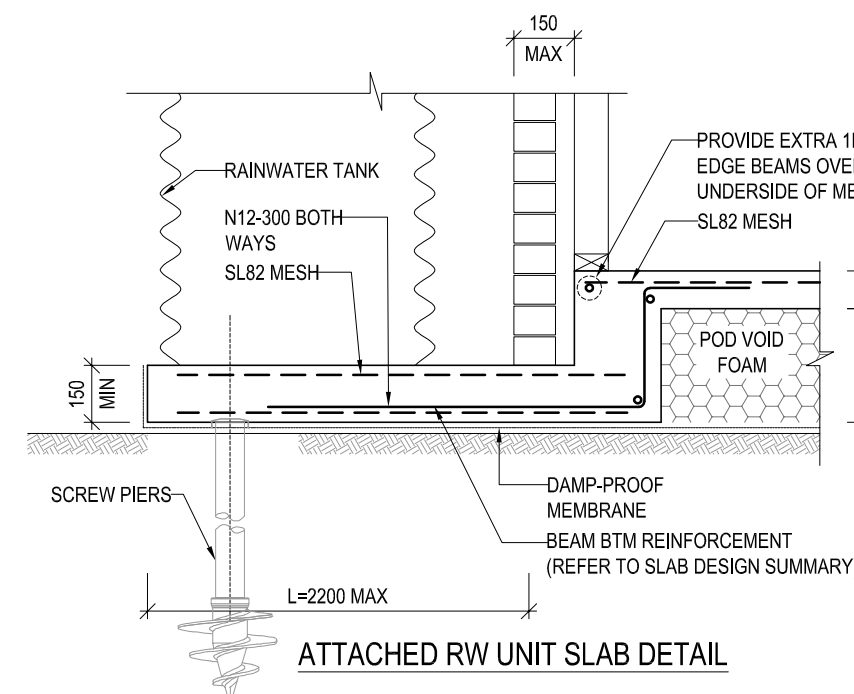


ATTACHED RW UNIT SLAB DETAIL




SECTION X-X

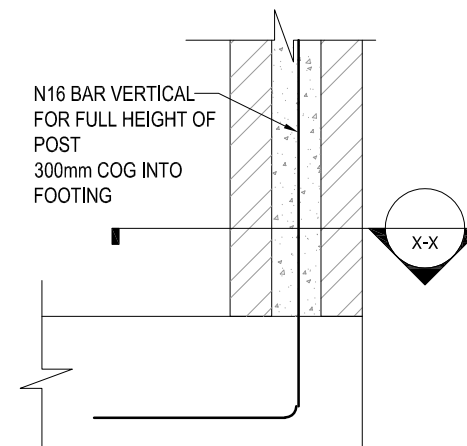


TYPICAL BRICK POST DETAIL

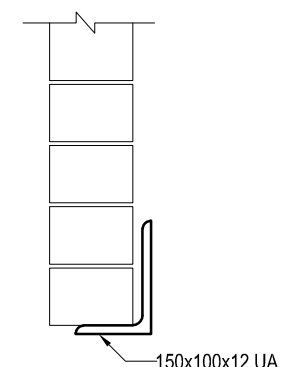


ANGLE LINTEL BEAM DETAIL

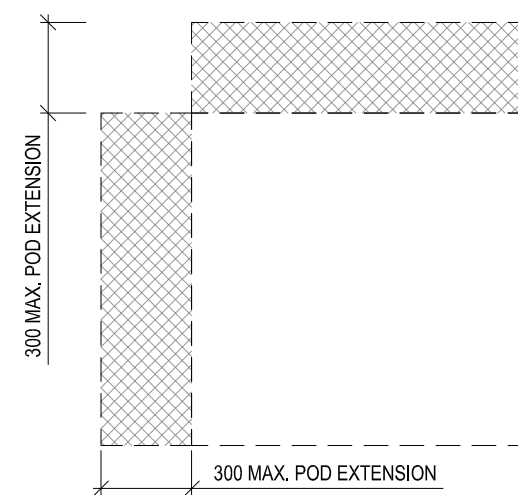


TYPICAL POD EXTENSION PLAN
1:20

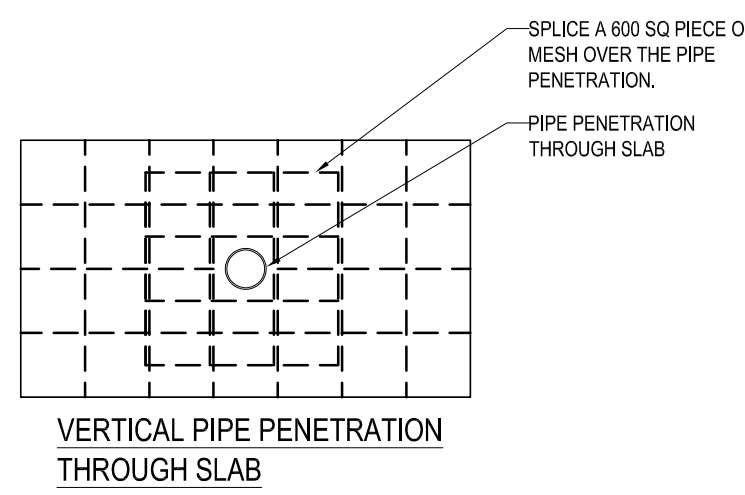

VERTICAL PIPE PENETRATION THROUGH SLAB

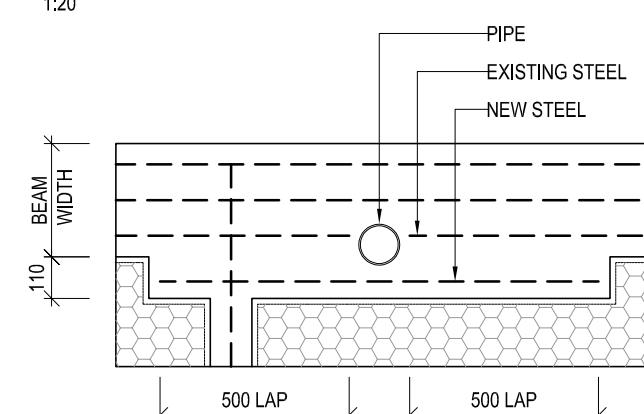


THROUGH BEAM

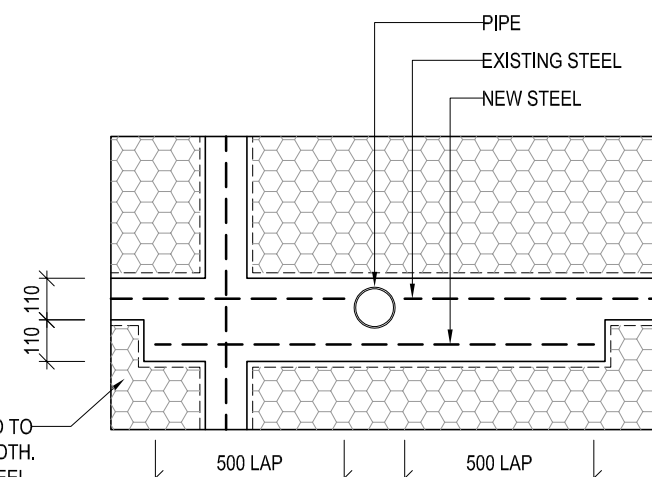


THROUGH RIBS

PLAN ON PIPE PENETRATIONS

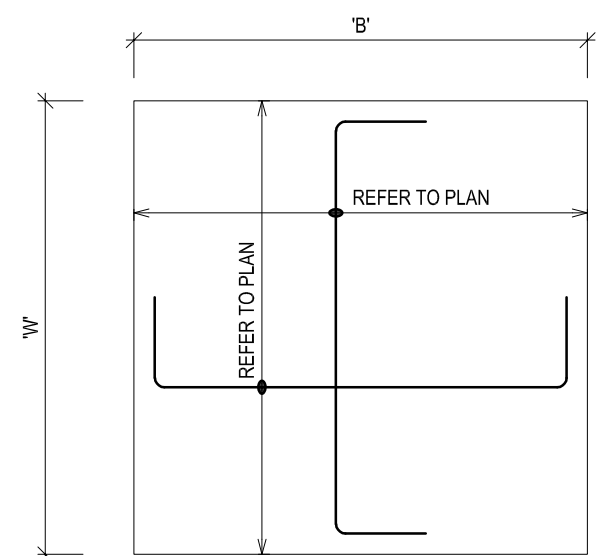

PAD FOOTING PLAN VIEW
1:20

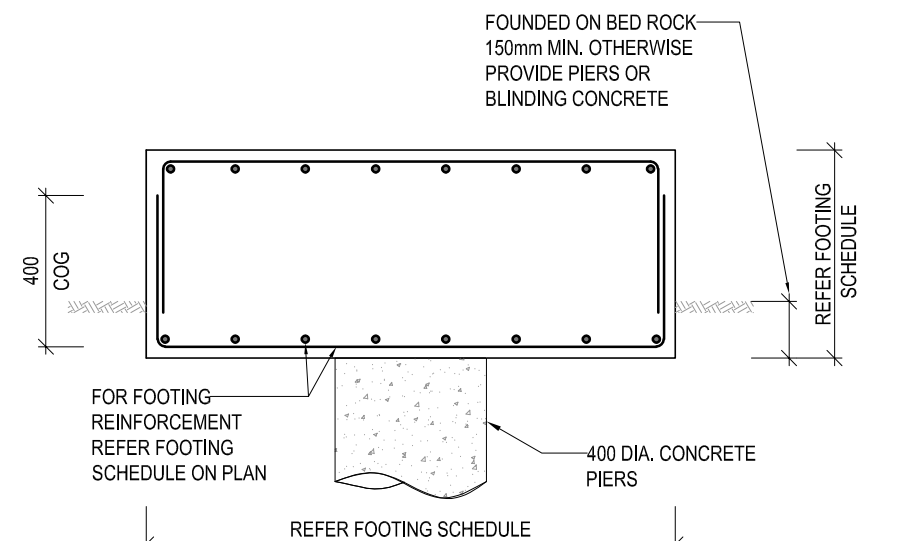

PAD FOOTING PF1
1:20



HCT ENGINEERING Pty Ltd
PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au
• STRUCTURAL & CIVIL ENGINEERS
• COUNCIL DOCUMENTATION
• STEEL DETAILING
• DRAFTING SERVICES






PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd





FOOTING TYPICAL DETAIL


SCALE: SHEET A2 DATE: 20.03.2025 DRN: PD APP: FN
REV: A DRG NO.: HCT - 1843 - ST102

A	ISSUED FOR CC	PD	20.03.2025	
ISSUE	AMENDMENT	BY	DATE	

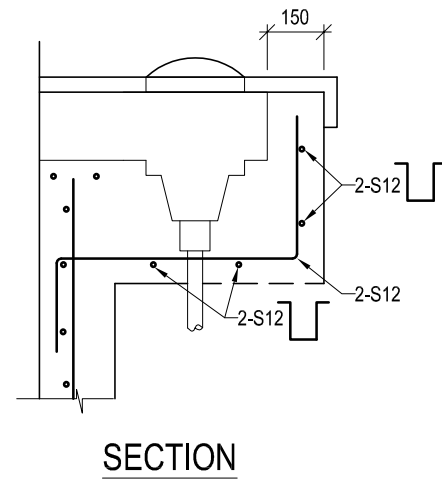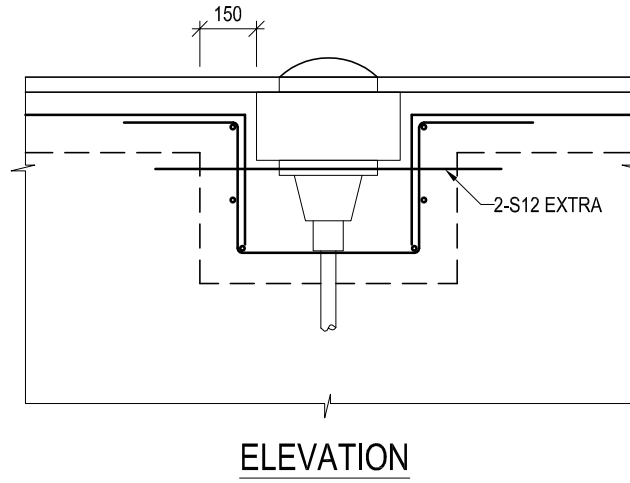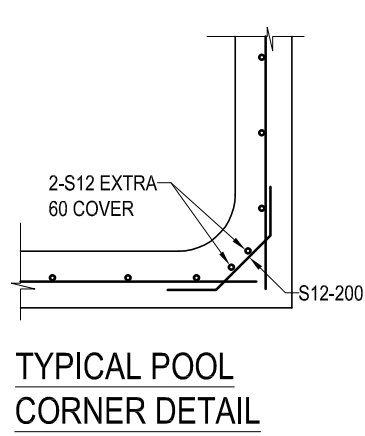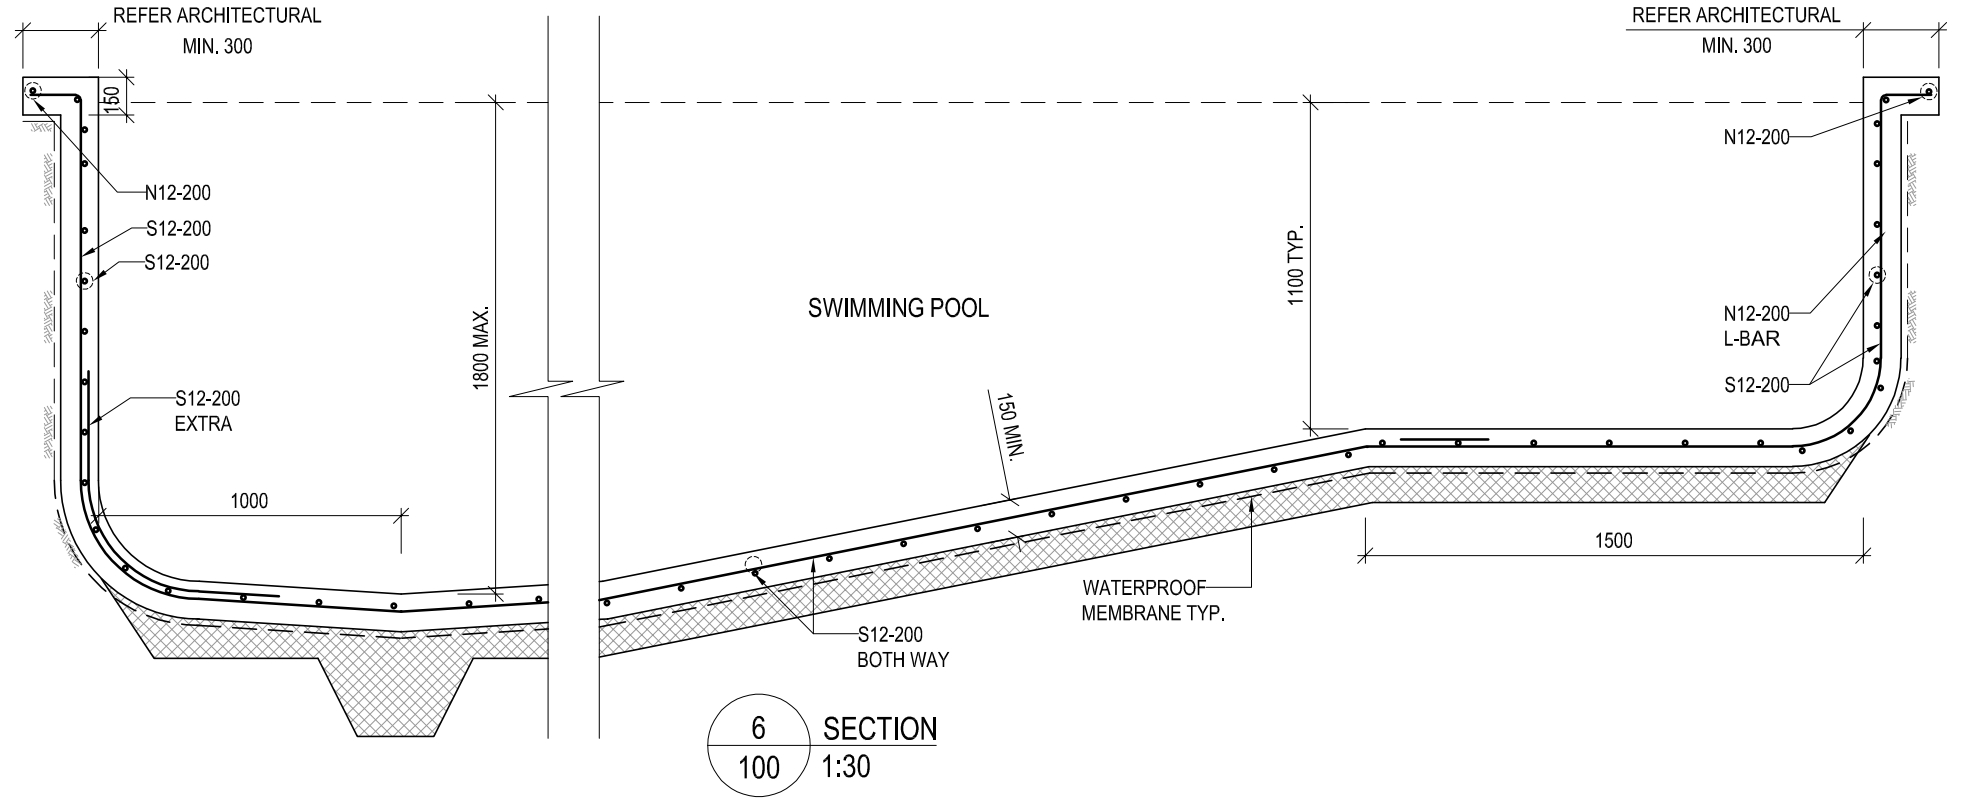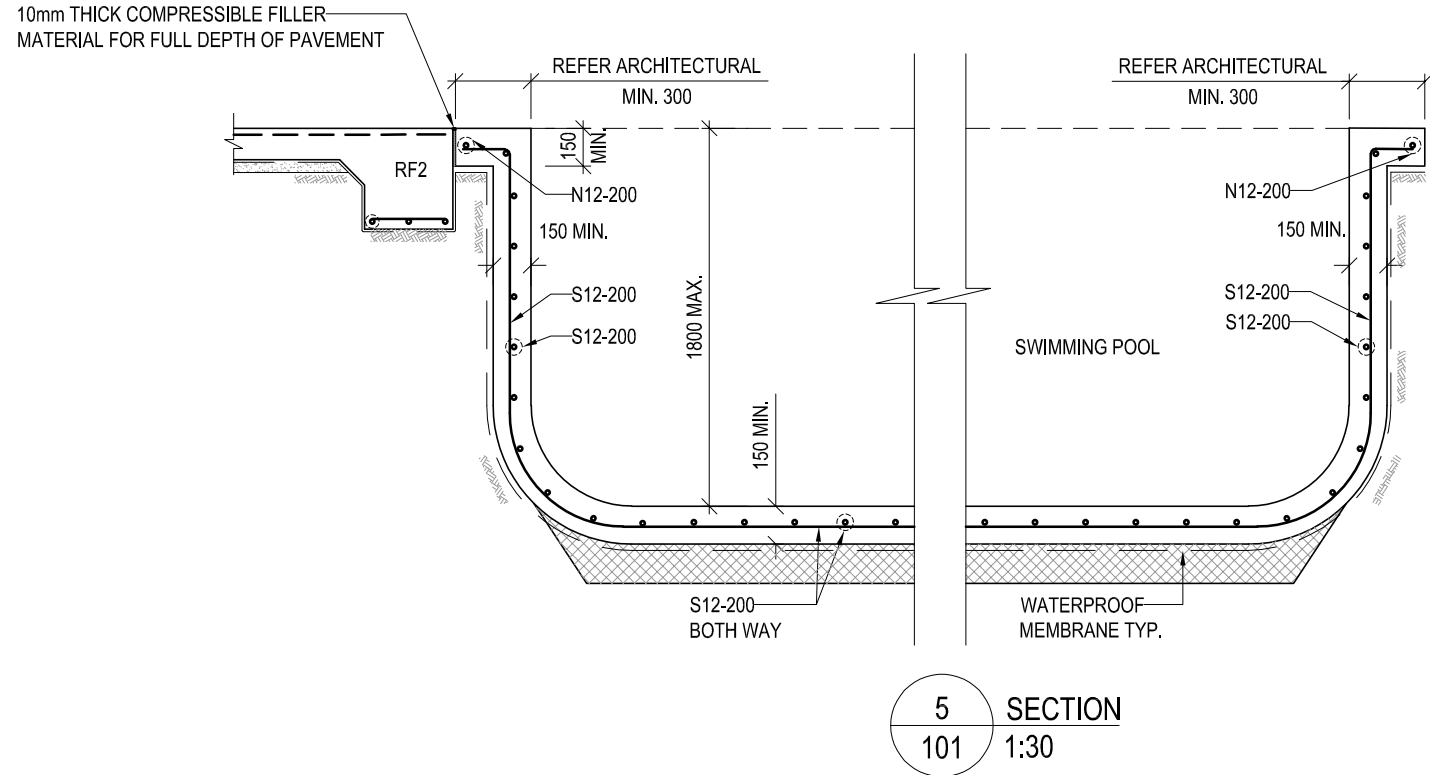


POOL SKIMMER DETAIL

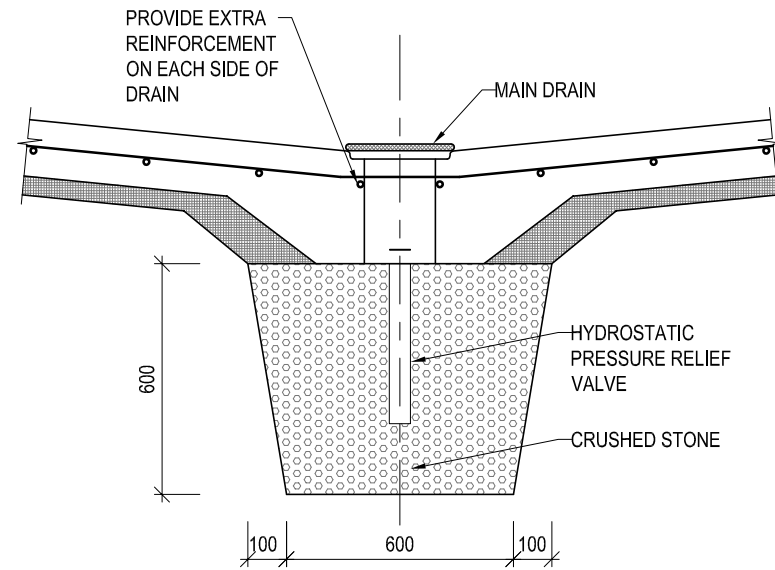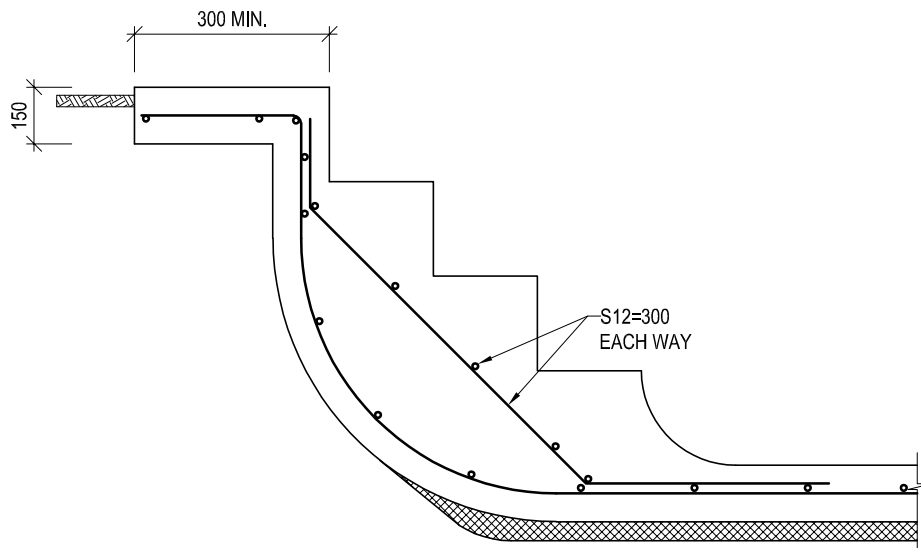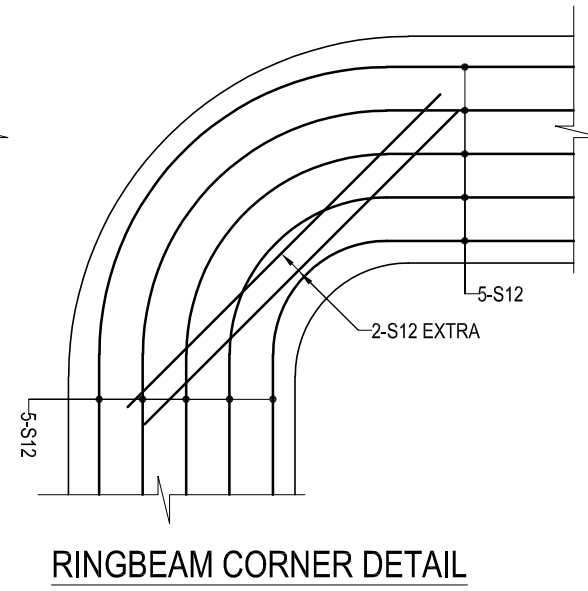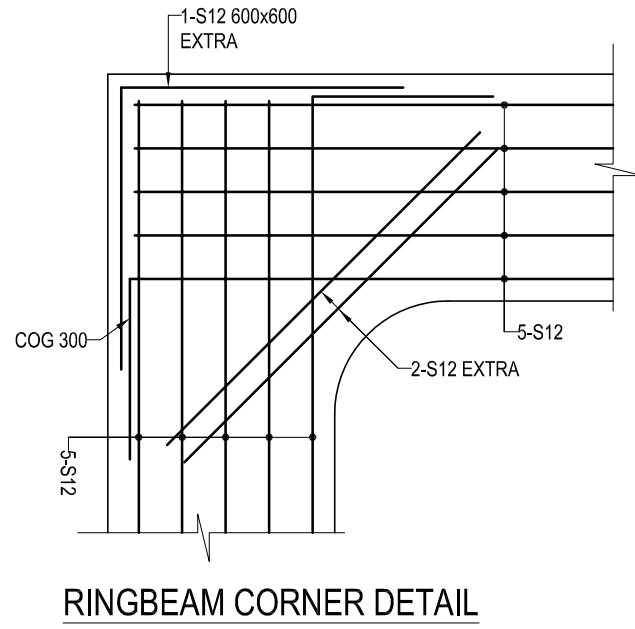


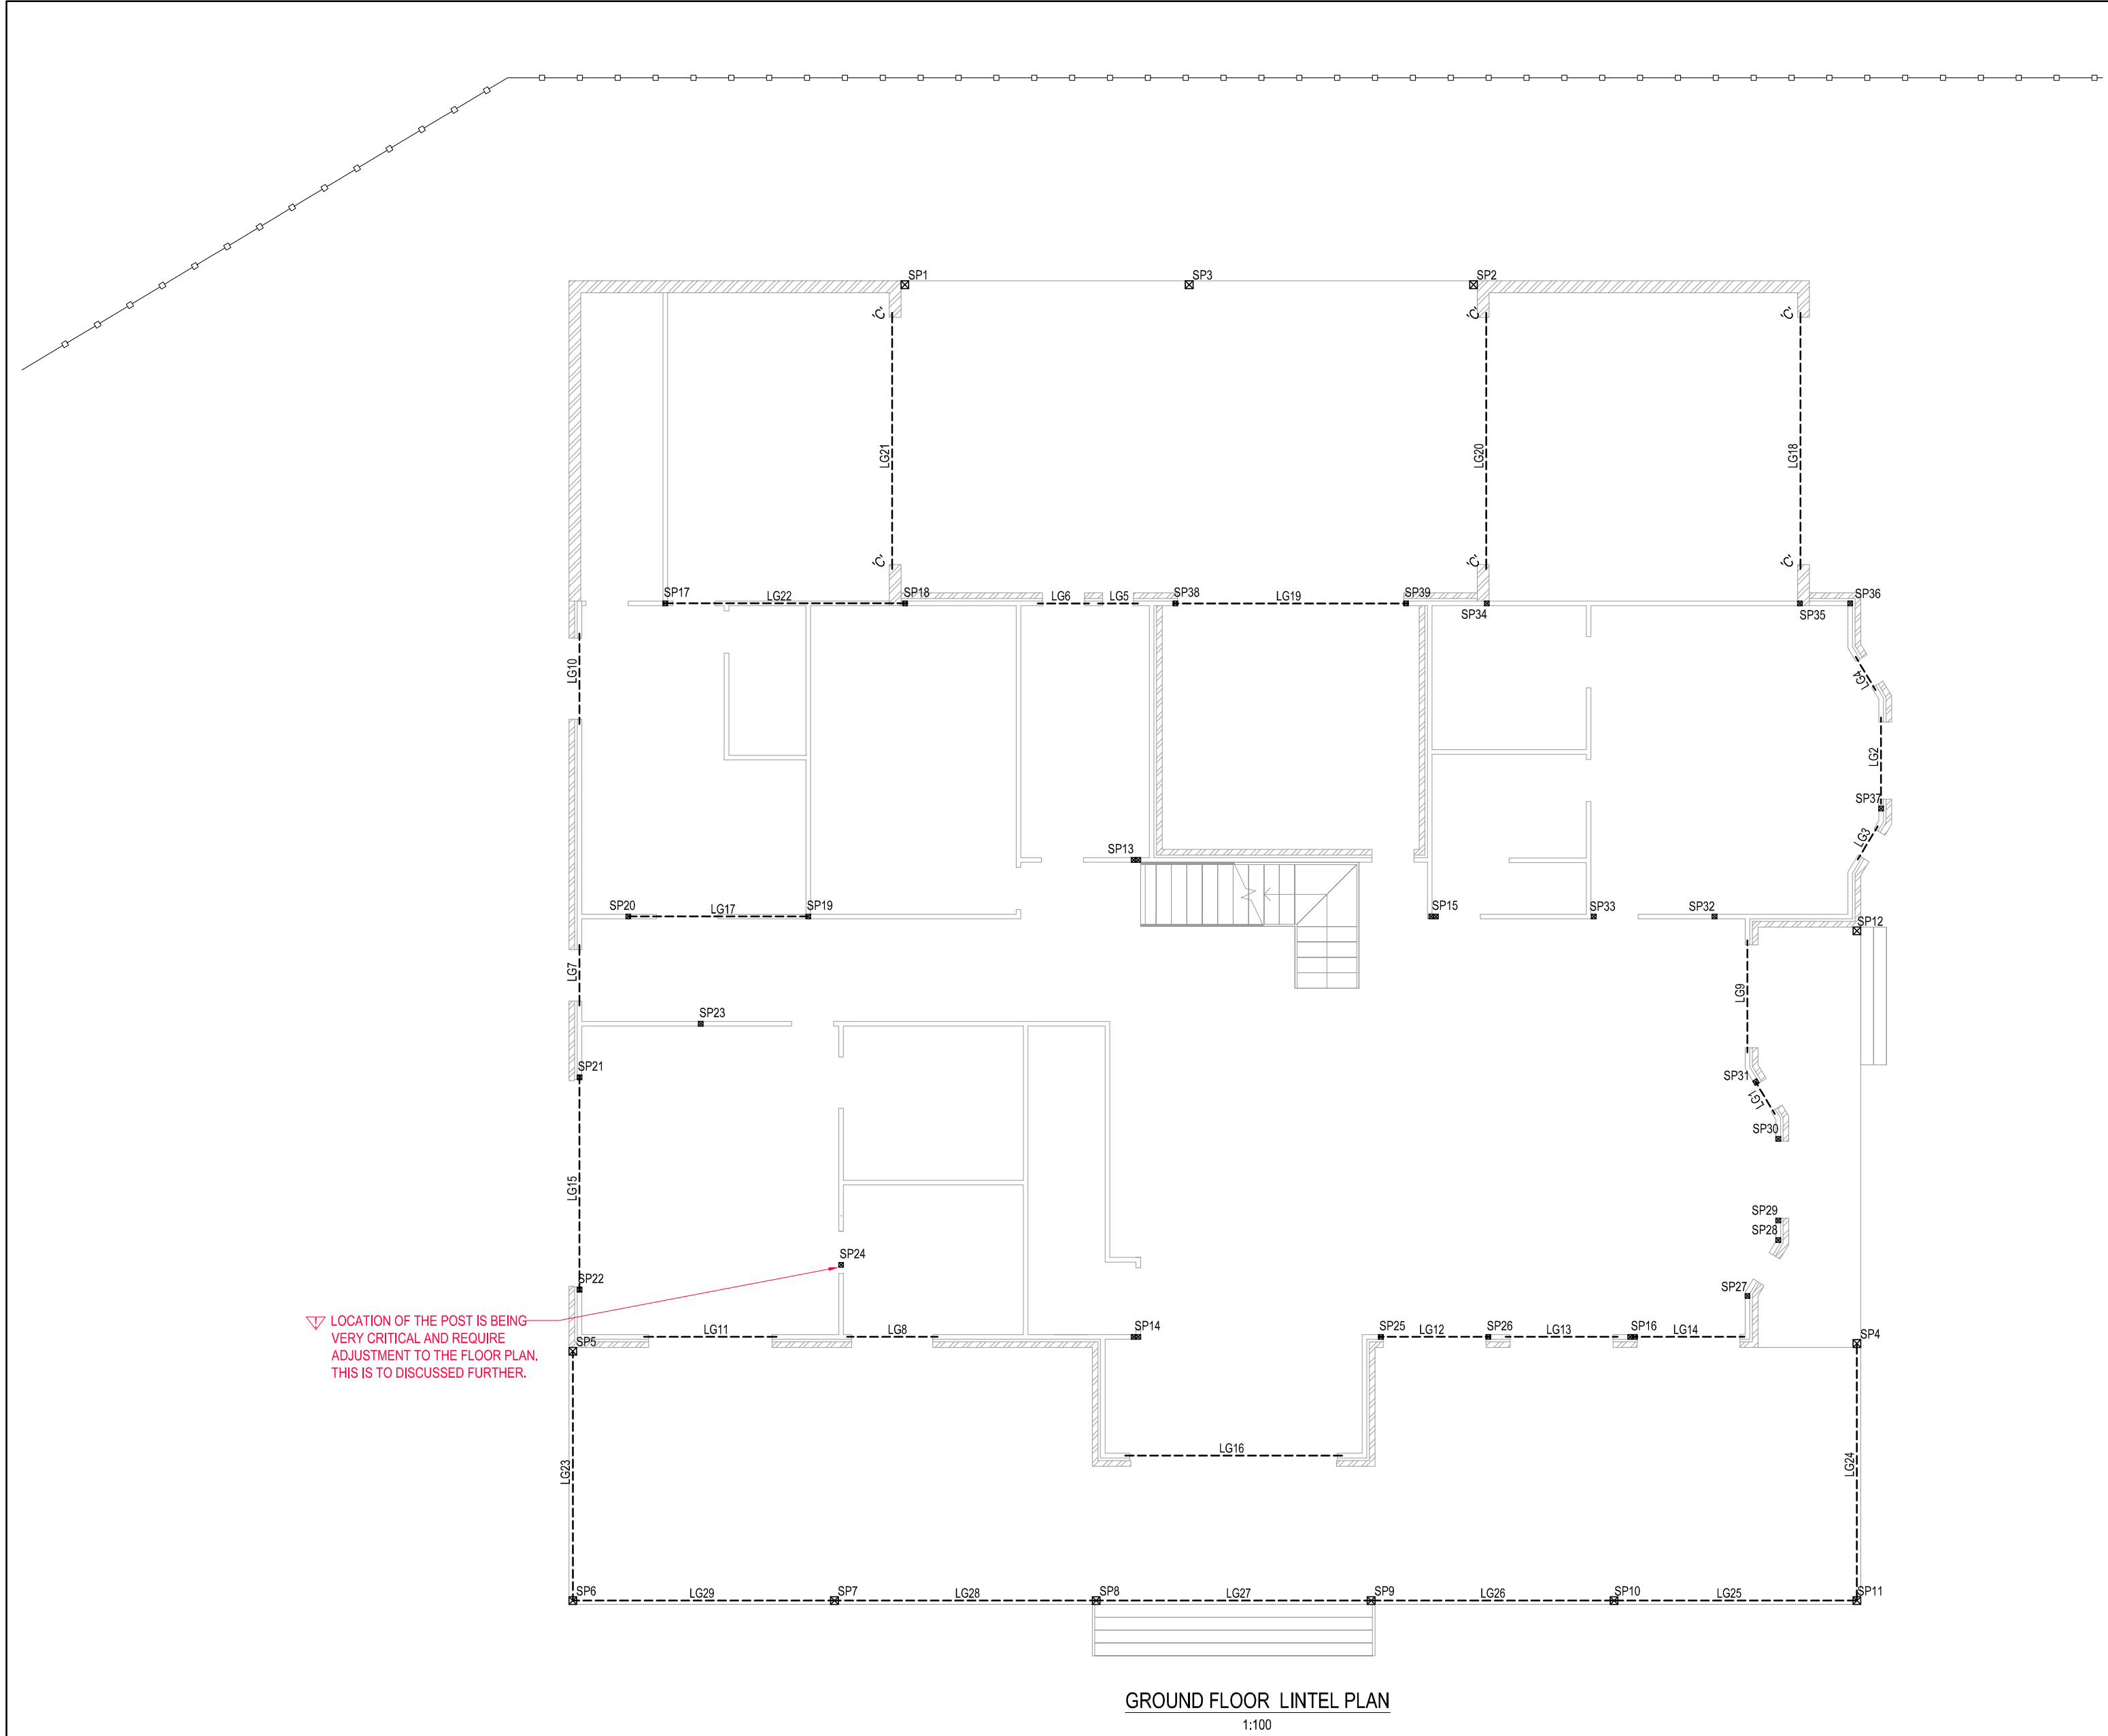

POST / BEAM / JOIST SCHEDULE					
MARK	DESCRIPTION	INTERNAL SKIN	EXTERNAL SKIN	MAX. LGTH	QTY.
LG1, LG3-LG5	LINTEL G	2/150x45 'Smart LVL 13'	100x100x8 EA	0.9m	4
LG10	LINTEL G	2/200x45 'Smart LVL 13'	150x100x10 UEA	1.9m	1
LG11	LINTEL G	2/200x45 'Smart LVL 13'	150x100x10 UEA	2.7m	1
LG15-LG16	LINTEL G	2/300x45 'Smart LVL 13'	150x100x10 UEA	4.4m	2
LG17	LINTEL G	300PFC		3.7m	1
LG18, LG20-LG21	LINTEL GARAGE	300PFC + 10mm FLAT BAR		5.1m	3
LG19	LINTEL G	300PFC + 10mm FLAT BAR		4.7m	1
LG2	LINTEL G	2/150x45 'Smart LVL 13'	100x100x8 EA	1.8m	1
LG22, LG25-LG26	LINTEL G	300PFC + 10mm FLAT BAR		4.9m	3
LG23	LINTEL G	300PFC + 10mm FLAT BAR		5.0m	1
LG24, LG28-LG29	LINTEL G	300PFC + 10mm FLAT BAR		5.2m	3
LG27	LINTEL G	300PFC + 10mm FLAT BAR		5.5m	1
LG6	LINTEL G	2/150x45 'Smart LVL 13'	100x100x8 EA	1.2m	1
LG7	LINTEL G	2/150x45 'Smart LVL 13'	100x100x8 EA	1.3m	1
LG8	LINTEL G	2/150x45 'Smart LVL 13'	100x100x8 EA	1.9m	1
LG9, LG12-LG14	LINTEL G	2/200x45 'Smart LVL 13'	150x100x10 UEA	2.3m	4
SP1-SP12	STEEL POST	150x150x6 SHS		-	12
SP13-SP16	STEEL POST	2/89x89x6 SHS		-	4
SP17-SP39	STEEL POST	89x89x6 SHS		-	23

THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

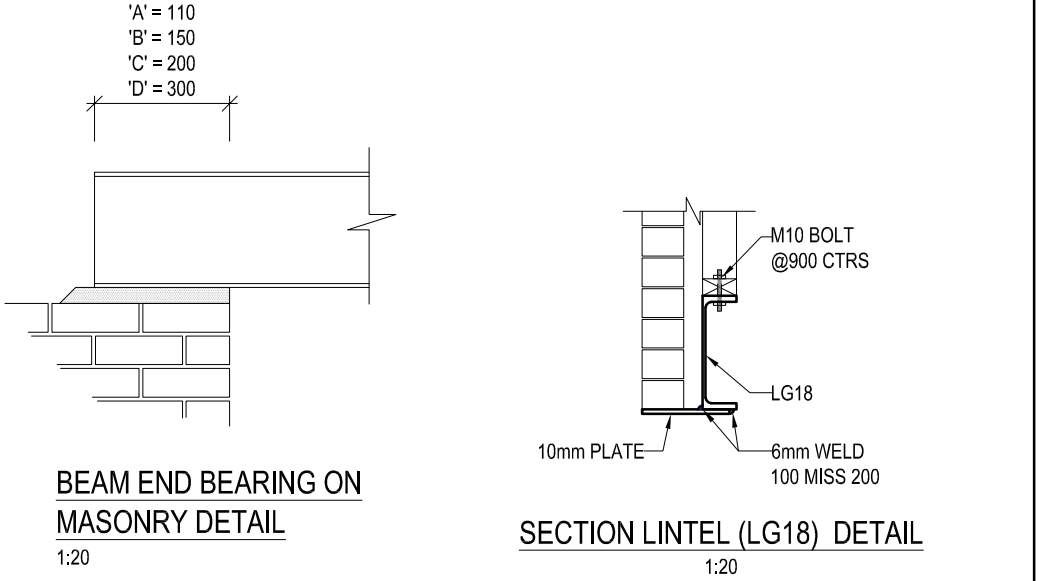

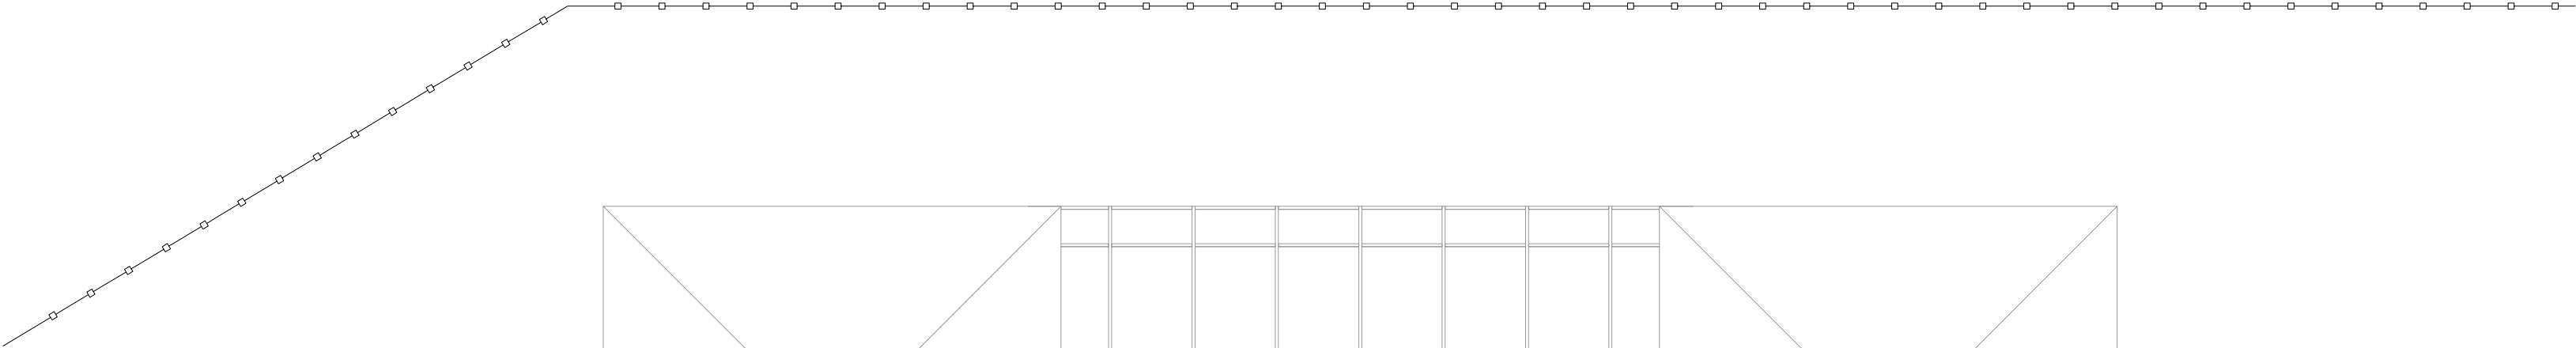

POST / BEAM / JOIST SCHEDULE					
MARK	DESCRIPTION	INTERNAL SKIN	EXTERNAL SKIN	MAX. LGTH	QTY.
LF1	LINTEL F	2/150x45 'Smart LVL 13'	100x100x8 EA	1.8m	1
LF10	LINTEL F	2/200x45 'Smart LVL 13'	150x100x10 UEA	2.2m	1
LF12-LF15	LINTEL F	2/200x45 'Smart LVL 13'	150x100x10 UEA	2.7m	4
LF16-LF17	LINTEL F	2/300x45 'Smart LVL 13'	150x100x10 UEA	4.9m	2
LF2-LF4, LF6, LF8	LINTEL F	2/150x45 'Smart LVL 13'	100x100x8 EA	0.9m	5
LF5, LF7	LINTEL F	2/150x45 'Smart LVL 13'	100x100x8 EA	1.2m	2
LF9, LF11	LINTEL F	2/240x45 'Smart LVL 13'	150x100x10 UEA	3.0m	2
TTT1-TTT8	TIMBER POST	90x90 H4 TREATED		-	8

THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

FIRST FLOOR LINTEL PLAN
1:100



HCT ENGINEERING Pty Ltd
PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES


PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

FIRST FLOOR LINTEL PLAN

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A	DRG NO.: HCT - 1843 - ST201			

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDEMENT	BY	DATE

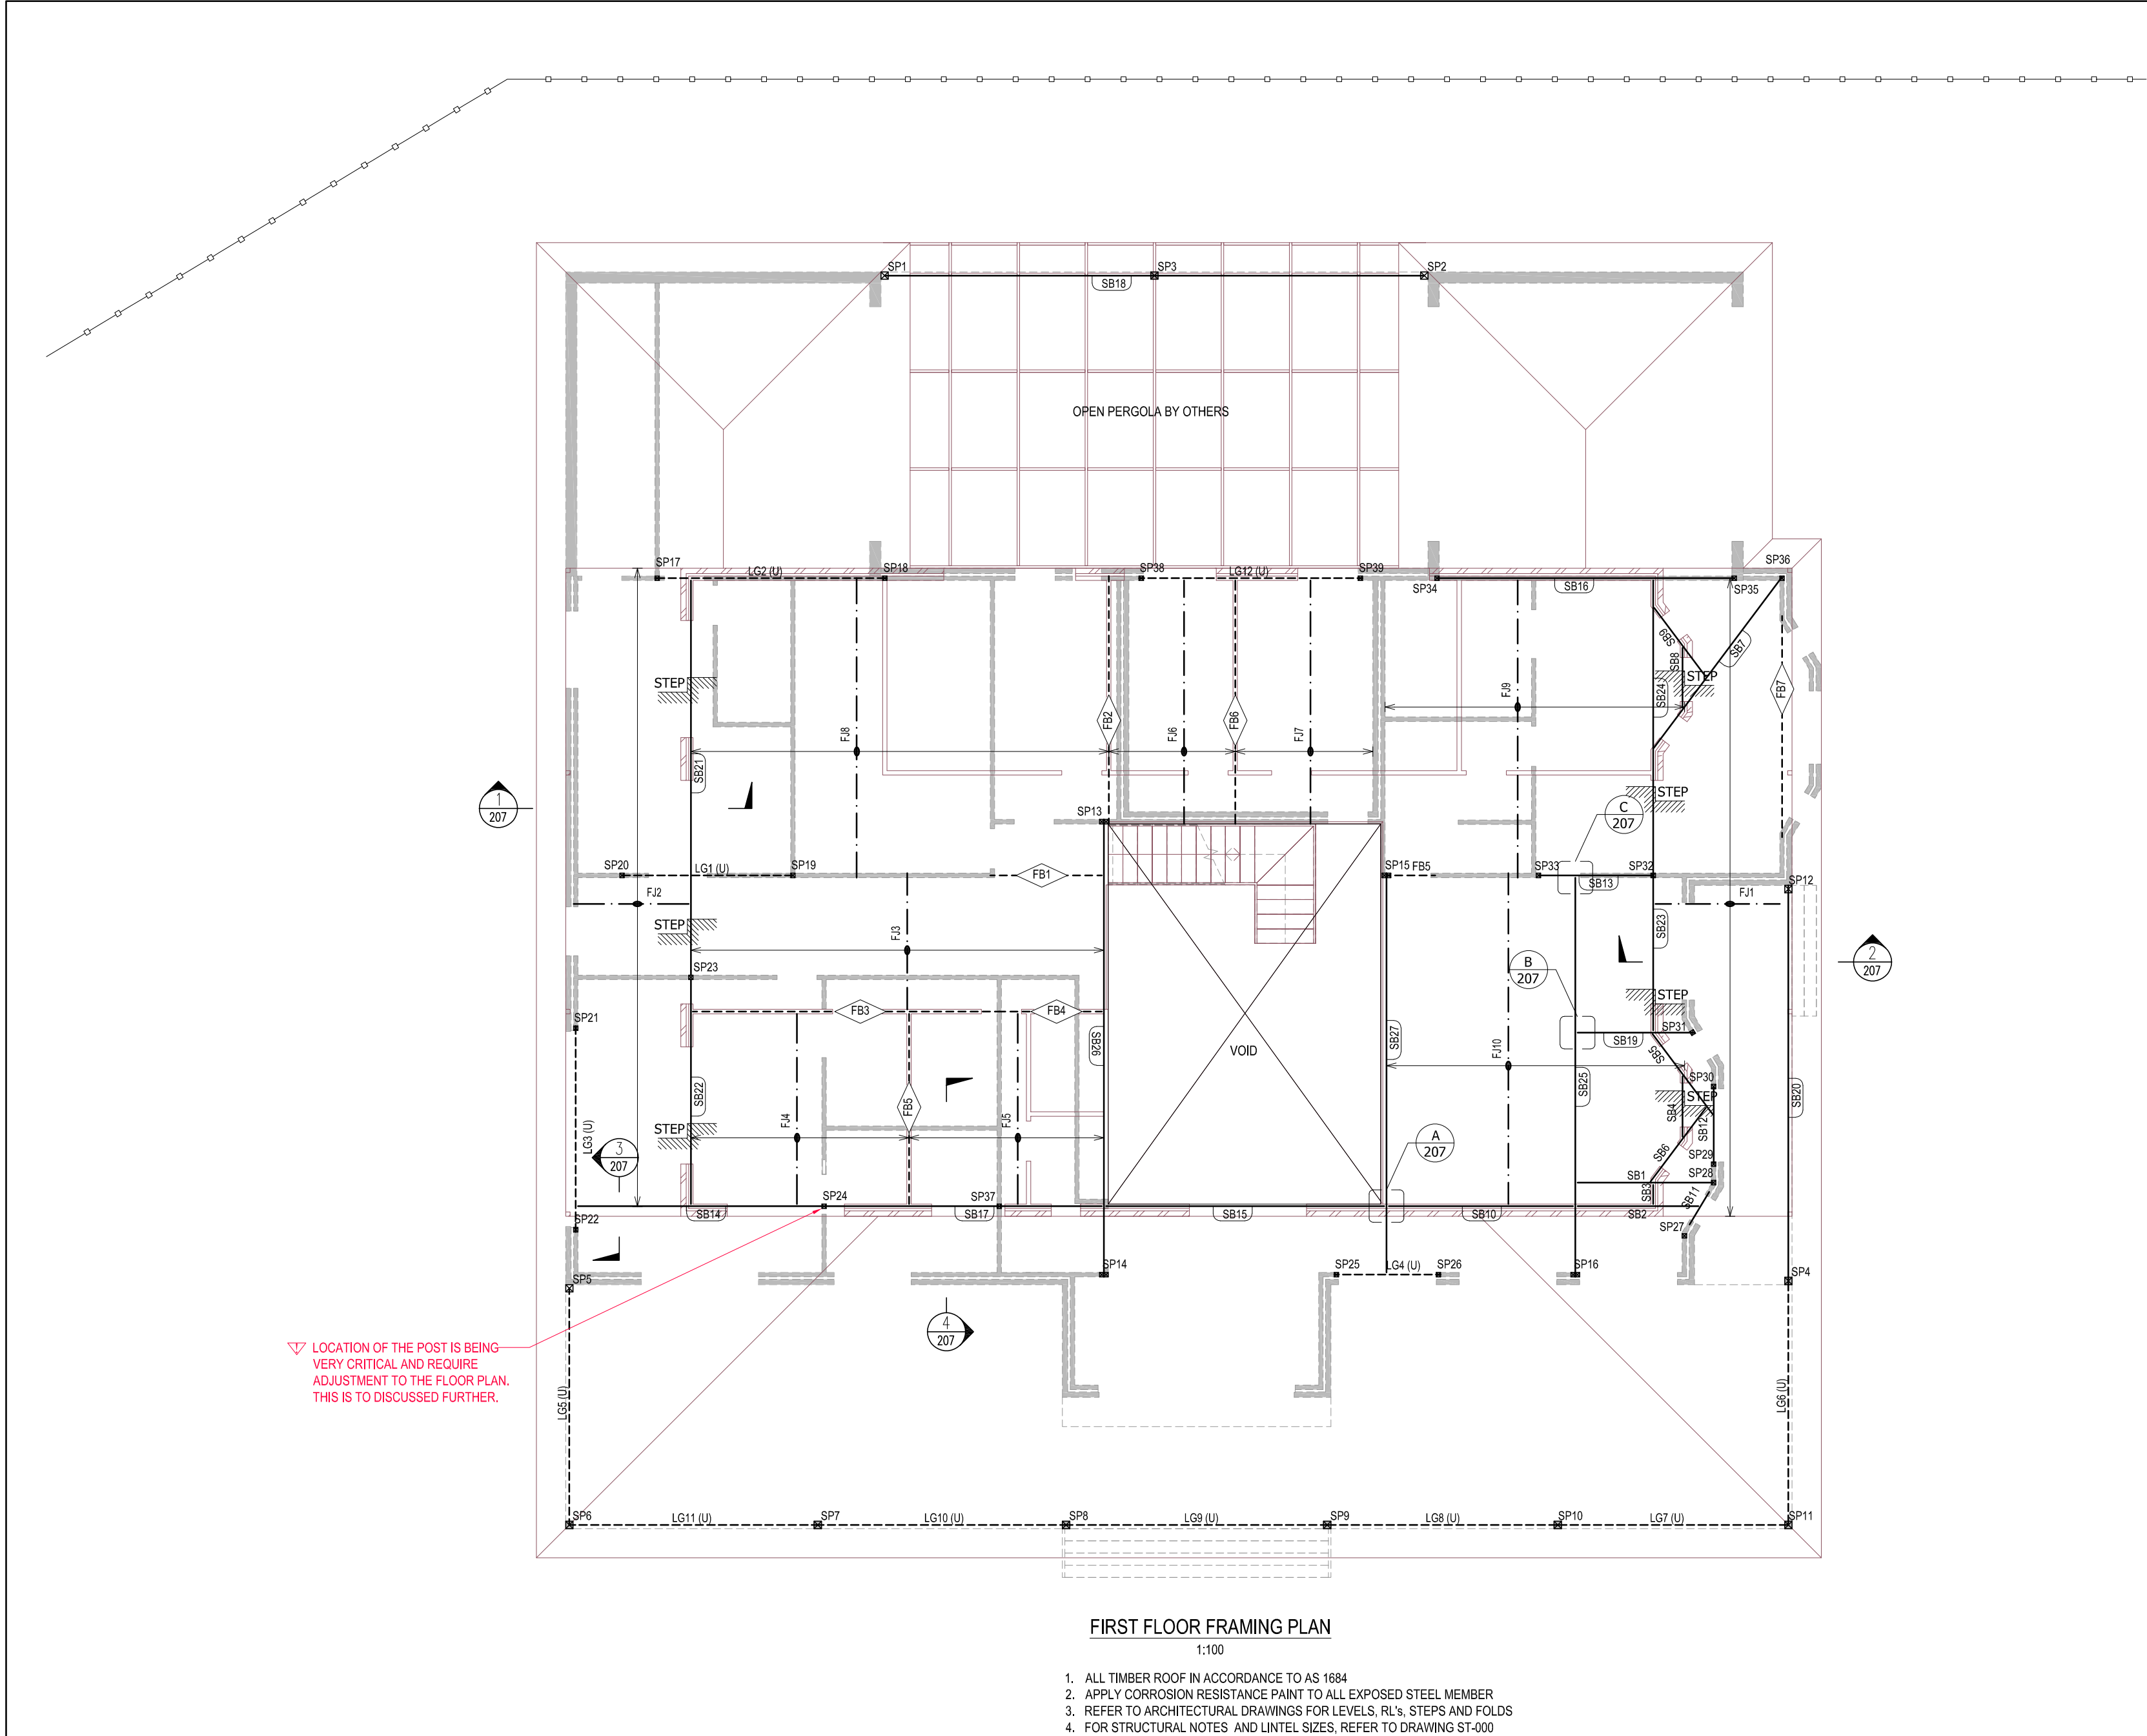


LEGEND			
ITEM	DESCRIPTION		
	DENOTES WALL BELOW		
	DENOTES WALL ABOVE		
POST / BEAM / JOIST SCHEDULE			
MARK	DESCRIPTION	SIZE	QTY.
STEEL BEAM			
SB1-SB12	STEEL BEAM	250PFC +10 mm FLAT BAR (WHERE REQUIRED)	12
SB13	STEEL BEAM	300PFC	1
SB14-SB17	STEEL BEAM	300PFC +10 mm FLAT BAR (WHERE REQUIRED)	4
SB18	STEEL BEAM	310UB32	1
SB19	STEEL BEAM	250PFC	1
SB20	STEEL BEAM	310UB46	1
SB21-SB24	STEEL BEAM	310UB46 +10 mm FLAT BAR (WHERE REQUIRED)	4
SB25-SB27	STEEL BEAM	310UC118	3
TIMBER BEAM			
FB1-FB6	TIMBER BEAM	2/300x45 'Smart LVL 13'	6
FB7	TIMBER BEAM	2/300x45 'Smart LVL 13' H3 or H4 TREATED	1
TIMBER JOIST			
FJ1-FJ2	TIMBER JOIST	240x45 LVL H3 OR H4 TREATED @450mm CTRS MAX	-
FJ3-FJ7	TIMBER JOIST	MJ300x63 'Mey Joist' @450mm CTRS MAX	-
FJ8-FJ10	TIMBER JOIST	MJ300x90 'Mey Joist' @450mm CTRS MAX	-
STEEL POST			
SP1-SP12	STEEL POST	150x150x6 SHS	12
SP13-SP16	STEEL POST	2/89x89x6 SHS	4
SP17-SP39	STEEL POST	89x89x6 SHS	23
LINTEL UNDER			
LG1 (U)	LINTEL	300PFC	1
LG2-LG12 (U)	LINTEL	300PFC + 10mm FLAT BAR (WHERE REQUIRED)	11


THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

- NOTES:
- BEARER & JOIST MEMBER SIZE INDICATED IN THE TABLE ABOVE ARE THE MINIMUM SIZE REQUIRED.
 - FLOOR JOISTS: REFER TO MANUFACTURE'S SPECIFICATIONS IF USING EQUIVALENT PROFILE
 - LOAD BEARING WALL TO SIT ON LVL BEAM MINIMUM 63mm WIDTH OR ALLOW DOUBLE JOIST OTHERWISE
 - ALL LVL TIMBER BEAM TO BE F17 GRADE MINIMUM

(U) : INDICATES BEAM UNDER
(O) : INDICATES BEAM OVER
WP : WHALING PLATE

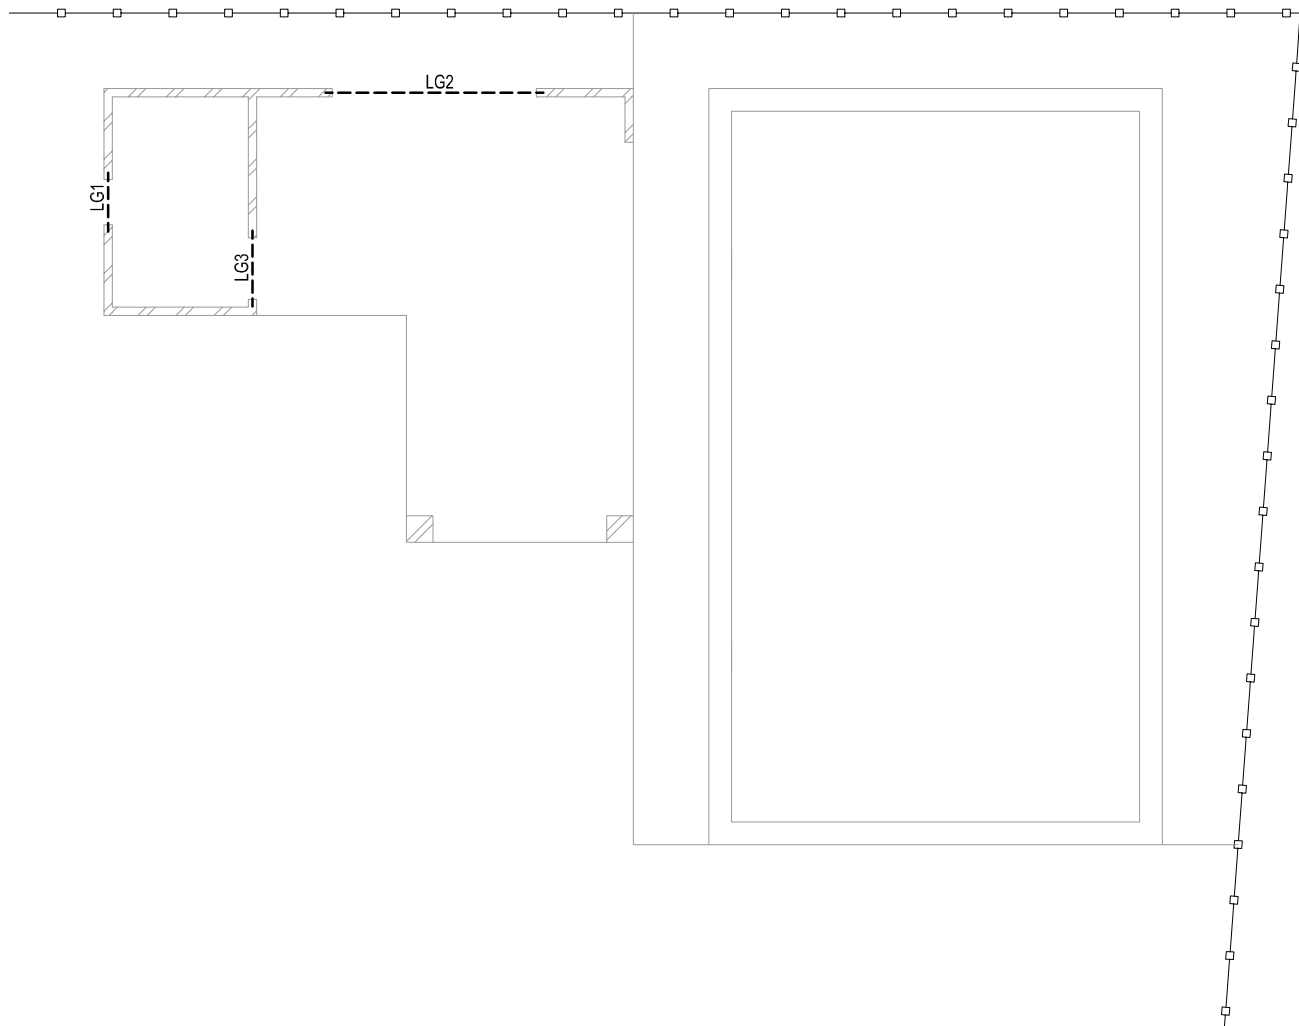

GROUND FLOOR LINTEL PLAN - SWIMMING POOL & CABANA PLAN
1:100

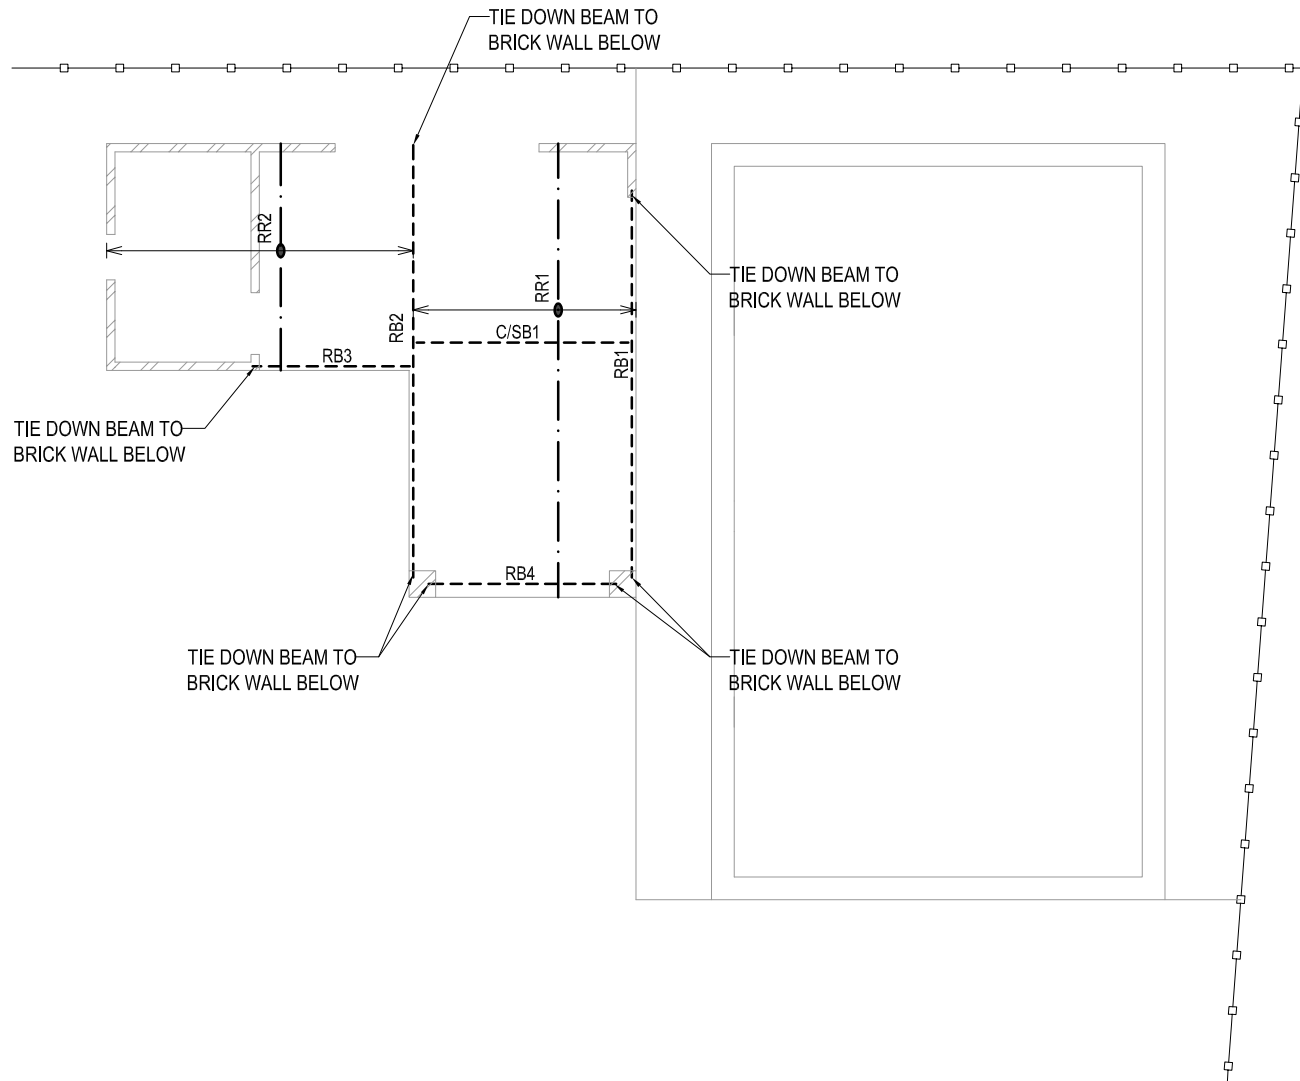

ROOF PLAN - SWIMMING POOL & CABANA PLAN
1:100

POST / BEAM / JOIST SCHEDULE					
MARK	DESCRIPTION	INTERNAL SKIN	EXTERNAL SKIN	MAX. LGTH	QTY.
LG1	LINTEL G	100x100x8 EA		0.9m	1
LG2	LINTEL G	150x100x10 UEA		3.0m	1
LG3	LINTEL G	100x100x8 EA		1.2m	1
ROOF BEAM SCHEDULE					
MARK	DESCRIPTION	SIZE			QTY.
RB1-RB2	RAFTER BEAM	300x45 'Smart LVL 13'			2
RB3-RB4	RAFTER BEAM	240x45 'Smart LVL 13'			2
RR1-RR2	RAFTERS	90x45 MGP10 @450mm CTRS MAX			-
C/SB1	COUNTER/ STRUTTING BEAM	300x45 'Smart LVL 13'			1

THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

THE ABOVE MEMBER SIZES ARE SUGGESTIONS ONLY BASED ON THE ASSUMPTION THAT THESE MEMBER SPANS NO MORE THAN 2.0M CONTINUOUSLY AND STRUTTING FRAMES ARE PROVIDED UNDERNEATH TO BREAK THE LARGE SPAN INTO SHORTER SPANS. THE CARPENTER/CONTRACTOR NEEDS TO TAKE DUE DILIGENCE TO DOUBLE CHECK FRAMING CONSTRUCTION WITH AS 1684.4 BEFORE ORDERING MATERIAL.



HCT ENGINEERING Pty Ltd

PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES


PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

ROOF FRAMING PLAN SH.2


SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A	DRG NO.: HCT - 1843 - ST204			

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDEMENT	BY	DATE

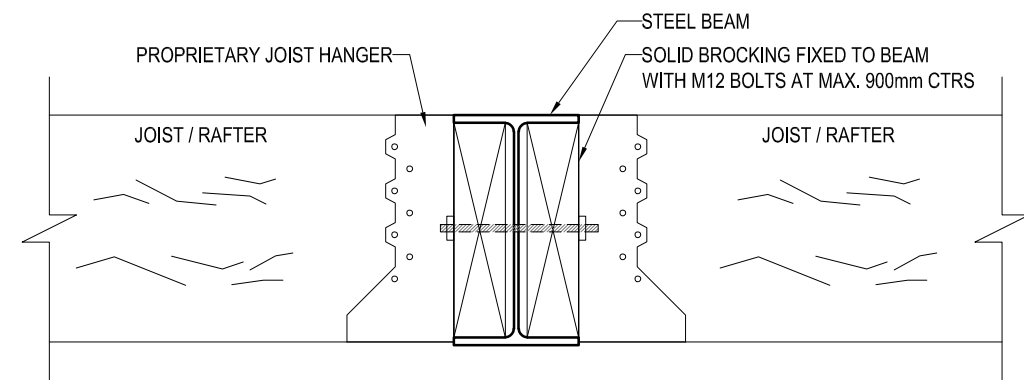



JOIST / RAFTER PERPENDICULAR TO STEEL BEAM

1:10

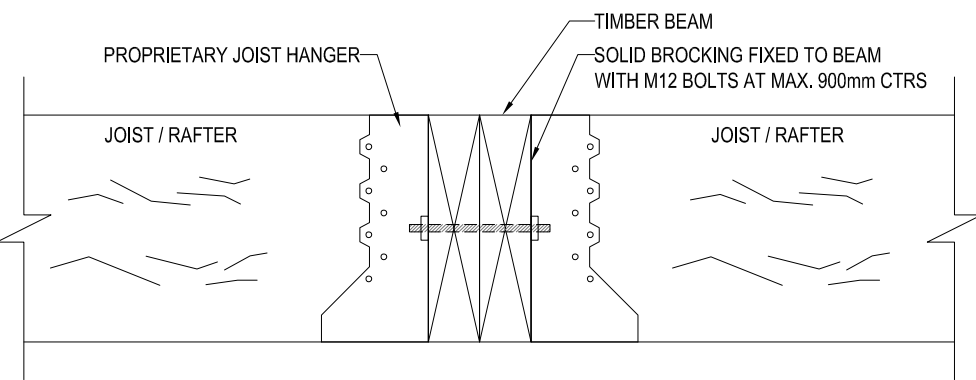


JOIST / RAFTER PERPENDICULAR TO TIMBER BEAM

1:10

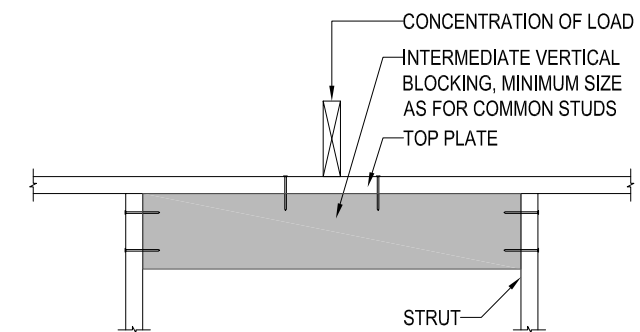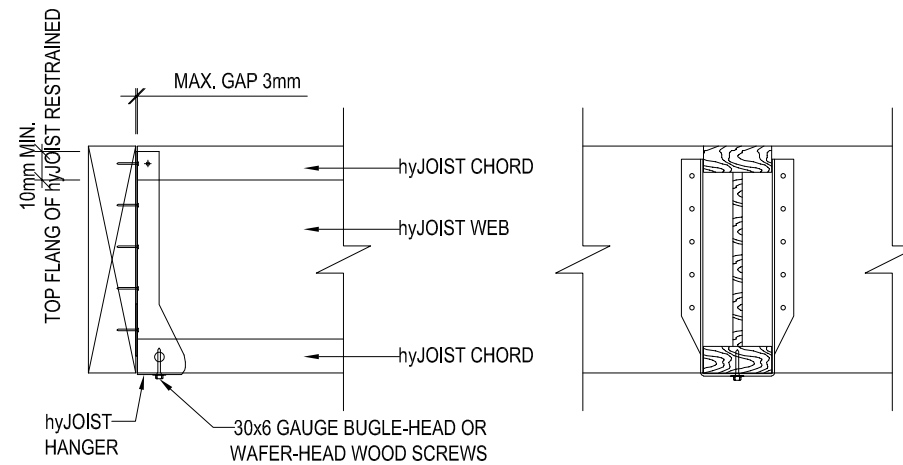



TOP PLATE STIFFENING DETAILS

1:20

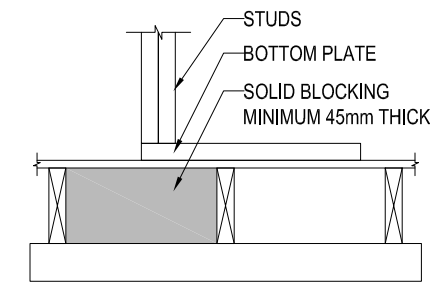



TOP PLATE STIFFENING DETAILS

1:20

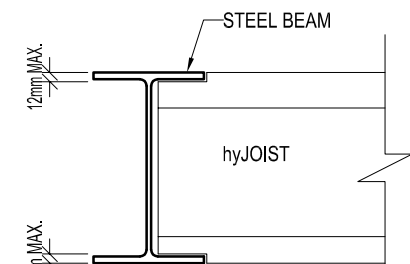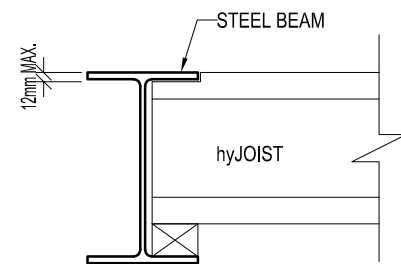


TYPICAL END SUPPORTS DETAIL

1:10

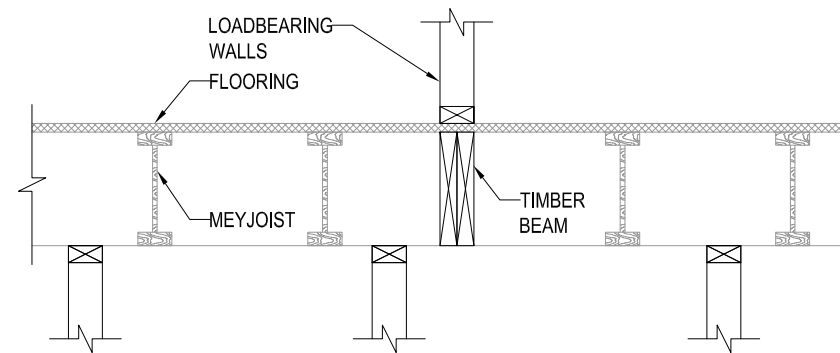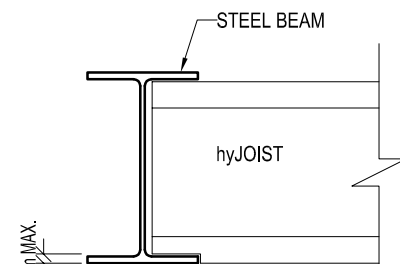


TYPICAL DETAIL FOR SUPPORTING LOADBEARING WALLS

1:10

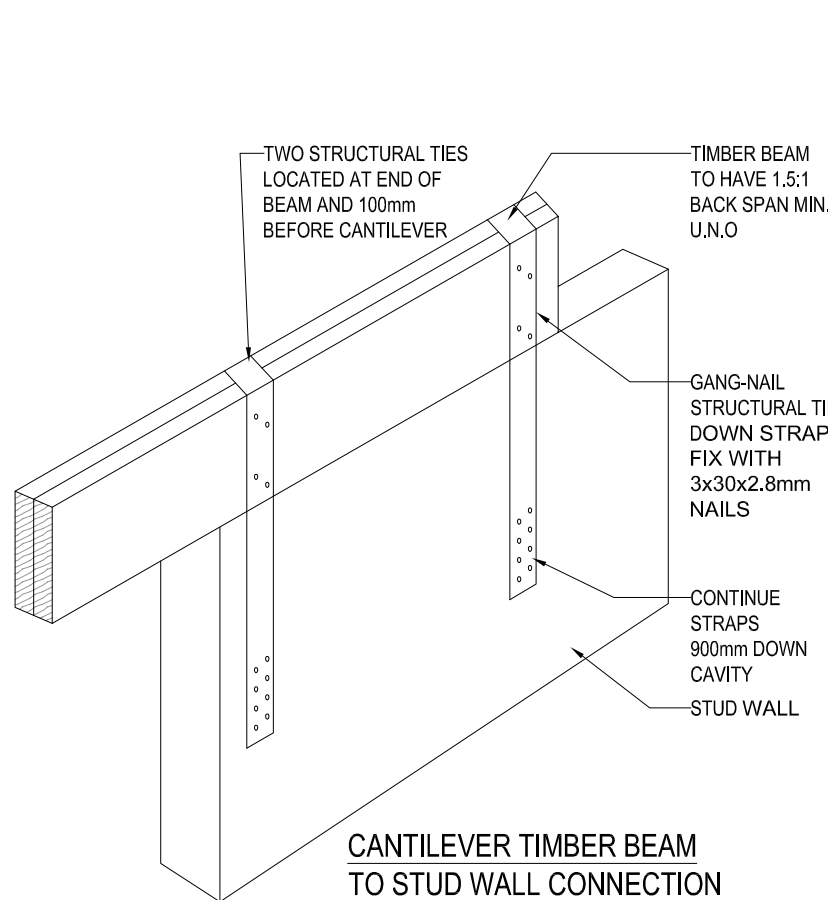


CANTILEVER TIMBER BEAM TO STUD WALL CONNECTION

NTS

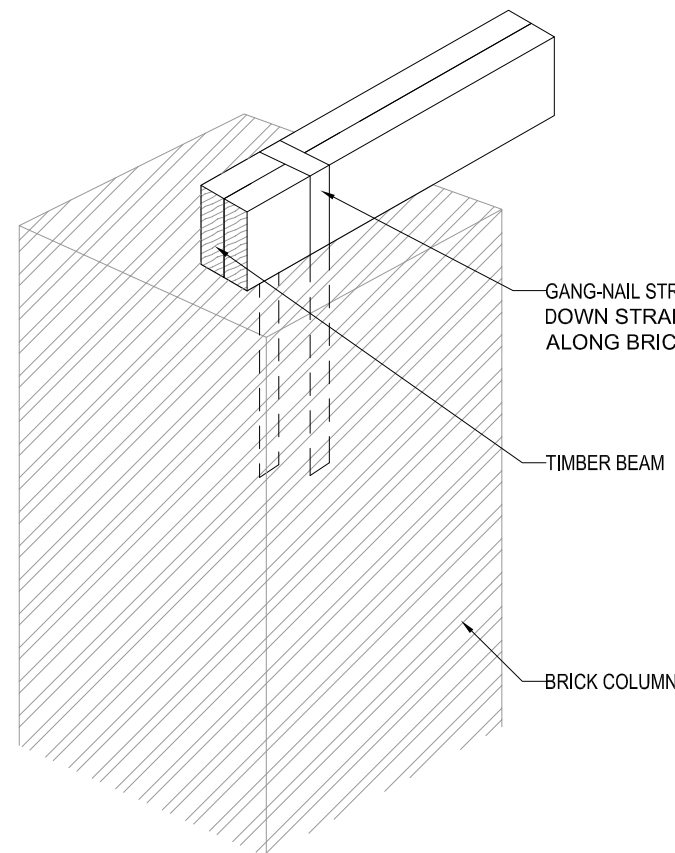


TIMBER BEAM TO BRICK COLUMN CONNECTION

NTS



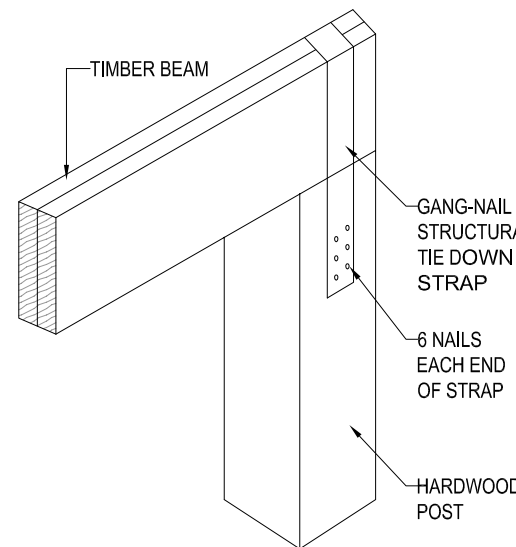


TIMBER BEAM TO POST CONNECTION DETAIL

NTS

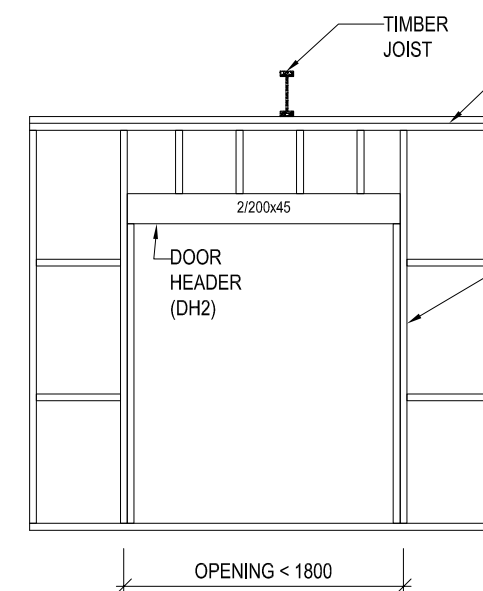


TYPICAL LOAD-BEARING WALL SET-OUT

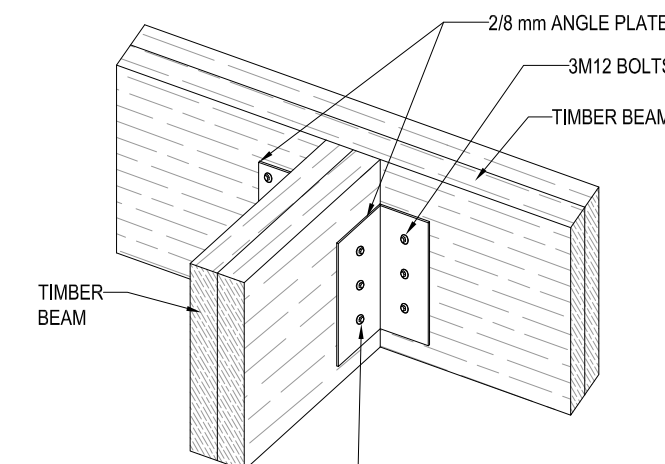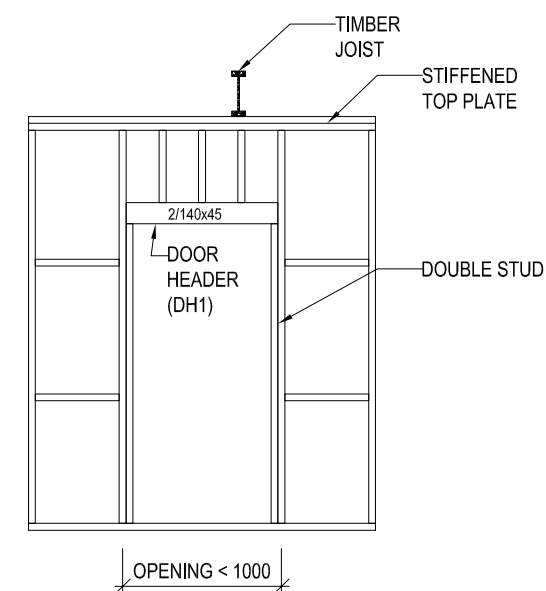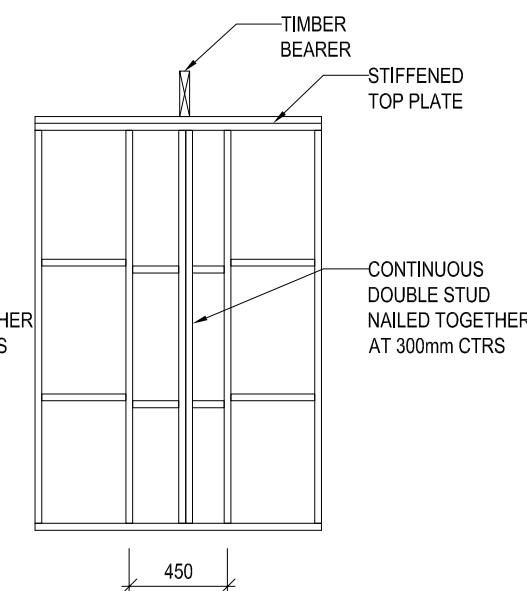


TIMBER BEAM CONNECTION DETAILS

1:20

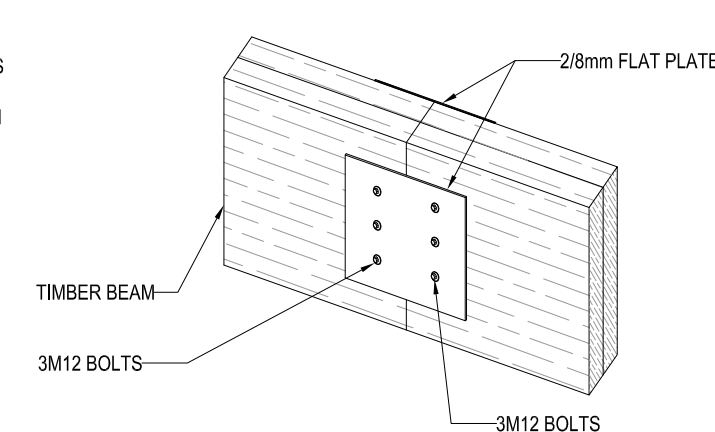


TIMBER BEAM CONNECTION DETAILS

1:20

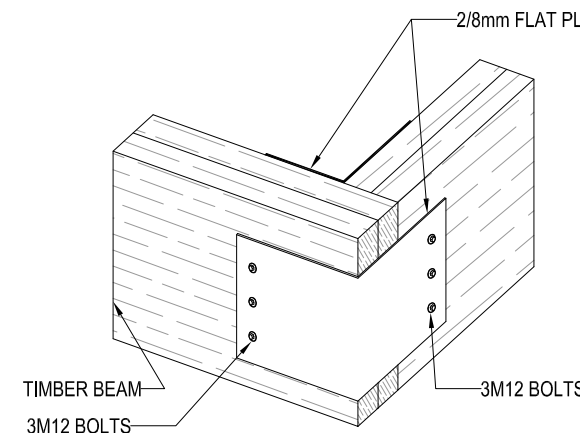


TIMBER BEAM CONNECTION DETAILS

1:20

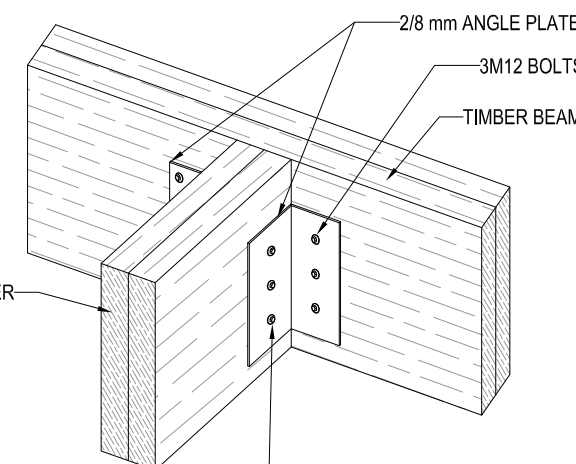


TIMBER BEAM CONNECTION DETAILS

1:20

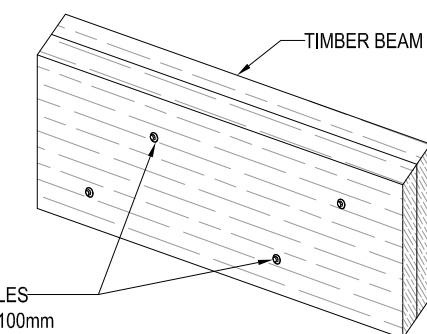













DOUBLE TIMBER BEAM DETAILS











1:20







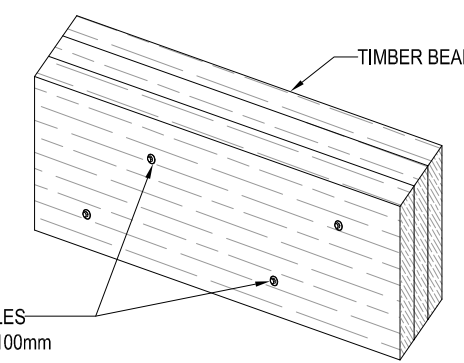


TRIPLE TIMBER BEAM DETAILS

1:20

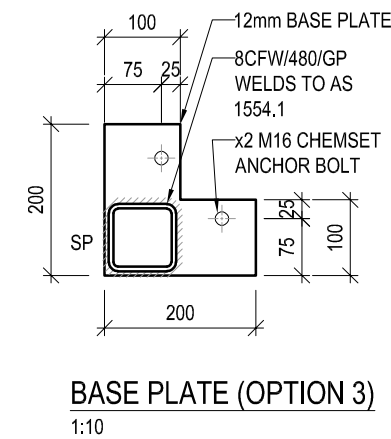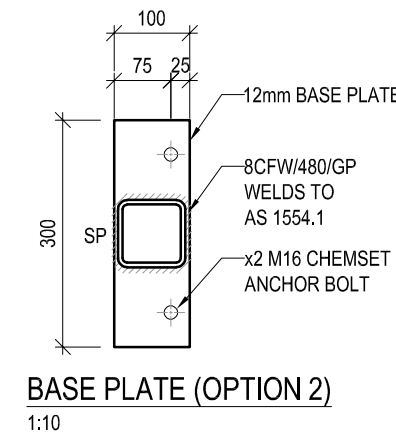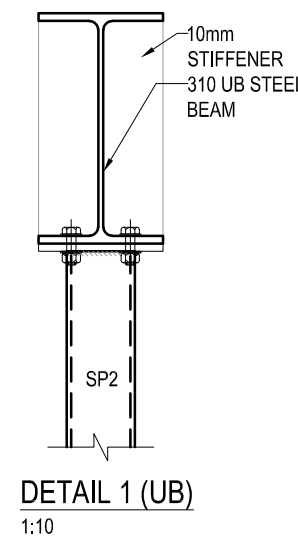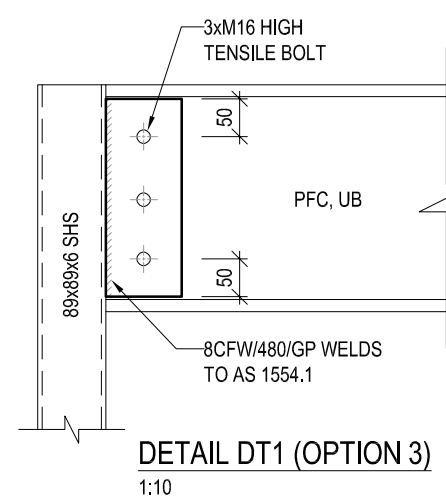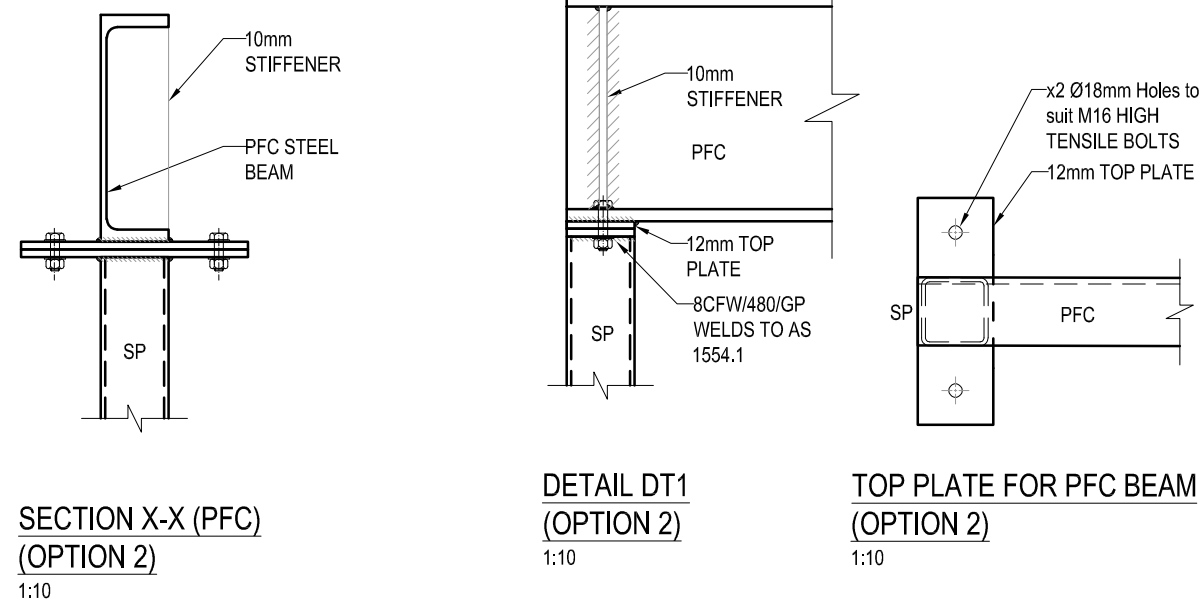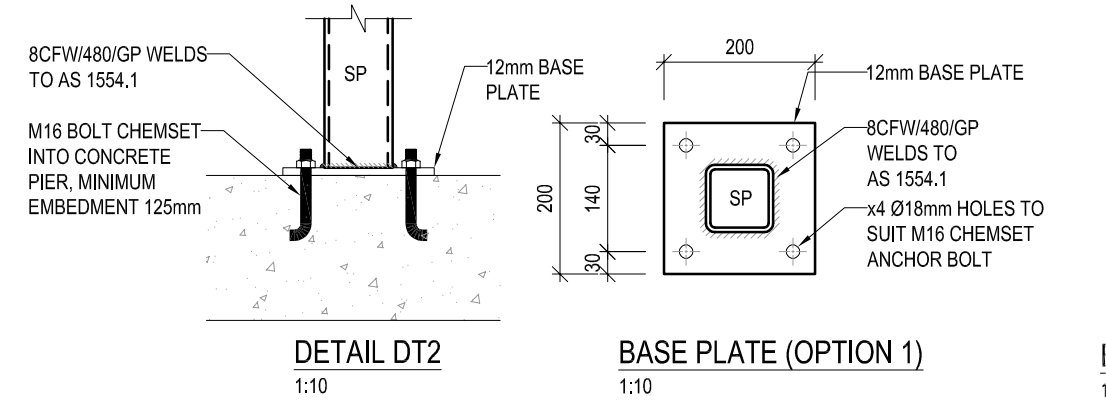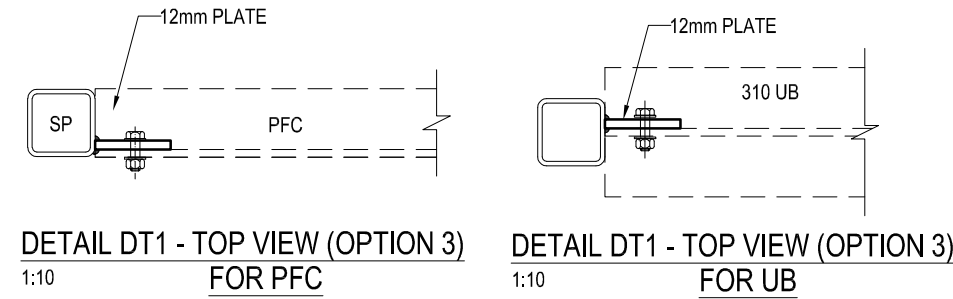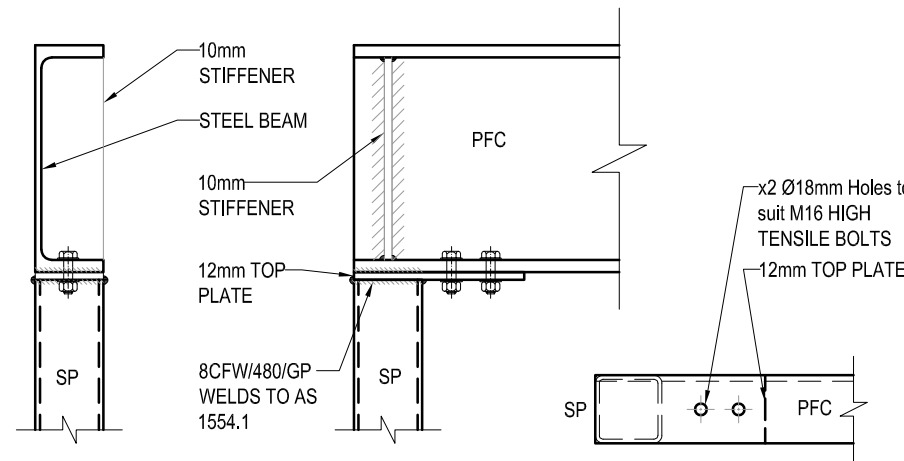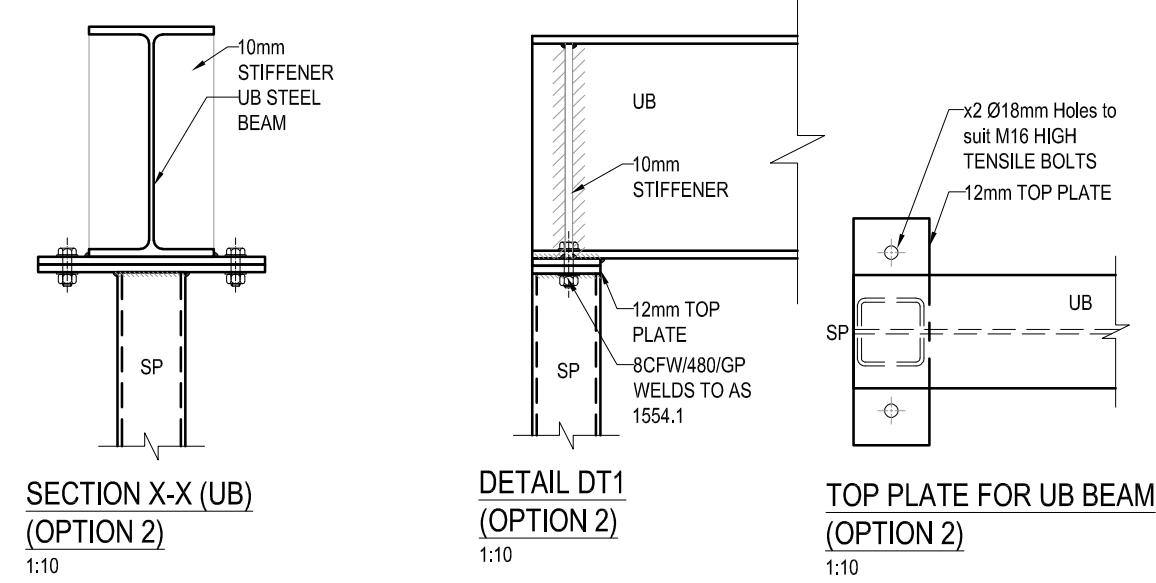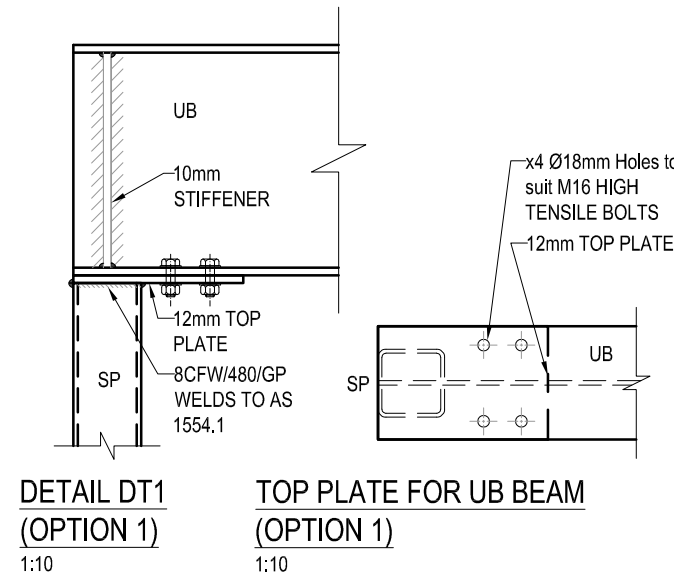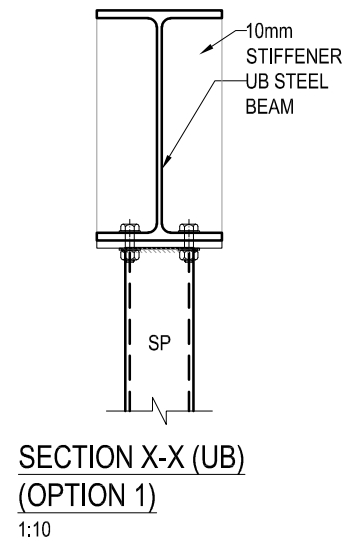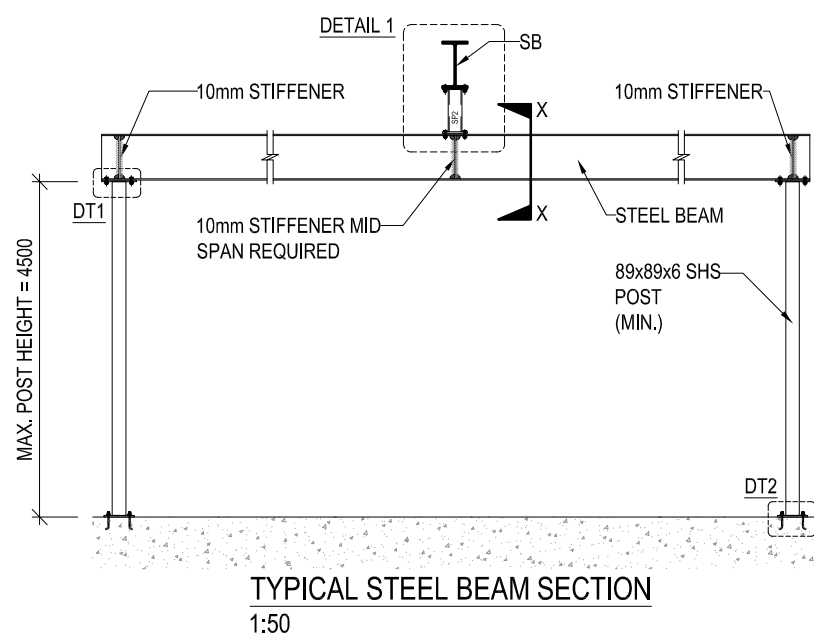

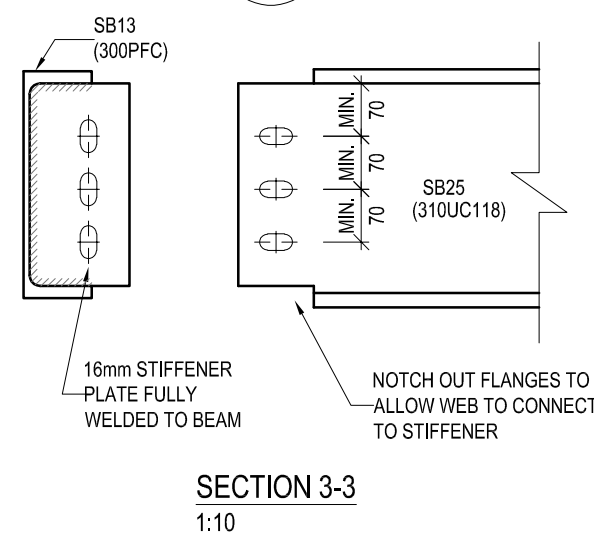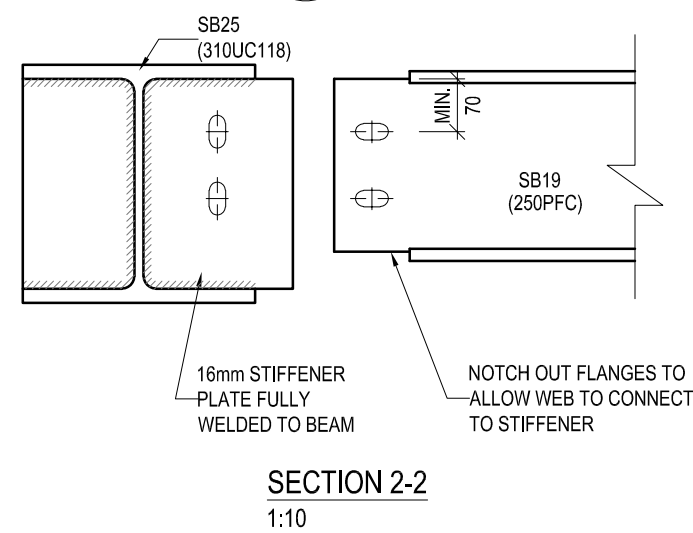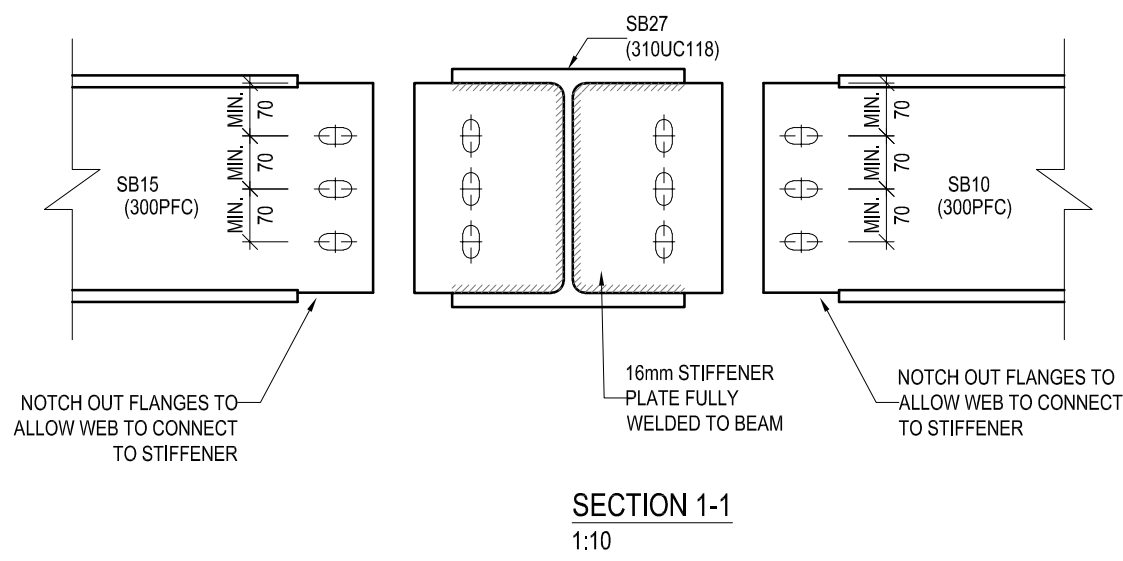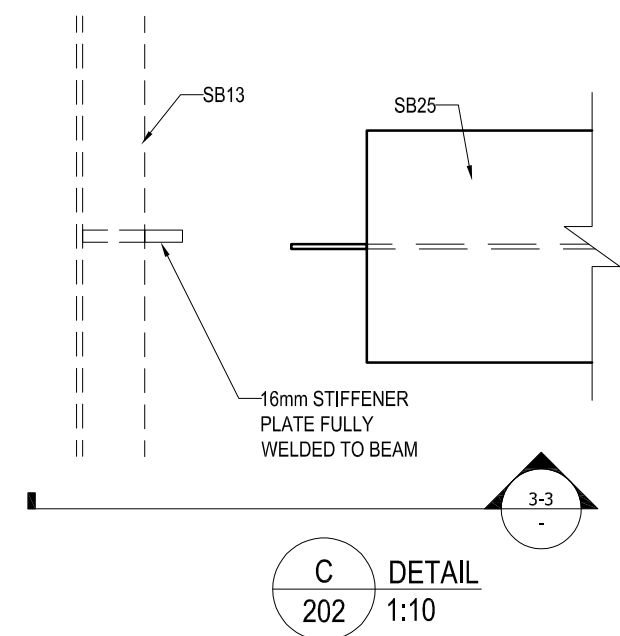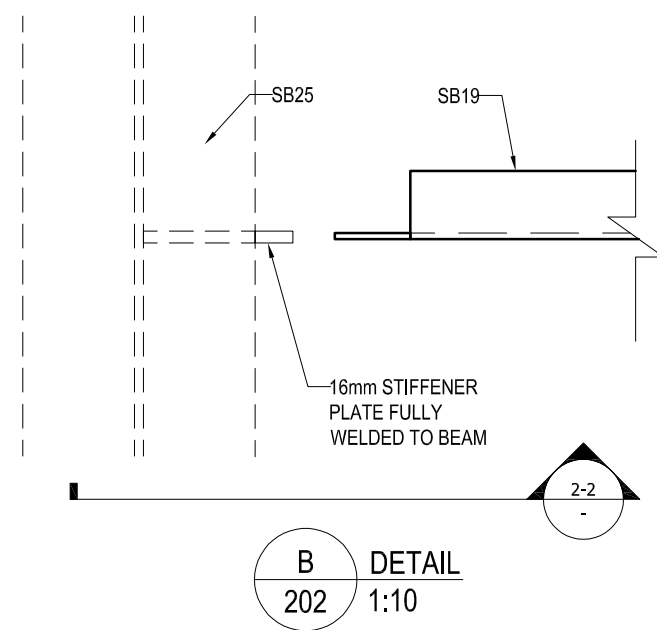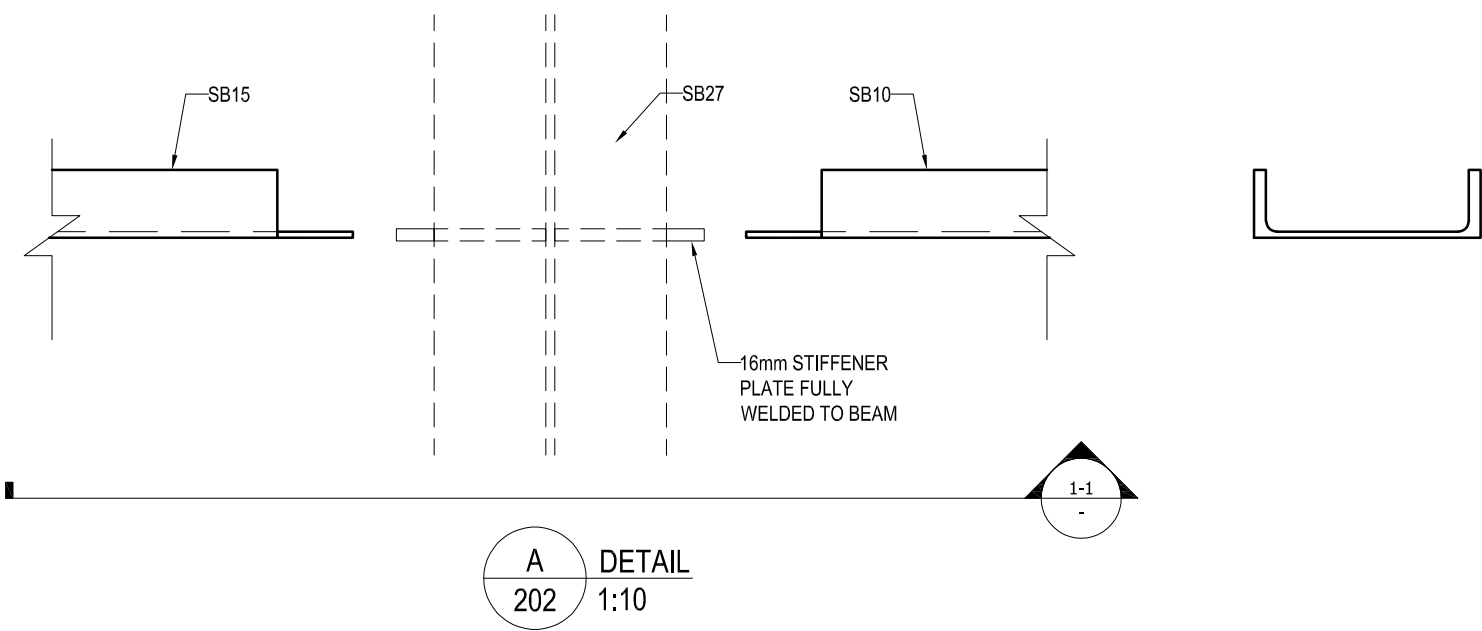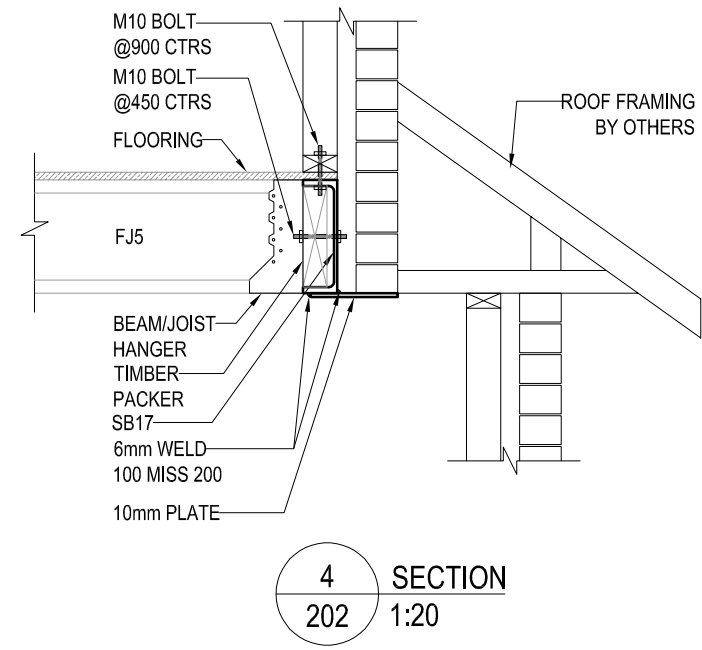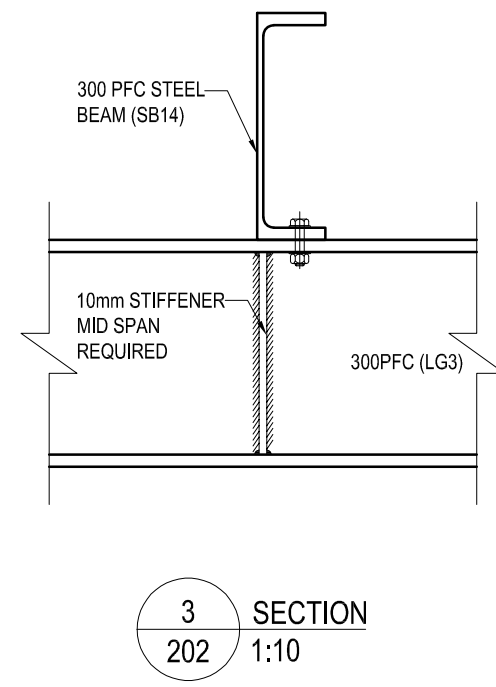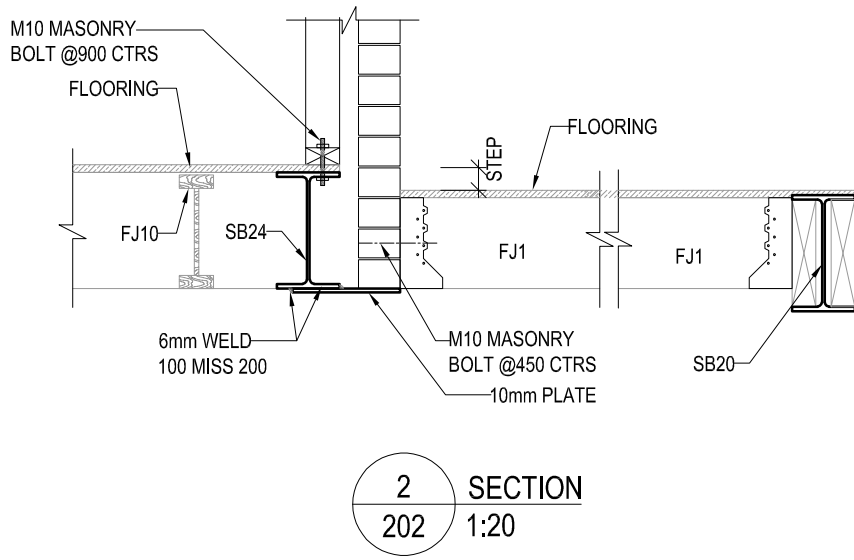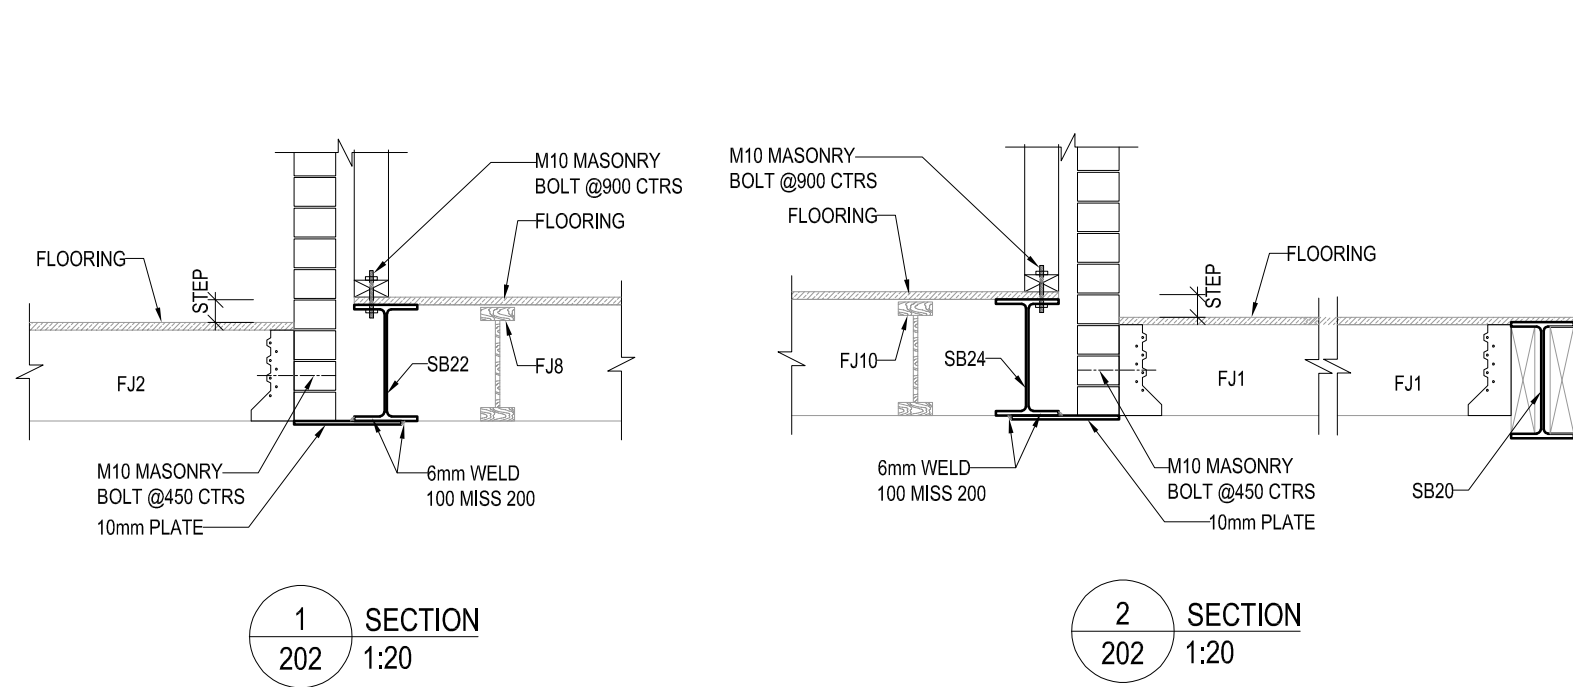

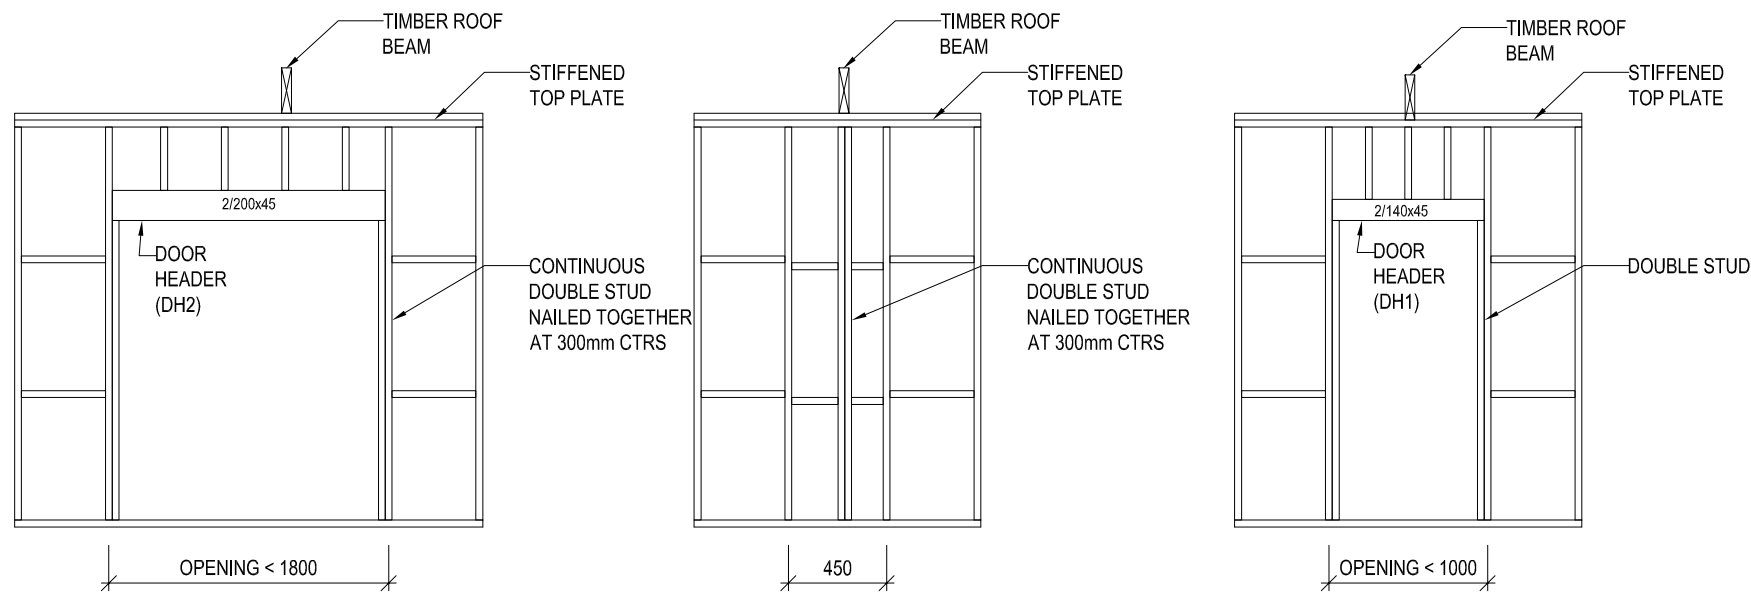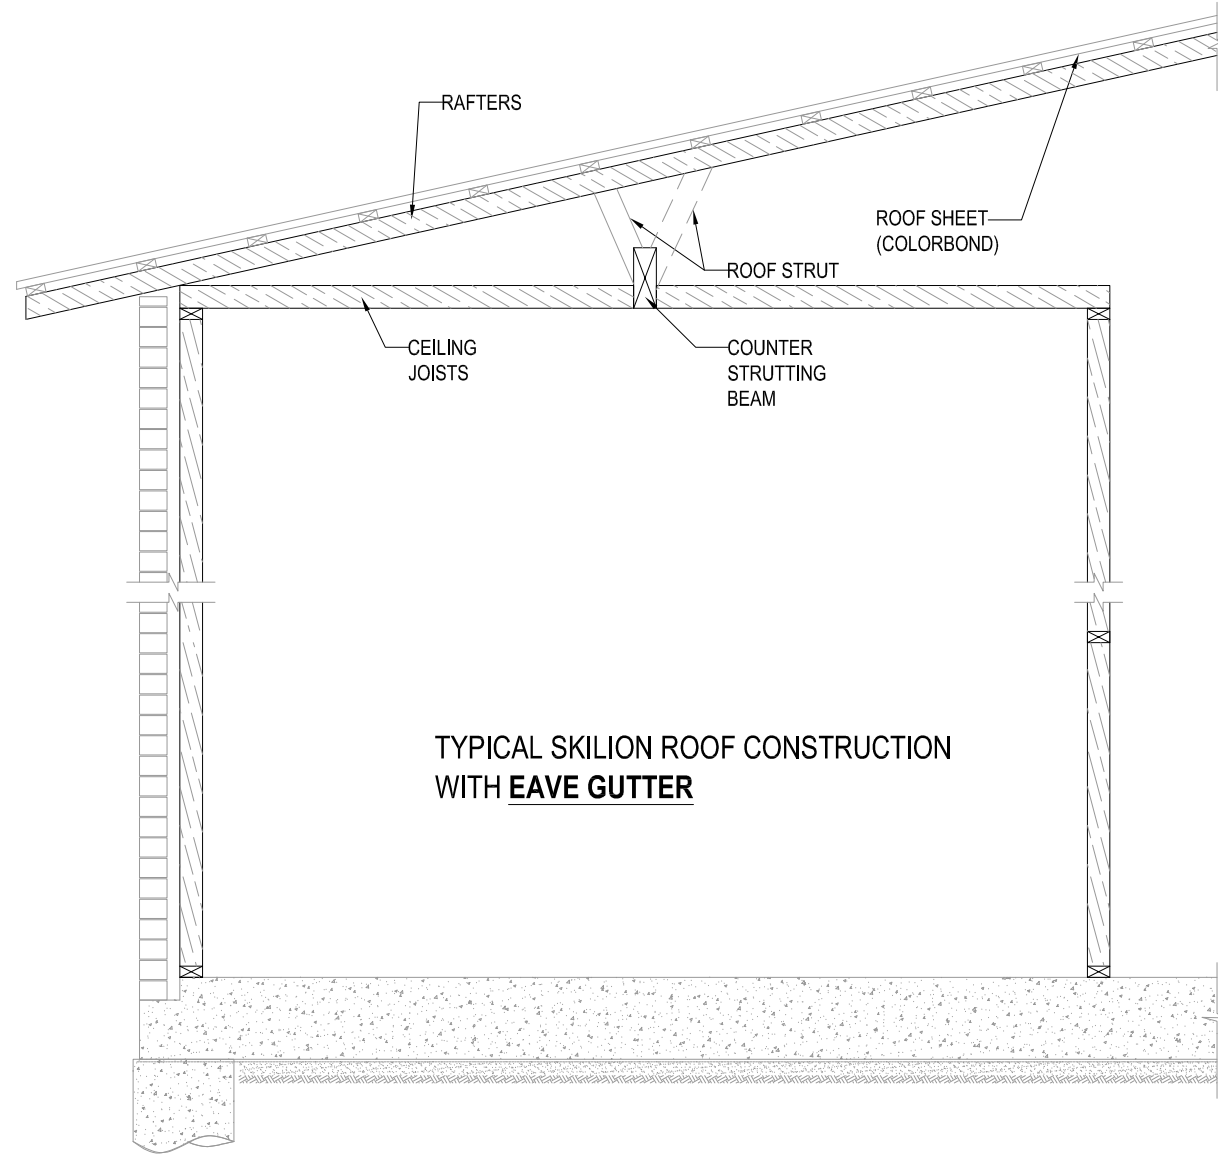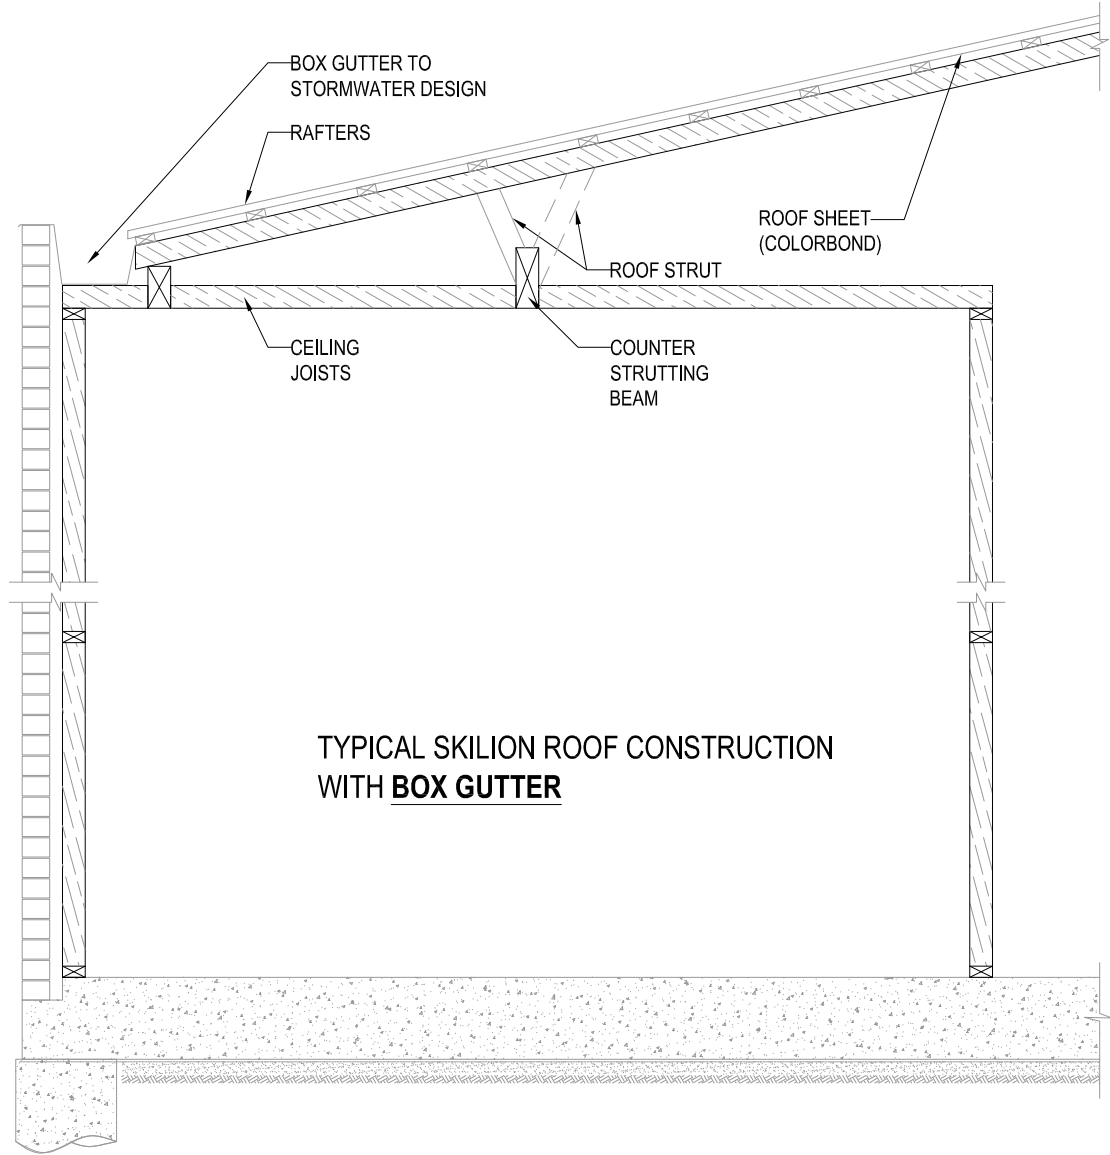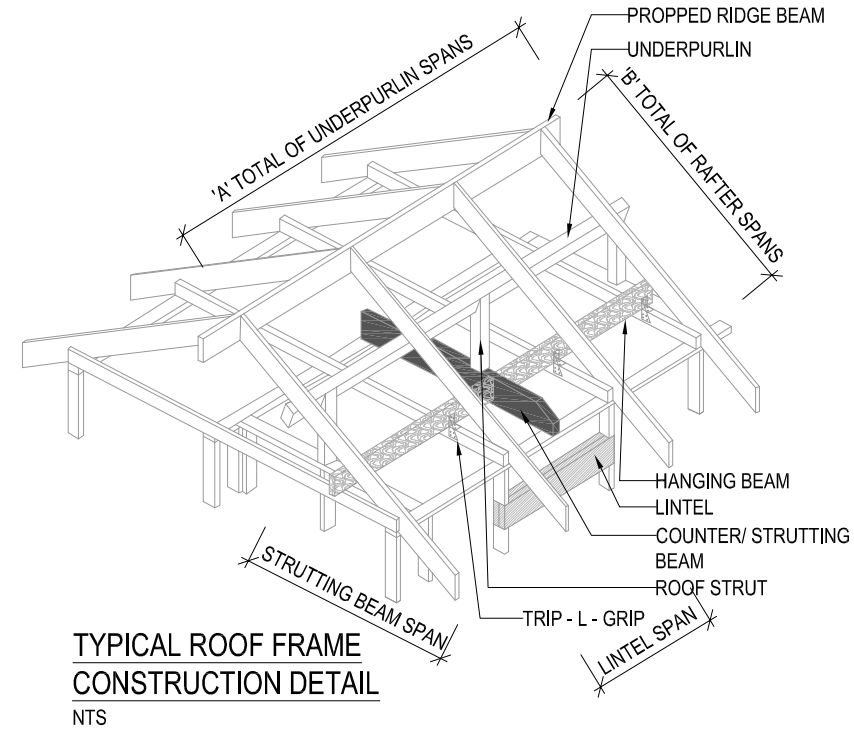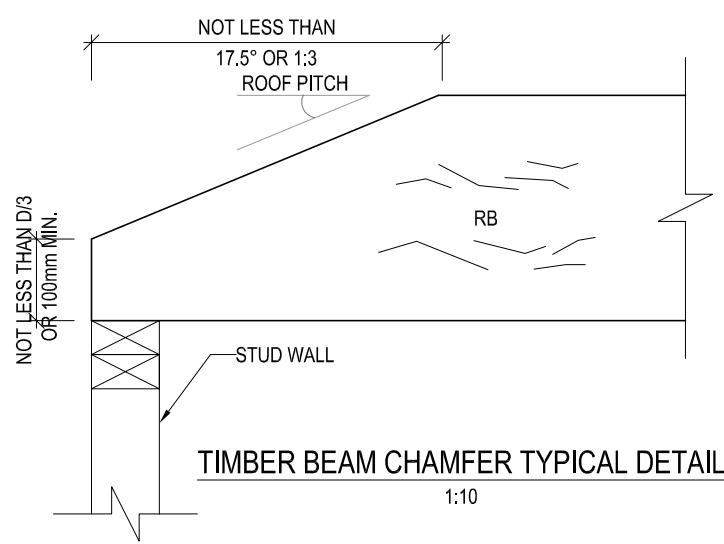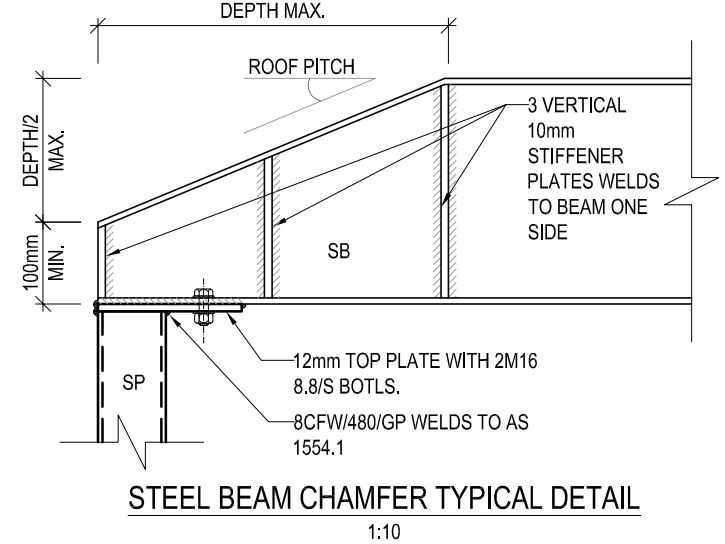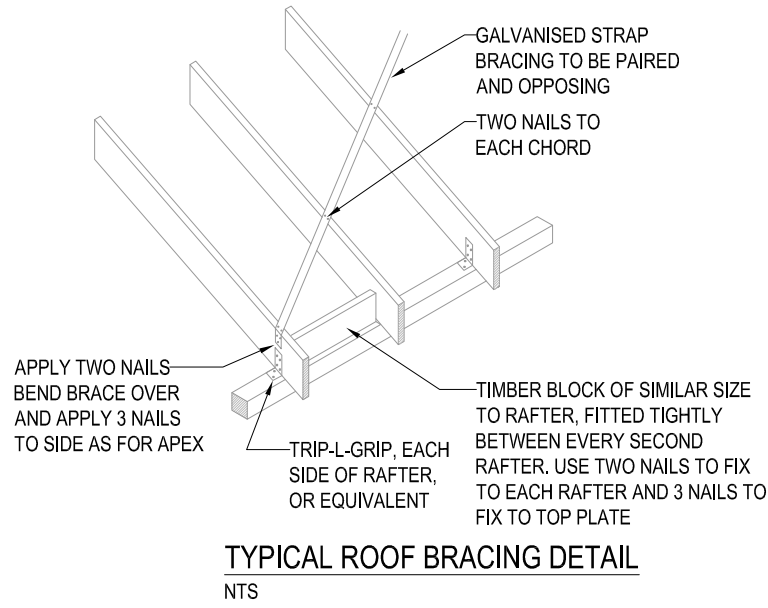

TYPICAL LOAD-BEARING WALL SET-OUT



HCT ENGINEERING Pty Ltd

PO BOX 3208, WAREEMBA NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES


**PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251**

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

ROOF TYPICAL DETAIL

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A	DRG NO.: HCT - 1843 - ST208			

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDMENT	BY	DATE

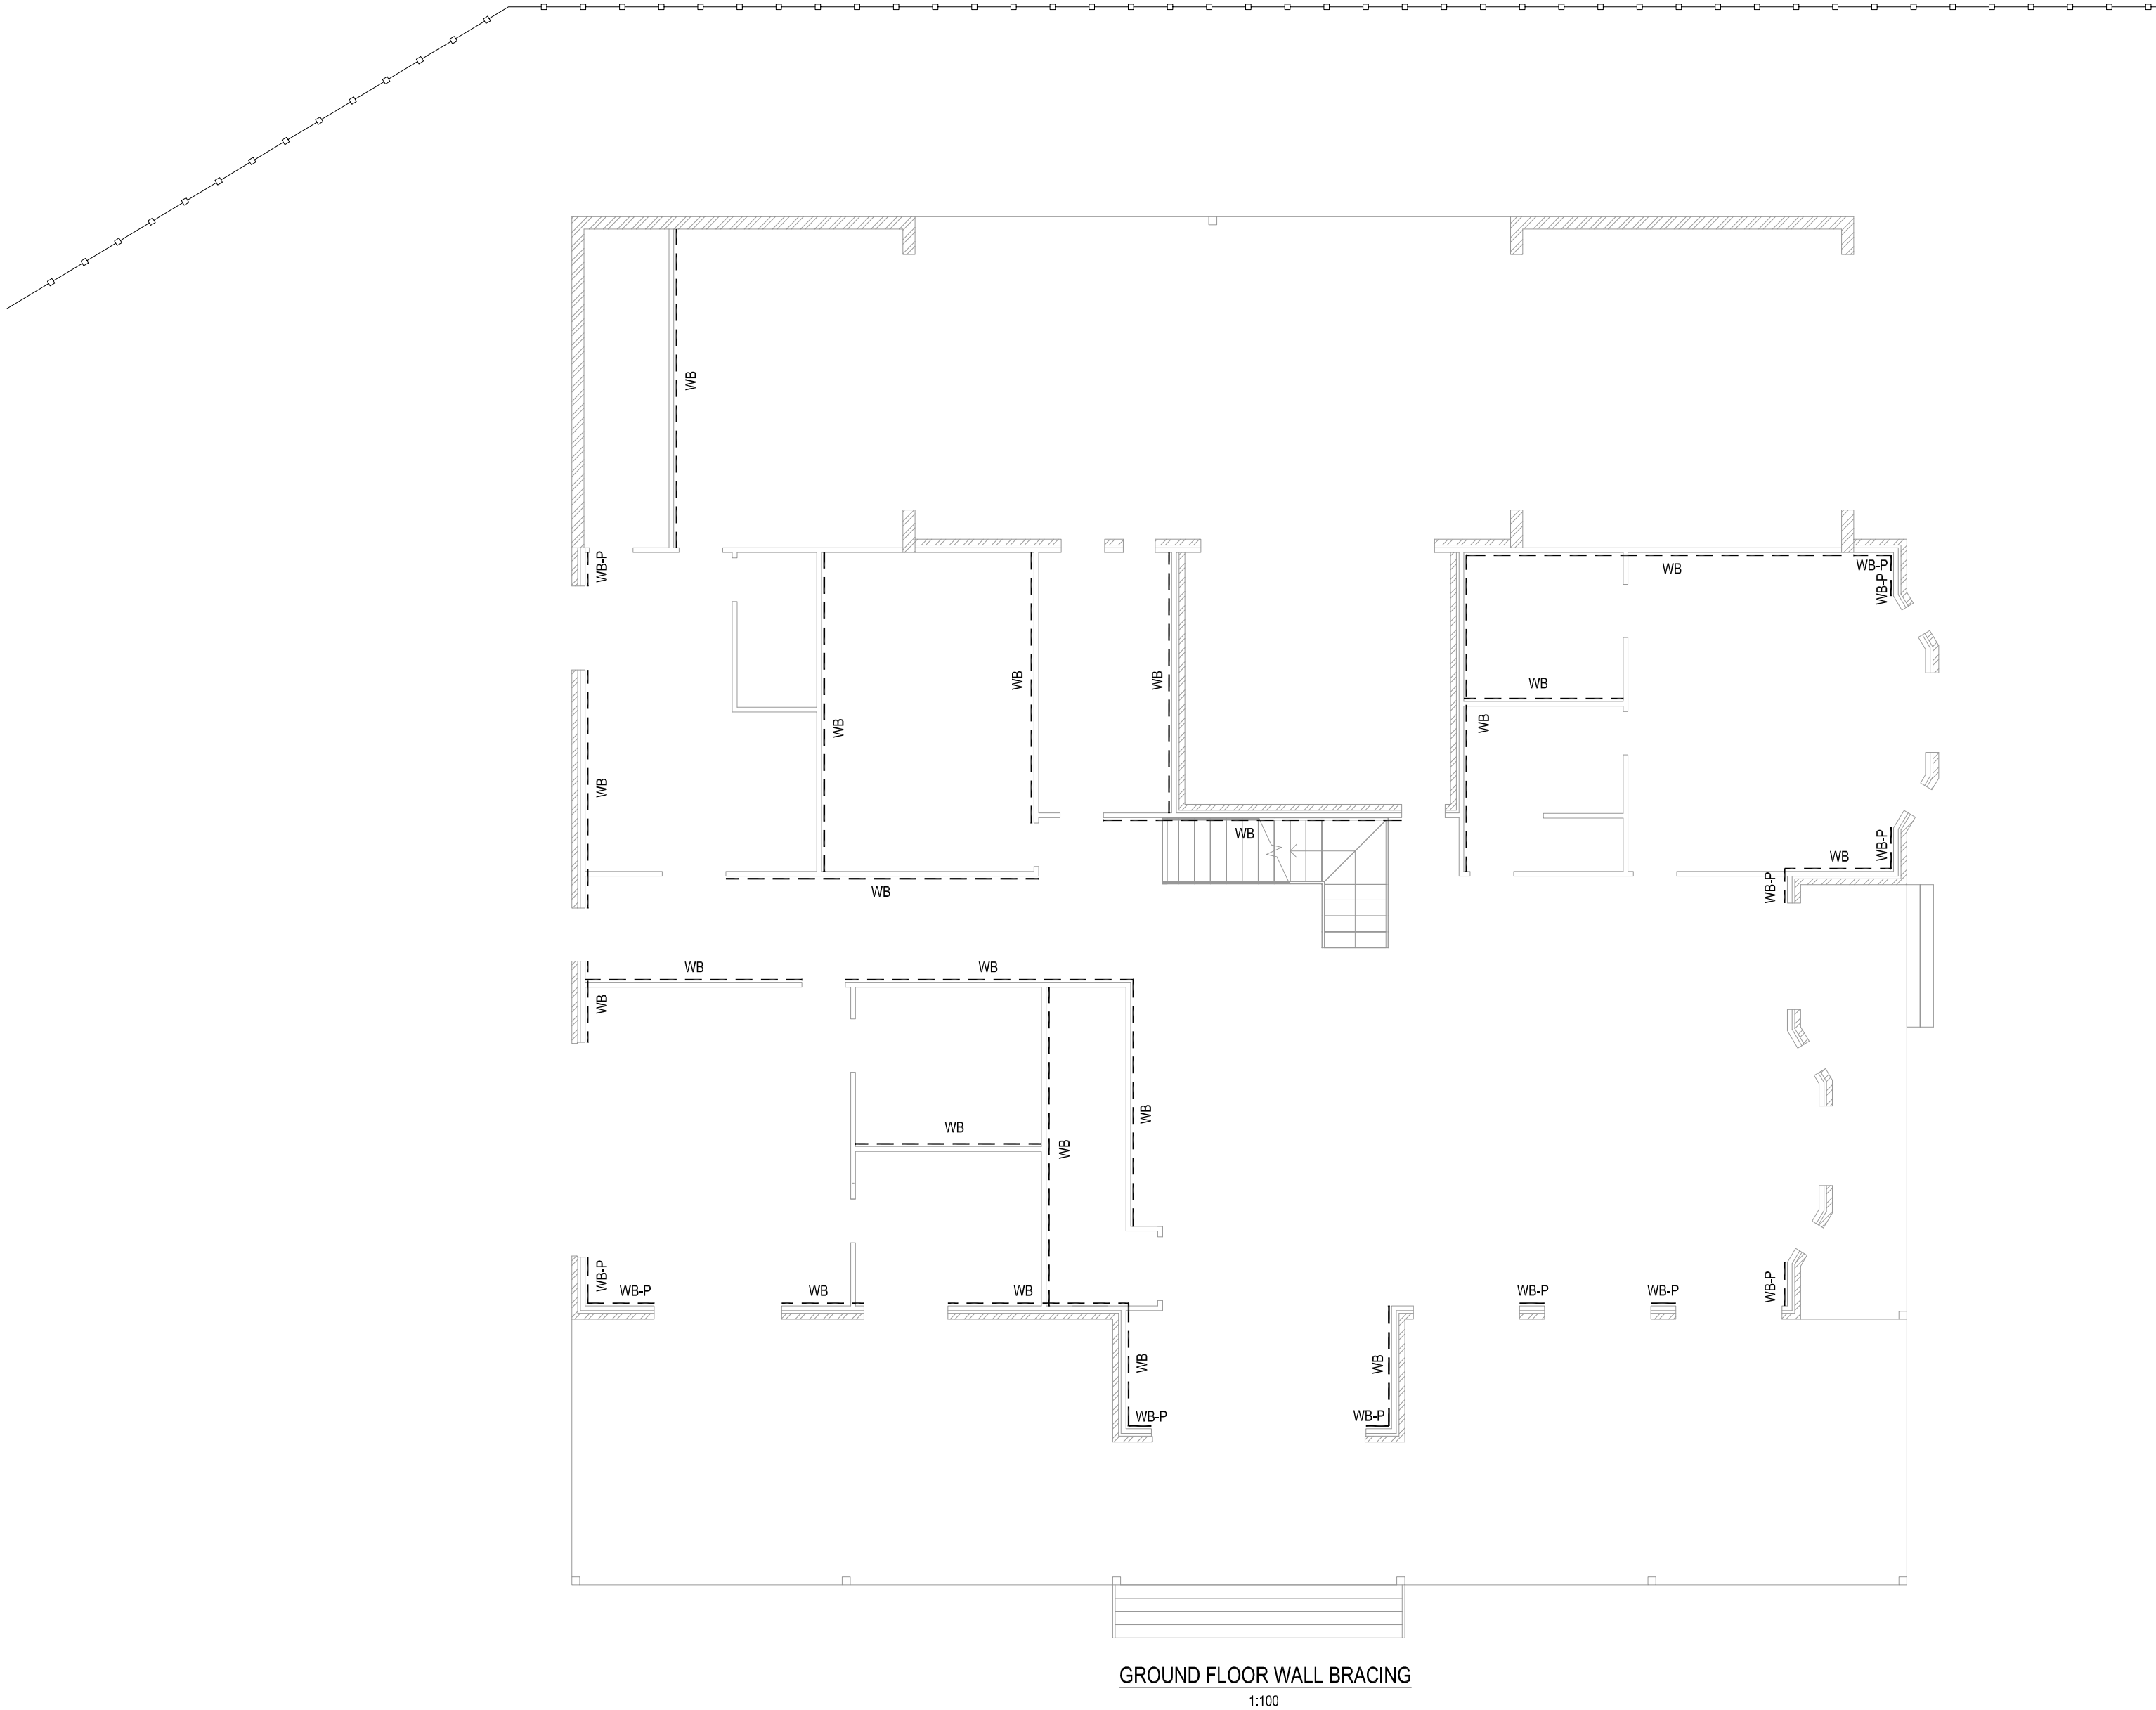

HCT ENGINEERING Pty Ltd

PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES



**PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251**

© COPYRIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

GROUND FLOOR BRACING PLAN

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A		DRG NO.: HCT - 1843 - ST300		

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDMENT	BY	DATE

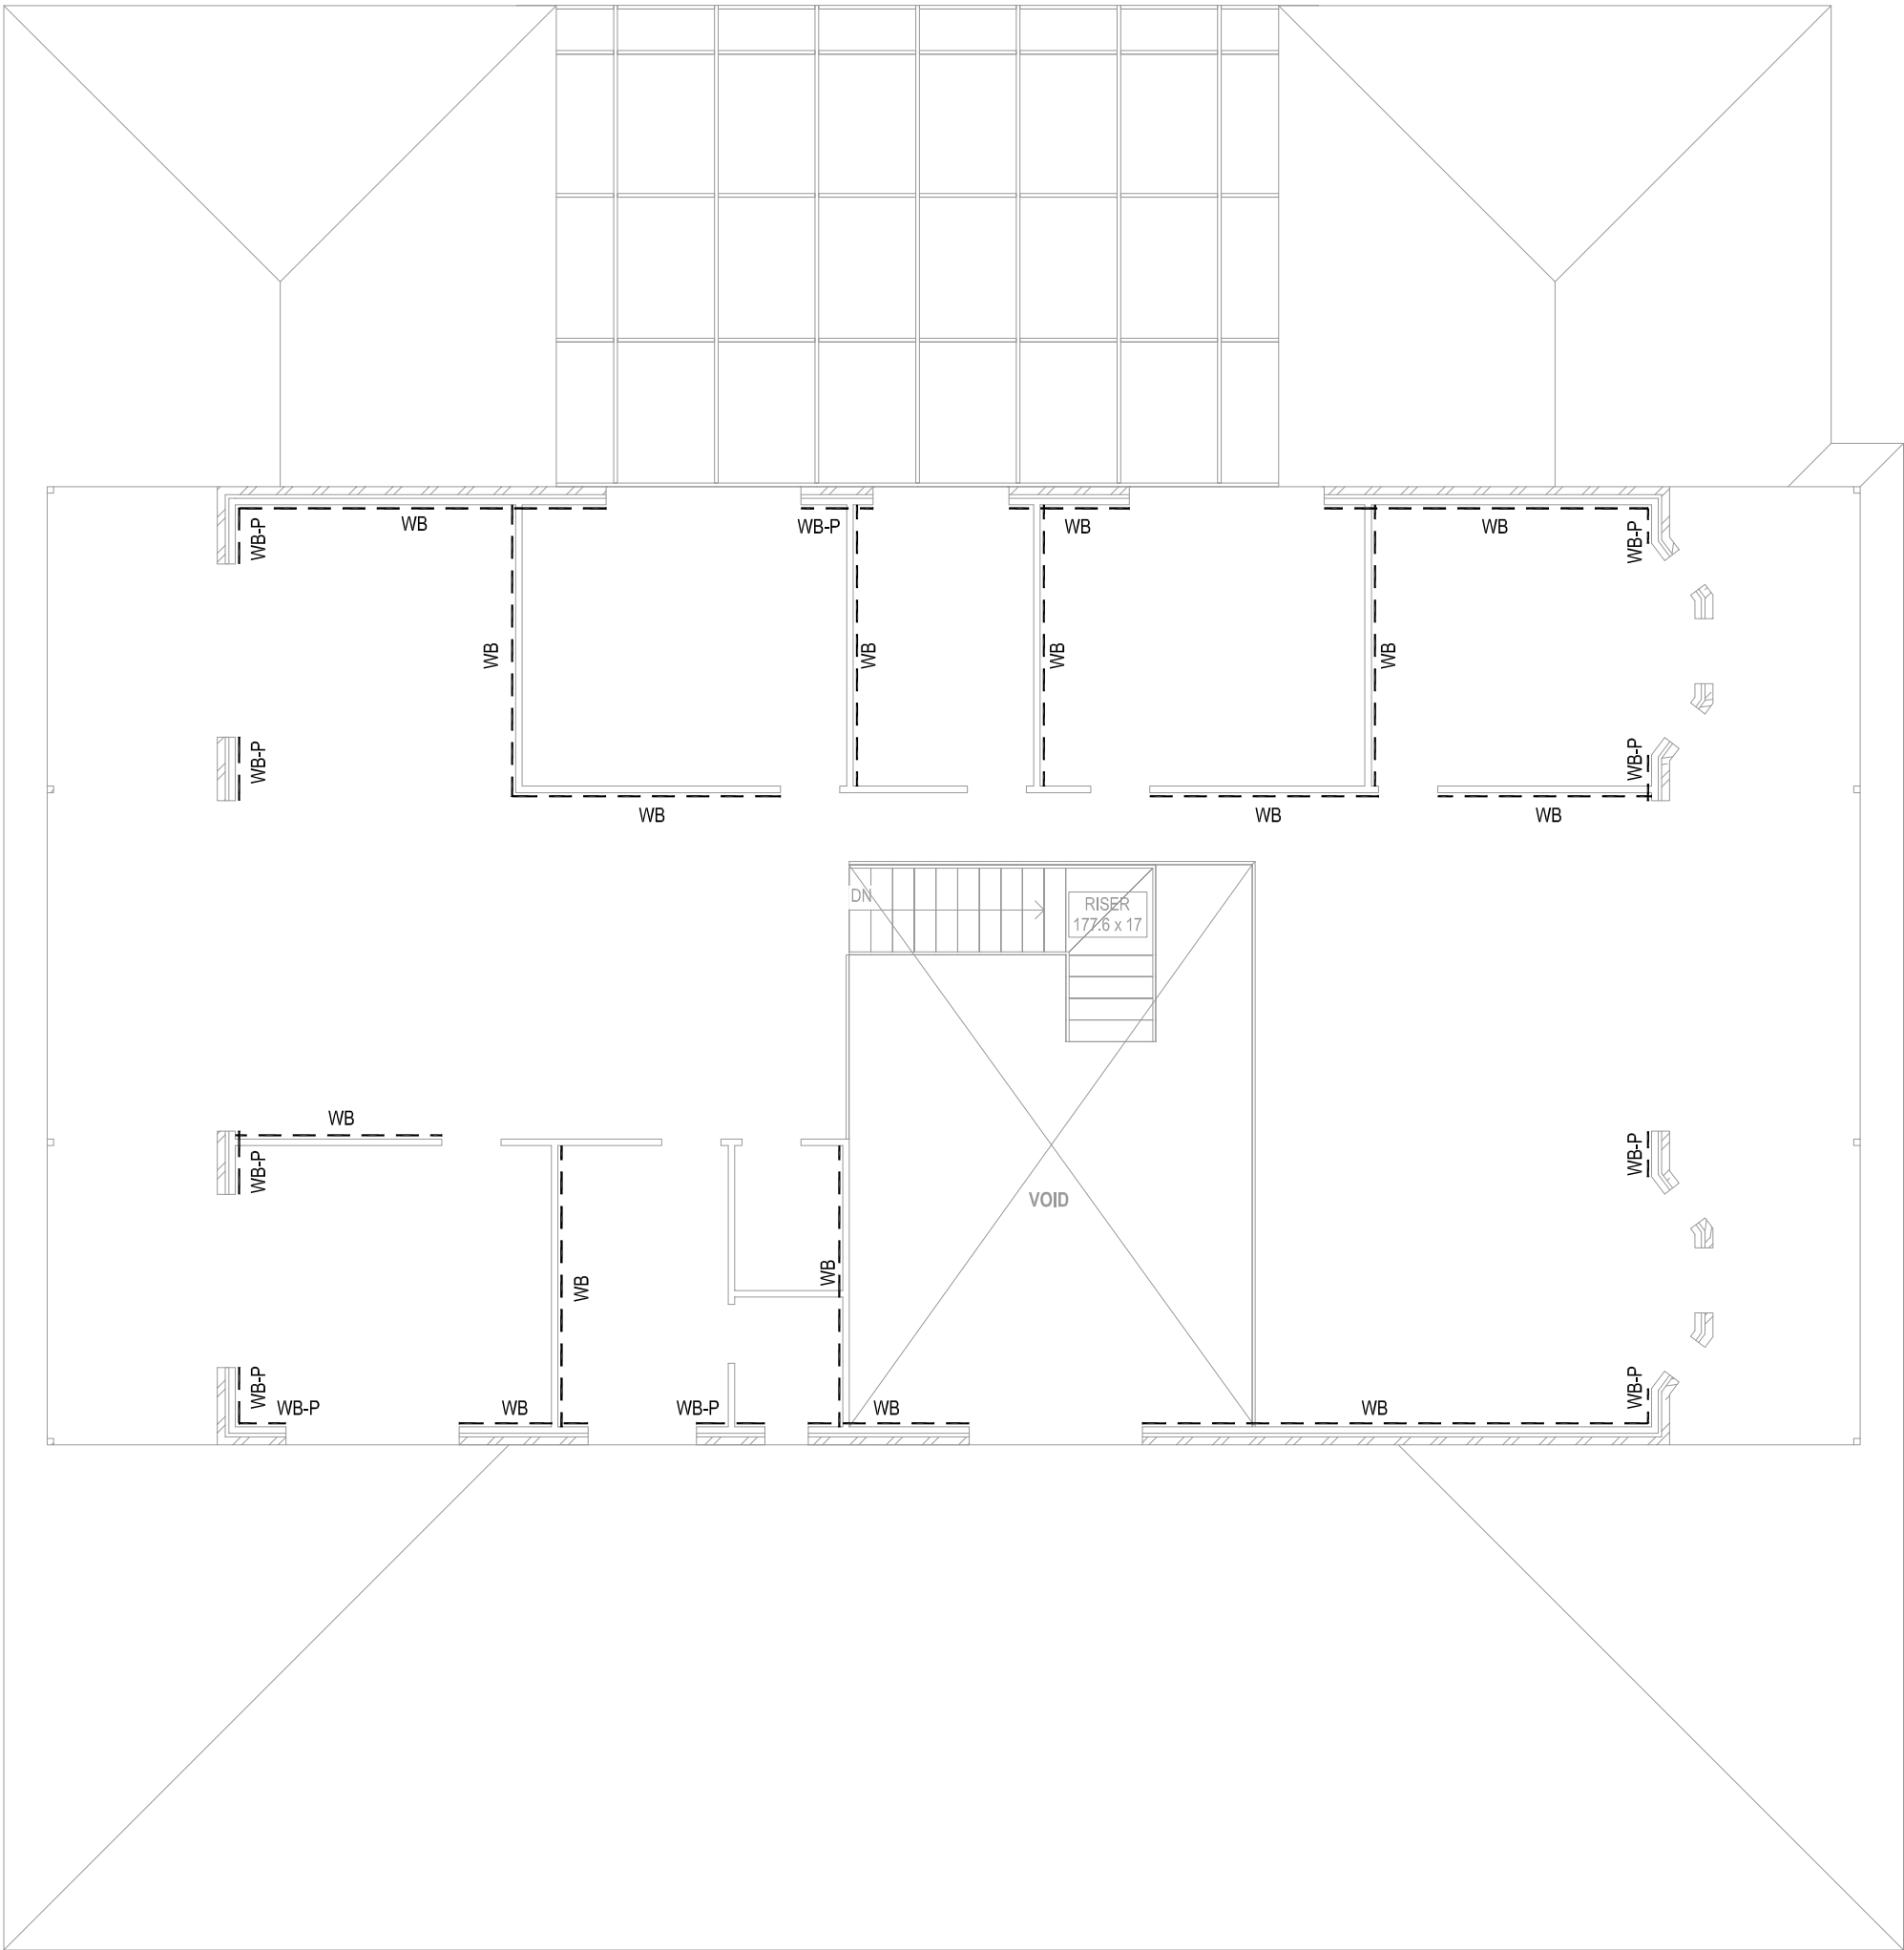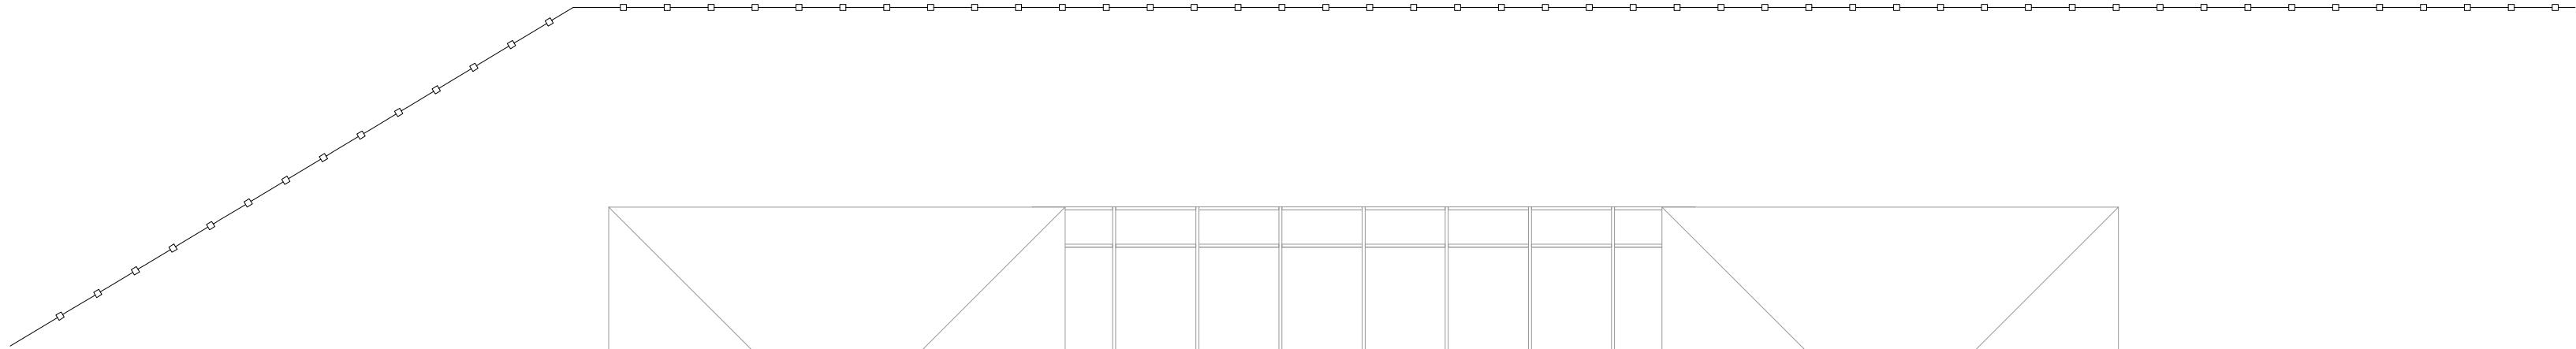

FIRST FLOOR WALL BRACING

1:100



HCT ENGINEERING Pty Ltd

PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES


PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd


FIRST FLOOR BRACING PLAN

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A	DRG NO.: HCT - 1843 - ST301			


A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDMENT	BY	DATE

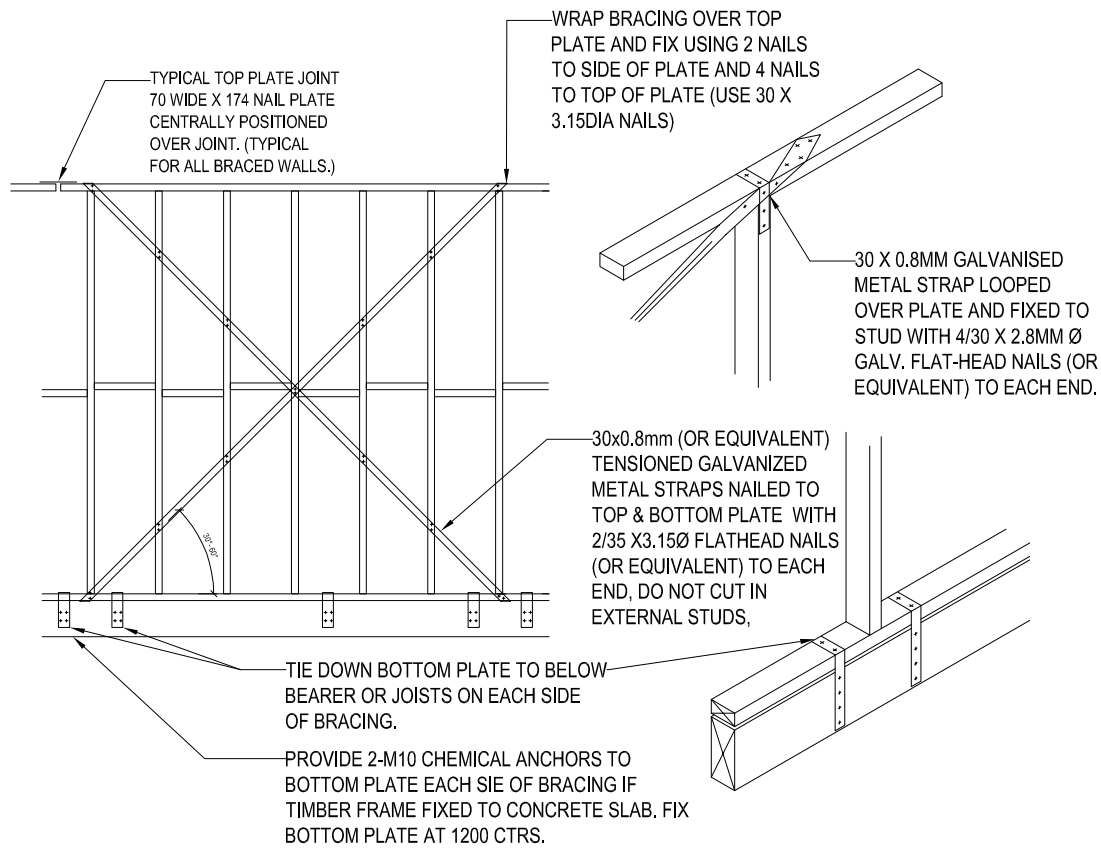


TYPICAL WALL BRACING DETAIL - 'WB'
1:50

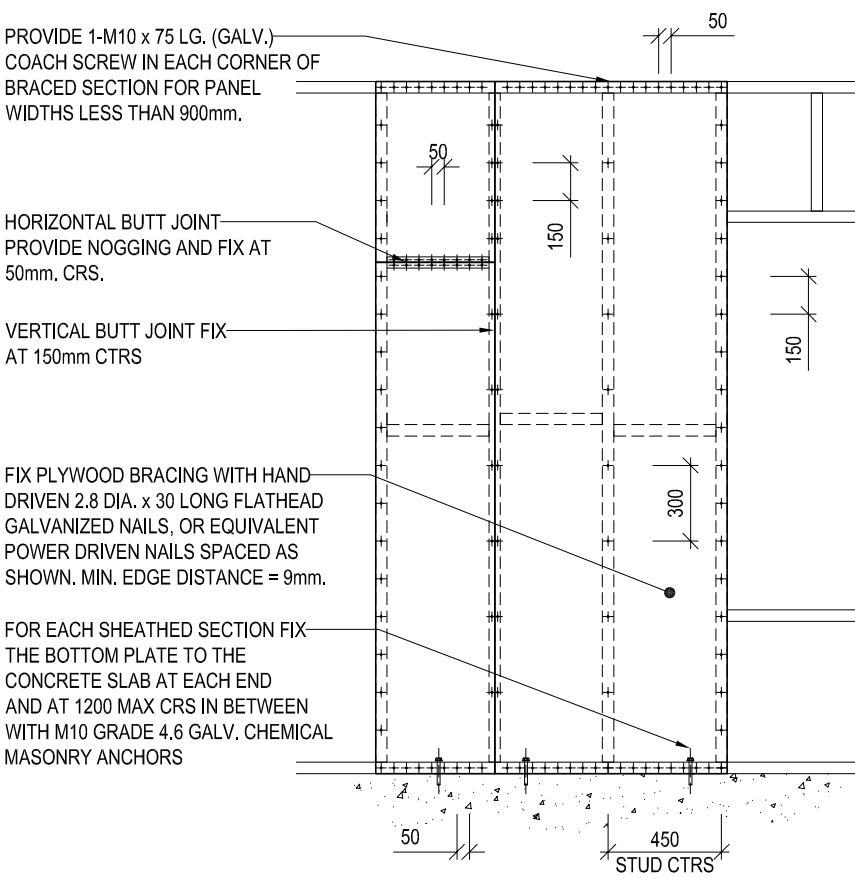

TYPICAL PLYWOOD WALL BRACING TO CONCRETE SLAB DETAIL - 'WB-P'
1:30

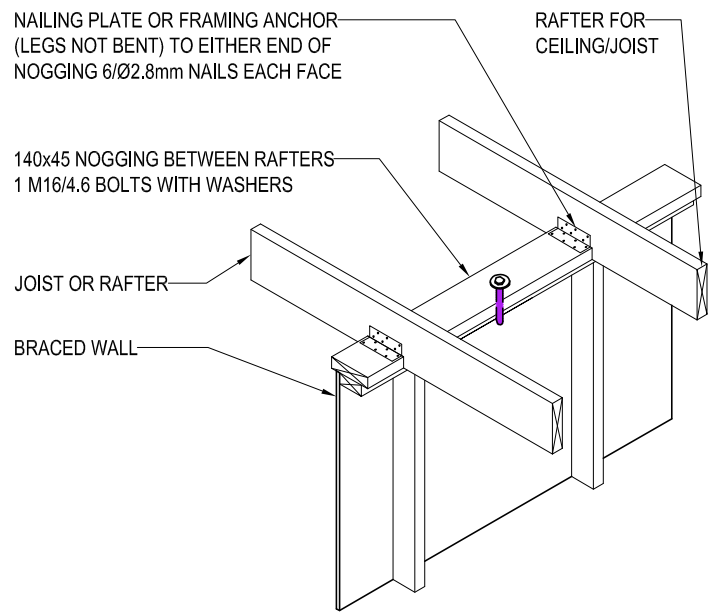

TYPICAL JOIST OR RAFTER PARALLEL TO BRACING WALL CONNECTION
NTS


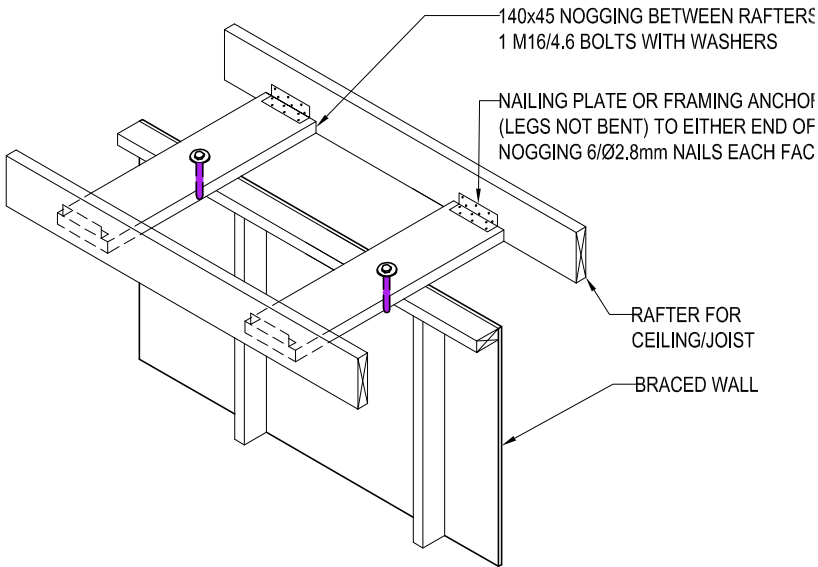


TYPICAL JOIST OR RAFTER PERPENDICULAR TO BRACING WALL CONNECTION
NTS

ARTICULATION DETAILS

BRICK CONTROL JOINTS AS PER AS4773.2
MASONRY IN SMALL BUILDINGS

ALL WALLS TIES TO BE BUILT IN FIXED TO FRAME
PROGRESSIVELY AS CONSTRUCTION PROCEEDS
SPACED AT EACH SIDE OF EXPANSION JIONTS AT
EACH THIRD COURSE. THE SPACING OF ALL OTHER
TIES AS PER AS7773.2 MASONRY IN SMALL BUILDINGS

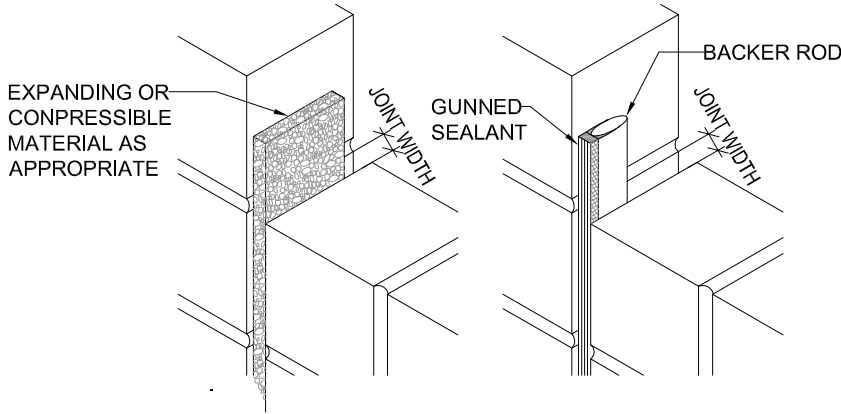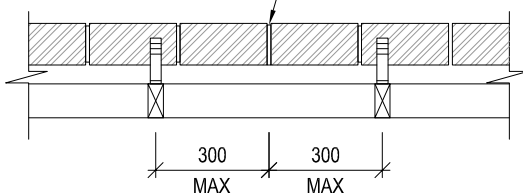

NOTES: WHERE SEALANT IS USED IN A CONTRACTION
JOINT, SEALANT DEPTH SHALL BE NO GREATER THAN
TWO-THIRDS THE JOINT WIDTH


CONTROL JOINT INFILL

1:50

ARTICULATION JOINTS


- ARTICULATION JOINTS SHALL BE PROVIDED IN UNREINFORCED MASONRY WALLS LONGER THAN 5M LONG.
- ARTICULATION JOINTS SHALL NOT BE LOCATED ABOVE GARAGE DOOR OPENINGS HOWEVER ARTICULATION JOINTS IN LINE WITH THE EDGE OF THE OPENING ARE PERMITTED.
- ARTICULATION JOINTS SHALL BE VERTICAL (NOT TOOTHED), FULL HEIGHT OF THE MASONRY, AND FREE OF MORTAR.
- WHERE ARTICULATION JOINTS ARE REQUIRED TO BE WEATHERPROOF OR INSECT-PROOF, THEY SHALL BE CLOSED BY INCORPORATING EITHER A FLEXIBLE SEALANT AND BACKING ROD; OR MATERIAL THAT WILL BOTH EXPAND AND CONTRACT; OR A PROPRIETARY SYSTEM DESIGNED FOR THIS APPLICATION.

Site Class	Masonry wall construction and surface finish	JOINT SPACING, M		
		Up to 4m high, 10mm joints	4-8.5m high, 10mm joints	4-8.5m high, 15mm joints
M, M-D	External face finish masonry	6.0	4.2	6.0
	External rendered and/or painted masonry	5.5	3.9	5.5
	Internal face finish or sheeted masonry	6.0	4.2	6.0
	Internal rendered and/or painted masonry	5.5	3.9	5.5
H1, H1-D	Masonry wall construction and surface finish	5.5	3.9	5.5
	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	5.5	3.9	5.5
	Internal face finish or sheeted masonry	5.0	3.5	5.0
H2, H2-D	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	4.5	3.2	4.5
	Internal face finish or sheeted masonry	5.0	3.5	5.0
	Internal rendered and/or painted masonry	4.5	3.2	4.5

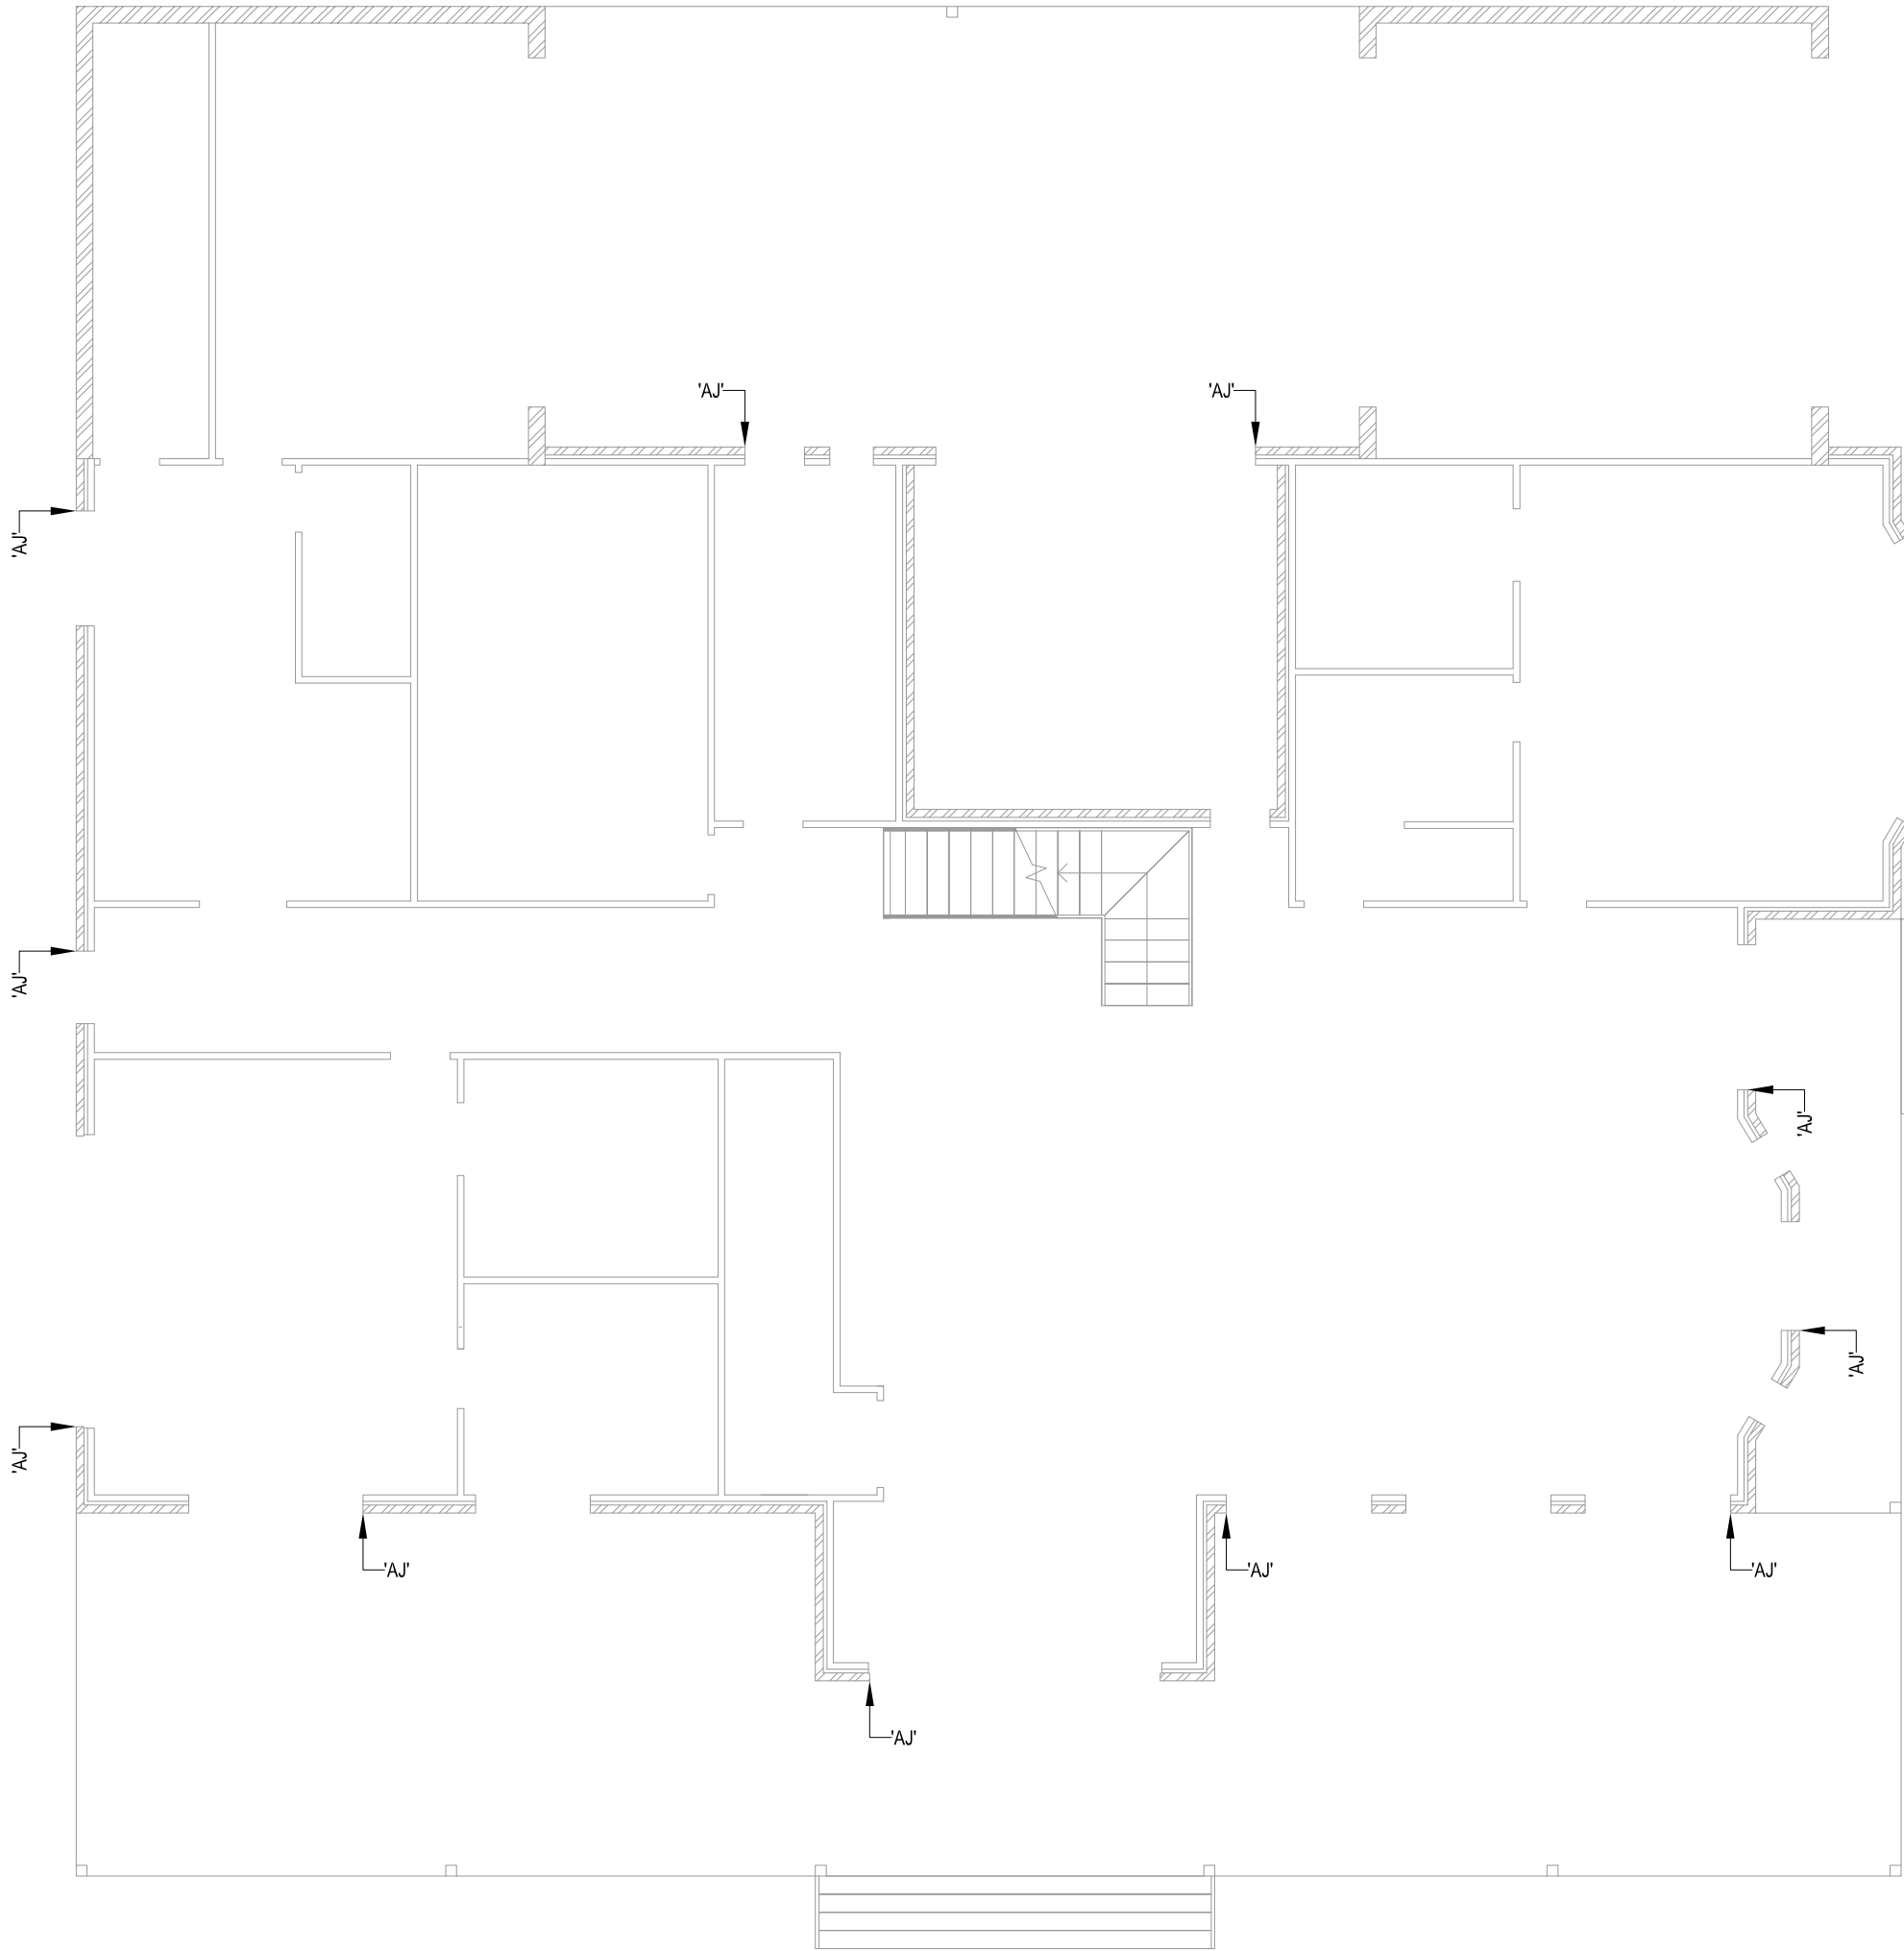

GROUND FLOOR ARTICULATION JOINT PLAN

1:100

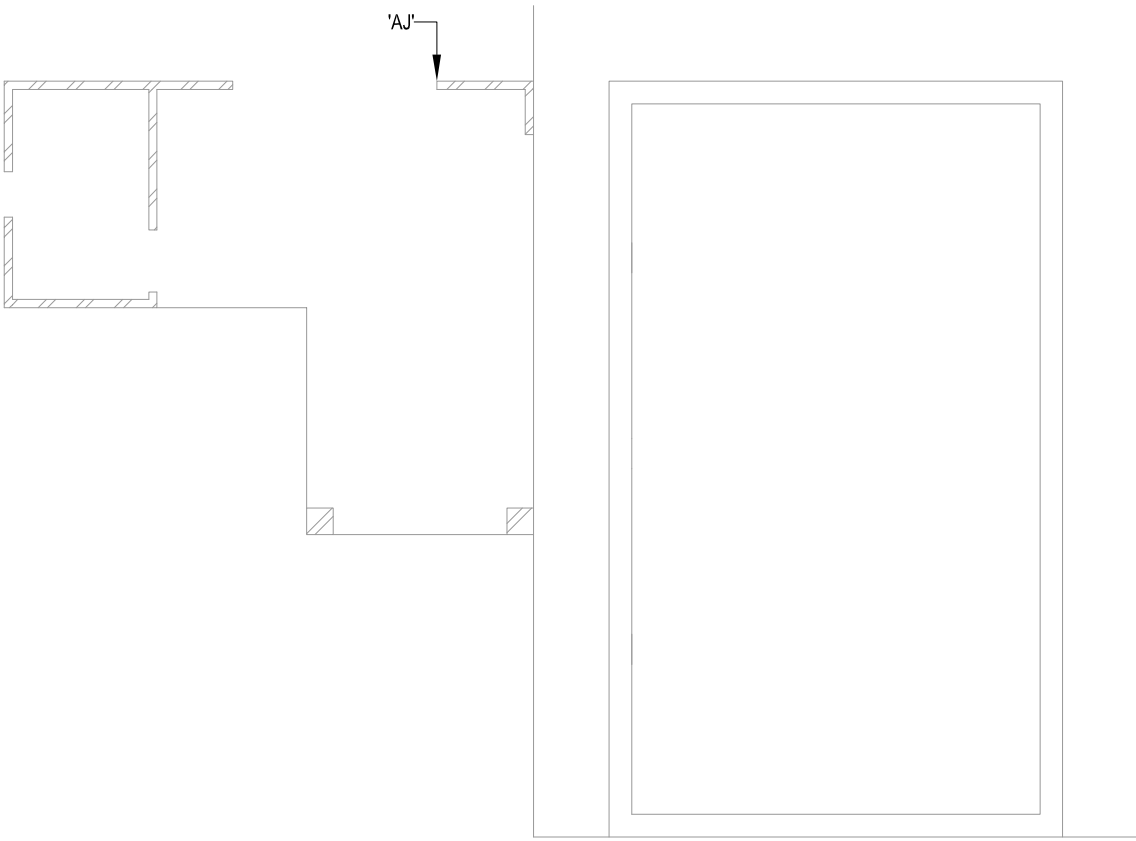

GROUND FLOOR ARTICULATION JOINT PLAN -

SWIMMING POOL & CABANA PLAN

1:100



HCT ENGINEERING Pty Ltd

PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES



PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

GROUND FLOOR BRACING PLAN

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A		DRG NO.: HCT - 1843 - ST400		

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDEMENT	BY	DATE

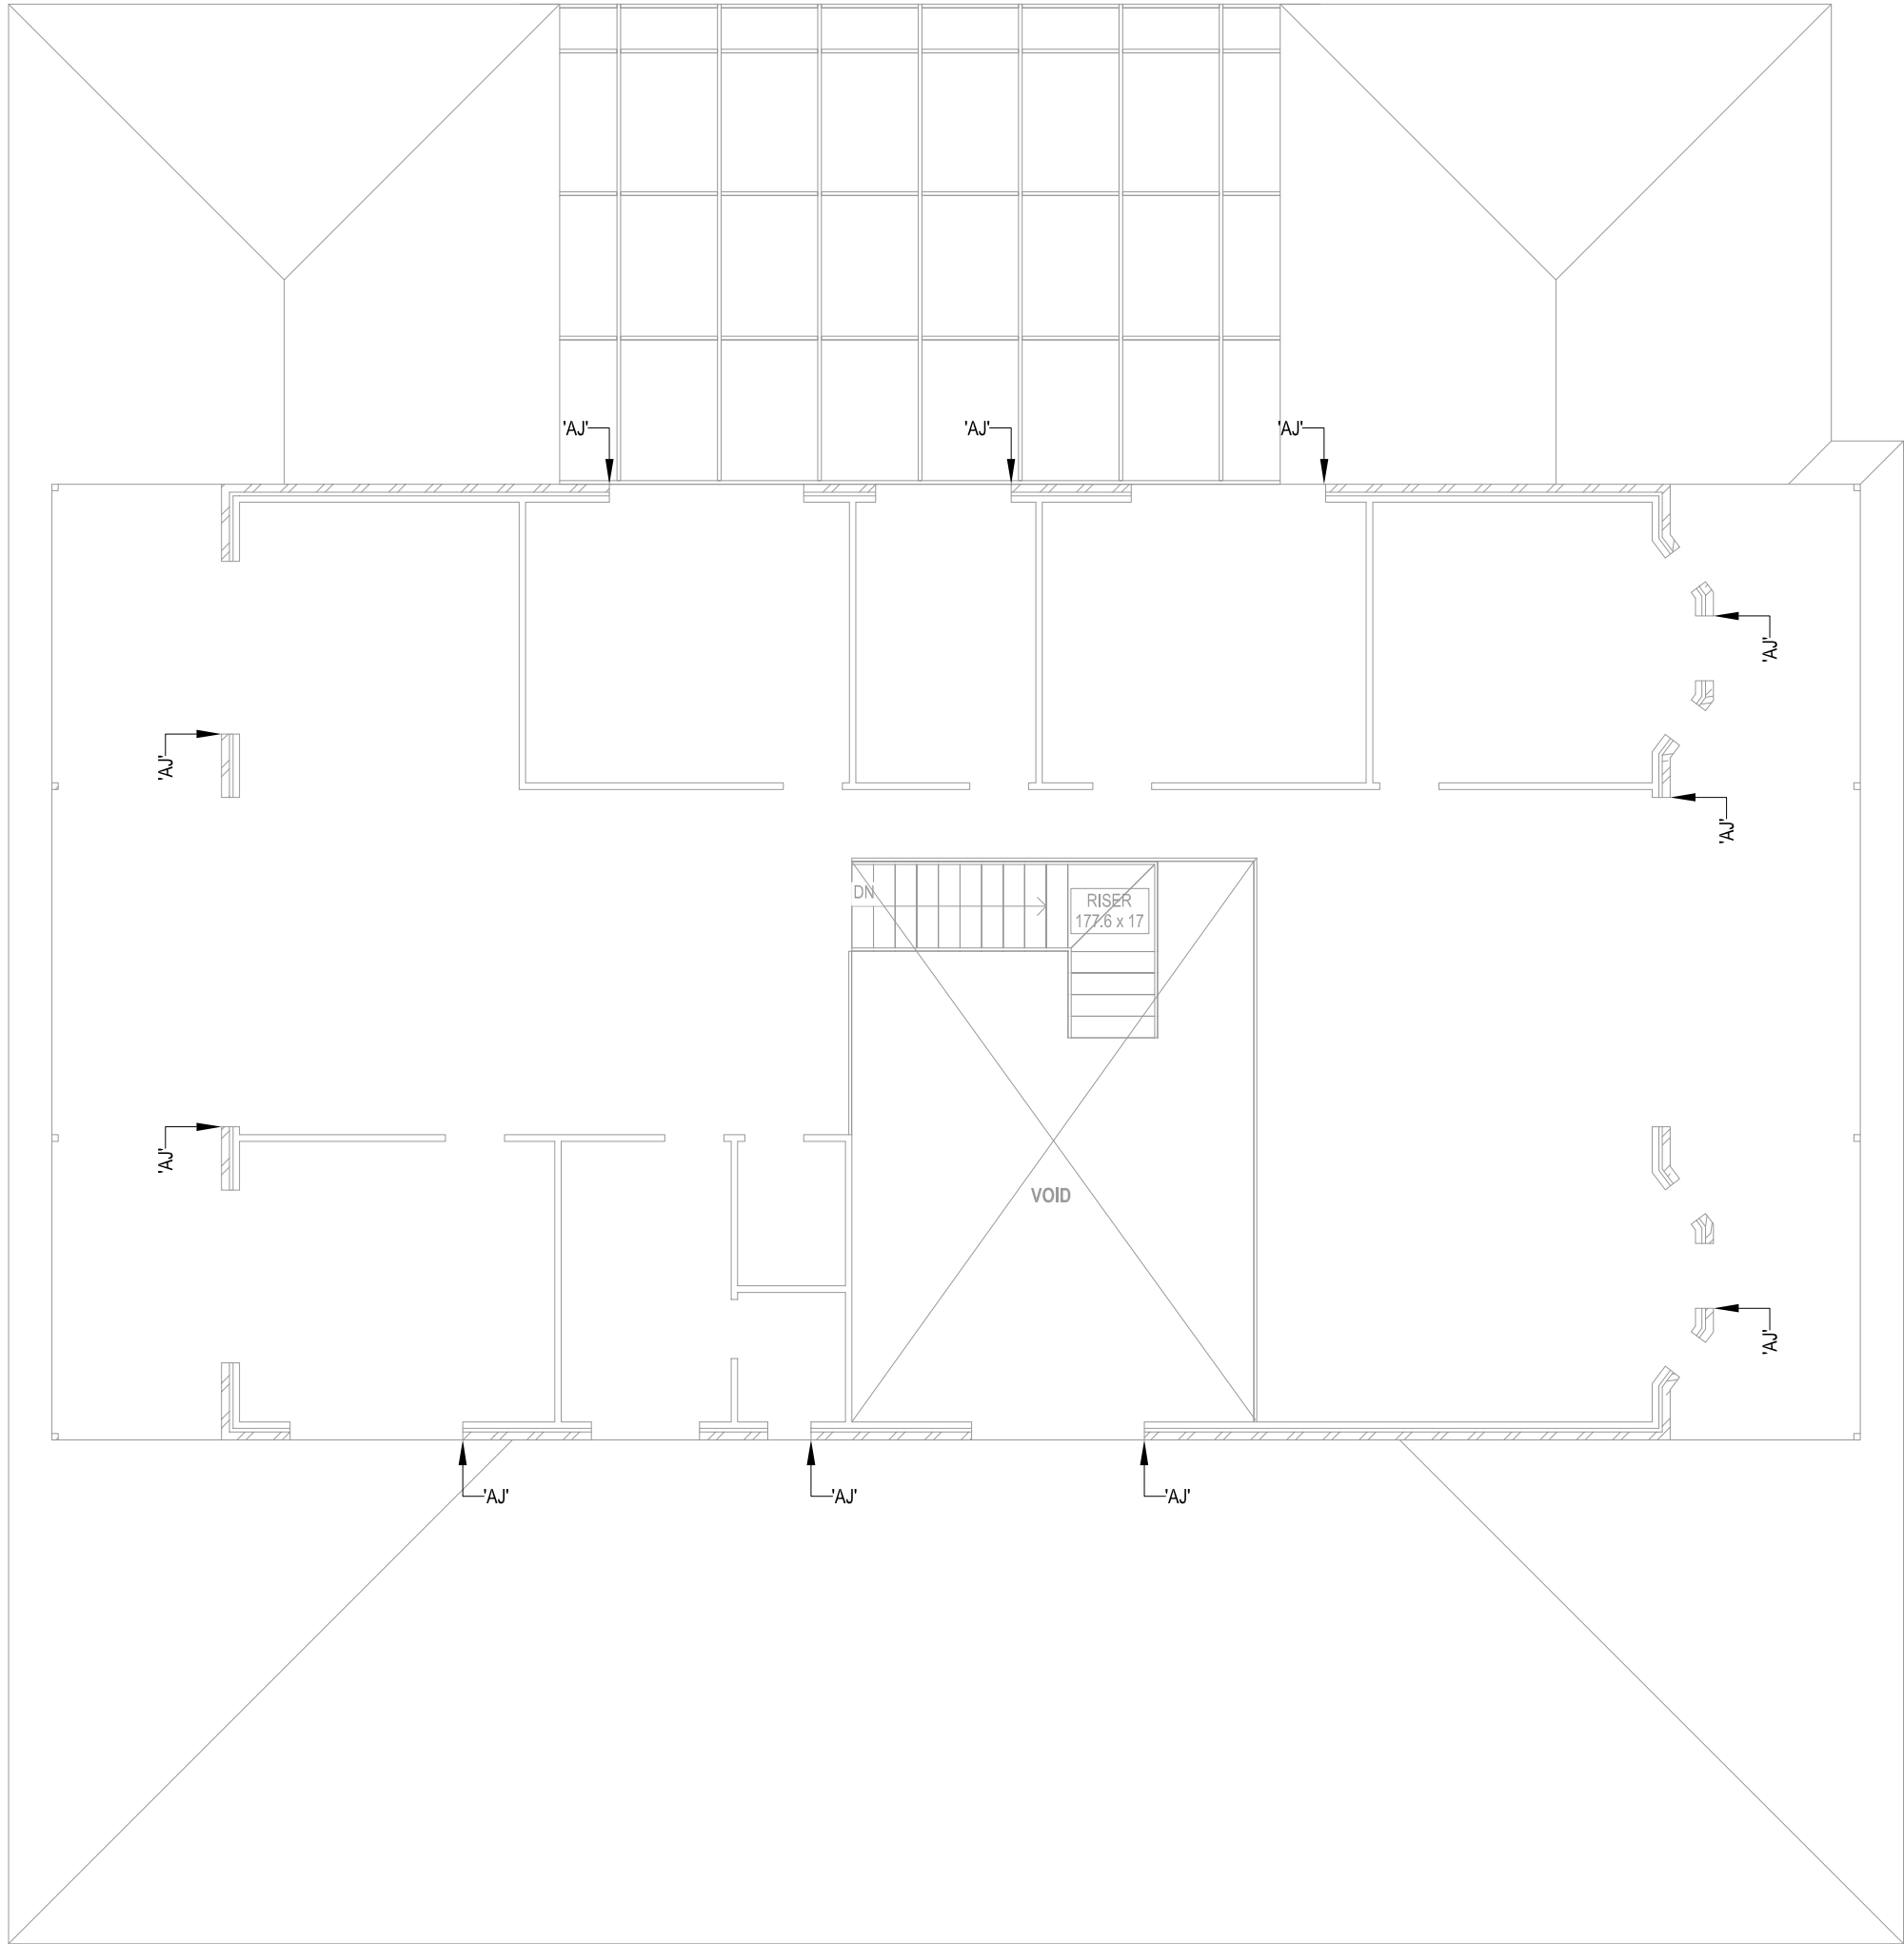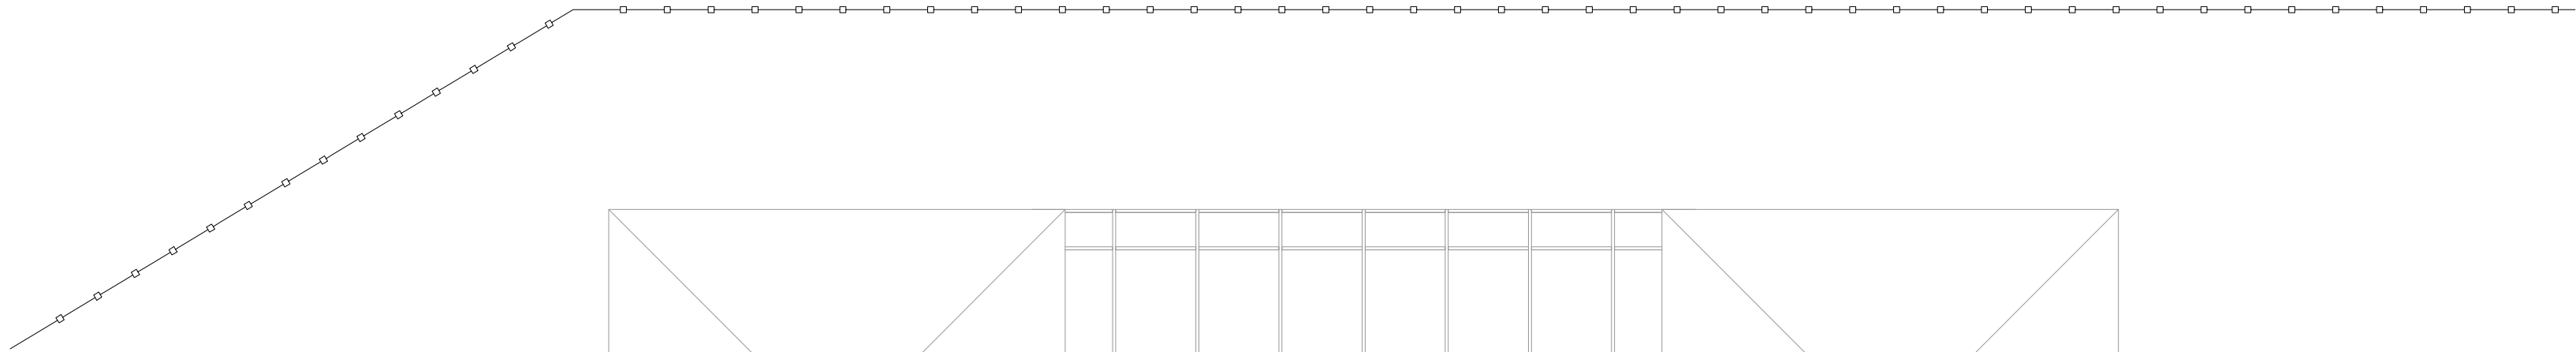



FIRST FLOOR ARTICULATION JOINT PLAN

1:100

ARTICULATION DETAILS

BRICK CONTROL JOINTS AS PER AS4773.2
MASONRY IN SMALL BUILDINGS

ALL WALLS TIES TO BE BUILT IN FIXED TO FRAME
PROGRESSIVELY AS CONSTRUCTION PROCEEDS
SPACED AT EACH SIDE OF EXPANSION JOINTS AT
EACH THIRD COURSE. THE SPACING OF ALL OTHER
TIES AS PER AS7773.2 MASONRY IN SMALL BUILDINGS

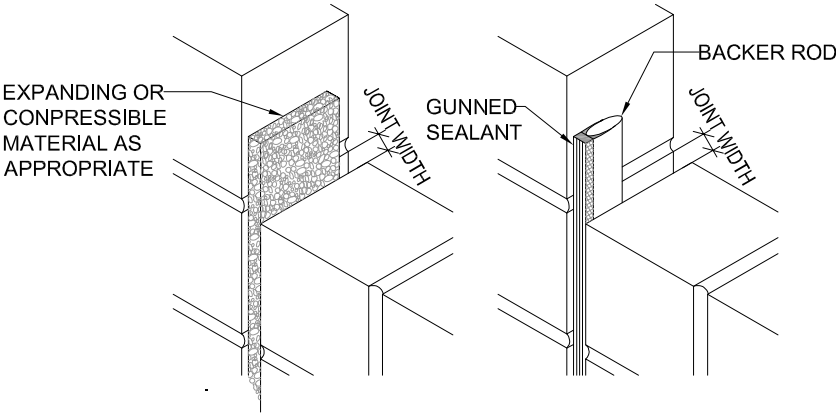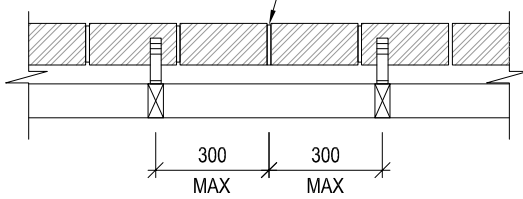

NOTES: WHERE SEALANT IS USED IN A CONTRACTION
JOINT, SEALANT DEPTH SHALL BE NO GREATER THAN
TWO-THIRDS THE JOINT WIDTH

CONTROL JOINT INFILL

1:50

ARTICULATION JOINTS

- ARTICULATION JOINTS SHALL BE PROVIDED IN UNREINFORCED MASONRY WALLS LONGER THAN 5M LONG.
- ARTICULATION JOINTS SHALL NOT BE LOCATED ABOVE GARAGE DOOR OPENINGS HOWEVER ARTICULATION JOINTS IN LINE WITH THE EDGE OF THE OPENING ARE PERMITTED.
- ARTICULATION JOINTS SHALL BE VERTICAL (NOT TOOTHED), FULL HEIGHT OF THE MASONRY, AND FREE OF MORTAR.
- WHERE ARTICULATION JOINTS ARE REQUIRED TO BE WEATHERPROOF OR INSECT-PROOF, THEY SHALL BE CLOSED BY INCORPORATING EITHER A FLEXIBLE SEALANT AND BACKING ROD; OR MATERIAL THAT WILL BOTH EXPAND AND CONTRACT; OR A PROPRIETARY SYSTEM DESIGNED FOR THIS APPLICATION.

Site Class	Masonry wall construction and surface finish	JOINT SPACING, M		
		Up to 4m high, 10mm joints	4-8.5m high, 10mm joints	4-8.5m high, 15mm joints
M, M-D	External face finish masonry	6.0	4.2	6.0
	External rendered and/or painted masonry	5.5	3.9	5.5
	Internal face finish or sheeted masonry	6.0	4.2	6.0
	Internal rendered and/or painted masonry	5.5	3.9	5.5
H1, H1-D	Masonry wall construction and surface finish	5.5	3.9	5.5
	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	5.5	3.9	5.5
	Internal face finish or sheeted masonry	5.0	3.5	5.0
H2, H2-D	External face finish masonry	5.0	3.5	5.0
	External rendered and/or painted masonry	4.5	3.2	4.5
	Internal face finish or sheeted masonry	5.0	3.5	5.0
	Internal rendered and/or painted masonry	4.5	3.2	4.5



HCT ENGINEERING Pty Ltd

PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

- STRUCTURAL & CIVIL ENGINEERS
- COUNCIL DOCUMENTATION
- STEEL DETAILING
- DRAFTING SERVICES

PROPOSED DOUBLE STOREY DWELLING WITH SWIMMING POOL
NO.3 GILL AVENUE, AVOCA BEACH, NSW 2251

© COPY RIGHT, THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

FIRST FL. ARTICULATION JOINT PLAN

SCALE:	SHEET A2	DATE: 20.03.2025	DRN: PD	APP: FN
REV: A		DRG NO.: HCT - 1843 - ST401		

A	ISSUED FOR CC	PD	20.03.2025
ISSUE	AMENDEMENT	BY	DATE