

PROPOSED ALTERATIONS AND ADDITIONS AND SECONDARY DWELLING NO.6 BELLEVUE STREET, BLACKTOWN, NSW 2148

- 1.0GENERAL
- 1.01

TECHNICAL SPECIFICATIONS OR SPECIFIC INSTRUCTIONS ON DRAWINGS TAKE PRECEDENCE OVER THESE NOTE.
- 1.02

THE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTION AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ANY DISCREPANCY SHALL BE PREFERRED TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK. CONSTRUCTION FROM THESE DRAWINGS, AND THEIR ASSOCIATED CONSULTANTS' DRAWINGS, IS NOT TO COMMENCE UNTIL APPROVED BY THE LOCAL AUTHORITIES.
- 1.03

ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE RELEVANT AND CURRENT STANDARD AUSTRALIA CODES AND WITH BY-LAWS AND ORDINANCES OF THE RELEVANT BUILDING AUTHORITIES ACCEPT WHERE VARIED BY THE PROJECT SPECIFICATION.
- 1.04

ALL DIMENSIONS SHOWN SHALL BE VERIFIED BY THE BUILDER ON SITE. ENGINEER'S DRAWINGS SHALL NOT BE SCALED FOR DIMENSIONS.
- 1.05

DURING CONSTRUCTION THE STRUCTURE, AND ANY ASSOCIATED EXCAVATIONS, SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED. TEMPORARY BRACING SHALL BE PROVIDED BY THE BUILDER TO KEEP THE WORKS AND EVACUATIONS STABLE AT ALL TIME.
- 1.06

UNLESS NOTED OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETRES (mm) AND ALL LEVELS ARE IN METRE (m) TO AUSTRALIAN HEIGHT DATUM (AHD).
- 1.07

ALL ABBREVIATIONS ARE IN ACCORDANCE WITH AS 1100. ADDITIONAL ABBREVIATIONS USED AS FOLLOW:
CTRS CENTRES
BTM BOTTOM
NF NEAR FACE
FF FAR FACE
EF EACH FACE
EW EACH WAY
STAG STAGGERED BARS
ALT ALTERNATING BARS
LV LENGTH VARIES
NSOP NOT SHOWN ON PLANT
- UNO

UNLESS NOTED OTHERWISE
- U/S

UNDERSIDE
- GL

GROUND LEVEL
- RL

REDUCED LEVEL
- RFL

FINISHED FLOOR LEVEL
- SSL

STRUCTURAL SLAB LEVEL
- RC

REINFORCED CONCRETE
- MC

MASS CONCRETE
- C/S

BRICKWORK COURSES
- 2.0FOUNDATIONS
- 2.01

FOUNDATIONS HAVE BEEN DESIGNED FOR A TYPICAL BEARING PRESSURE OF 250kPa UNLESS OTHERWISE NOTED
- 2.02

THE FOUNDATION MATERIAL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER FOR THE BEARING CAPACITY BEFORE PLACING ANY MEMBRANE, REINFORCEMENT OR CONCRETE. WHERE NECESSARY, THE FOOTING DESIGN MAY BE ALTERED.
- 2.03

REFER TO GEOTECHNICAL INVESTIGATION REPORT BY GEO ENGINEERING DATED 18/03/2026, REF: GE26-083-DN001.
- 2.04

THE BUILDER SHALL BE RESPONSIBLE FOR MAINTAINING ANY EXCAVATIONS IN A STABLE CONDITION WITHOUT ADVERSELY AFFECTING SURROUNDING PROPERTIES INCLUDING SERVICES. THIS INCLUDES OBTAINING ALL NECESSARY APPROVALS FOR SHORING AND ANCHORING SYSTEMS.
- 2.05

FOOTINGS SHALL BE LOCATED CENTRALLY UNDER WALLS AND COLUMNS UNLESS NOTED OTHERWISE.
- 2.06

FOOTINGS NEAR BOUNDARIES MUST NOT BE LOCATED HIGHER OR LOWER THAN THE FOOTINGS OF ADJACENT PROPERTIES UNLESS APPROVED.
- 2.07

OBTAIN THE APPROVAL OF THE ENGINEER FOR ALL EXCAVATIONS PRIOR TO CONCRETING.
- 2.08

WHERE FOOTINGS ARE OVER-EXCAVATED, FILL OVER-EXCAVATED AREAS WITH BLINDING CONCRETE GRADE SAME AS FOOTING TO A MINIMUM THICKNESS OF 50mm.
- 2.09

KEEP FOOTING CLEAN AND FREE OF LOOSE MATERIAL BEFORE INSPECTION, IMMEDIATELY PRIOR TO POURING OF CONCRETE, AND DURING POURING.
- 2.10

DO NOT EXCEED RISE OF 1000mm IN A RUN OF 3000MM FOR THE LINE OF SLOPE BETWEEN ADJACENT FOOTINGS OR EXCAVATIONS.
- 2.11

DO NOT BACKFILL RETAINING WALLS (OTHER THAN CANTILEVER WALLS) UNTIL FLOOR CONSTRUCTION AT TOP AND BOTTOM IS COMPLETED. ENSURE FREE DRAINING BACKFILL AND DRAINAGE IS IN PLACE.
- 2.12

FOOTINGS ARE TO BE CONSTRUCTED AND BACKFILLED AS SOON AS POSSIBLE FOLLOWING EXCAVATION TO AVOID SOFTENING OR DRYING OUT BY EXPOSURE.
- 2.13

SOON TEST ALL PAD FOOTINGS FOR BEARING PRESSURE GREATER THAN 3500kPa FOR EACH FOOTING. PROVIDE A 50mm DIAMETER PROVING HOLE TO THE DEPTH OF 1.5 TIMES THE MINIMUM WIDTH OR 2.5m, WHICHEVER IS LESS, BELOW THE BASE OF THE FOOTING.
- 3.0SLAB ON GROUND
- 3.01

REMOVE ALL TOP SOIL INCLUDING ROOTS AND ANY OTHER ORGANIC MATTER, STORE TOP SOIL AS REQUIRED.
- 3.02

WHERE SHOWN ON DRAWINGS, BASE AND SAND BUILDING ARE TO BE PLACED AND COMPACTED AS SPECIFIED.
- 3.03

EXCAVATE TO THE REQUIRED FORMATION LEVEL AND PROOF ROLL FORMATION WITH 6 PASSES OF A 10 TONNE SMOOTH WHEELED ROLLER. SOFT AREAS ARE TO BE REMOVED AND REPLACED WITH SUITABLE FILL COMPACTED TO THE DENSITY NOMINATED IN THE SPECIFICATION.
- 3.04

FILL MATERIAL SHALL MEET THE REQUIREMENTS OF THE SPECIFICATION. PLACE IN MAXIMUM 150mm THICK LAYERS MAXIMUM DEPTH OF FILL IS TO BE 750mm UNLESS NOTED OTHERWISE BY THE ENGINEER.
- 3.05

CLAY SUBGRADE FORMATIONS TO BE MAINTAINED AT OPTIMUM MOISTURE CONTENT -0,+3% PRIOR TO COVERING.

- 4.0REINFORCEMENT
- 4.01

REINFORCEMENT SYMBOLS:
S DENOTES GRADE 250S HOT ROLLED DEFORMED BARS TO AS 4671
N DENOTED GRADE D500 N BARS TO AS 4671 GRADE N
SL & RL DENOTES GRADE 250S HOT ROLLED PLAIN BARS TO AS 4671 SQUARE AND RECTANGULAR MESH RESPECTIVELY.
R DENOTES GRADE 250 HOT ROLLED PLAIN BARS TO AS 4671
W DENOTES HARD-DRAWN PLAIN WIRE TO AS 4671
DW DENOTES COLD ROLLED RIBBED WIRE TO AS 4671
- NUMBER OF BARS IN GROUP

BAR GRADE & TYPE

17N20-250

NOMINAL BAR SIZE IN mm

BAR SPACING IN mm
- 4.02

THE FIGURE FOLLOWING THE FABRIC SYMBOL IS REFERENCE NUMBER FOR FABRIC TO AS 4671
- 4.02

ALL REINFORCEMENT SHALL BE FIRMLY SUPPORTED ON MILD STEEL PLASTIC TIPPED CHAIRS, PLASTIC CHAIR OR CONCRETE CHAIRS AT NOT GREATER THAN 1 METRE CENTRES BOTH WAYS. BARS SHALL BE TIED AT ALTERNATIVE INTERSECTIONS. IN EXPOSURE CONDITIONS GREATER THAN B1 USE ONLY PLASTIC CHAIR.
- 4.03

REINFORCEMENT IS REPRESENTED DIAGRAMMATICALLY AND NOT NECESSARILY IN TRUE PROJECTION.
- 4.04

SLAB REINFORCEMENT SHALL EXTEND AT LEAST 75mm ONTO MASONRY SUPPORT WALLS AND 50 PERCENT OF BOTTOM REINFORCEMENT SHALL BE COGGED TO ACHIEVE ANCHORAGE AT SIMPLY SUPPORTED ENDS.
- 4.05

SPICES IN REINFORCEMENT SHALL BE MADE ONLY IN POSITIONS SHOWN OR OTHERWISE APPROVED IN WRITING BY THE ENGINEER. LAPS SHALL BE IN ACCORDANCE THE FOLLOWING:

SLABS / BAND BEAMS / WALLS / STAIRS

TENSION LAP LENGTH (mm)				
BAR	CONCRETE GRADE ≥ 32MPa			
	LESS THAN 300mm CONCRETE CAST BELOW OR VERTICAL BAR		MORE THAN 300mm CONCRETE CAST BELOW BAR	
	SPACING < 150	SPACING ≥ 150	SPACING < 150	SPACING ≥ 150
N12	450	300	600	400
N16	800	550	950	700
N20	1100	800	1400	950
N24	1500	1100	1900	1350
N28	1950	1400	2450	1750
N32	2400	1700	2950	2100
N36	NOT TO BE USED - REFER TO AS 3600 13.2.1 (e)			

SITE BENDING OF DEFORMED REINFORCING BARS SHALL BE DONE WITHOUT HEATING USING MECHANICAL BENDING TOOLS.
WELDING OF REINFORCEMENT SHALL NOT BE PERMITTED UNLESS SHOWN ON THE STRUCTURAL DRAWINGS OR APPROVED BY THE ENGINEER.
JOGGLES TO BARS SHALL BE 1 BAR DIAMETER OVER A LENGTH OF 12 BARS DIAMETERS.
WHERE TRANSVERSE THE BARS ARE NOT SHOWN PROVIDE N12-300 SLICED WHERE NECESSARY AND LAP WITH MAIN BARS 450mm U.N.O.
NOTES: THESE LAP LENGTHS ARE BASED ON THE FOLLOWING MINIMUM COVER TO THE BARS:
SLABS & WALLS : 20mm
BEAMS: 40mm
- 5.0MASONRY NOTES
- 5.01

ALL MASONRY SHALL COMPLY WITH AS3700 AND THE PROJECT SPECIFICATION
- 5.02

CONCRETE MASONRY UNITS TO HAVE A MINIMUM CHARACTERISTIC UNCONFINED STRENGTH OF 20MPa IN ACCORDANCE WITH AS2733.
- 5.03

MASONRY TO BE BEDDED IN FRESHLY PREPARED MORTAR.
(a) CONCRETE BLOCKS:
MORTAR MIX TO BE UNIFORMLY MIXED IN A RATIO OF ONE PART CEMENT ONE PART LIME AND SIX PARTS SAND CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.
(b) CLAY BRICKS:
MORTAR MIX TO BE UNIFORMLY MIXED IN THE RATIO OF ONE PART CEMENT, THREE PARTS SAND AND ONE FOURTH PART LIME CONFORMING TO AS2701. 'BRICKIES LOAM' SHALL NOT BE USED.
- 5.04

GROUT SHALL HAVE A COMPRESSIVE STRENGTH (f_c) OF 20 MPa AT 28 DAYS. A SLUMP OF 125mm IN A 150mm CONE, A MAXIMUM AGGREGATE SIZE OF 10mm AND BE IN ACCORDANCE WITH AS3700
- 5.05

BEDDING OF MASONRY SHALL BE FULL FACE WITH CROSS JOINTS COMPLETELY FILLED, JOINT THICKNESS SHALL NOT EXCEED 12mm
- 5.06

PROVIDE WALL TIES AT 600mm MAXIMUM CENTRES VERTICALLY AND HORIZONTALLY. REFER TO MASONRY DETAILS FOR WALL TIE SETOUT AT OPENINGS
- 5.07

THE CAVITY SHALL NOT EXCEED 100mm AND SHALL NOT BE SMALLER THAN 40mm UNLESS NOTED OTHERWISE. KEEP CAVITY CLEAN AND CLEAR OF OBSTRUCTIONS
- 5.08

ALL WALLS TO BE KEPT STABLE AT ALL STAGES OF CONSTRUCTION AND NOT BE OVER STRESSED AT ANY TIME.
- 5.09

UNLESS NOTED OR SHOWN OTHERWISE ON DRAWINGS THERE ARE TO BE NO CHASES OR RECESSES PERMITTED IN MASONRY WALL WITHOUT THE PRIOR APPROVAL OF HCT ENGINEERING PTY LTD

- 4.0TIMBER NOTES
- T1

AS 1684 IS RELEVANT TO DOMESTIC CONSTRUCTION IN SHELTERED LOCATIONS
- T2

SOFTWOOD MINIMUM GRADE F7 U.N.O.
HARDWOOD MINIMUM GRADE F11 U.N.O.
- T3

EXTERNAL TIMBER TO BE EITHER HARDWOOD
DURABILITY CLASS I OR II OR IMPREGNATED GRADE F7, PRESSURE TREATED TO AS 1684 AND RE-DRILLED PRIOR TO USE. SUPPLEMENTARY TREATMENT SHALL BE APPLIED TO ALL CUT SURFACES, PROVIDE DOCUMENTATION.
- T4

ALL BOLTS IN TIMBER CONSTRUCTION TO BE MIN. M16 U.N.O. BOLT HOLES TO BE DRILLED EXACT SIZE. WASHERS UNDER HEADS AND NUTS TO BE AT LEAST 2.5 TIMES BOLT DIAMETER
- T5

FINISHED TIMBER SIZES
SEASONED SOFTWOOD +5,-0mm
UNSEASONED SOFTWOOD F7 +3, -3mm; F7+2, -4mm
SEASONED HARDWOOD +2,-0mm
UNSEASONED HARDWOOD -3,-3mm
(SEE ALSO CLAUSE 1.6.2 IN AS 2082)
- T6

ALL TIMBER JOINTS AND NOTCHES TO BE 100mm MINIMUM FROM LOOSE KNOTS. SEVERE SLOPING GRAIN, GUM VEINS OR OTHER MINOR DEFECTS.
- T7

BLOCKING IS NOT REQUIRED FOR JOISTS SPANNING LESS THAN 3m
• FOR JOISTS SPANNING GREATER THAN 3m AND LESS THAN 4.2m PROVIDE ONE ROW OF BLOCKING MID-SPAN
• FOR JOISTS SPANNING GREATER THAN 3.2m AND UP TO 6.0m PROVIDE TWO ROWS OF BLOCKING AT 1/3 SPAN
• FOR DEEP JOISTED FLOORS WHERE A CONTINUOUS TRIMMING JOIST IS NOT PROVIDED AT END OF JOISTS. BLOCKING IS REQUIRED AT 1800 MAXIMUM CENTERS. (REFER TO AS 1684)

WALL FRAMING SUMMARY			
TYPE	HEIGHT	DETAIL	
LOAD BEARING WALL	2700 TO 3000	EXTERNAL / INTERNAL LOAD BEARING WALL	
		90x45 'MGP10' STUDS @450 MAX CTRS.	
		2 ROWS NOGGINGS @1350 MAX CTRS.	
		STUDS MUST BE CONTINUOUS TO UPPER ROOF LEVEL	
NON-LOAD BEARING WALL	2700 TO 3000	INTERNAL NON-LOAD BEARING WALL	
		90x45 'MGP10' STUDS @600 MAX CTRS.	
		SINGLE 45 THICK ' MGP10' PLATE TOP AND BOTTOM	
TOP @ BOTTOM PLATES		ALL EXTERNAL / INTERNAL LOAD BEARING STUD ALLS SHALL HAVE TWO (2) 35 THICK 'MGP10' TOP PLATE AND ONE (1) 45 THICK 'MGP10' BOTTOM PLATE. NOGGINS AT 1350 MAX CTRS WITH MIN 2 ROWS.	
		ALL INTERNAL NON-LOAD BEARING STUDS WALLS SHALL HAVE ONE (1) 45 THICK 'MGP10' PLATE TOP AND BOTTOM.	
ROOF BATTENS		45x70 'MGP10' @600 CTRS OR TOP HAT 40mm.	
WALL FRAMING CONNECTION			
SINGLE/ UPPER STOREY	STUDS TO BOTTOM/ TOP PLATES	G.I.S. 2/2. 80 NAILS EACH END OF FRAMING ANCHORS x 1 WITH 4/2.80 NAILS EACH LEG	
	BOTTOM PLATES TO SLAB	M10 CAST IN BOLT 1.2M MAX CTRS. (180 MIN. EMBEDMENT)	
	BOTTOM PLATES TO FLOOR FRAME	2/NO. 14 TYPE 17 SCREWS 900 MAX. CTRS. (40MIN. EMBEDMENT INTO JOIST)	

- 4.0STRUCTURAL STEEL WORK NOTES
- S1

ALL MATERIALS, WORKMANSHIP, FABRICATION AND ERECTION SHALL COMPLY WITH THE REQUIREMENTS OF AS4100, AS1538 AND THE SPECIFICATION
- S2

UNLESS SHOWN OTHERWISE, ALL STEEL SHALL BE IN ACCORDANCE WITH AS1204 GRADE 300. ALL STELL HOLLOW SECTIONS SHALL BE GRADE 350 U.N.O. AND SHALL BE IN ACCORDANCE WITH AS1163. ALL PRESSED METAL PURLINS AND GIRTS SHALL BE GRADE 450 STEEL IN ACCORDANCE WITH AS 1538
- S3

UNLESS SHOWN OTHERWISE ON THE DRAWINGS, ALL CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING MINIMUM REQUIREMENTS:
ALL WELDS SHALL BE 6mm CONTINUOUS FILLET WELDS ALL ROUND,
"SP" GRADE WITH E48 ELECTRODE
ALL BOLTS SHALL BE M20-8.8/S, WITH A MINIMUM OF 2 BOLTS PER CONNECTION
PURLIN BOLTS TO BE M12-4.6/S WITH A MINIMUM OF 2 BOLTS PER PURLIN END
ALL GUSSET AND CLEAT PLATES SHALL BE 10mm THICK (U.N.O)
ALL CAP PLATES SHALL BE 10mm THICK (U.N.O)
ALL BASE PLATES SHALL BE 10mm THICK (U.N.O)
- S4

BOLT DESIGNATION:
4.8/S REFERS TO COMMERCIAL BOLTS OF STRENGTH GRADE 4.6 TO AS1111 TIGHTENED TO A SNUG TIGHT CONDITION
8.8/S REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 TIGHTENED TO A SNUG TIGHT CONDITION
8.8/TB REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS A BEARING JOINT
8.8/TF REFERS TO HIGH STRENGTH STRUCTURAL BOLTS OF GRADE 8.8 TO AS1252 FULLY TENSIONED TO AS4100 AS A FRICTION JOINT
- S5

HIGH STRENGTH BOLTED JOINTS SHALL BE IN ACCORDANCE WITH AS1511. THE SPECIFIED BOLT TENSION SHALL BE OBTAINED BY USE OF THE "PART TURN" METHOD OF TIGHTENING.
- S6

ALL WELDS SHALL BE SP (SPECIAL PURPOSE) IN ACCORDANCE WITH AS1554. ALL ELECTRODES SHALL BE CLASS E48. ALL BUTT WELDS SHALL BE FULL STRENGTH COMPLETE PENETRATION WELDS.
- S7

SUBSTITUTIONS FOR STEEL SECTIONS SHOWN ON DRAWINGS SHALL NOT BE MADE WITHOUT THE APPROVAL OF THE ENGINEER
- S8

ALL STEELWORK BELOW GROUND OR FINISHED SURFACE LEVEL IS TO BE ENCASED IN 75mm MIN. CONCRETE ALL ROUND
- S9

ALL STEELWORK, EXCEPT THAT WHICH IS TO BE CONCRETE ENCASED, FIRE SPRAYED OR CONTACT SURFACES OF FRICTION TYPE JOINTS, SHALL BE SURFACE CLEANED AND PAINTED IN ACCORDANCE WITH THE SPECIFICATION.
- S10

STEELWORK THAT IS CONCRETE ENCASED, FIRE SPAYED OR FACING SURFACES OF FRICTION TYPE JOINTS SHALL BE LEFT UNPAINTED AND FREE FROM SCALE
- S11

THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND DRILL AL HOLES NECESSARY FOR FIXING STEEL, TIMBER AND OTHER ELEMENTS TO STEEL WHETHER OR NOT DETAILED ON THE DRAWINGS
- S12

THE FABRICATION AND ERECTION OF THE STRUCTURAL STEELWORK SHALL BE SUPERVISED BY QUALIFIED PERSONNEL EXPERIENCED IN SUCH SUPERVISION TO ENSURE THAT ALL REQUIREMENTS OF THE DESIGN ARE MET. DETAILS OF ERECTION SEQUENCE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ERECTION
- S13

COLUMNS AND MULLIONS SHALL HAVE THEIR BASE PLATES FULLY GROUTED IN ACCORDANCE WITH THE SPECIFICATIONS AFTER PLUMBING AND LEVELING ON STEEL PACKERS
- S14

THREE SETS OF STEELWORK SHOP DETAIL DRAWINGS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF ANY FABRICATION. THE CHECK SHALL NOT COVER LAYOUT AND MEMBER DIMENSIONS.
- S15

CONCRETE ENCASED STRUCTURAL STEELWORK TO BE ENCLOSED BY F41 MESH PLACED CLEAR OF STEELWORK, ENCASING TO PROVIDE 50mm MIN. COVER TO STEELWORK U.N.O. ON THE DRAWINGS. COVER TO MESH TO BE 20mm MIN. MAXIMUM AGGREGATE SIZE = 10mm, CONCRETE f_c≈20MPa.
- S16

UNLESS SPECIFIED OTHERWISE, STEELWORK SHALL BE PREPARED TO CLASS 2.5 FINISH IN ACCORDANCE WITH AS1627.4 AND GIVE TWO COATS OF ZINC PHOSPHATE TO A TOTAL DRY FILM THICKNESS OF 70 MICRONS.

SUMMARY DESIGN	
SITE CLASSIFICATION	CLASS 'P' (H1)
SOIL CLASSIFICATION	'CLAY'
WIND CLASSIFICATION	AS4055 N2
ROOF CONSTRUCTION	SHEET ROOF
ROOF FRAME	ROOF TRUSSES BY OTHERS
ROOF LOAD	40KG/M2 FOR SHEET ROOF
GROUND FLOOR WALL	CLADDED FRAMED WALL
GROUND FLOOR WALL LOAD	EX.WALL = 2.03 kN/m
	INT.WALL = 0.99 kN/m
GROUND FLOOR SLAB/FOOTING SYSTEM	TIMBER BEARER AND JOISTS

DRAWING LIST	
ST000	GENERAL NOTES
ST100	FOOTING & SLAB PLAN
ST101	FOOTING TYPICAL DETAIL
ST200	LINTEL PLAN AND ROOF PLAN
ST201	BEAM & POST TYPICAL DETAIL
ST300	GROUND FLOOR BRACING PLAN



HCT ENGINEERING Pty Ltd

STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Waremba NSW 2046

E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

© COPYRIGHT: THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT (S) ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

PROJECT: PROPOSED ALTERATIONS AND ADDITIONS AND SECONDARY DWELLING NO.6 BELLEVUE STREET, BLACKTOWN, NSW 2148			
DRG. TITLE: GENERAL NOTES			
SHEET A3	DRG No.	HCT - 2697 - ST000	APP: FN

A	ISSUED FOR CDC	TT	13.05.2026
ISSUE	AMENDEMENT	BY	DATE

POST / BEAM / JOIST SCHEDULE		
MARK	DESCRIPTION	SIZE
TB1	TIMBER BEAM	100x75 'RED ALERT'
TJ1	TIMBER JOIST	100x45 'RED ALERT' @450mm CTRS MAX.


GROUND FLOOR SLAB PLAN

- 1:100
- ALL TIMBER ROOF IN ACCORDANCE TO AS 1684
 - APPLY CORROSION RESISTANCE PAINT TO ALL EXPOSED STEEL MEMBER
 - REFER TO ARCHITECTURAL DRAWINGS FOR LEVELS, RL's, STEPS AND FOLDS
 - FOR STRUCTURAL NOTES REFER TO DRAWING ST-000

LEGEND	
ITEM	DESCRIPTION
	Ø450mm MASS CONCRETE PIER FOUNDED ON HARD CLAY OR SHALE WITH BRICK PIER + ANT CAP TO SUPPORT TIMBER FLOOR FRAME
	Ø450mm MASS CONCRETE PIER FOUNDED ON HARD CLAY OR SHALE WITH TIMBER POST

CONCRETE QUALITY				
ELEMENT	SLUMP	AGGREGATE (MAX.SIZE)	CEMENT TYPE	f _c
SLAB ON GROUND	80mm	20mm	A	32MPa
FOOTING	80mm	20mm	A	32MPa
COLUMN	80mm	20mm	A	32MPa
SUSPENDE SLAB	80mm	20mm	A	32MPa
PIER	80mm	20mm	A	32MPa
REINFORCEMENT COVER SCHEDULE				
MEMBER	COVER (mm)			EXPOSURE CLASSIFICATION
	TOP	BTM	SIDES	
INTERNAL SLABS	20mm	25mm	20mm	A1
EXTERNAL SLABS	45mm	45mm	45mm	B1

*WPM : WATER PROOFING MEMBRANE

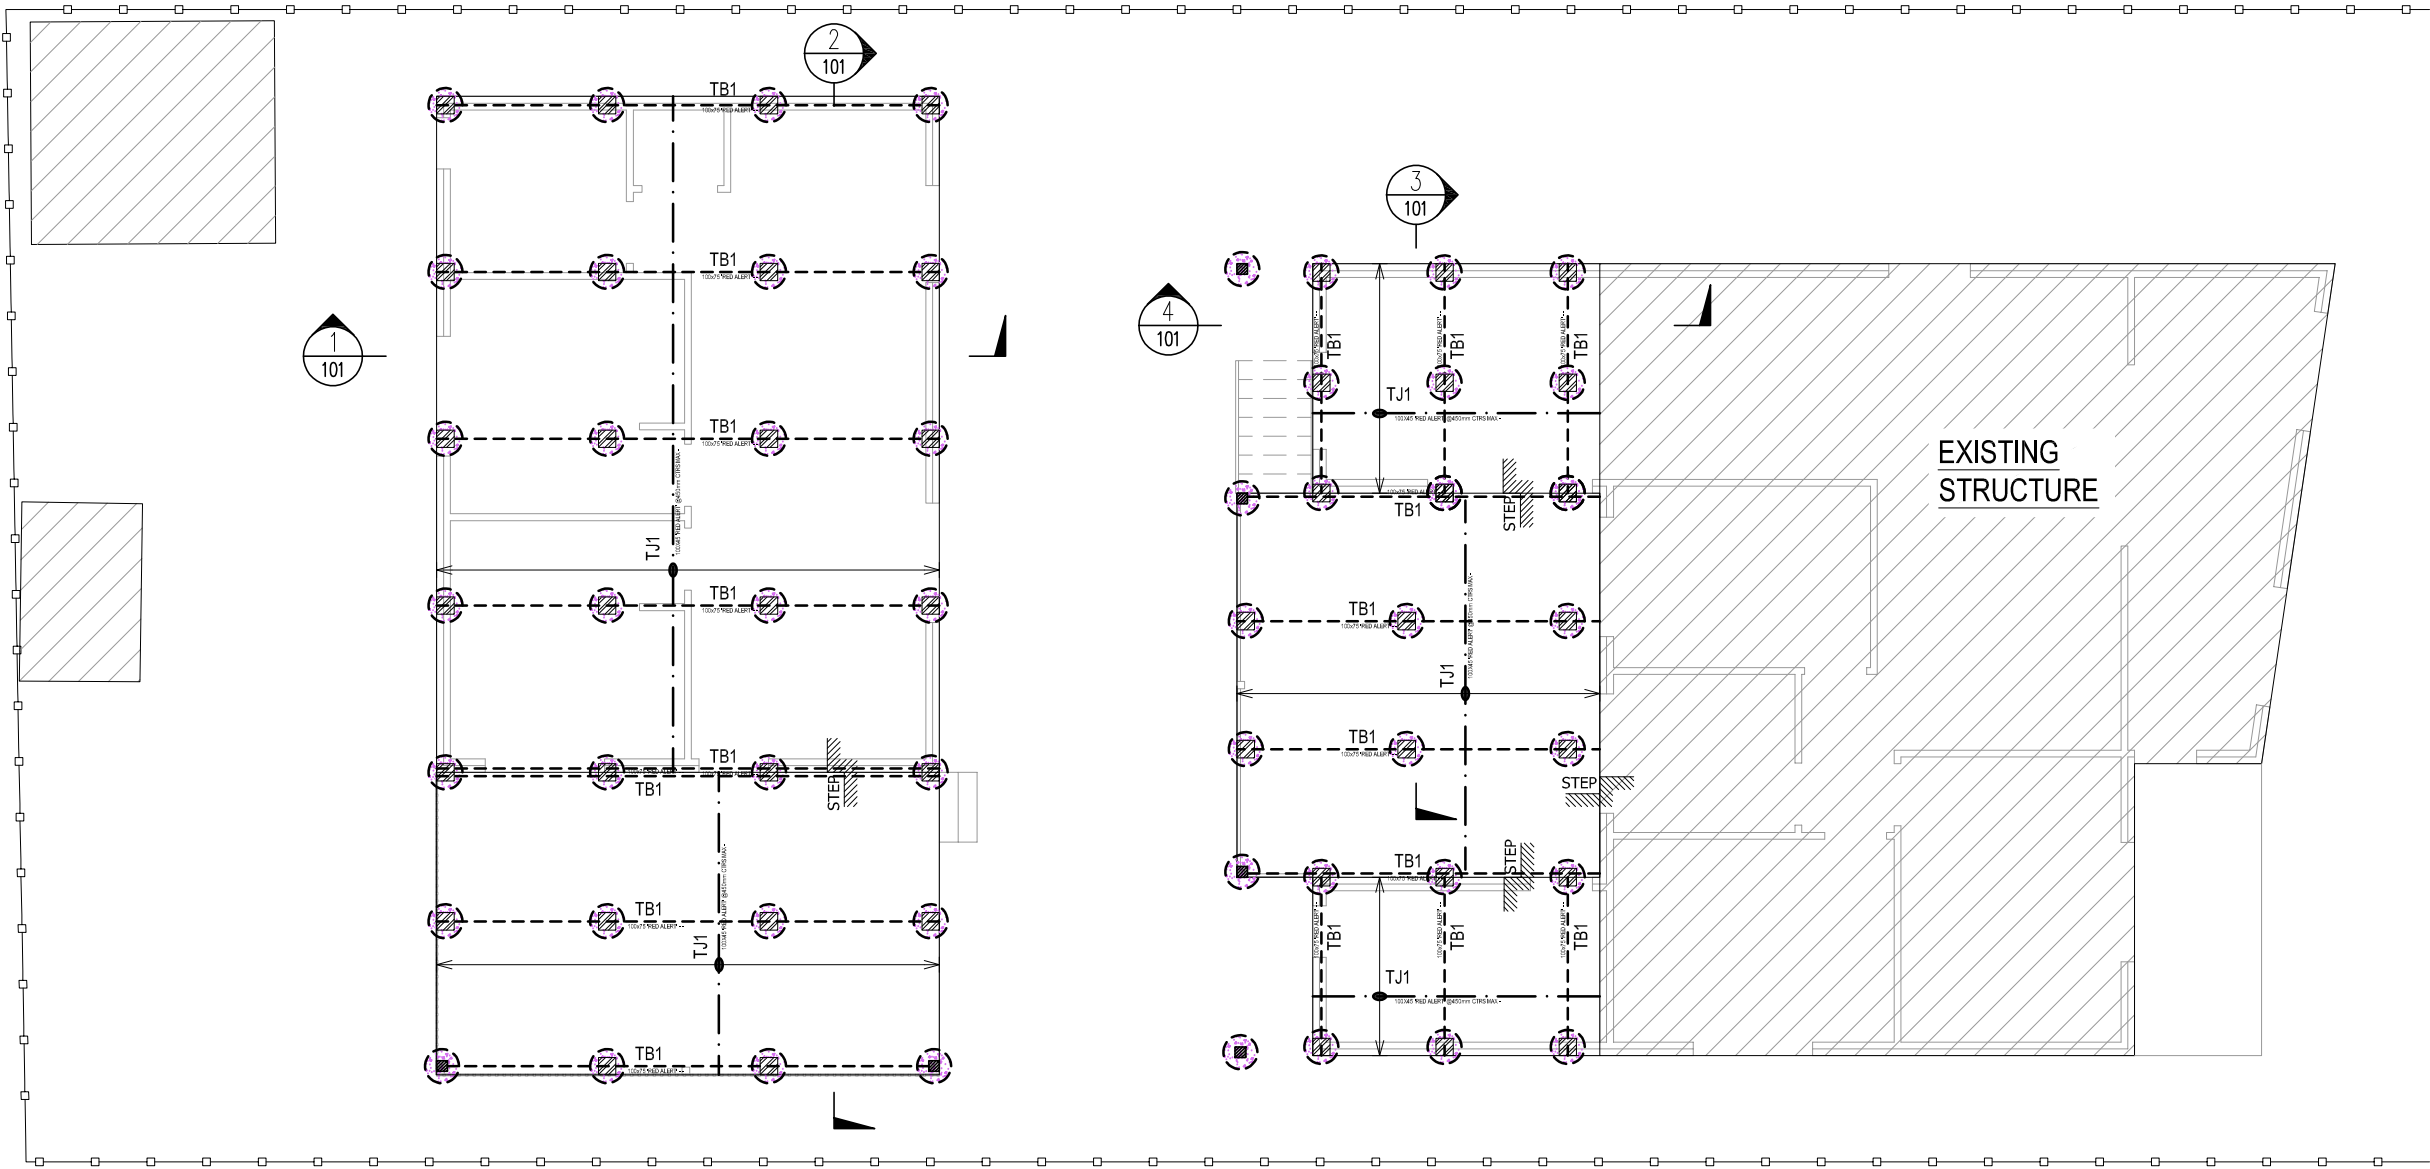


HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

© COPYRIGHT: THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd.

PROJECT: PROPOSED ALTERATIONS AND ADDITIONS AND SECONDARY DWELLING NO.6 BELLEVUE STREET, BLACKTOWN, NSW 2148			
DRG. TITLE: FOOTING & SLAB PLAN			
SHEET A3	DRG No.	HCT - 2697 - ST100	APP: FN


A	ISSUED FOR CDC	TT	13.05.2026
ISSUE	AMENDEMENT	BY	DATE

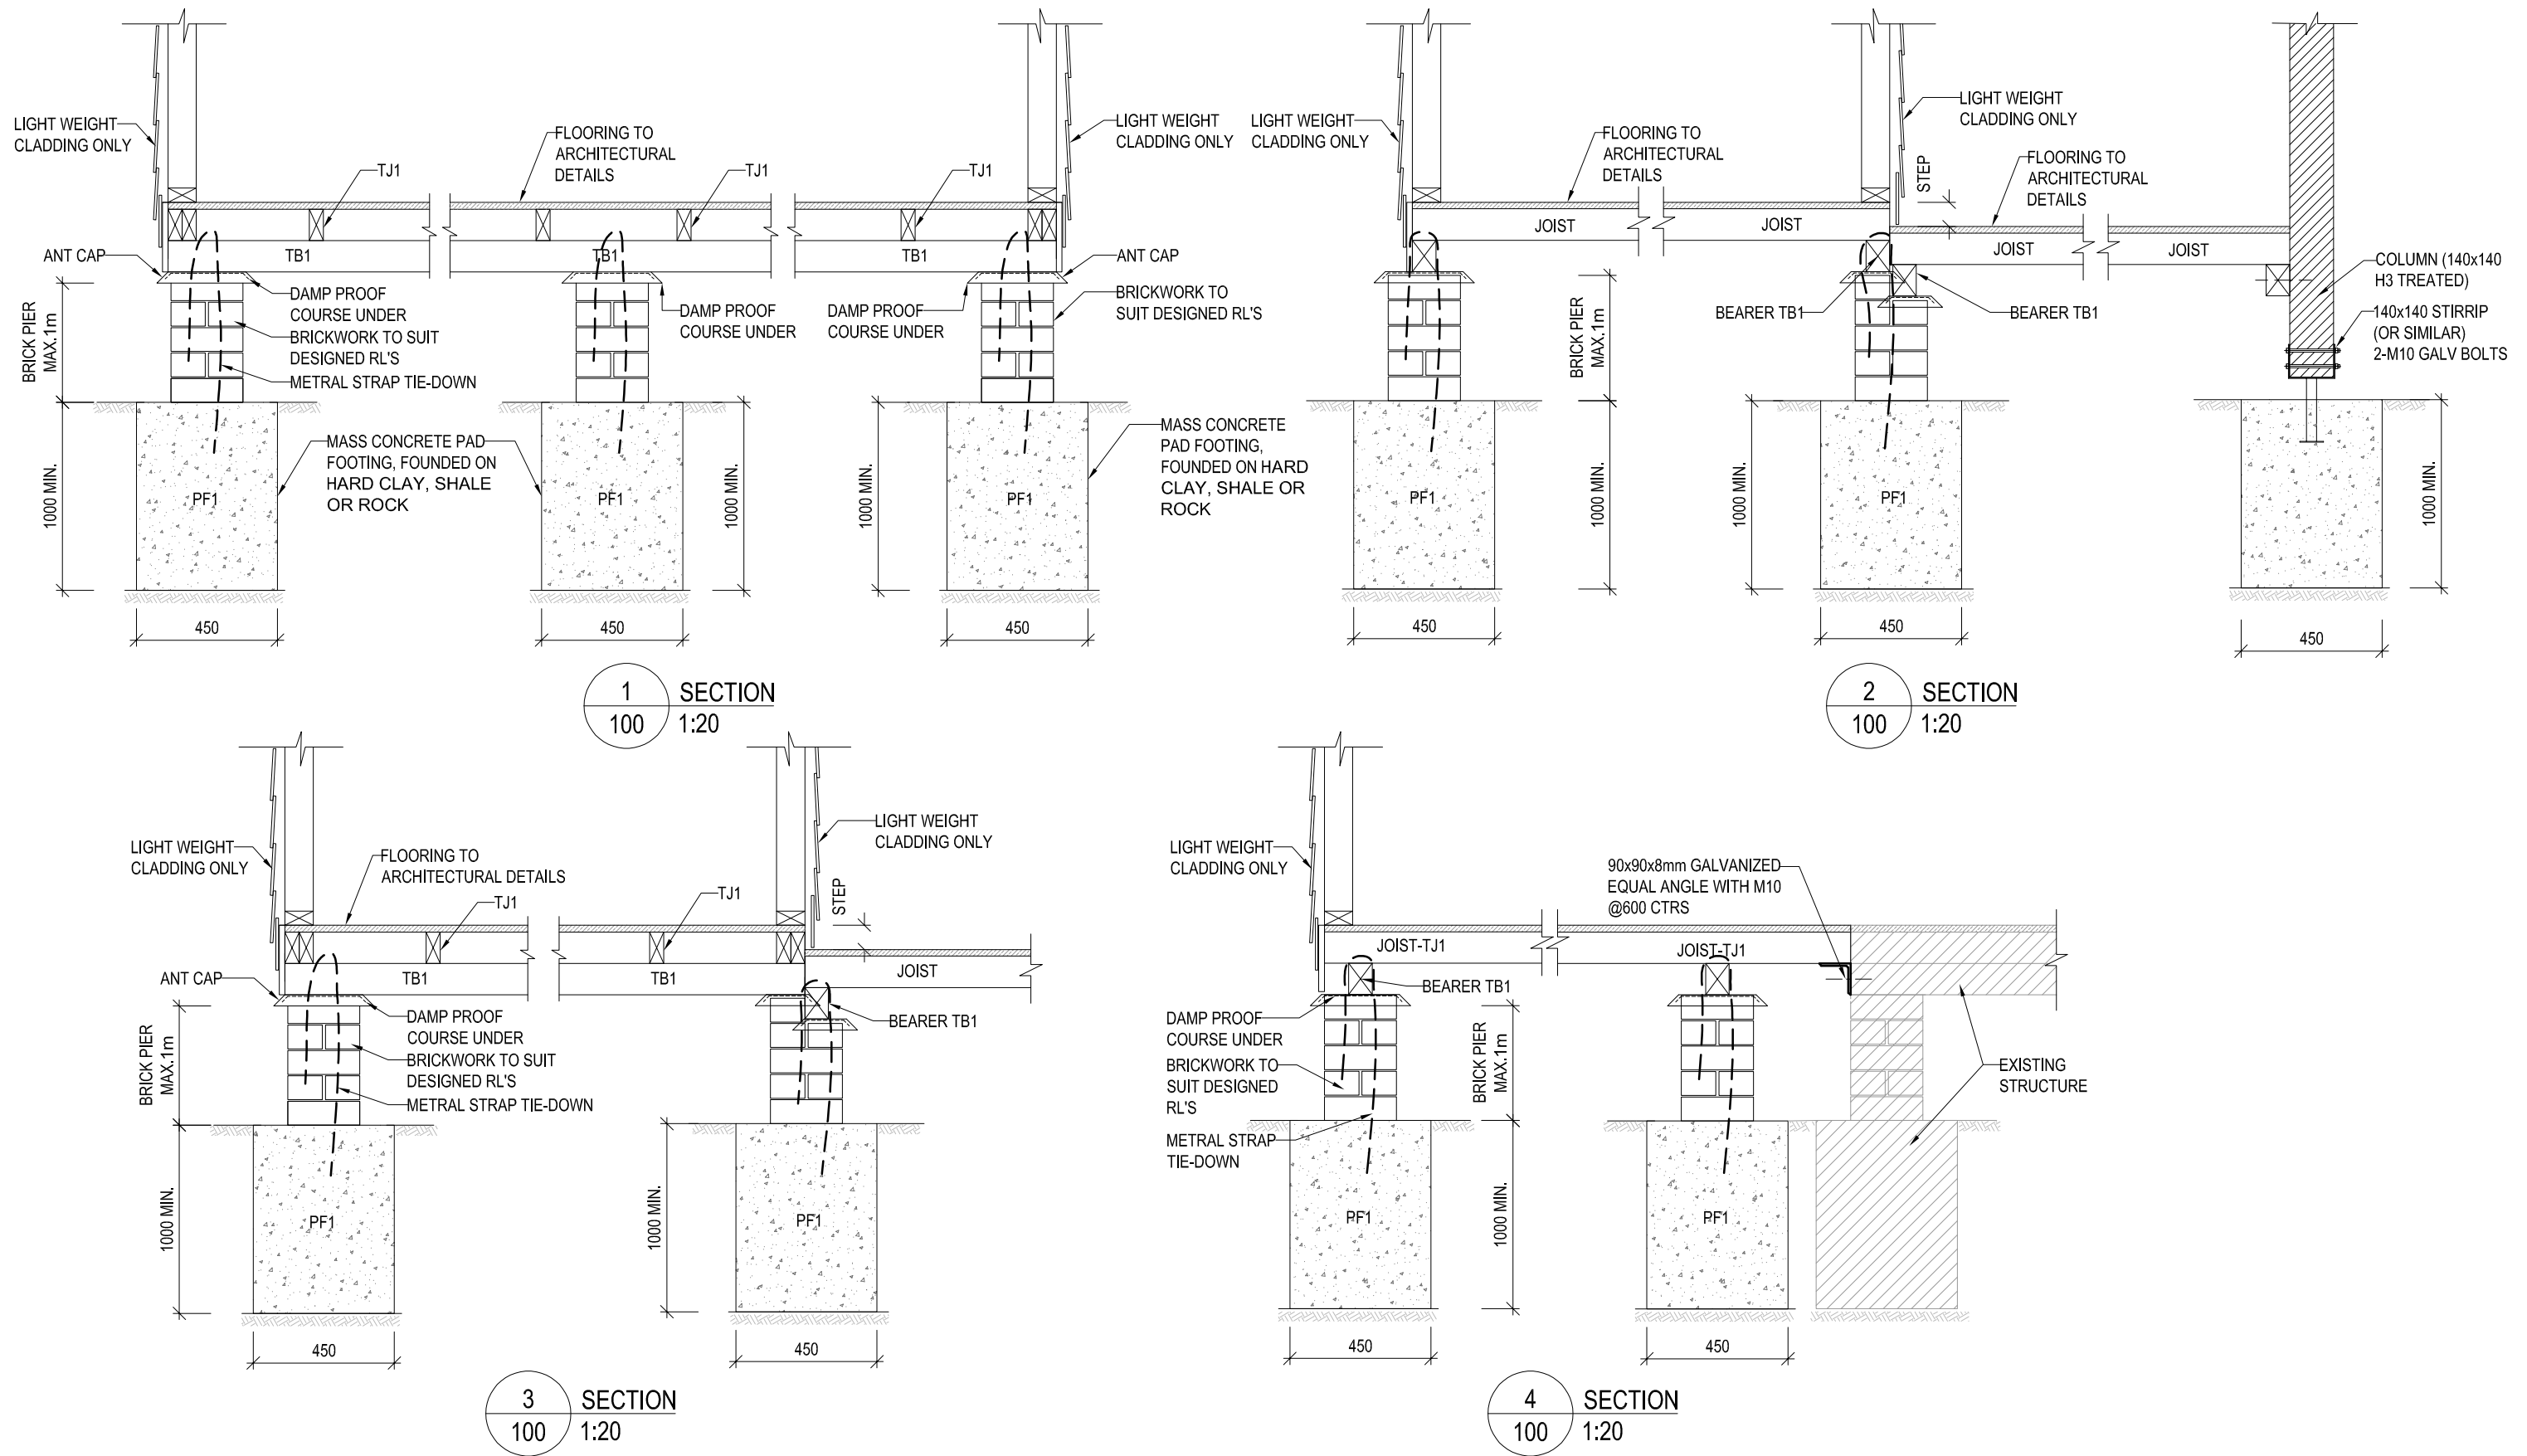

A	ISSUED FOR CDC	TT	13.05.2026
ISSUE	AMENDEMENT	BY	DATE


POST / BEAM / JOIST SCHEDULE					
MARK	DESCRIPTION	INTERNAL SKIN	EXTERNAL SKIN	EST.	QTY.
LG1	LINTEL G	2/140x45 'MGP10'		1.0m	1
LG2	LINTEL G	2/140x45 'MGP10'		1.1m	1
LG3	LINTEL G	2/140x45 'MGP10'		1.6m	1
LG4	LINTEL G	2/190x45 'MGP10'		2.5m	1
LG5	LINTEL G	2/140x45 'MGP10'		1.0m	1
LG6	LINTEL G	2/140x45 'MGP10'		1.3m	1
LG7	LINTEL G	2/140x45 'MGP10'		1.6m	1
LG8-LG10	LINTEL G	2/140x45 'MGP10'		1.9m	3
TTT1-TTT8	TIMBER POST	140x140 H3 TREATED		-	8

THE INDICATED BEAM LENGTHS SERVE AS REFERENCE POINTS ONLY. BEFORE PLACING AN ORDER, IT IS IMPERATIVE TO CROSS-VERIFY THE FINAL TAKE-OFF LENGTH WITH THE WINDOW AND DOOR SCHEDULE, AS WELL AS ON-SITE MEASUREMENTS.

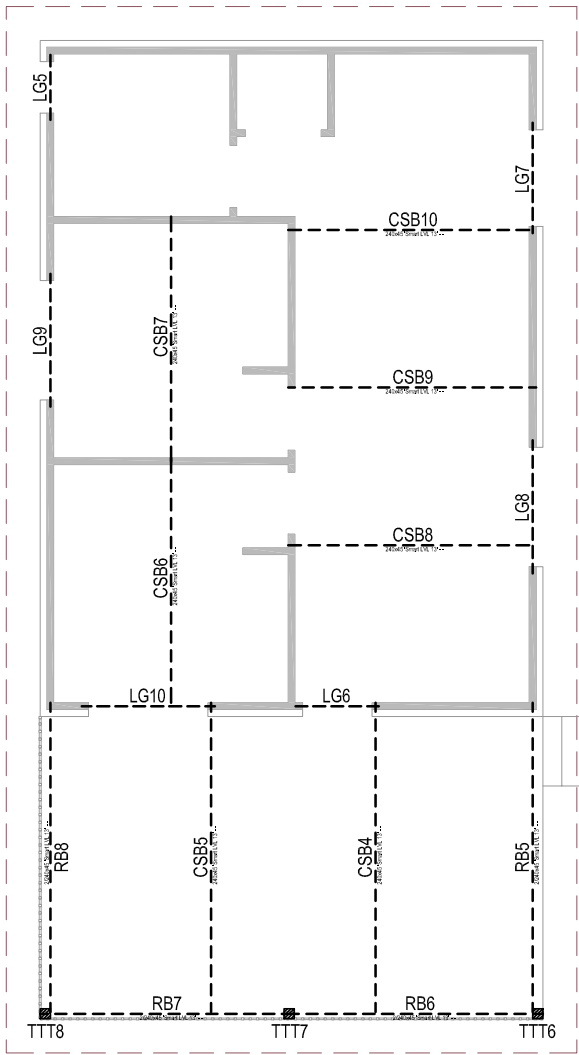


LEGEND			
ITEM	DESCRIPTION		
	DENOTES LOAD BEARING WALL BELOW		
POST / BEAM / JOIST SCHEDULE			
MARK	DESCRIPTION	SIZE	QTY.
TYP. RAFTERS		90x45 'MGP10' @600mm CTRS MAX	-
RB1-RB4	RAFTER BEAM	2/200x45 'Smart LVL 13'	4
RB5-RB8	RAFTER BEAM	2/240x45 'Smart LVL 13'	4
CSB1	COUNTER/ STRUTTING BEAM	2/300x45 'Smart LVL 13'	1
CSB2 - CSB10		240x45 'Smart LVL 13'	9

THE ABOVE MEMBER SIZES ARE SUGGESTIONS ONLY BASED ON THE ASSUMPTION THAT THESE MEMBER SPANS NO MORE THAN 2.0M CONTINUOUSLY AND STRUTTING FRAMES ARE PROVIDED UNDERNEATH TO BREAK THE LARGE SPAN INTO SHORTER SPANS. THE CARPENTER/CONTRACTOR NEEDS TO TAKE DUE DILIGENCE TO DOUBLE CHECK FRAMING CONSTRUCTION WITH AS 1684.4 BEFORE ORDERING MATERIAL.

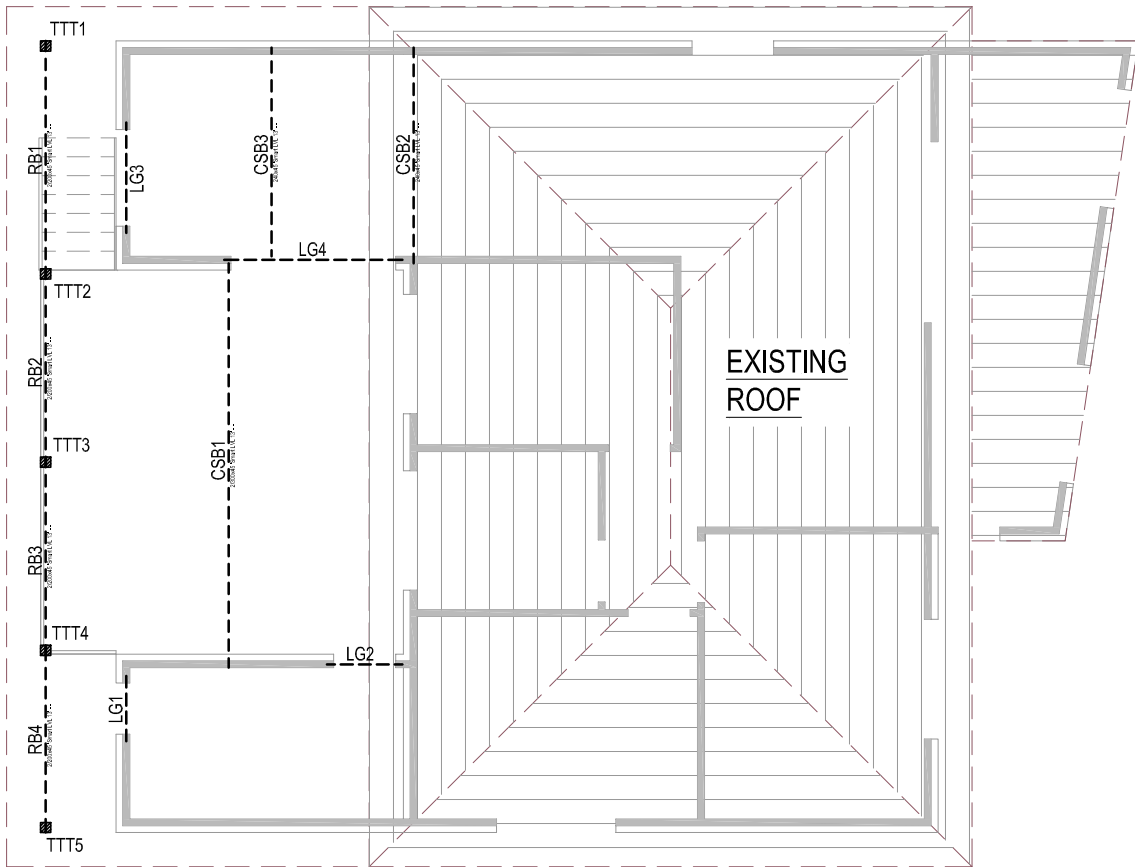


LINTEL PLAN AND ROOF PLAN

1:100

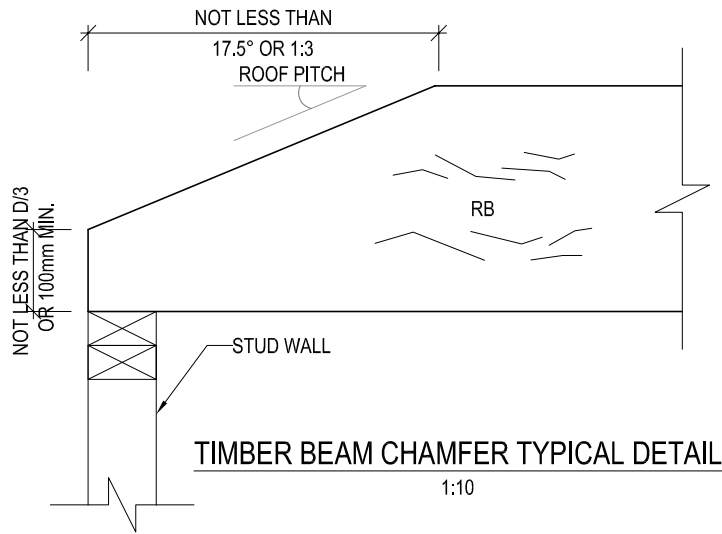


TIMBER BEAM CHAMFER TYPICAL DETAIL

1:10

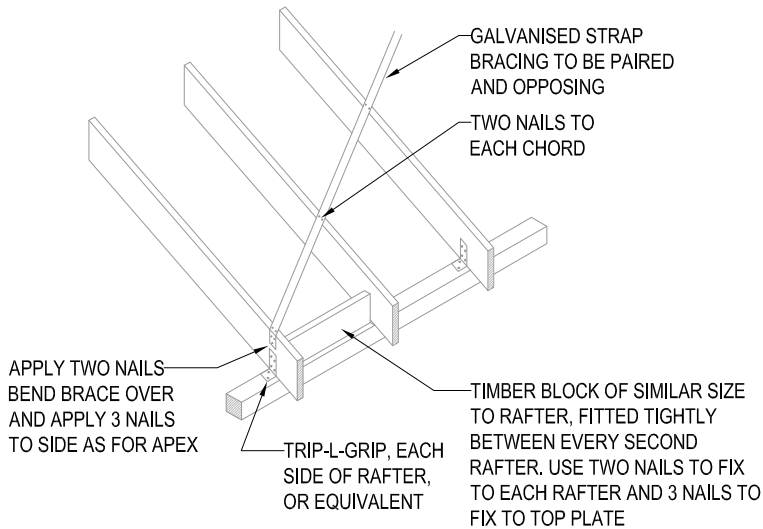

TYPICAL ROOF BRACING DETAIL

NTS

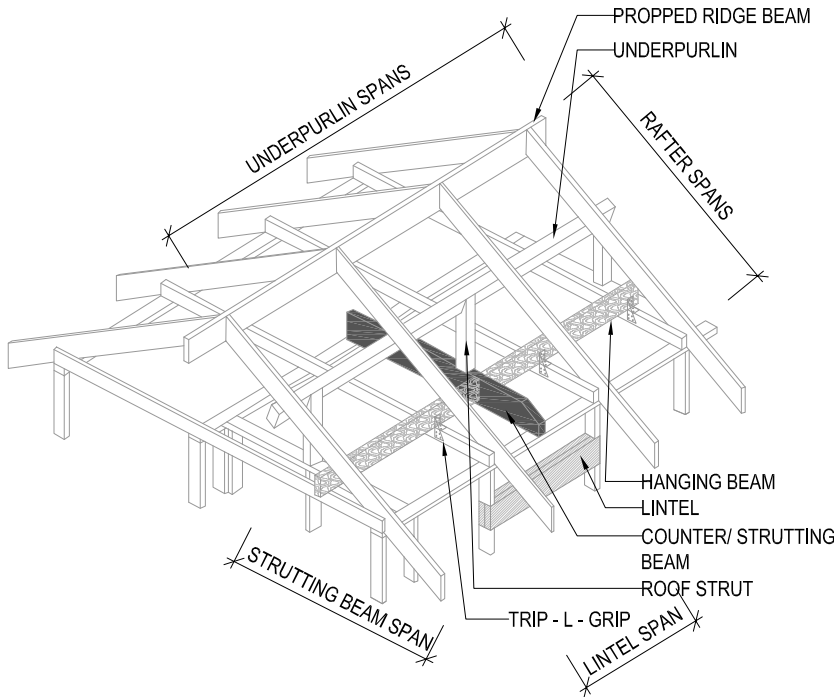

TYPICAL ROOF FRAMING CONSTRUCTION DETAIL
(FOR TERMINOLOGY REFERENCE ONLY)

PLEASE NOTE: THIS DIAGRAM IS INTENDED TO ILLUSTRATE STANDARD ROOF FRAMING TERMINOLOGY AND MAY NOT PRECISELY REFLECT THE SPECIFIC ROOF CONFIGURATION OF THE SUBJECT PROJECT. HOWEVER, THE NAMES AND STRUCTURAL ROLES OF THE ROOF MEMBERS DEPICTED ARE CONSISTENT WITH THOSE COMMONLY USED IN ROOF CONSTRUCTION.



HCT ENGINEERING Pty Ltd

STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Waremba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

© COPYRIGHT: THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

PROJECT:

PROPOSED ALTERATIONS AND ADDITIONS
AND SECONDARY DWELLING
NO.6 BELLEVUE STREET, BLACKTOWN, NSW 2148

DRG. TITLE:

LINTEL PLAN AND ROOF PLAN



SHEET A3

DRG No.

HCT - 2697 - ST200


APP: FN

A	ISSUED FOR CDC	TT	13.05.2026
ISSUE	AMENDEMENT	BY	DATE

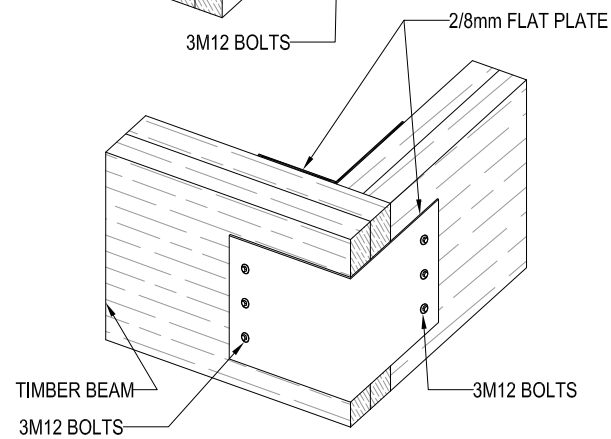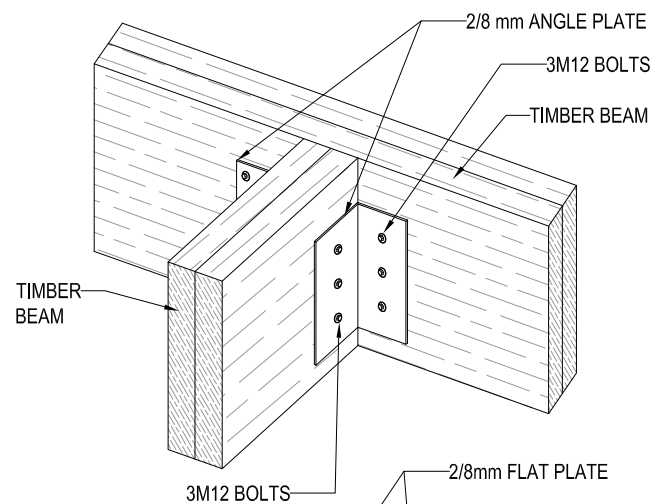



TIMBER BEAM CONNECTION DETAILS

1:20

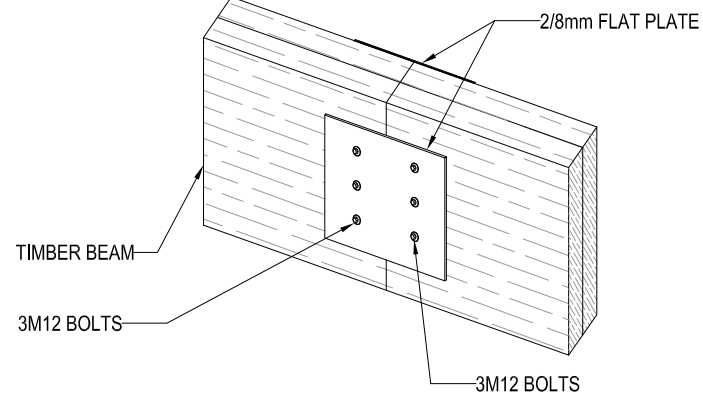


DOUBLE TIMBER BEAM DETAILS

1:20

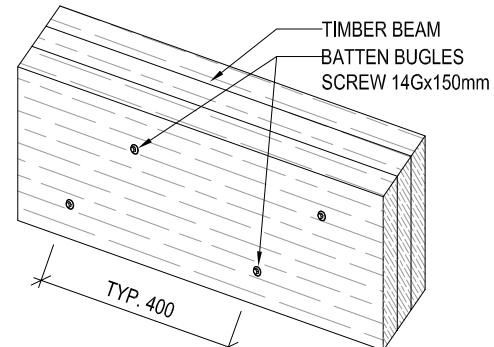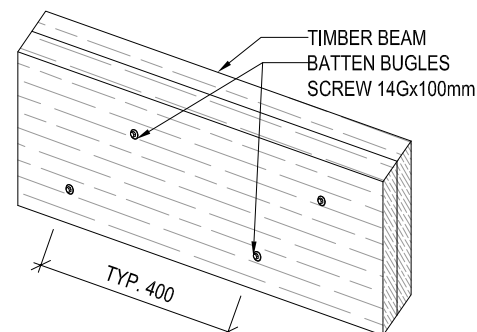


TRIPLE TIMBER BEAM DETAILS

1:20

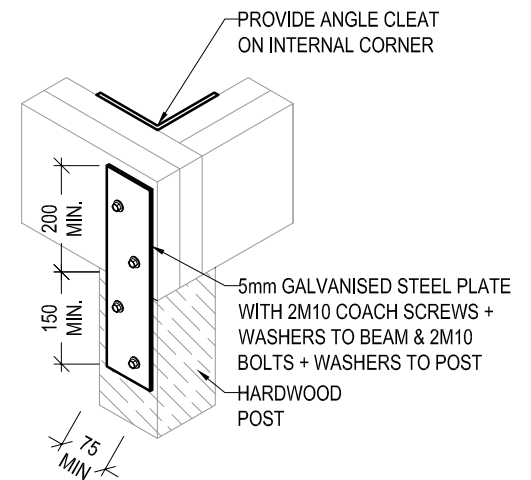


TIMBER BEAM TO CORNER POST CONNECTION DETAIL


NTS

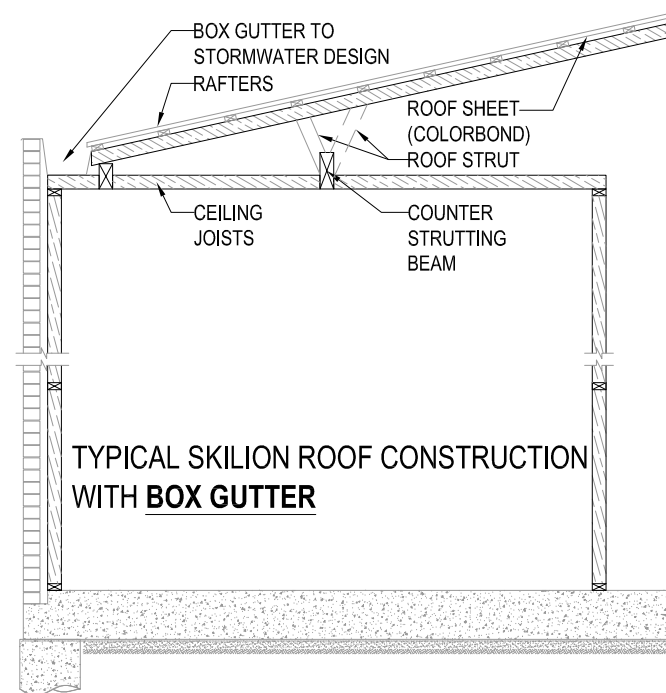

TYPICAL SKILLION ROOF CONSTRUCTION WITH BOX GUTTER

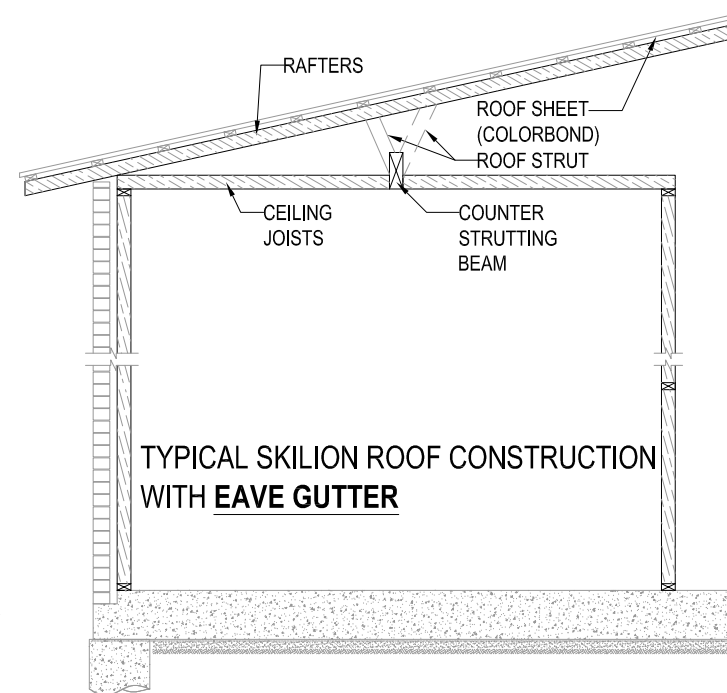


TYPICAL SKILLION ROOF CONSTRUCTION WITH EAVE GUTTER

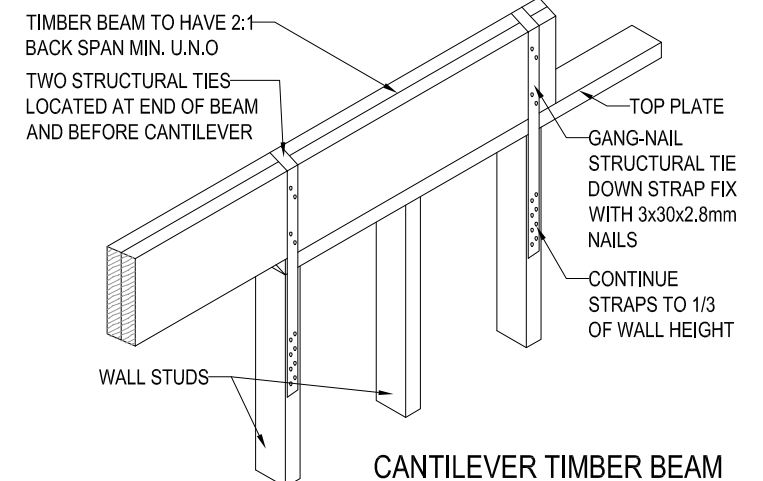


CANTILEVER TIMBER BEAM TO STUD WALL CONNECTION

NTS

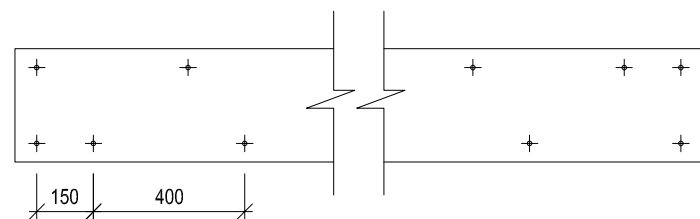


BEAM LAMINATING DETAIL BOLT HOLES PATTERN

1:20

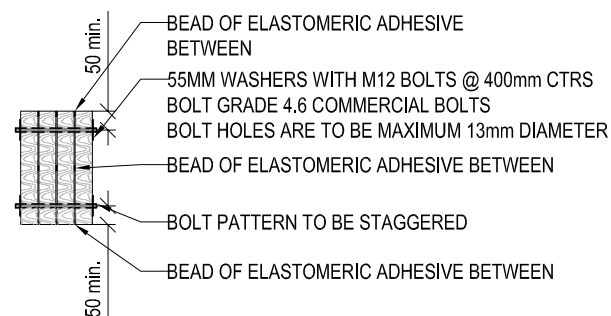


BEAM LAMINATING DETAIL SECTION VIEW


1:20

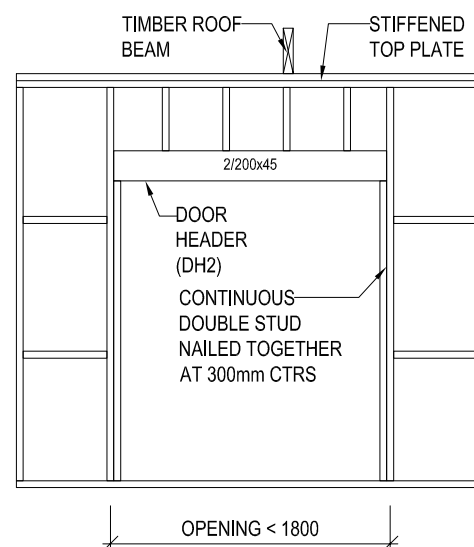

OPENING < 1800

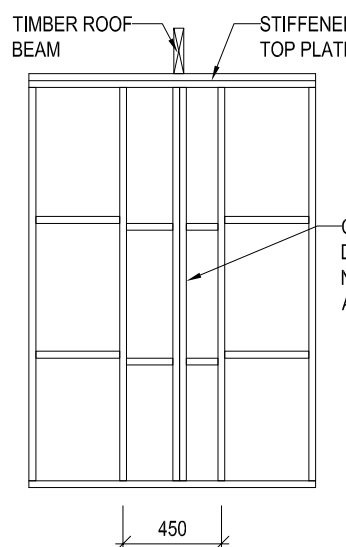


450

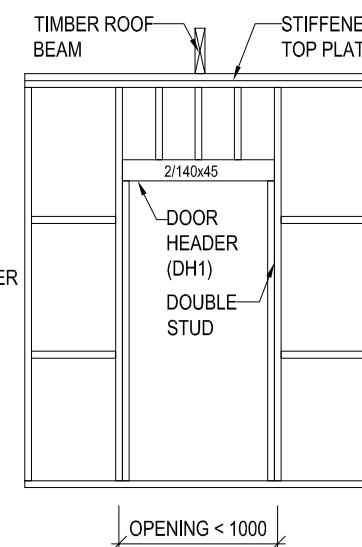


OPENING < 1000

TYPICAL LOAD-BEARING WALL SET-OUT

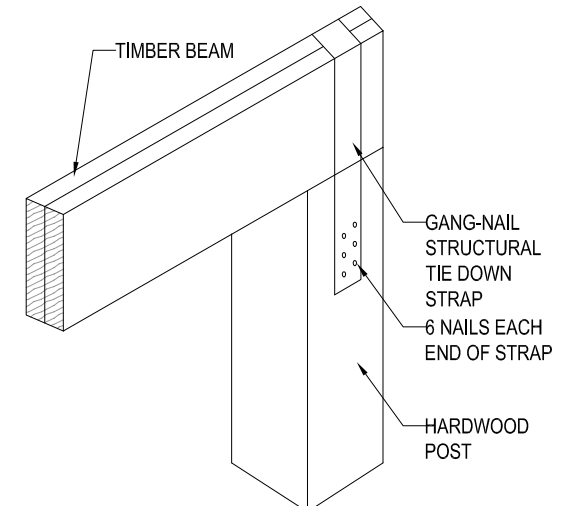


TIMBER BEAM TO POST CONNECTION DETAIL

NTS

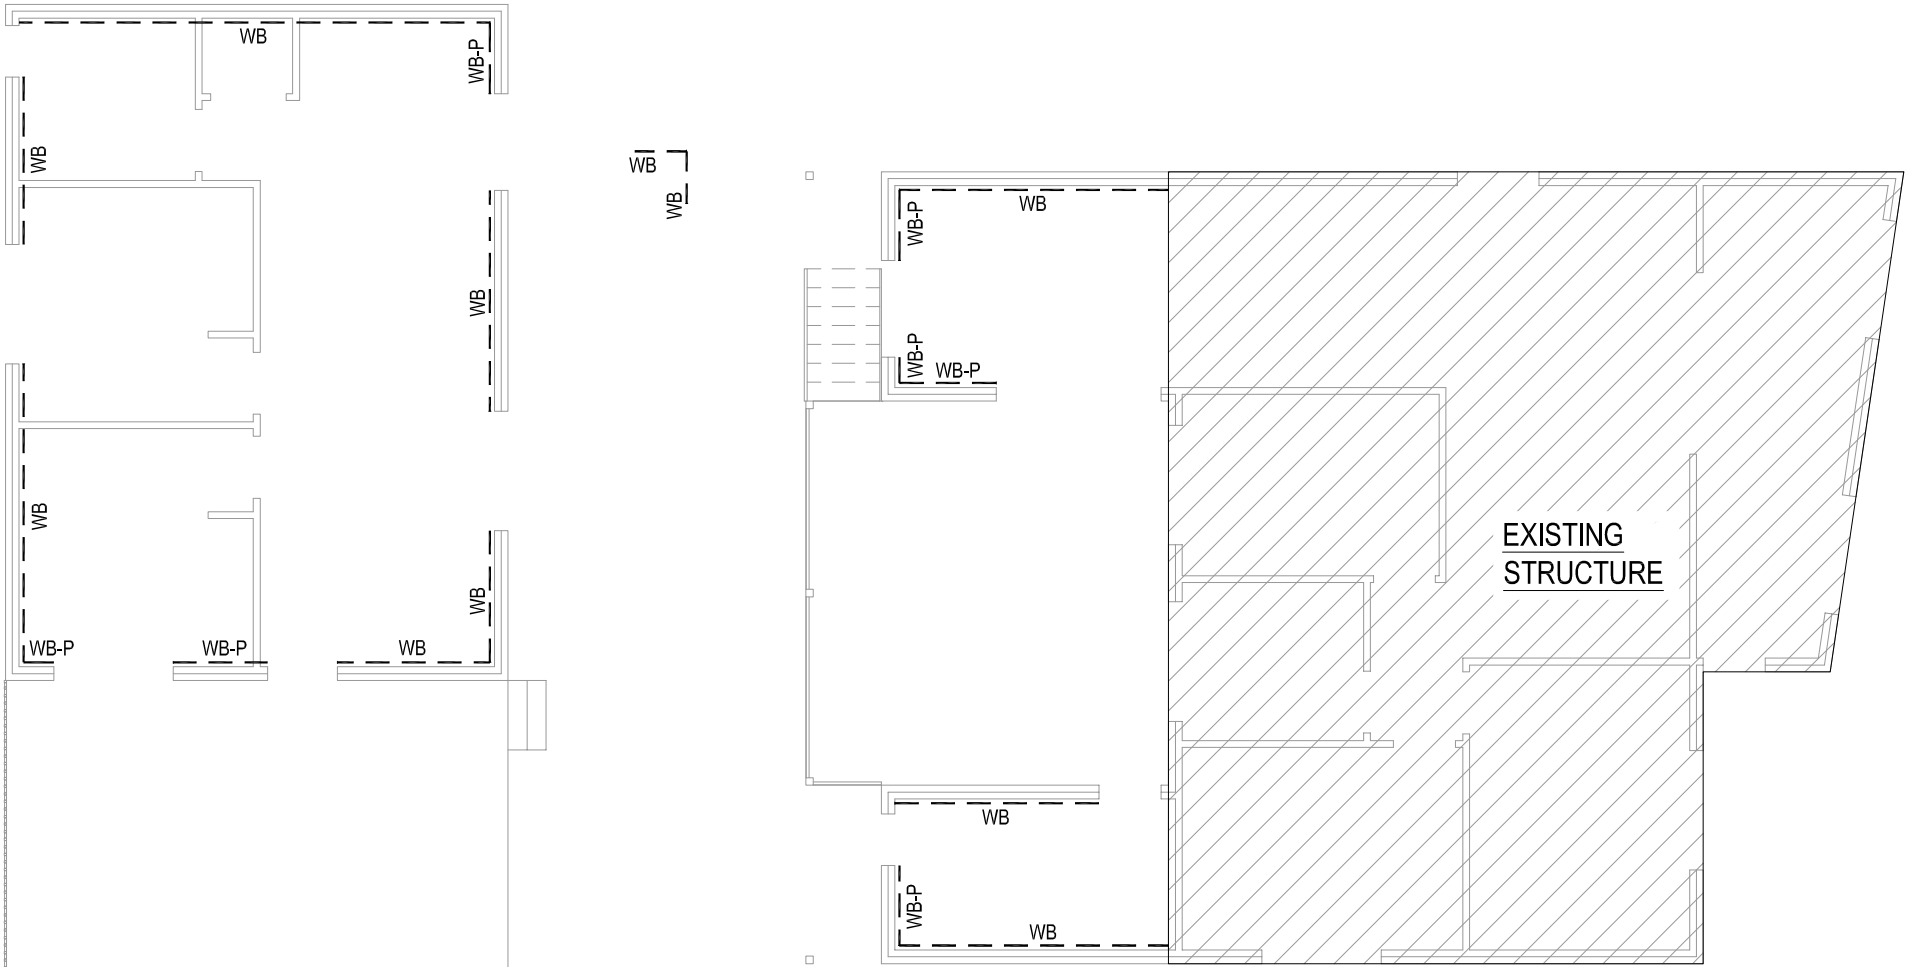


GROUND FLOOR WALL BRACING

1:100

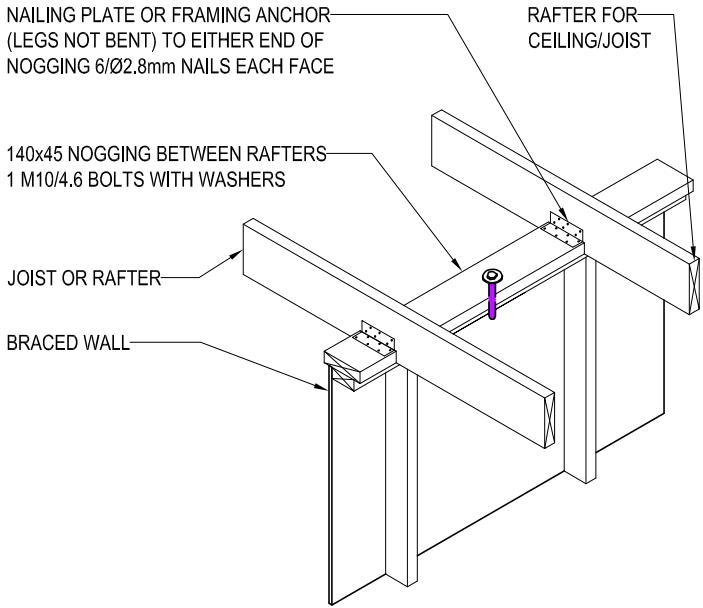


TYPICAL JOIST OR RAFTER PARALLEL TO BRACING WALL CONNECTION

NTS

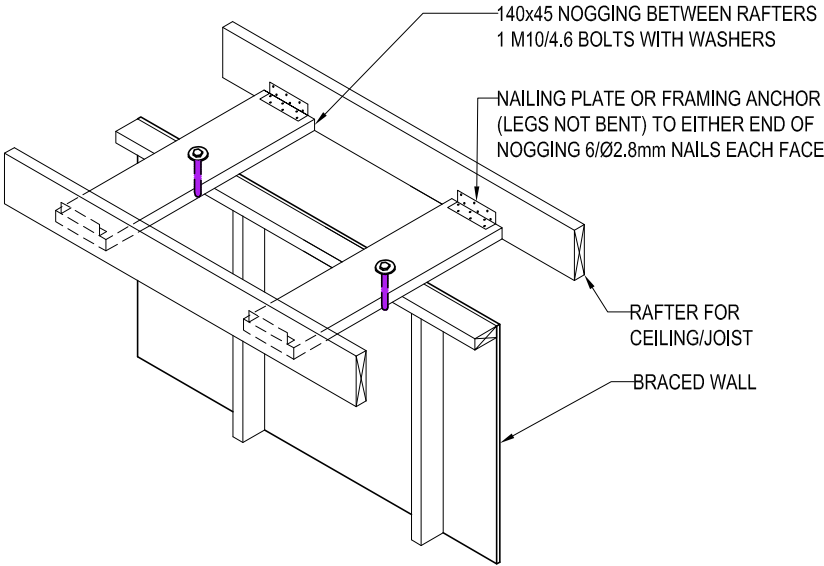


TYPICAL JOIST OR RAFTER PERPENDICULAR TO BRACING WALL CONNECTION

NTS

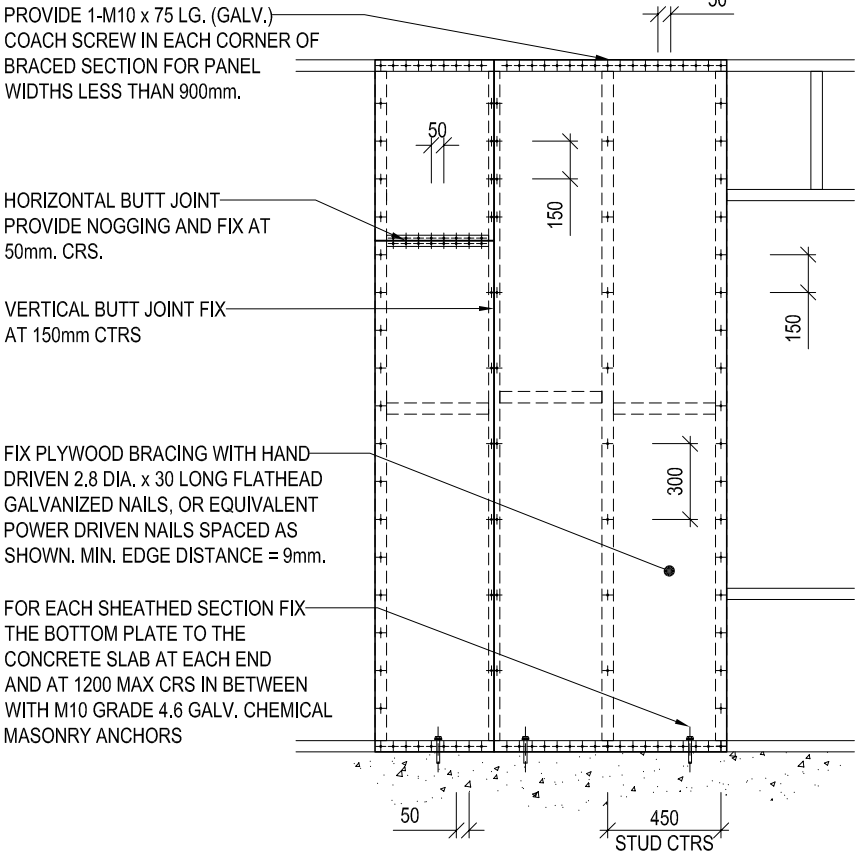

TYPICAL PLYWOOD WALL BRACING TO CONCRETE SLAB DETAIL - 'WB-P'

1:30

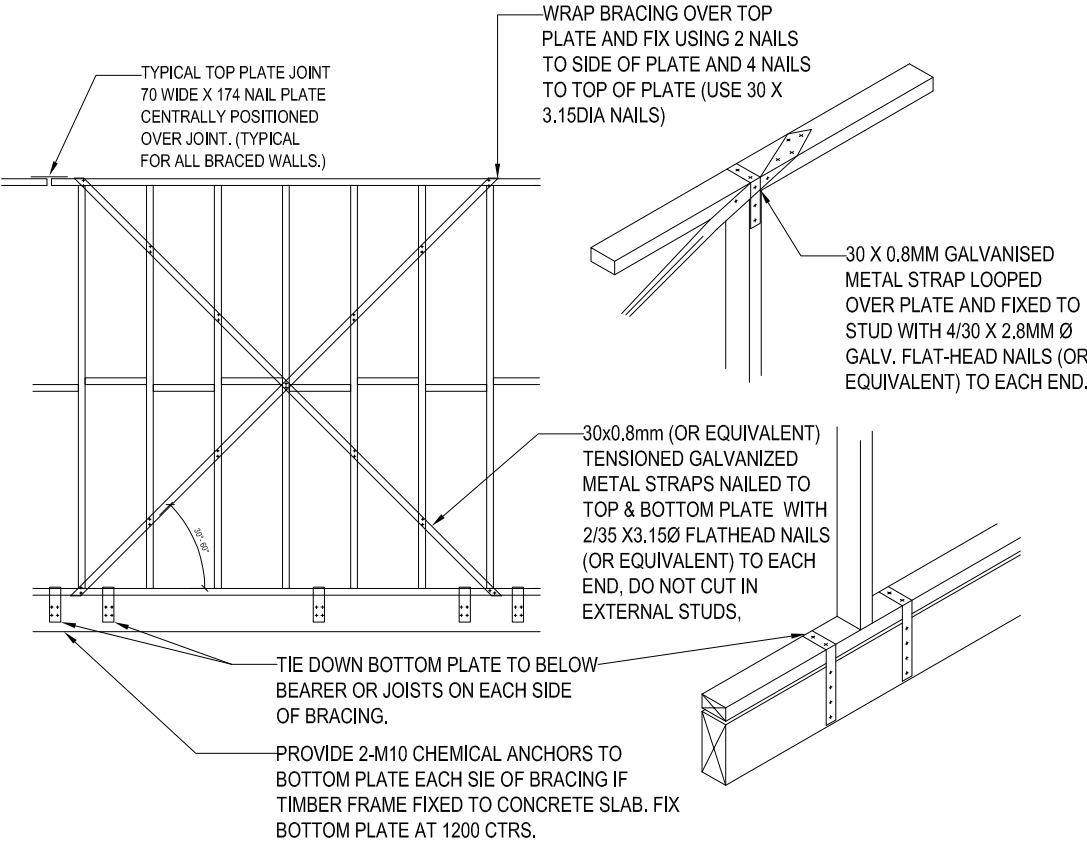

TYPICAL WALL BRACING DETAIL - 'WB'

1:50



HCT ENGINEERING Pty Ltd
STRUCTURAL & CIVIL ENGINEERS
PO BOX 3208, Wareemba NSW 2046
E | frankn@hctengineering.com.au
P | 0425 043 330
W | www.hctengineering.com.au

© COPYRIGHT: THE INFORMATION IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS/ARE PROHIBITED FROM DISCLOSING SUCH INFORMATION, IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF HCT ENGINEERING Pty Ltd

PROJECT: PROPOSED ALTERATIONS AND ADDITIONS AND SECONDARY DWELLING NO.6 BELLEVUE STREET, BLACKTOWN, NSW 2148			
DRG. TITLE: GROUND FLOOR BRACING PLAN			
SHEET A3	DRG No.	HCT - 2697 - ST300	APP: FN

A	ISSUED FOR CDC	TT	13.05.2026
ISSUE	AMENDEMENT	BY	DATE