

IMPORTANT NOTE -INCONGRUENCIES BETWEEN FINAL CONSTRUCTION DRAWINGS/DOCUMENTS
THE CONTRACTOR IS WARNED THAT IF THERE ARE ANY INCONSISTENCIES AND/OR CLASHES BETWEEN DIFFERENT CONSULTANTS DRAWINGS AND REPORTS, FOR EXAMPLE, THE STRUCTURAL DRAWINGS CLASH WITH THE ARCHITECTURAL DRAWINGS, THE CONTRACTOR MUST INFORM THE NECESSARY CONSULTANTS IMMEDIATELY PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHASTOEVER IF THE CONSTRCTOR FAILS TO ADHERE TO THIS NOTE.

CONSTRUCTION NOTES FOR BASIX
- BASEMENT SLAB ON GROUND,
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

IMPORTANT NOTE - DAMP PROOF MEMBRANES
IT'S IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT DAMP PROOF MEMBRANES FOR USE IN THE SLABS ON GROUND ARE REQUIRED TO BE CONTINUOUSLY STAMPED AS BEING'**0.2MM HIGH IMPACT**' AS REQUIRED BY NCC 2022
DAMP PROOFING MEMBRANE EXCERPT BELOW.
A. MATERIALS
I. DAMP-PROOFING MEMBRANE MUST BE -
1. 0.2MM NOMINAL THICKNESS POLYETHYLENE FILM; AND
1. HIGH IMPACT RESISTANT, DETERMINED IN ACCORDANCE WITH CRITERIA SPECIFIED IN CLAUSE 5.3.3.3 OF AS2870; AND
1. BE BRANDED CONTINUOUSLY *AS 2870 CONCRETE UNDERLAY, 0.2MM HIGH IMPACT RESISTANCE.

IMPORTANT NOTE - FLOOD REPORT
THE CONTRACTOR MUST READ THESE ARCHITECTURAL DRAWINGS IN CONJUNCTION WITH THE FLOOD REPORT DATED 21 NOV 2025 PREPARED BY MODULAR ENGINEERS.

IMPORTANT NOTE - EXTERNAL WALLS PROVIDED WITH EXTERNAL CLADDING FINISH
LOCATION: REFER TO THE ARCHITECTURAL DOCUMENTATION.
PROVIDE THE EXTERNAL CLADDING SYSTEM NOMINATED ON THE SCHEDULE OF FINISHES AND THE ARCHITECTURAL DRAWINGS AND FIXED TO THE EXTERIOR OF THE MASONRY AND/OR TIMBER WALL IN STRICT ACCORDANCE WITH THE MANUFACTURERS DETAILS AND SPECIFICATIONS.

THE SELECTED PREFINISHED MATERIALS AND COLOURS OF THE EXTERNAL CLADDING ARE TO BE CONFIRMED IN WRITING BY THE PROPRIETORS PRIOR TO THE SIGNING OF ANY BUILDING WORKS CONTRACT.
EACH CLADDING SYSTEM IS TO BE FIXED TO THE REQUIRED SUBSTRATE MATERIAL IN STRICT ACCORDANCE WITH THE MANUFACTURERS DETAILS AND SPECIFICATIONS.
IT IS THE SOLE RESPONSIBILITY OF THE BUILDING CONTRACTOR TO ALLOW FOR THE PREPARATION OF THE SUBSTRATE AND ALL MATERIALS REQUIRED FOR THE FIXING OF THE SELECTED CLADDING SYSTEMS.
THE BUILDING CONTRACTOR MUST ALSO ENSURE THAT THE FINISHED CLADDING SYSTEM IS SECURE, STABLE AND WATERTIGHT.
THE SUBSTRATE SYSTEM FOR THE CLADDING FINISH IS TO BE CONSTRUCTED IN A POSITION AS TO ALLOW FOR THE FIXING OF THE CLADDING SO THAT THE FINISHED EXTERIOR FACE OF THE CLADDING SYSTEM DOES NOT ENCR OACH ON THE SPECIFIC COUNCIL REQUIRED MINIMUM SETBACKS AND/OR ENCR OACHMENTS ON THE BOUNDARIES.

IMPORTANT NOTE - HYDRAULICS
IT IS IMPORTANT TO NOTE THESE CDC ARCHITECTURAL DRAWINGS DO NOT INCORPORATE ALL OF THE BUILDING SERVICES REQUIRED FOR EACH OF THE RESIDENCES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE FLOOR WASTE ARE THOROUGHLY COORDINATED WITH AN ACCREDITED HYDRAULICS ENGINEER AND DO NOT FOLLOW THE ARCHITECTS PLACEMENT AS THEY ARE PURELY DIAGRAMMATIC AND ENSURE THE FLOOR WASTE COMPLY WITH THE RELEVANT CLAUSES OF THE BCA AND APPLICABLE AUSTRALIAN STANDARDS.

IMPORTANT NOTE 1 - PERMANENT FORMWORK WALL SYSTEMS
THE CONTRACTOR IS **WARNED** THAT WHERE PERMANENT FORMWORK IS PROPOSED, THE CONTRACTOR MUST PROVIDE THE FOLLOWING:
1. CONFIRMATION OF THE PROPOSED PRODUCT ACCOMPANIED BY CERTIFICATION (I.E CODEMARK CERTIFICATE).
2. TESTING CERTIFICATE CONFIRM THE PRODUCT COMPLIES WITHAS 5637.1.
3. IF DINCEL, REDIWALL OR UNKNOWN PRODUCT - STRUCTURAL ENGINEERS DESIGN STATEMENT REQUIRED IF THE WALL IS LOADBEARING.IF THE WALL IS NON-LOADBEARING, WRITTEN CONFIRMATION BY THE OWNER MUST BE PROVIDED.
4. WRITTEN CONFIRMATION BY THE CONTRACTOR IS TO BE PROVIDED IF THE PERMANENT FORMWORK IS TO BE PROVIDED FOR EXTERNAL WALLS, IF YES, A SITE SPECIFIC PERFORMANCE SOLUTION WILL BE REQUIRED FROM A C10 REGISTERED FIRE ENGINEER.

IMPORTANT NOTE 2 - PERMANENT FORMWORK
THE CONTRACTOR IS **WARNED** THAT THE USE OF DINCEL AND OTHER SUCH SYSTEMS SUCH AS AFS REDIWALL WHICH HAVE A PERMANENT PLASTIC FORMWORK DO NOT MEET THE DEEMED TO SATISFY REQUIREMENTS OF THE NCC 2022 - WHERE THEY SPECIFY THE USE OF NON-COMBUSTIBLE ELEMENTS A SITE SPECIFIC PERFORMANCE SOLUTION IS REQUIRED WHERE SUCH FORMS OF CONSTRUCTION ARE PROPOSED AND THIS SITE SPECIFIC PERFORMANCE SOLUTION MUST BE ACCEPTED, IN WRITING, BY THEPRIVATE CERTIFIER PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE. THE ARCHITECTS, WILL NOT BE HELD RESPONSIBLE AT ALL, IF THERE ARE ANY ISSUES WHATSOEVER REGARDING THE USE OF THESE SUCH WALL SYSTEMS WHICH HAVE A PERMANENT PLASTIC FORMWORK, WITHIN THE CONSTRUCTION OF THIS PROJECT.

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS@ CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS@ CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS@ CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

ARCHITECTURAL DRAWING SCHEDULE

SHEET	DRAWING TITLE	ISSUE
A000	TITLE PAGE	A
A000-A	WALL LEGEND	A
A002	SITE ANALYSIS	A
A003	BASEMENT PLAN	A
A003-A	BASEMENT PLAN - DIMENSIONS	A
A004	GROUND FLOOR PLAN	A
A004-A	GROUND FLOOR - DIMENSIONS	A
A005	LEVEL 1 PLAN	A
A005-A	LEVEL 1 - DIMENSIONS	A
A006	ROOF PLAN	A
A008	ELEVATIONS	A
A010	NORTH & SOUTH ELEVATIONS	A
A013	SHADOWS - JUNE 21 - 9AM	A
A014	SHADOWS - JUNE 21 - 10AM	A
A015	SHADOWS - JUNE 21 - 11AM	A
A016	SHADOWS - JUNE 21 - 12PM	A
A017	SHADOWS - JUNE 21 - 1PM	A
A018	SHADOWS - JUNE 21 - 2PM	A
A019	SHADOWS - JUNE 21 - 3PM	A
A020	WINDOW AND DOOR SCHEDULE	A
A023	WASTE MANAGMENT PLAN	A
A024	LANDSCAPE PLAN	A
A025	MATERIALS AND FINISHES	A

COMPLYING DEVELOPMENT APPLICATION

ISSUE A

Job No. 1500-24

Date 07.04.2026

Project 2A STORNAWAY CRESCENT, BERKELEY VALE

Client GEGE CONSTRUCTIONS PTY LTD



Katris Architects Pty Ltd

Nominated Architects Nick Katris (Reg 3878), Peter Katris (Reg 4569), Chris Katris (Reg 9724)
level 1, Suite 2, 28-30 Burwood Road, Burwood 2134 NSW Australia
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421
F 02 9747 5046
www.katris.com.au
admin@katris.com.au

IMPORTANT NOTES




1. The Builder, the Head Contractor and all Subcontractors attention is drawn to the fact that the contract documents involve both the Architectural Specification and Architectural Construction Certificate Drawings. Both have to be read in conjunction with each other. There are many items that appear in the Architectural Written Specification that will not appear on the Architectural Construction Certificate Contract Drawings. It is the responsibility of the Builder, Head Contractor and any Subcontractor to familiarise themselves with all such documents and ensure that they have allowed for all items that are indicated in all such documents. Do not assume that the Architectural Specification is just a covering document with little relevance. It is a Contract Document that must be allowed for by all the parties to this contract; the builder, the head contractor and all subcontractorattention is drawn to the fact that the contract documents involve both the Architectural Specification and Architectural Construction Certificate Drawings. Both have to be read in conjunction with each other. There are many items that appear in the Architectural Written Specification that will not appear on the Architectural Construction Certificate Contract Drawings. It is the responsibility of the Builder, Head Contractor and any Subcontractor to familiarise themselves with all such documents and ensure that they have allowed for all items that are indicated in all such documents. Do not assume that the Architectural Specification is just a covering Document with little relevance. It is a Contract Document that must be allowed for by all the parties to this contract.
2. THE CONTRACTOR MUST ADHERE TO THE LATEST DRAWINGS; OTHERWISE HE WILL BE DIRECTLY RESPONSIBLE FOR ANY RECTIFICATION COSTS FOR FAILURE TO DO SO.

ISSUE FOR CONSTRUCTION

WALL TYPE - WT1.1 WT1.1	STUD WALL - DRY TO WET CONSTRUCTION DESCRIPTION: 90MM X 45MM TIMBER STUD WORK. ON WET SIDE OF THE WALL TO BE 6MM MOISTURE RESISTANT PLASTERBOARD, FIXED TO TIMBER STUD FRAME. 10MM TILES AS SELECTED BY PROPRIETOR FIXED TO THE AQUACHEK PLASTERBOARD. ON THE DRY SIDE OF THE WALL TO BE 10MM PLASTERBOARD AND PAINT FINISH, FIXED TO THE TIMBER STUD FRAME. LOCATION: INTERNAL WALLS AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION AS PER NCC 2022 VOL 2 NOTES: THE CONTRACTOR MUST CONFIRM WITH THE ARCHITECTS THE LOCATION OF THIS WALL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS NOTE	WALL TYPE - WT1.2 WT1.2	STUD WALL - DRY TO DRY CONSTRUCTION DESCRIPTION: 90MM X 45MM TIMBER STUD WORK. ON BOTH SIDES OF THE WALL TO BE 10MM PLASTERBOARD AND PAINT FINISH, FIXED TO TIMBER STUD FRAME. LOCATION: INTERNAL WALLS AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: NOTES: THE CONTRACTOR MUST CONFIRM WITH THE ARCHITECTS THE LOCATION OF THIS WALL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS NOTE	WALL TYPE - WT1.3 WT1.3	STUD WALL - WET TO WET CONSTRUCTION DESCRIPTION: 90MM X 45MM TIMBER STUD WORK. ON BOTH SIDES OF THE WALL TO BE 6MM MOISTURE RESISTANT PLASTERBOARD, FIXED TO TIMBER STUD FRAME. 10MM TILES AS SELECTED BY PROPRIETOR FIXED TO THE MOISTURE RESISTANT PLASTERBOARD ON BOTH SIDES OF THE WALL. LOCATION: INTERNAL WALLS AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: NOTES: THE CONTRACTOR MUST CONFIRM WITH THE ARCHITECTS THE LOCATION OF THIS WALL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS NOTE
WALL TYPE - WT3.1 WT3.1	COMMON SEPERATING INTERTENANCY HEBEL WALL - EXTERIOR ("DRY AND DRY") CONSTRUCTION DESCRIPTION: PROVIDE HEBEL "POWERPANEL". PROVIDE TWO ROWS OF 90MM X 45MM TIMBER STUDS AT 450MM CENTRES WITH TWO X 20MM DISCONTINUOUS AIR GAPS FROM BOTH SIDES OF THE 75MM HEBEL "POWERPANEL". TO THE FACE OF THE TIMBER STUD ALONG THE WET AREA, A 10MM PLASTERBOARD, TO THE OTHER SIDE OF THE INTERNAL FACE OF THE TIMBER STUD FIX ONE LAYER OF 10MM (SOUNDCEK OR EQUIV.) LOCATION: COMMON SEPERATING WALL AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: RW + CTR -NOT LESS THAN 50 AIRBORNE AND MUST BE DISCONTINUOUS CONSTRUCTION AS INDICATED IN CLAUSE F7D4, F7D6 AND AS INDICATED IN TABLE 2 OF SPECIFICATION 28 OF THE BUILDING CODE OF AUSTRALIA (IRE RATING: 90/90/90 (LOAD BEARING) -60/60 (NON LOAD BEARING)) NOTES:	WALL TYPE - WT2.1 WT2.1	EXTERNAL TIMBER FRAMED WALLS WITH CLADDING CONSTRUCTION DESCRIPTION: 90MM X 45MM TIMBER STUD WORK. STUD FRAME INFILL OF BULK INSULATION. INSULATION MUST BE NON-COMBUSTIBLE AS PER NCC 2022 VOL 2. APPLY A SINGLE LAYER OF 6MM MOISTURE RESISTANT INTERNAL WALL LINING AND ENSURE PLASTERBOARD IS MOISTURE RESISTANT. APPLY TILES TO MOISTURE RESISTANT WALL LINING. EXTERNAL LINEA CLADDING SYSTEM FIXED TO STUDS USING TIMBER BATTENS AS PER MANUFACTURER'S REQUIREMENTS. CLADDING LINED WITH SARKING (PLIABLE MEMBRANE) AS PER MANUFACTURERS REQ'S. CLADDING LINED ON EXTERNAL WALL SIDE WITH ANOTHER SINGLE LAYER OF PLYWOOD. CLADDING TO BE FINISHED IN AS PER MATERIALS AND FINISHES SCHEDULE. THE CONTRACTOR MUST PROVIDE APPROPRIATE CERTIFICATION FOR THE WATERPROOFING OF ALL WET AREAS. FOR WET AREAS LOCATION: EXTERNAL WALLS AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION AS PER NCC 2022 VOL 2 NOTES: THE CONTRACTOR MUST CONFIRM WITH THE ARCHITECTS THE LOCATION OF THIS WALL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS NOTE	WALL TYPE - WT2.2 WT2.2	EXTERNAL TIMBER FRAMED WALLS WITH CLADDING CONSTRUCTION DESCRIPTION: 90MM X 45MM TIMBER STUD WORK. STUD FRAME INFILL OF BULK INSULATION. INSULATION MUST BE NON-COMBUSTIBLE AS PER NCC 2022 VOL 2. EXTERNAL LINEA CLADDING SYSTEM FIXED TO STUDS USING TIMBER BATTENS AS PER MANUFACTURER'S REQUIREMENTS. CLADDING LINED WITH SARKING (PLIABLE MEMBRANE) AS PER MANUFACTURERS REQ'S. CLADDING TO BE FINISHED AS PER MATERIALS AND FINISHES SCHEDULE. THE CONTRACTOR MUST PROVIDE APPROPRIATE CERTIFICATION FOR THE WATERPROOFING OF ALL WET AREAS. FOR WET AREAS LOCATION: EXTERNAL WALLS AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION AS PER NCC 2022 VOL 2 NOTES: THE CONTRACTOR MUST CONFIRM WITH THE ARCHITECTS THE LOCATION OF THIS WALL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS NOTE
WALL TYPE - WT4.1 WT0.1	CONCRETE BLOCK WALL CONSTRUCTION DESCRIPTION: AUSTRAL MASONRY. PRODUCT CODE: 20.01 FULL. 190MM X 190MM X 390MM WITH GROUT CORE FILL AND 13 MM RENDER AND PAINT FINISH TO BOTH SIDES OF THE WALL AS PER ENGS DETAILS AND MANUFACTURERS REQUIREMENTS. THE BUILDING CONTRACTOR IS ALSO DIRECTLY RESPONSIBLE FOR ENSURING THAT ALL BUILDING MATERIALS, PRODUCTS AND ELEMENTS USED IN THE CLASS 2 BUILDING COMPLY WITH THE REQUIREMENTS OF THE NATIONAL CONSTRUCTION CODE 2022 (NCC) VOLUME 2. THIS WALL SYSTEM MUST BE NON-COMBUSTIBLE AS PER BCA 2022 VOL. 2 AND APPROPRIATE CERTIFICATION MUST BE PROVIDED TO CERTIFY THIS. LOCATION: BASEMENT MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: RW NOT LESS THAN 50. AND RW + CTR 50 FIRE RATING: AS PER NCC VOL 2; 2022 NOTES: THE CONTRACTOR MUST ALSO ALLOW FOR A LAYER OF 13MM CEMENT RENDER INTERNAL FINISH AS PER MANUFACTURERS REQ'S TO COMPLY WITH MIN. RW RATINGS	WALL TYPE - WT3.2 WT3.2	COMMON SEPERATING INTERTENANCY HEBEL WALL - EXTERIOR ("DRY AND WET") CONSTRUCTION DESCRIPTION: PROVIDE HEBEL "POWERPANEL". PROVIDE TWO ROWS OF 90MM X 45MM TIMBER STUDS AT 450MM CENTRES WITH TWO X 20MM DISCONTINUOUS AIR GAPS FROM BOTH SIDES OF THE 75MM HEBEL "POWERPANEL". TO THE FACE OF THE TIMBER STUD ALONG THE WET AREA, A 6MM MOISTURE RESISTANT PLASTERBOARD FOLLOWED BY TILES. TO THE OTHER SIDE OF THE INTERNAL FACE OF THE TIMBER STUD FIX ONE LAYER OF 10MM (SOUNDCEK OR EQUIV.) LOCATION: COMMON SEPERATING WALL AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: RW + CTR -NOT LESS THAN 50 AIRBORNE AND MUST BE DISCONTINUOUS CONSTRUCTION AS INDICATED IN CLAUSE F7D4, F7D6 AND AS INDICATED IN TABLE 2 OF SPECIFICATION 28 OF THE BUILDING CODE OF AUSTRALIA REFER TO SOUND INSULATION NOTE. FIRE RATING: 90/90/90 (LOAD BEARING) -60/60 (NON LOAD BEARING) NOTES:	WALL TYPE - WT3.3 WT3.3	COMMON SEPERATING INTERTENANCY HEBEL WALL - EXTERIOR ("DRY AND WET") CONSTRUCTION DESCRIPTION: PROVIDE HEBEL "POWERPANEL". PROVIDE TWO ROWS OF 90MM X 45MM TIMBER STUDS AT 450MM CENTRES WITH TWO X 20MM DISCONTINUOUS AIR GAPS FROM BOTH SIDES OF THE 75MM HEBEL "POWERPANEL". TO THE FACE OF THE TIMBER STUD, A 10MM PLASTERBOARD. TO THE EXTERNAL FACE, EXTERNAL LINEA CLADDING SYSTEM FIXED TO STUDS USING TIMBER BATTENS AS PER MANUFACTURER'S REQUIREMENTS. CLADDING LINED WITH SARKING (PLIABLE MEMBRANE) AS PER MANUFACTURERS REQ'S. CLADDING TO BE FINISHED AS PER MATERIALS AND FINISHES SCHEDULE. LOCATION: COMMON SEPERATING WALL AS INDICATED MINIMUM FIRE & ACOUSTIC RATING SOUND INSULATION: RW + CTR -NOT LESS THAN 50 AIRBORNE AND MUST BE DISCONTINUOUS CONSTRUCTION AS INDICATED IN CLAUSE F7D4, F7D6 AND AS INDICATED IN TABLE 2 OF SPECIFICATION 28 OF THE BUILDING CODE OF AUSTRALIA REFER TO SOUND INSULATION NOTE. FIRE RATING: 90/90/90 (LOAD BEARING) -60/60 (NON LOAD BEARING) NOTES:

Figure 1.3.3a for surface drainage

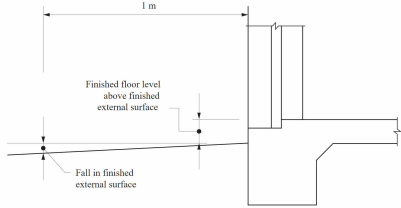

ALL SURFACE DRAINAGE STEP DOWNS MUST IN ACCORDANCE WITH PART 3.3.3 OF THE NCC 2022 VOL. 2 AS PER THE FIGURE ABOVE

ALL BATHROOMS, LAUNDRIES AND KITCHENS, REQUIRE MECHANICAL VENTILATION TO IN ACCORDANCE TO BCA HOUSING PROVISIONS 10.6.2, 10.6.3, 10.8.2

IMPORTANT NOTE - BASIX

WALL LEGEND MUST COMPLY WITH THE BASIX AND NATHERS REQUIREMENTS.

IMPORTANT NOTE - WATERPROOFING OF EXTERNAL WET AREAS

THE CONTRACTOR MUST ENSURE THAT FOR ALL EXTERNAL AREAS REFER TO **TYPICAL OUTDOOR WATERPROOFING DETAIL** ON DRAWING A006

IMPORTANT NOTE - WATERPROOFING OF INTERNAL WET AREAS

THE CONTRACTOR MUST ENSURE THAT FOR ALL INTERNAL WET AREAS REFER TO **TYPICAL INDOOR WATERPROOFING DETAIL** ON DRAWING A006. FOR CROSS FALLS IN WET AREAS - 1:80 CROSS FALL IN BATHRM AND IN SHOWER

IMPORTANT NOTE - WATERPROOFING OF SLIDING DOOR TRACK

THE CONTRACTOR MUST ENSURE THAT THE UNDERSIDE OF ALL EXTERNAL SLIDING DOOR TRACK(S) AREA TO BE WATERPROOFED AND SEALED IN ACCORDANCE WITH AS4654.2-2012

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:

BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

ARCHITECTURAL - GENERAL NOTES

- A1 All dimensions are to be confirmed on site by the builder/subcontractor. any incongruities must be reported to the Architect before commencement of any work.
- A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.
- A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.
- A4 The Builder/subcontractor will be held responsible for the water tightness of the whole building for a minimum period of two years after the date of practical completion.
- A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work is proceeded with.
- A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Negligent or careless other than specified, are allowed without written permission from the Architect and/or Engineer.
- A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.
- A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details from part of the total specification.
- A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.
- A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.
- A11 Foundation set-out, to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.
- A12 All labor work to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification).
- A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.
- A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.
- A15 Comply with the hazardous materials' clause of the specification.
- IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and/or all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The Tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, The Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's clear Engineer's decision shall be carried out at its own cost.

DRAWN DATE ISSUE AMENDMENT

CK 07.04.2026 A ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

WALL LEGEND

SCALE @ A1: 1 : 10

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A000-A

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick

Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road,

Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970





HAIGH CLOSE

1 SITE ANALYSIS PLAN
A002


1 : 300 @ A1
1 : 600 @ A3

ISSUE FOR CONSTRUCTION

ARCHITECTURAL - GENERAL NOTES			
A1	All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.		
A2	The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.		
A3	In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.		
A4	The Builder/subcontractor will be held responsible for the water-tightness of the whole building for a minimum period of two years after the date of practical completion.		
A5	It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.		
A6	All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.		
A7	Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.		
A8	All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.		
A9	All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.		
A10	No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.		
A11	Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.		
A12	All brickwork is to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification).		
A13	Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.		
A14	All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.		
A15	Comply with the 'hazardous materials' clause of the specification.		
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The Tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT
2A STORNAWAY CRESCENT, BERKELEY VALE NSW
Lot 17 in DP 262327
CLIENT
GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME SITE ANALYSIS			
SCALE @ A1: 1 : 300	DRAWN: CK	DATE: 07.04.2026	
SCALE @ A3:	CHECKER: CK		
JOB NO. 1500-24	DRAWING NO. A002	ISSUE: A	

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

1 PROPOSED BASEMENT PLAN

A003 1 : 100

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any discrepancies must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the waterproofing of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.

A12 All timber work is to comply with the requirements of the Light Timber Framing Code (S.A.A. Codes and Structural Engineer's details and specification).

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the "hazardous materials" clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt in the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

BASEMENT PLAN

SCALE @ A1: 1 : 100

SCALE @ A3:

JOB NO.

1500-24

DRAWN: CK

CHECKER: CK

DRAWING NO.

A003

DATE: 07.04.2026

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



ABBREVIATIONS

(S)	= DENOTES HARD WIRED SMOKE ALARMS SMOKE ALARMS WILL BE INSTALLED AND COMPLIANT IN ACCORDANCE WITH THE NCC 2022 VOL. 2. AND AS 3786-2014.	RWH	= DENOTES RAINWATER HEADS TO STORMWATER AND HYDRAULIC ENGS DETAILS
Φfw	= DENOTES FLOOR WASTES AS PER THE NCC 2022 VOL. 2. DRAINAGE FLANGES/SPURDLE FLANGES MUST BE INSTALLED TO ALL FLOOR WASTES DURING THE WATERPROOFING STAGES. REFER TO ARCH SPEC AND MANUFACTURERS REQS. REFER TO TYPICAL INDOOR AND OUTDOOR WATERPROOFING DETAIL.	RC	= DENOTES REINFORCED CONC. SLAB TO ENGS DETAILS
NG RL. 00	= DENOTES NEW PROPOSED NATURAL GROUND LEVEL	TB	= DENOTES TIMBER FLOOR CONSTRUCTION TO ENGS DETAIL
FFL RL. 00	= DENOTES FINISH FLOOR LEVEL	TF	= DENOTES TILED FLOOR FINISH
ODP	= DENOTES DOWN PIPES TO STORMWATER AND HYDRAULIC ENGS DETAILS	CPT	= DENOTES CARPET FLOOR FINISH
OF	= OVERFLOW TO STORMWATER ENGS DETAILS	BT	= DENOTES BATHROOM TILE
	DENOTES EXIST TREES TO REMAIN	OT	= DENOTES OUTDOOR TILE FLOOR FINISH
		CL	= DENOTES CLOTHESLINE
		RWO	= DENOTES STORMWATER PITS TO STORMWATER ENGS DETAILS. ALL PIPES CONNECTED TO THESE DRAINAGE POINTS MUST DRAIN WATER AS PER STORMWATER ENGS DETAILS
		SWP	= STORMWATER PIT TO STORMWATER AND HYDRAULIC ENGS DETAILS
		RWT	= RAINWATER TANK TO STORMWATER AND HYDRAULIC ENGS DETAILS AND AS PER BASIX
			DENOTES EXIST TREES TO BE REMOVED

ALL EXPANSION JOINTS AS PER STRUCT ENGS DETAILS

IMPORTANT STAIR NOTE

STAIR TREADS AND NOCING STRIPS MUST COMPLY WITH AS 4586-2013 AND PART 11.2 HOUSING PROVISIONS OF NCC 2022 VOLUME 2. THE STAIR MUST CONSIST OF CONTINUOUS HANDRAILS AS PER PART 11.3.5 HOUSING PROVISIONS OF NCC 2022 VOLUME 2.

IMPORTANT BARRIERS AND HANDRAIL NOTE

ALL BARRIERS AND HANDRAILS AND WINDOWS MUST COMPLY WITH PART 11.3 OF HOUSING PROVISIONS OF NCC 2022 VOL. 2 AND FIGURE 11.3.7 PROTECTION OF OPENABLE WINDOWS — BEDROOMS AS PER NCC 2022 VOL. 2 ON DRAWING A004.

IMPORTANT ROOM HEIGHTS NOTE

ALL ROOM HEIGHTS MUST COMPLY WITH PART 10.3 HOUSING PROVISIONS OF NCC 2022 VOL. 2

IMPORTANT STAIRS NOTE

ALL STAIRCASES MUST COMPLY WITH PART 11.2.2 OF HOUSING PROVISIONS OF NCC 2022 VOL. 2

PROPOSED LOT 2

PROPOSED LOT 1

STORNAWAY CRESCENT

ABBREVIATIONS

S

= DENOTES HARD WIRE SMOKE ALARMS SMOKE ALARMS WILL BE INSTALLED AND COMPLIANT IN ACCORDANCE WITH THE NCC 2022 VOL. 2. AND AS 3786-2014.

fw

= DENOTES FLOOR WASTES AS PER THE NCC 2022 VOL. 2. DRAINAGE FLANGES/SPURDLE FLANGES MUST BE INSTALLED TO ALL FLOOR WASTES DURING THE WATERPROOFING STAGES. REFER TO ARCH SPEC AND MANUFACTURERS REQS. REFER TO TYPICAL INDOOR AND OUTDOOR WATERPROOFING DETAIL.

NG RL. 00

= DENOTES NEW PROPOSED NATURAL GROUND LEVEL.

FFL RL. 00

= DENOTES FINISH FLOOR LEVEL.

DP

= DENOTES DOWN PIPES TO STORMWATER AND HYDRAULIC ENGS DETAILS.

OF

= OVERFLOW TO STORMWATER ENGS DETAILS.

DENOTES EXIST TREES TO REMAIN.

DENOTES EXIST TREES TO BE REMOVED.

RWH

= DENOTES RAINWATER HEADS TO STORMWATER AND HYDRAULIC ENGS DETAILS.

RC

= DENOTES REINFORCED CONC. SLAB TO ENGS DETAIL.

TB

= DENOTES TIMBER FLOOR CONSTRUCTION TO ENGS DETAIL.

TF

= DENOTES TILED FLOOR FINISH.

CPT

= DENOTES CARPET FLOOR FINISH.

BT

= DENOTES BATHROOM TILE.

OT

= DENOTES OUTDOOR TILE FLOOR FINISH.

CL

= DENOTES CLOTHESLINE.

RWO

= DENOTES STORMWATER PITS TO STORMWATER ENGS DETAILS. ALL PIPES CONNECTED TO THESE DRAINAGE POINTS MUST DRAIN WATER AS PER STORMWATER ENGS DETAILS.

SWP

= STORMWATER PIT TO STORMWATER AND HYDRAULIC ENGS DETAILS.

RWT

= RAINWATER TANK TO STORMWATER AND HYDRAULIC ENGS DETAILS AND AS PER BASIX.

ALL EXPANSION JOINTS AS PER STRUCT ENGS DETAILS.

IMPORTANT STAIR NOTE

STAIR TREADS AND NOCING STRIPS MUST COMPLY WITH AS 4586-2013 AND PART 11.2 HOUSING PROVISIONS OF NCC 2022 VOLUME 2. THE STAIR MUST CONSIST OF CONTINUOUS HANDRAILS AS PER PART 11.3.5 HOUSING PROVISIONS OF NCC 2022 VOLUME 2.

IMPORTANT BARRIERS AND HANDRAIL NOTE

ALL BARRIERS AND HANDRAILS AND WINDOWS MUST COMPLY WITH PART 11.3 OF HOUSING PROVISIONS OF NCC 2022 VOL. 2 AND FIGURE 11.3.7 PROTECTION OF OPENABLE WINDOWS — BEDROOMS AS PER NCC 2022 VOL. 2 ON DRAWING A004.

IMPORTANT ROOM HEIGHTS NOTE

ALL ROOM HEIGHTS MUST COMPLY WITH PART 10.3 HOUSING PROVISIONS OF NCC 2022 VOL. 2.

IMPORTANT STAIRS NOTE

ALL STAIRCASES MUST COMPLY WITH PART 11.2.2 OF HOUSING PROVISIONS OF NCC 2022 VOL. 2.

1

A003-A

BASEMENT PLAN - DIMENSIONS

1 : 100

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the water-tightness of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Repairs or breakages other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details from part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.

A12 All builder work is to comply with the requirements of the Light Timber Framing Code (S.A.A. Code) and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the hazardous materials clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

BASEMENT PLAN - DIMENSIONS

SCALE @ A1: 1 : 100

DRAWN: CK

SCALE @ A3:

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A003-A

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970

ISSUE FOR CONSTRUCTION

CONSTRUCTION NOTES FOR BASIX

- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:

- BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**

COMPLYING DEVELOPMENT INFORMATION - PART 3B - LOW RISE HOUSING DIVERSITY CODE

PROPOSED LOT 2 - "BUILDING A"

3B.9 MAXIMUM BUILDING HEIGHT
THE MAXIMUM HEIGHT FOR A DUAL OCCUPANCY AND ANY ATTACHED DEVELOPMENT IS **8.5M** ABOVE GROUND LEVEL (EXISTING).

3B.10 MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS

THE MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS ON A LOT IS SHOWN IN THE FOLLOWING TABLE-
LOT AREA OF PARENT LOT
MAXIMUM GFA
400M²-2,000M²
>2,000M²
25% OF LOT AREA + 300M²
800M²

THEREFORE MAX ALLOWABLE = **461.25M²**

TOTAL SITE AREA OF PARENT LOT = **1417M²**

MAX GFA:
= 25% OF LOT AREA + 300M²
= 25% X 1417 + 300M²
= 654.25M² TOTAL GFA ALLOWED

TOTAL PROPOSED GFA FOR "BUILDING A"

GF AREA = 117.6M²
FF AREA = 134.6M²

TOTAL = 252.2M² - **COMPLIES (TOWARDS MAX. COMBINED AREA OF 654.25M²)**

3B.15 MINIMUM LANDSCAPED AREA

- (1) The minimum landscaped area that must be provided is 50% of the parent lot area minus 100m².
- (2) At least 25% of the area of the lot forward of the building line must be landscaped.
- (2A) At least 50% of the area required to be landscaped under subclause (1) must be located behind the building line.
- (3) Each landscaped area must have—
(a) a minimum width of 1.5m, and
(b) a minimum length of 1.5m.
- (4) Principal private open space must be provided for each dwelling that—
(a) is at least 16m², and
(b) is at least 3m wide.
- (5) This clause does not apply to complying development that is the alteration of, or addition to, a dual occupancy or attached development if the development does not—
(a) increase the footprint of the dual occupancy or attached development, or
(b) decrease the landscaped area on the lot, or
(c) decrease the principal private open space for a dwelling.

LANDSCAPED AREA FOR BOTH PROPOSED LOTS 1 & 2
(50% X 1417) - 100m = 608.5M²

MIN. LANDSCAPE AREA FOR EACH SITE = 304.25M²

PROPOSED. LANDSCAPE AREA FOR BUILDING A = 374M² - **COMPLIES**

COMPLYING DEVELOPMENT INFORMATION - PART 3B - LOW RISE HOUSING DIVERSITY CODE

PROPOSED LOT 2 - "BUILDING A"

3B.9 MAXIMUM BUILDING HEIGHT
THE MAXIMUM HEIGHT FOR A DUAL OCCUPANCY AND ANY ATTACHED DEVELOPMENT IS **8.5M** ABOVE GROUND LEVEL (EXISTING).

3B.10 MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS

THE MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS ON A LOT IS SHOWN IN THE FOLLOWING TABLE-
LOT AREA OF PARENT LOT
MAXIMUM GFA
400M²-2,000M²
>2,000M²
25% OF LOT AREA + 300M²
800M²

THEREFORE MAX ALLOWABLE = **461.25M²**

TOTAL SITE AREA OF PARENT LOT = **1417M²**

MAX GFA:
= 25% OF LOT AREA + 300M²
= 25% X 1417 + 300M²
= 654.25M² TOTAL GFA ALLOWED

TOTAL PROPOSED GFA FOR "BUILDING B"

GF AREA = 167.0M²
FF AREA = 195.8M²

TOTAL = 362.8M² - **COMPLIES (TOWARDS MAX. COMBINED AREA OF 654.25M²)**

3B.15 MINIMUM LANDSCAPED AREA

- (1) The minimum landscaped area that must be provided is 50% of the parent lot area minus 100m².
- (2) At least 25% of the area of the lot forward of the building line must be landscaped.
- (2A) At least 50% of the area required to be landscaped under subclause (1) must be located behind the building line.
- (3) Each landscaped area must have—
(a) a minimum width of 1.5m, and
(b) a minimum length of 1.5m.
- (4) Principal private open space must be provided for each dwelling that—
(a) is at least 16m², and
(b) is at least 3m wide.
- (5) This clause does not apply to complying development that is the alteration of, or addition to, a dual occupancy or attached development if the development does not—
(a) increase the footprint of the dual occupancy or attached development, or
(b) decrease the landscaped area on the lot, or
(c) decrease the principal private open space for a dwelling.

LANDSCAPED AREA FOR BOTH PROPOSED LOTS 1 & 2
(50% X 1417) - 100m = 608.5M²

MIN. LANDSCAPE AREA FOR EACH SITE = 304.25M²

PROPOSED. LANDSCAPE AREA FOR BUILDING B = 460M² - **COMPLIES**

PROPOSED GROUND FLOOR PLAN & SITE PLAN

1:100

ARCHITECTURAL - GENERAL NOTES

- A1 All dimensions are to be confirmed on site by the builder/subcontractor. Any incongruities must be reported to the Architect before commencement of any work.
- A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.
- A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.
- A4 The Builder/subcontractor will be held responsible for the construction of the whole building for a minimum period of two years after the date of practical completion.
- A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.
- A6 All construction, central joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Negligent or careless work other than specified, are allowed without written permission from the Architect and/or Engineer.
- A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.
- A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.
- A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.
- A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.
- A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.
- A12 All labor work to comply with the requirements of the Light Timber Framing Code (S.A.A. Codes and Structural Engineer's details and specification).
- A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by the office. Written authority is required for any reproduction.
- A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.
- A15 Comply with the "hazardous materials" clause of the specification.
- IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for costs, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN DATE ISSUE AMENDMENT

CK 07.04.2026 A ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

GROUND FLOOR PLAN

SCALE @ A1: 1:100

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A004

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road,
Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

CONSTRUCTION NOTES FOR BASIX

- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:

- BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**
- NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO**

COMPLYING DEVELOPMENT INFORMATION - PART 3B - LOW RISE HOUSING DIVERSITY CODE

PROPOSED LOT 2 - "BUILDING A"

3B.9 MAXIMUM BUILDING HEIGHT
THE MAXIMUM HEIGHT FOR A DUAL OCCUPANCY AND ANY ATTACHED DEVELOPMENT IS **8.5M** ABOVE GROUND LEVEL (EXISTING).

3B.10 MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS

THE MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS ON A LOT IS SHOWN IN THE FOLLOWING TABLE-
LOT AREA OF PARENT LOT
MAXIMUM GFA
400M²-2,000M²
>2,000M²
25% OF LOT AREA + 300M²
800M²

THEREFORE MAX ALLOWABLE =461.25M²

TOTAL SITE AREA OF PARENT LOT = **1417M²**

MAX GFA:
= 25% OF LOT AREA + 300M²
= 25% X 1417 + 300M²
= 654.25M² TOTAL GFA ALLOWED

TOTAL PROPOSED GFA FOR "BUILDING A"

GF AREA =117.6M²
FF AREA = 134.6M²

TOTAL = 252.2M² - **COMPLIES (TOWARDS MAX. COMBINED AREA OF 654.25M²)**

3B.15 MINIMUM LANDSCAPED AREA

- (1) The minimum landscaped area that must be provided is 50% of the parent lot area minus 100m².
- (2) At least 25% of the area of the lot forward of the building line must be landscaped.
- (2A) At least 50% of the area required to be landscaped under subclause (1) must be located behind the building line.
 - (a) a minimum width of 1.5m, and
 - (b) a minimum length of 1.5m.

- (4) Principal private open space must be provided for each dwelling that-
 - (a) is at least 16m², and
 - (b) is at least 3m wide.
- (5) This clause does not apply to complying development that is the alteration of, or addition to, a dual occupancy or attached development if the development does not-
 - (a) increase the footprint of the dual occupancy or attached development, or
 - (b) decrease the landscaped area on the lot, or
 - (c) decrease the principal private open space for a dwelling.

LANDSCAPED AREA FOR BOTH PROPOSED LOTS 1 & 2
(50%X 1417) - 100m =608.5M²

MIN. LANDSCAPE AREA FOR EACH SITE = 304.25M²

PROPOSED. LANDSCAPE AREA FOR BUILDING A = 374M² - **COMPLIES**

COMPLYING DEVELOPMENT INFORMATION - PART 3B - LOW RISE HOUSING DIVERSITY CODE

PROPOSED LOT 2 - "BUILDING A"

3B.9 MAXIMUM BUILDING HEIGHT
THE MAXIMUM HEIGHT FOR A DUAL OCCUPANCY AND ANY ATTACHED DEVELOPMENT IS **8.5M** ABOVE GROUND LEVEL (EXISTING).

3B.10 MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS

THE MAXIMUM GROSS FLOOR AREA OF ALL BUILDINGS ON A LOT IS SHOWN IN THE FOLLOWING TABLE-
LOT AREA OF PARENT LOT
MAXIMUM GFA
400M²-2,000M²
>2,000M²
25% OF LOT AREA + 300M²
800M²

THEREFORE MAX ALLOWABLE =461.25M²

TOTAL SITE AREA OF PARENT LOT = **1417M²**

MAX GFA:
= 25% OF LOT AREA + 300M²
= 25% X 1417 + 300M²
= 654.25M² TOTAL GFA ALLOWED

TOTAL PROPOSED GFA FOR "BUILDING B"

GF AREA = 167.0M²
FF AREA = 195.8M²

TOTAL = 362.8M² - **COMPLIES (TOWARDS MAX. COMBINED AREA OF 654.25M²)**

3B.15 MINIMUM LANDSCAPED AREA

- (1) The minimum landscaped area that must be provided is 50% of the parent lot area minus 100m².
- (2) At least 25% of the area of the lot forward of the building line must be landscaped.
- (2A) At least 50% of the area required to be landscaped under subclause (1) must be located behind the building line.
 - (a) a minimum width of 1.5m, and
 - (b) a minimum length of 1.5m.
- (4) Principal private open space must be provided for each dwelling that-
 - (a) is at least 16m², and
 - (b) is at least 3m wide.
- (5) This clause does not apply to complying development that is the alteration of, or addition to, a dual occupancy or attached development if the development does not-
 - (a) increase the footprint of the dual occupancy or attached development, or
 - (b) decrease the landscaped area on the lot, or
 - (c) decrease the principal private open space for a dwelling.

LANDSCAPED AREA FOR BOTH PROPOSED LOTS 1 & 2
(50%X 1417) - 100m =608.5M²

MIN. LANDSCAPE AREA FOR EACH SITE = 304.25M²

PROPOSED. LANDSCAPE AREA FOR BUILDING B = 460M² - **COMPLIES**

--- = PROPOSED SUBDIVISION LINE

■ = PROPOSED LANDSCAPED AREA AS PER SEPP

1 Ground Floor - Dimensions

1 : 100

ARCHITECTURAL - GENERAL NOTES

- A1 All dimensions are to be confirmed on site by the builder/subcontractor. Any incongruities must be reported to the Architect before commencement of any work.
- A2 The builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.
- A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.
- A4 The builder/subcontractor will be held responsible for the construction of the whole building for a minimum period of two years after the date of practical completion.
- A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.
- A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Negligence or breaches other than specified, are allowed without written permission from the Architect and/or Engineer.
- A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.
- A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.
- A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.
- A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.
- A11 Foundation set-out, to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.
- A12 All labor work to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification).
- A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.
- A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN DATE ISSUE AMENDMENT

CK A ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

GROUND FLOOR - DIMENSIONS

SCALE @ A1: 1 : 100

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A004-A

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road,
Burwood NSW 2134


PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



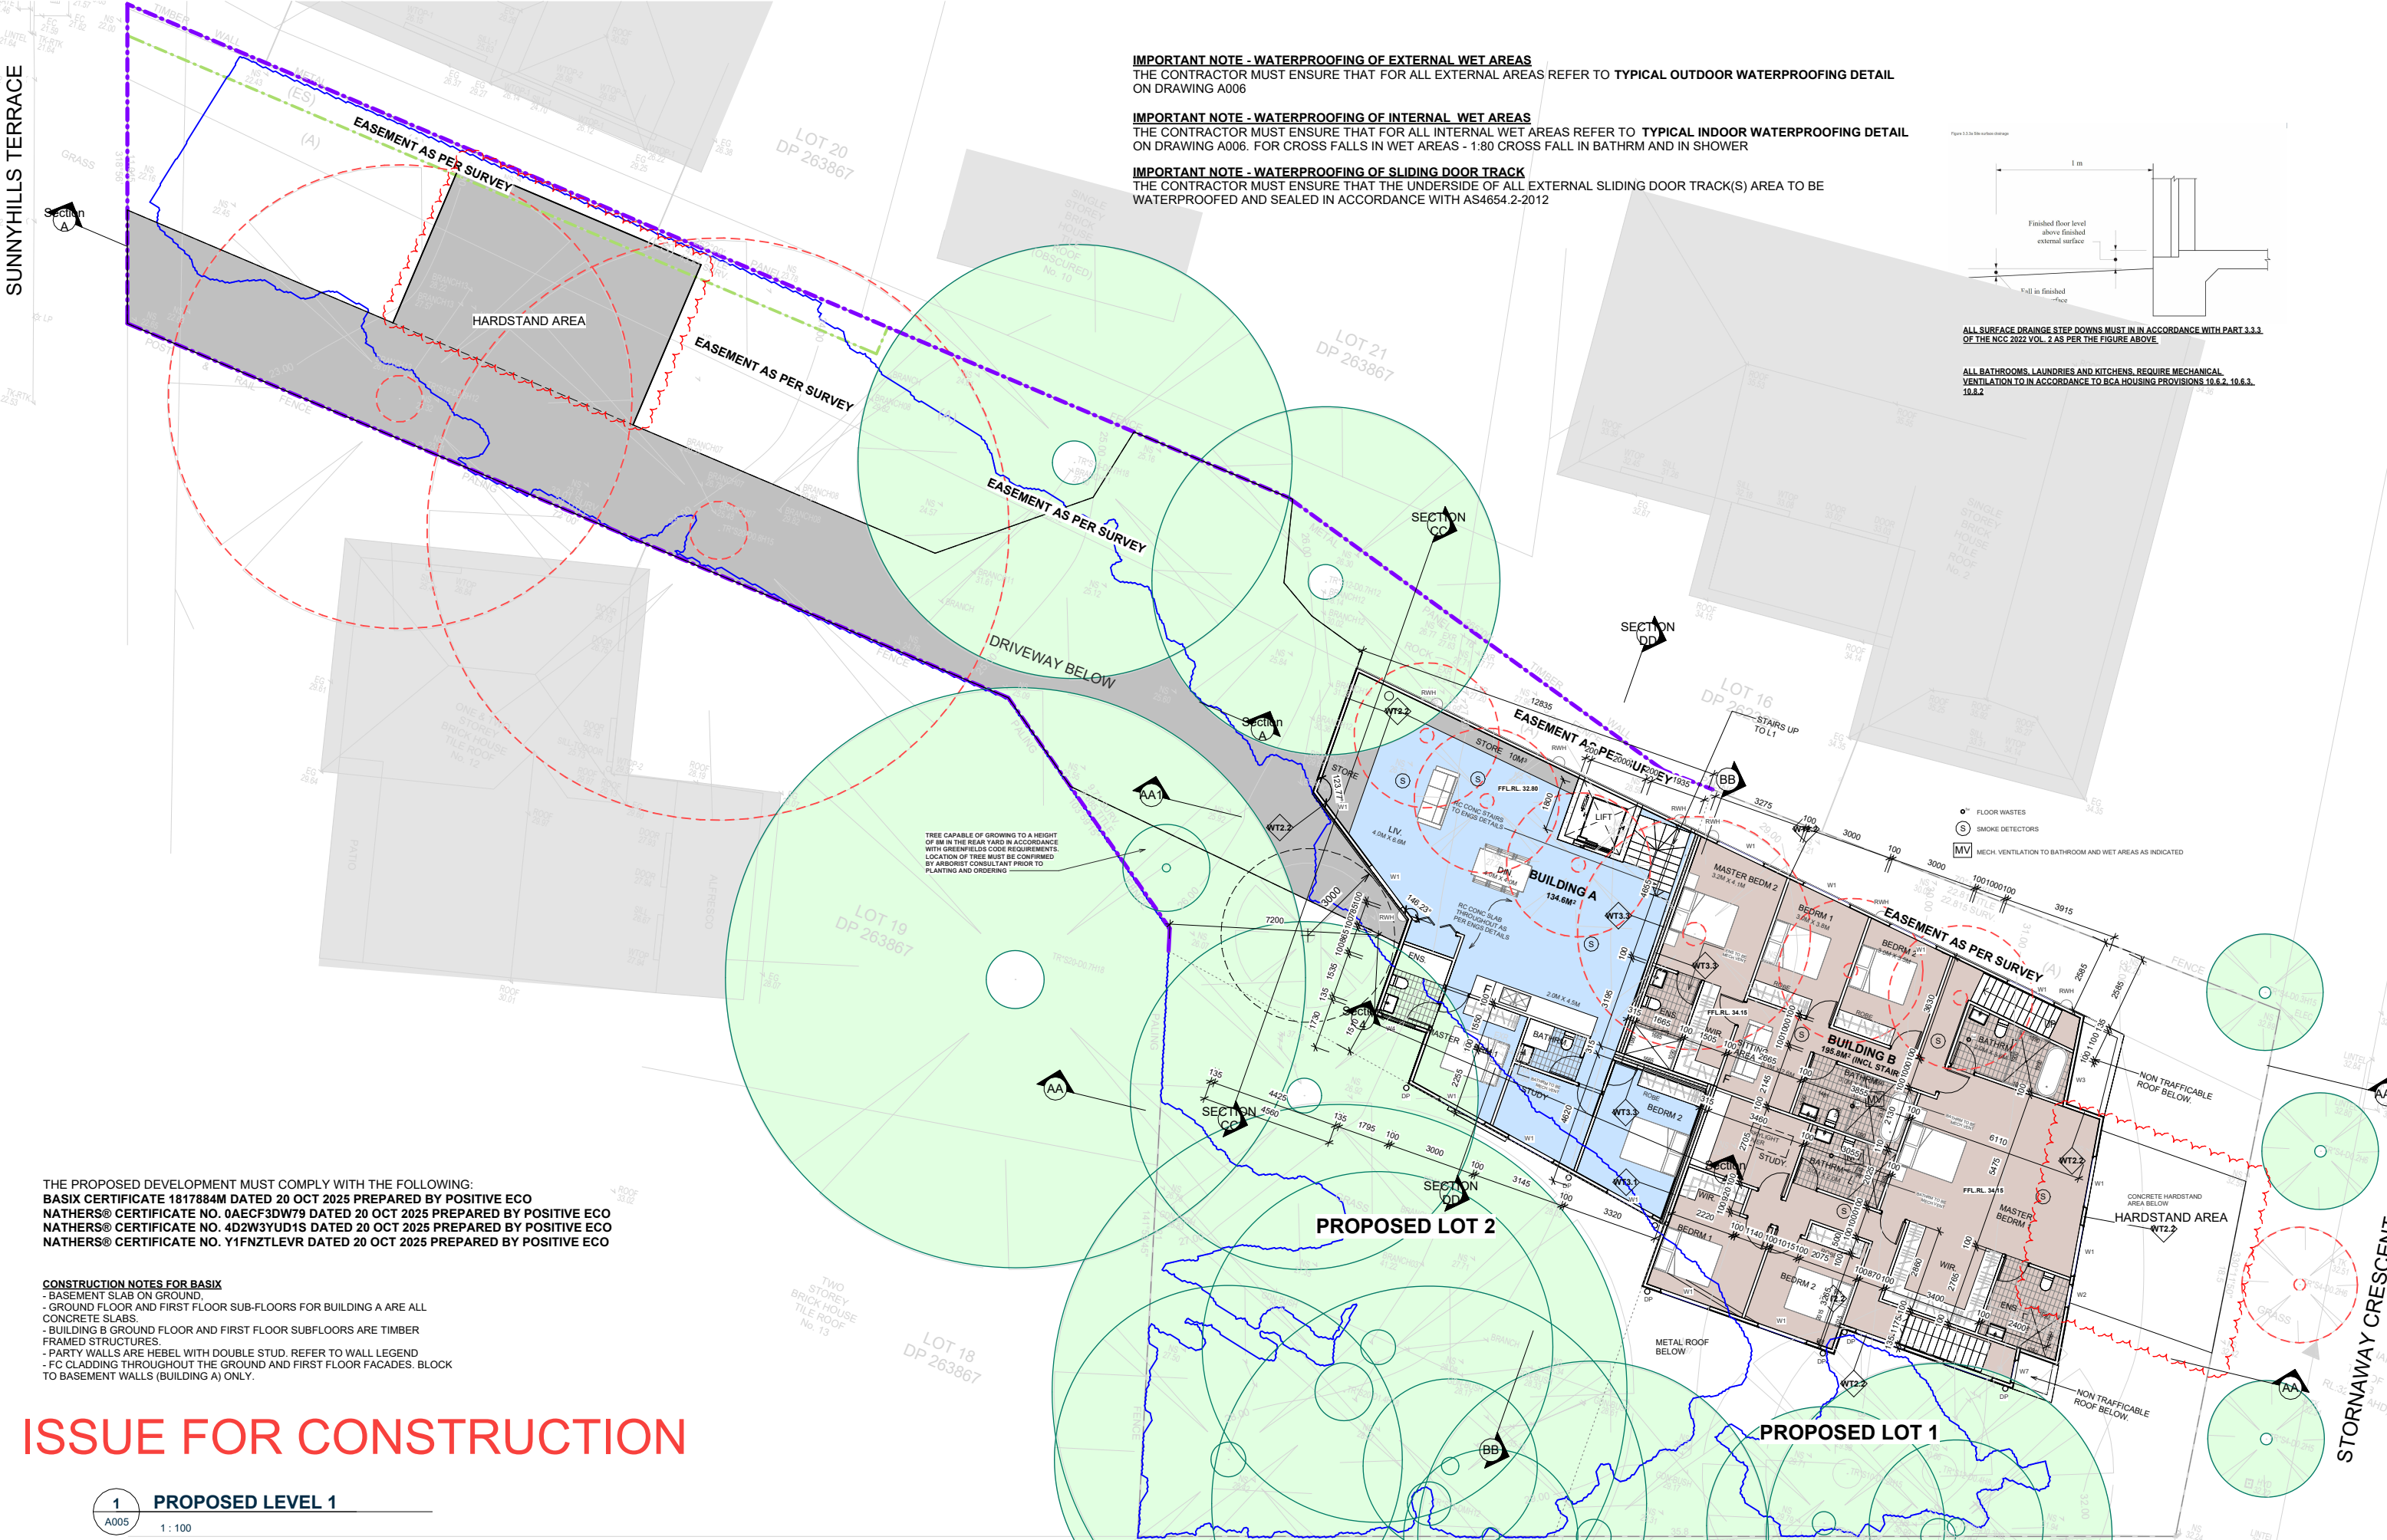

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

CONSTRUCTION NOTES FOR BASIX

- BASEMENT SLAB ON GROUND,
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

ISSUE FOR CONSTRUCTION

1 PROPOSED LEVEL 1
A005 1:100

ARCHITECTURAL - GENERAL NOTES			
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.			
A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.			
A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.			
A4 The Builder/subcontractor shall be held responsible for the waterlogging of the whole building for a minimum period of two years after the date of practical completion.			
A5 In the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may proceed with.			
A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Heights or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.			
A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.			
A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.			
A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.			
A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.			
A11 Foundation set-out, to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.			
A12 All labor work to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification).			
A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.			
A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.			
A15 Comply with the hazardous materials clause of the specification.			
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt in the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT	
2A STORNAWAY CRESCENT, BERKELEY VALE NSW	
Lot 17 in DP 262327	
CLIENT	
GEGE CONSTRUCTIONS PTY LTD	

DRAWING NAME	
LEVEL 1 PLAN	
SCALE @ A1: 1:100	DRAWN: CK
SCALE @ A3:	CHECKER: CK
DATE: 07.04.2026	
JOB NO.	DRAWING NO.
1500-24	A005
ISSUE: A	

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



Section
A

HARDSTAND AREA

EASEMENT AS PER SURVEY


DRIVEWAY BELOW

SECTION
CC

SECTION
DD

PROPOSED LOT 2

PROPOSED LOT 1

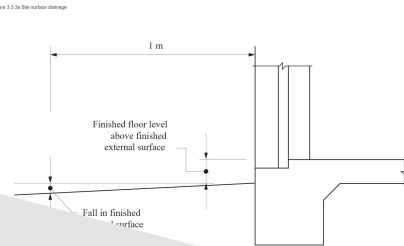

ALL SURFACE DRAINAGE STEP DOWNS MUST IN IN ACCORDANCE WITH PART 3.3.3 OF THE NCC 2022 VOL. 2 AS PER THE FIGURE ABOVE.

ALL BATHROOMS, LAUNDRIES AND KITCHENS, REQUIRE MECHANICAL VENTILATION TO IN ACCORDANCE TO BCA HOUSING PROVISIONS 10.6.2, 10.6.3, 10.8.2

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

CONSTRUCTION NOTES FOR BASIX

- BASEMENT SLAB ON GROUND,
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

ISSUE FOR CONSTRUCTION

1 Level 1 - Dimensions

A005-A

1 : 100

ARCHITECTURAL - GENERAL NOTES			
A1	All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.		
A2	The Builder/Subcontractor will be held responsible for any construction details which have not been approved by the Architect.		
A3	In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.		
A4	The Builder/Subcontractor will be held responsible for the construction of the whole building for a minimum period of two years after the date of practical completion.		
A5	It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.		
A6	All construction, central joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Heights or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.		
A7	Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.		
A8	All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.		
A9	All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.		
A10	No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.		
A11	Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.		
A12	All labor work to comply with the requirements of the Light Timber Framing Code (S.A.A. Codes and Structural Engineer's details and specification.		
A13	Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.		
A14	All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.		
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, The Tenderer and/or Contractor nullifies any right or claim for costs, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT
2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT
GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME
LEVEL 1 - DIMENSIONS

SCALE @ A1: 1 : 100
SCALE @ A3:

DRAWN: CK
CHECKER: CK

DATE: 07.04.2026

JOB NO.
1500-24

DRAWING NO.
A005-A

ISSUE:
A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road,
Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1617884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

- CONSTRUCTION NOTES FOR BASIX**
- BASEMENT SLAB ON GROUND.
 - GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
 - BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
 - PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
 - FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

ISSUE FOR CONSTRUCTION

1
A006

Roof Plan

1 : 100

IMPORTANT NOTE - WATERPROOFING OF EXTERNAL WET AREAS

THE CONTRACTOR MUST ENSURE THAT FOR ALL EXTERNAL AREAS REFER TO TYPICAL OUTDOOR WATERPROOFING DETAIL ON DRAWING A006


IMPORTANT NOTE - WATERPROOFING OF INTERNAL WET AREAS

THE CONTRACTOR MUST ENSURE THAT FOR ALL INTERNAL WET AREAS REFER TO TYPICAL INDOOR WATERPROOFING DETAIL ON DRAWING A006. FOR CROSS FALLS IN WET AREAS - 1:80 CROSS FALL IN BATHRM AND IN SHOWER

IMPORTANT NOTE - WATERPROOFING OF SLIDING DOOR TRACK


THE CONTRACTOR MUST ENSURE THAT THE UNDERSIDE OF ALL EXTERNAL SLIDING DOOR TRACK(S) AREA TO BE WATERPROOFED AND SEALED IN ACCORDANCE WITH AS4654.2-2012

Figure 2.3.3a: Slope section drainage

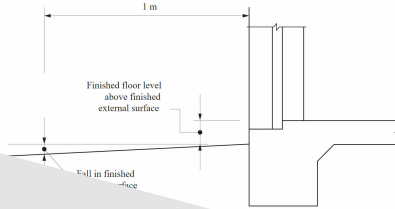

ALL SURFACE DRAINAGE STEP DOWNS MUST IN IN ACCORDANCE WITH PART 3.3.3 OF THE NCC 2022 VOL. 2 AS PER THE FIGURE ABOVE.

ALL BATHROOMS, LAUNDRIES AND KITCHENS, REQUIRE MECHANICAL VENTILATION TO IN ACCORDANCE TO BCA HOUSING PROVISIONS 10.6.2, 10.6.3, 10.8.2

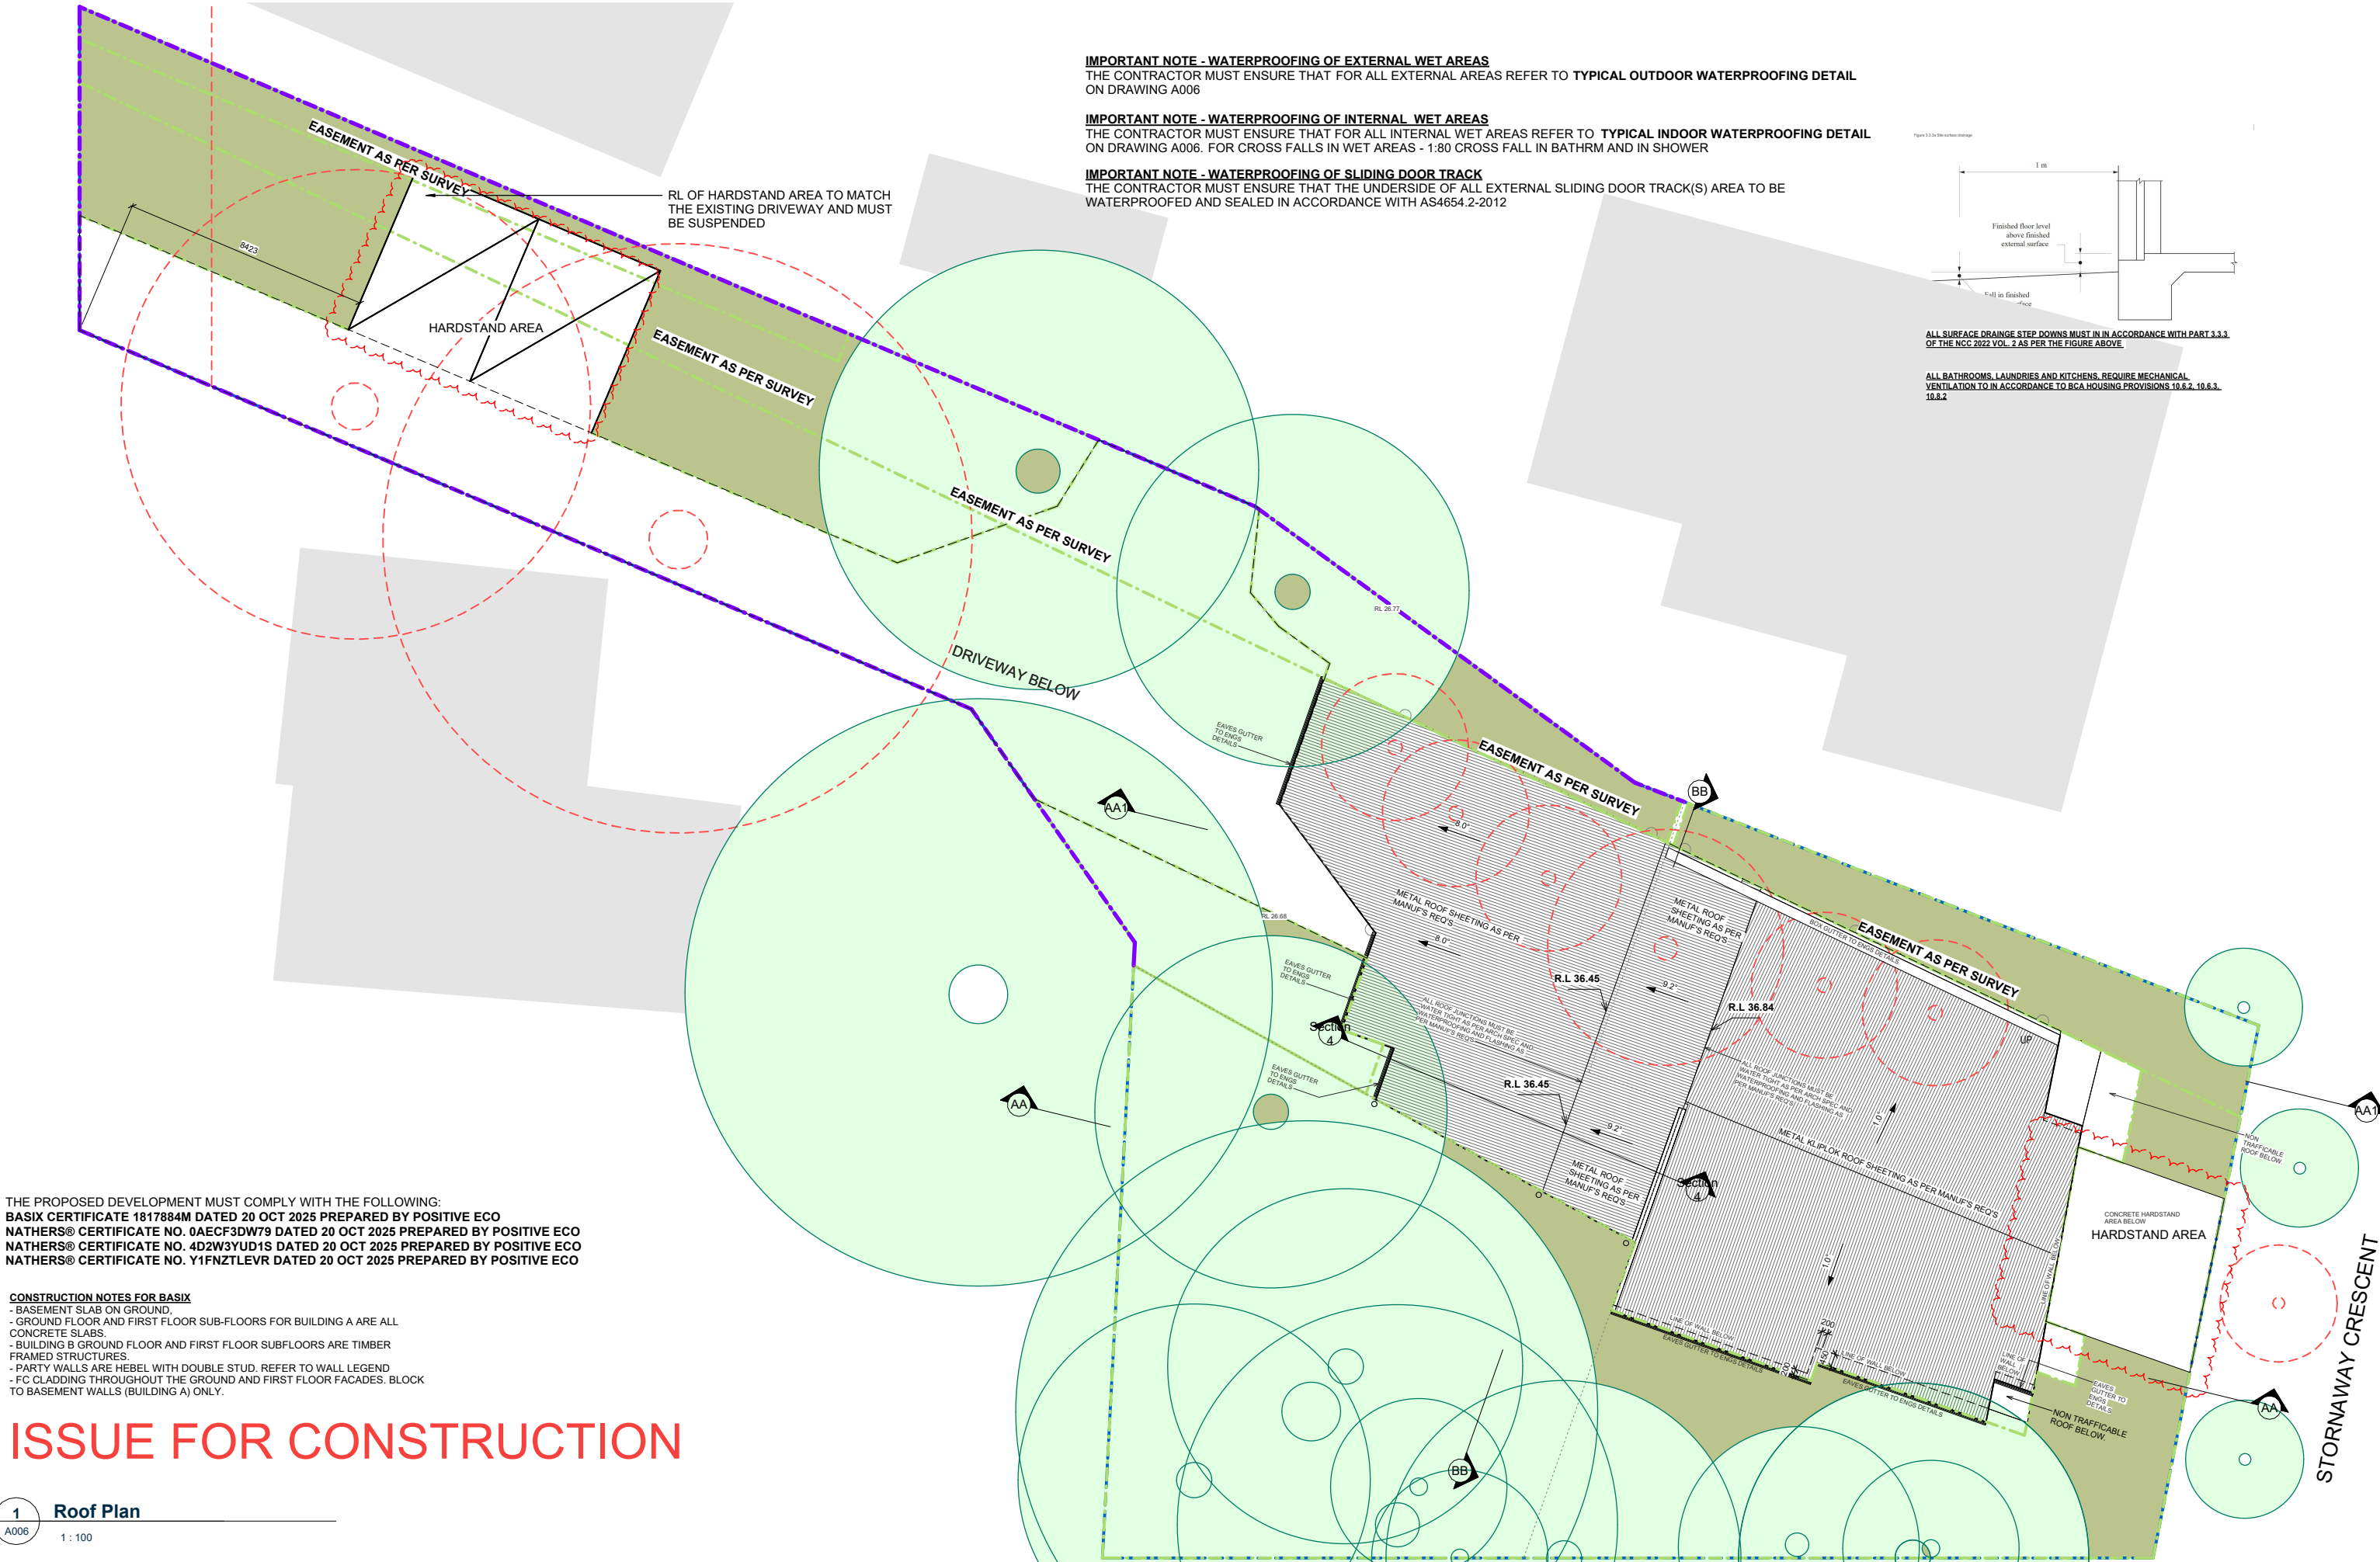

ARCHITECTURAL - GENERAL NOTES			
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.			
A2 The Builder/Subcontractor will be held responsible for any construction details which have not been approved by the Architect.			
A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.			
A4 The Builder/Subcontractor shall be held responsible for the construction of the building for a minimum period of two years after the date of practical completion.			
A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.			
A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Repairs or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.			
A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.			
A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details from part of the total specification.			
A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.			
A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.			
A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.			
A12 All timber work is to comply with the requirements of the Light Timber Framing Code (S.A.A. Codes and Structural Engineer's details and specification.			
A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.			
A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.			
A15 Comply with the hazardous materials' clause of the specification.			
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt in the availability of such document's the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, The Tenderer and/or Contractor nullifies any right or claim for costs, due to integration of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

ROOF PLAN

SCALE @ A1: 1 : 100

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A006

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134


PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970




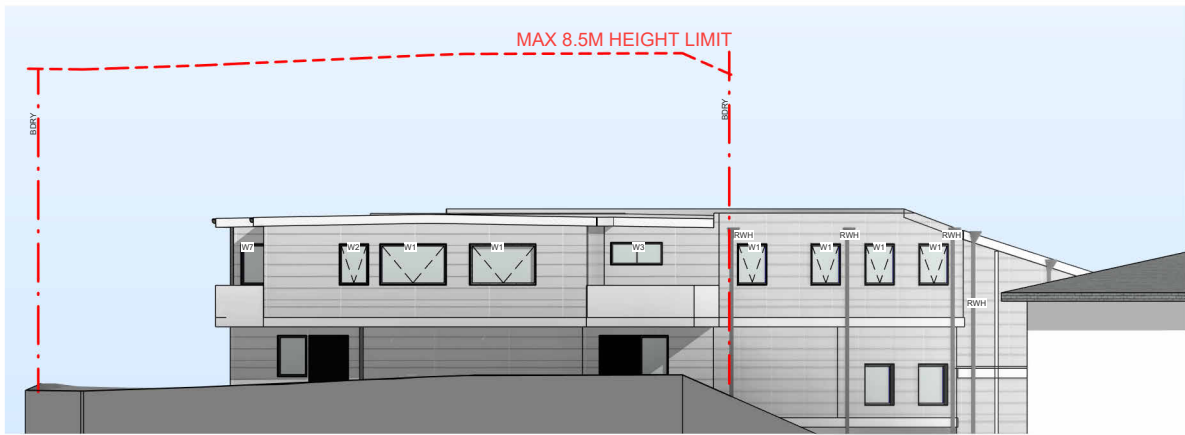


2 North-East Elevation -(STORNAWAY CRESCENT)
A008 1 : 100



1 South-West Elevation (rear)
A008 1 : 100

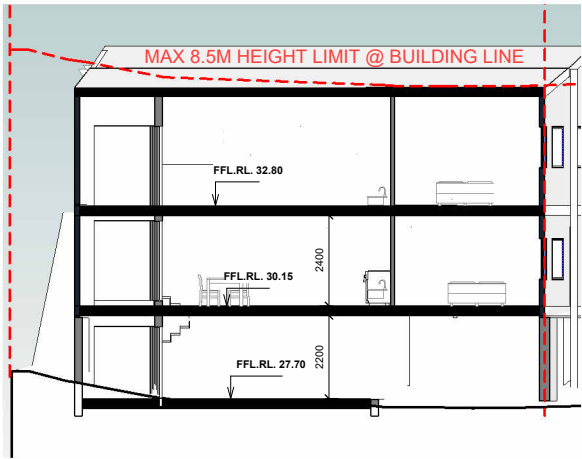


7 SECTION DD
A008 1 : 100

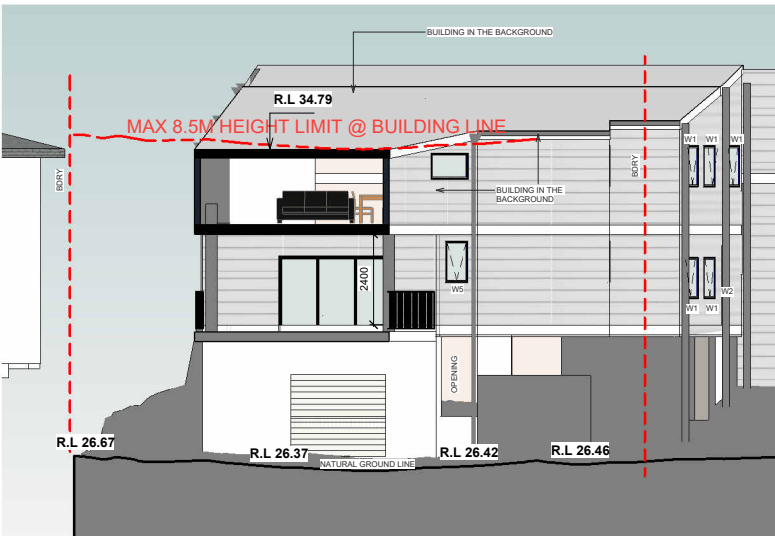

5 SECTION CC
A008 1 : 100

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

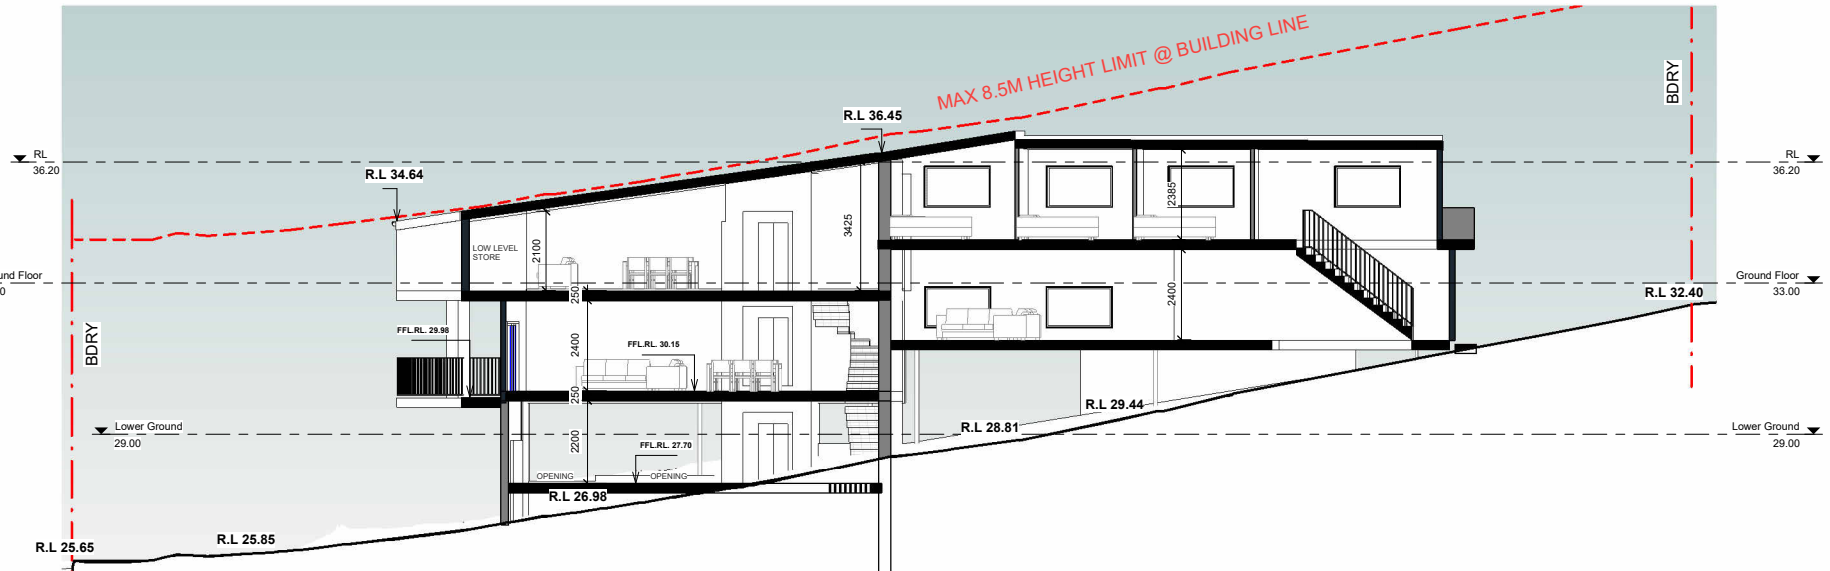


6 SECTION AA1
A008 1 : 100



3 SECTION AA
A008 1 : 100

CONSTRUCTION NOTES FOR BASIX
- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

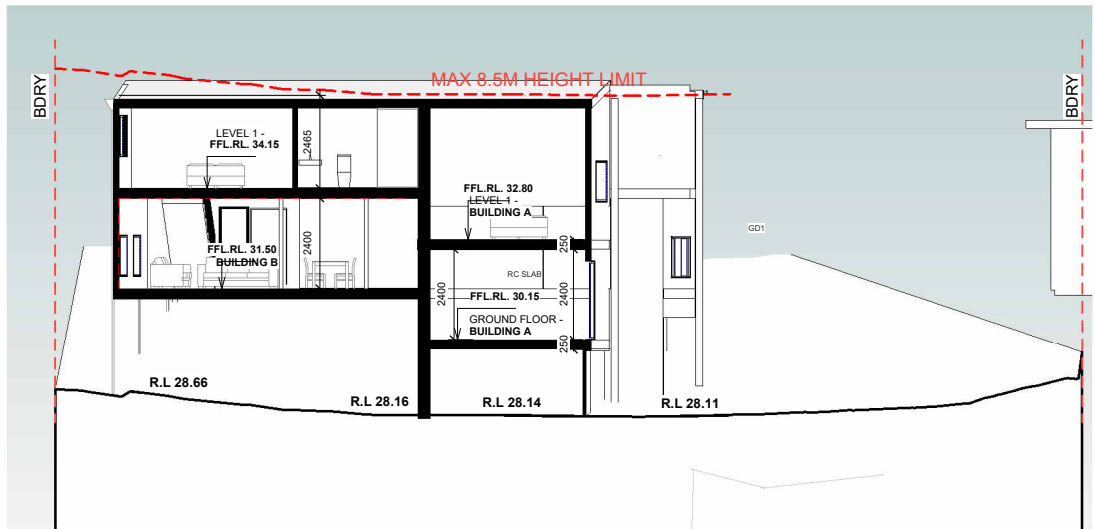

4 SECTION BB
A008 1 : 100

ISSUE FOR CONSTRUCTION

ARCHITECTURAL - GENERAL NOTES
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any discrepancies must be reported to the Architect before commencement of any work.
A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.
A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.
A4 The Builder/subcontractor shall be held responsible for the construction of the whole building for a minimum period of two years after the date of practical completion.
A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities before the start of construction.
A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Repairs or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.
A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.
A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.
A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.
A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.
A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.
A12 All labor work to comply with the requirements of the Light Timber Framing Code S.A.A. Codes and Structural Engineer's details and specification.
A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.
A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.
A15 Comply with the "hazardous materials" clause of the specification.
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt in the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to integration of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN DATE ISSUE AMENDMENT
CK 07.04.2026 A ISSUE FOR CONSTRUCTION

PROJECT
2A STORNAWAY CRESCENT, BERKELEY VALE NSW
Lot 17 in DP 262327
CLIENT
GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME
ELEVATIONS

SCALE @ A1: 1 : 100
SCALE @ A3:

DRAWN: CK
CHECKER: CK

DATE: 07.04.2026

JOB NO.
1500-24

DRAWING NO.
A008


ISSUE:
A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



STORNAWAY
CRESCENT

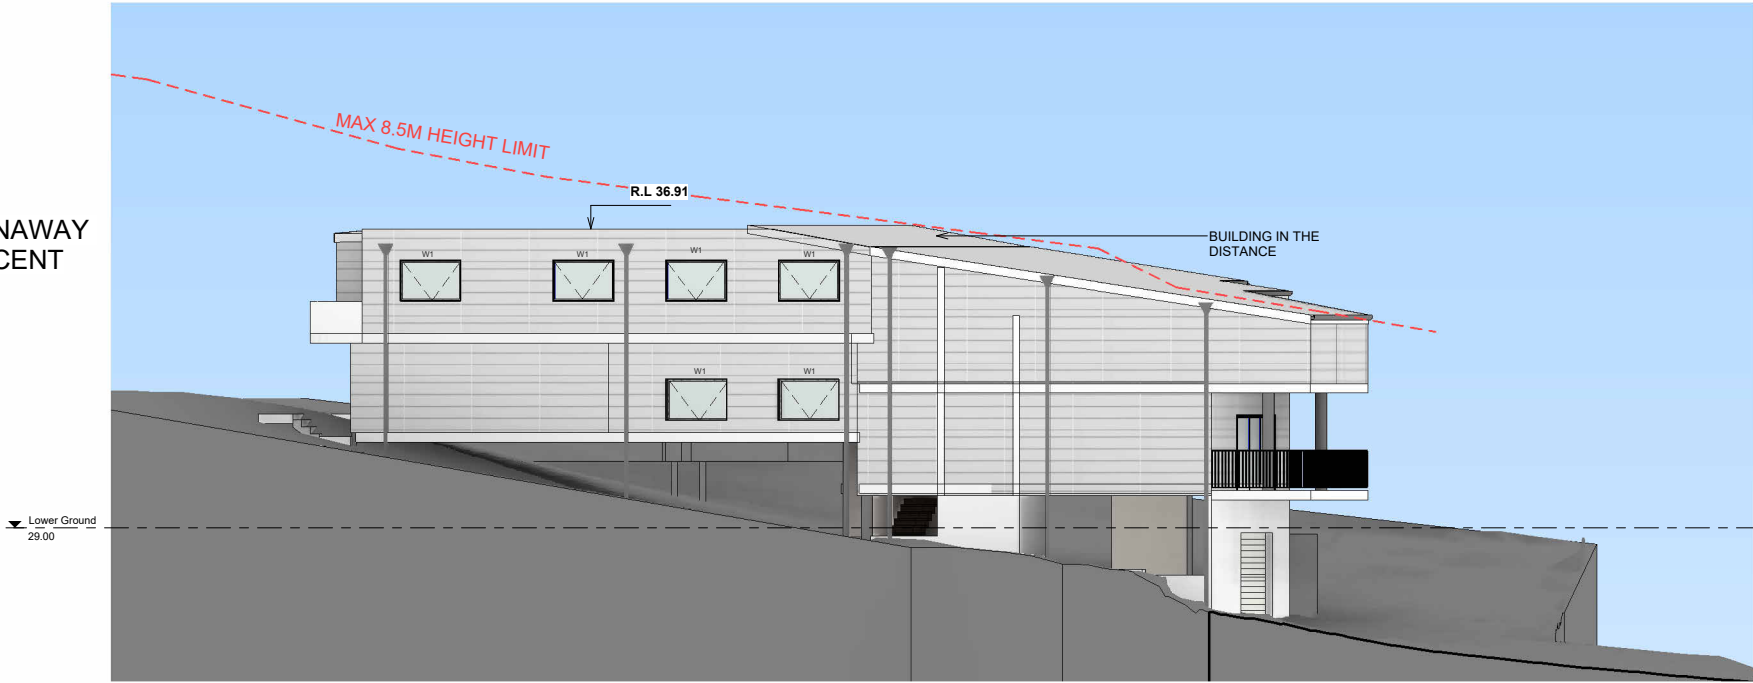

2 NORTH ELEVATION
A010 1 : 100




1 SOUTH ELEVATION
A010 1 : 100

CONSTRUCTION NOTES FOR BASIX


- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HERBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:

BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

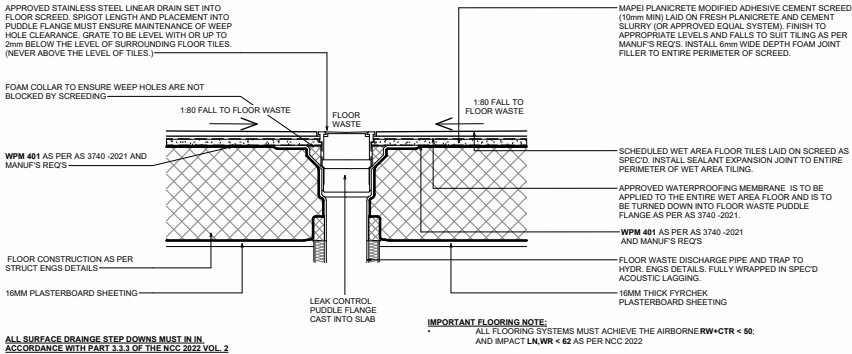

3 Typical Indoor Waterproofing Detail
A010 1 : 10

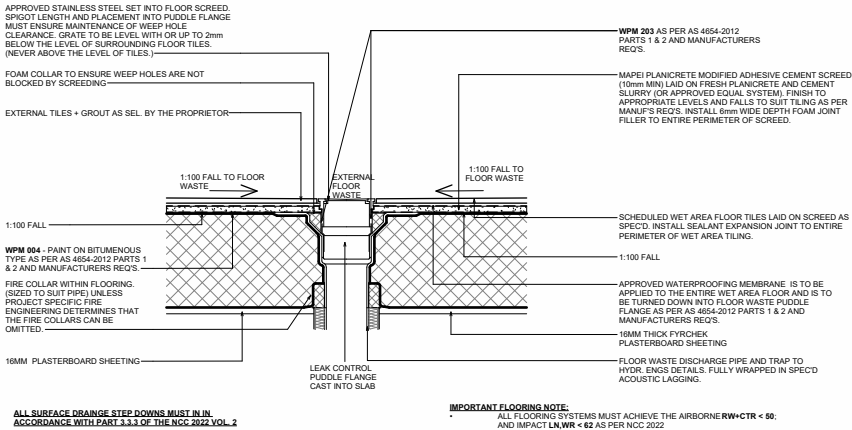

4 Typical Outdoor Waterproofing Detail
A010 1 : 10

ISSUE FOR CONSTRUCTION

ARCHITECTURAL - GENERAL NOTES			
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.			
A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.			
A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.			
A4 The Builder/subcontractor will be held responsible for the maintenance of the whole building for a minimum period of two years after the date of practical completion.			
A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.			
A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.			
A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.			
A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.			
A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.			
A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.			
A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.			
A12 All timber work is to comply with the requirements of the Light Timber Framing Code S.A.A. Codes and Structural Engineer's details and specification.			
A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.			
A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.			
A15 Comply with the 'hazardous materials' clause of the specification.			
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

NORTH & SOUTH ELEVATIONS

SCALE @ A1: As indicated

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A010

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia


P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

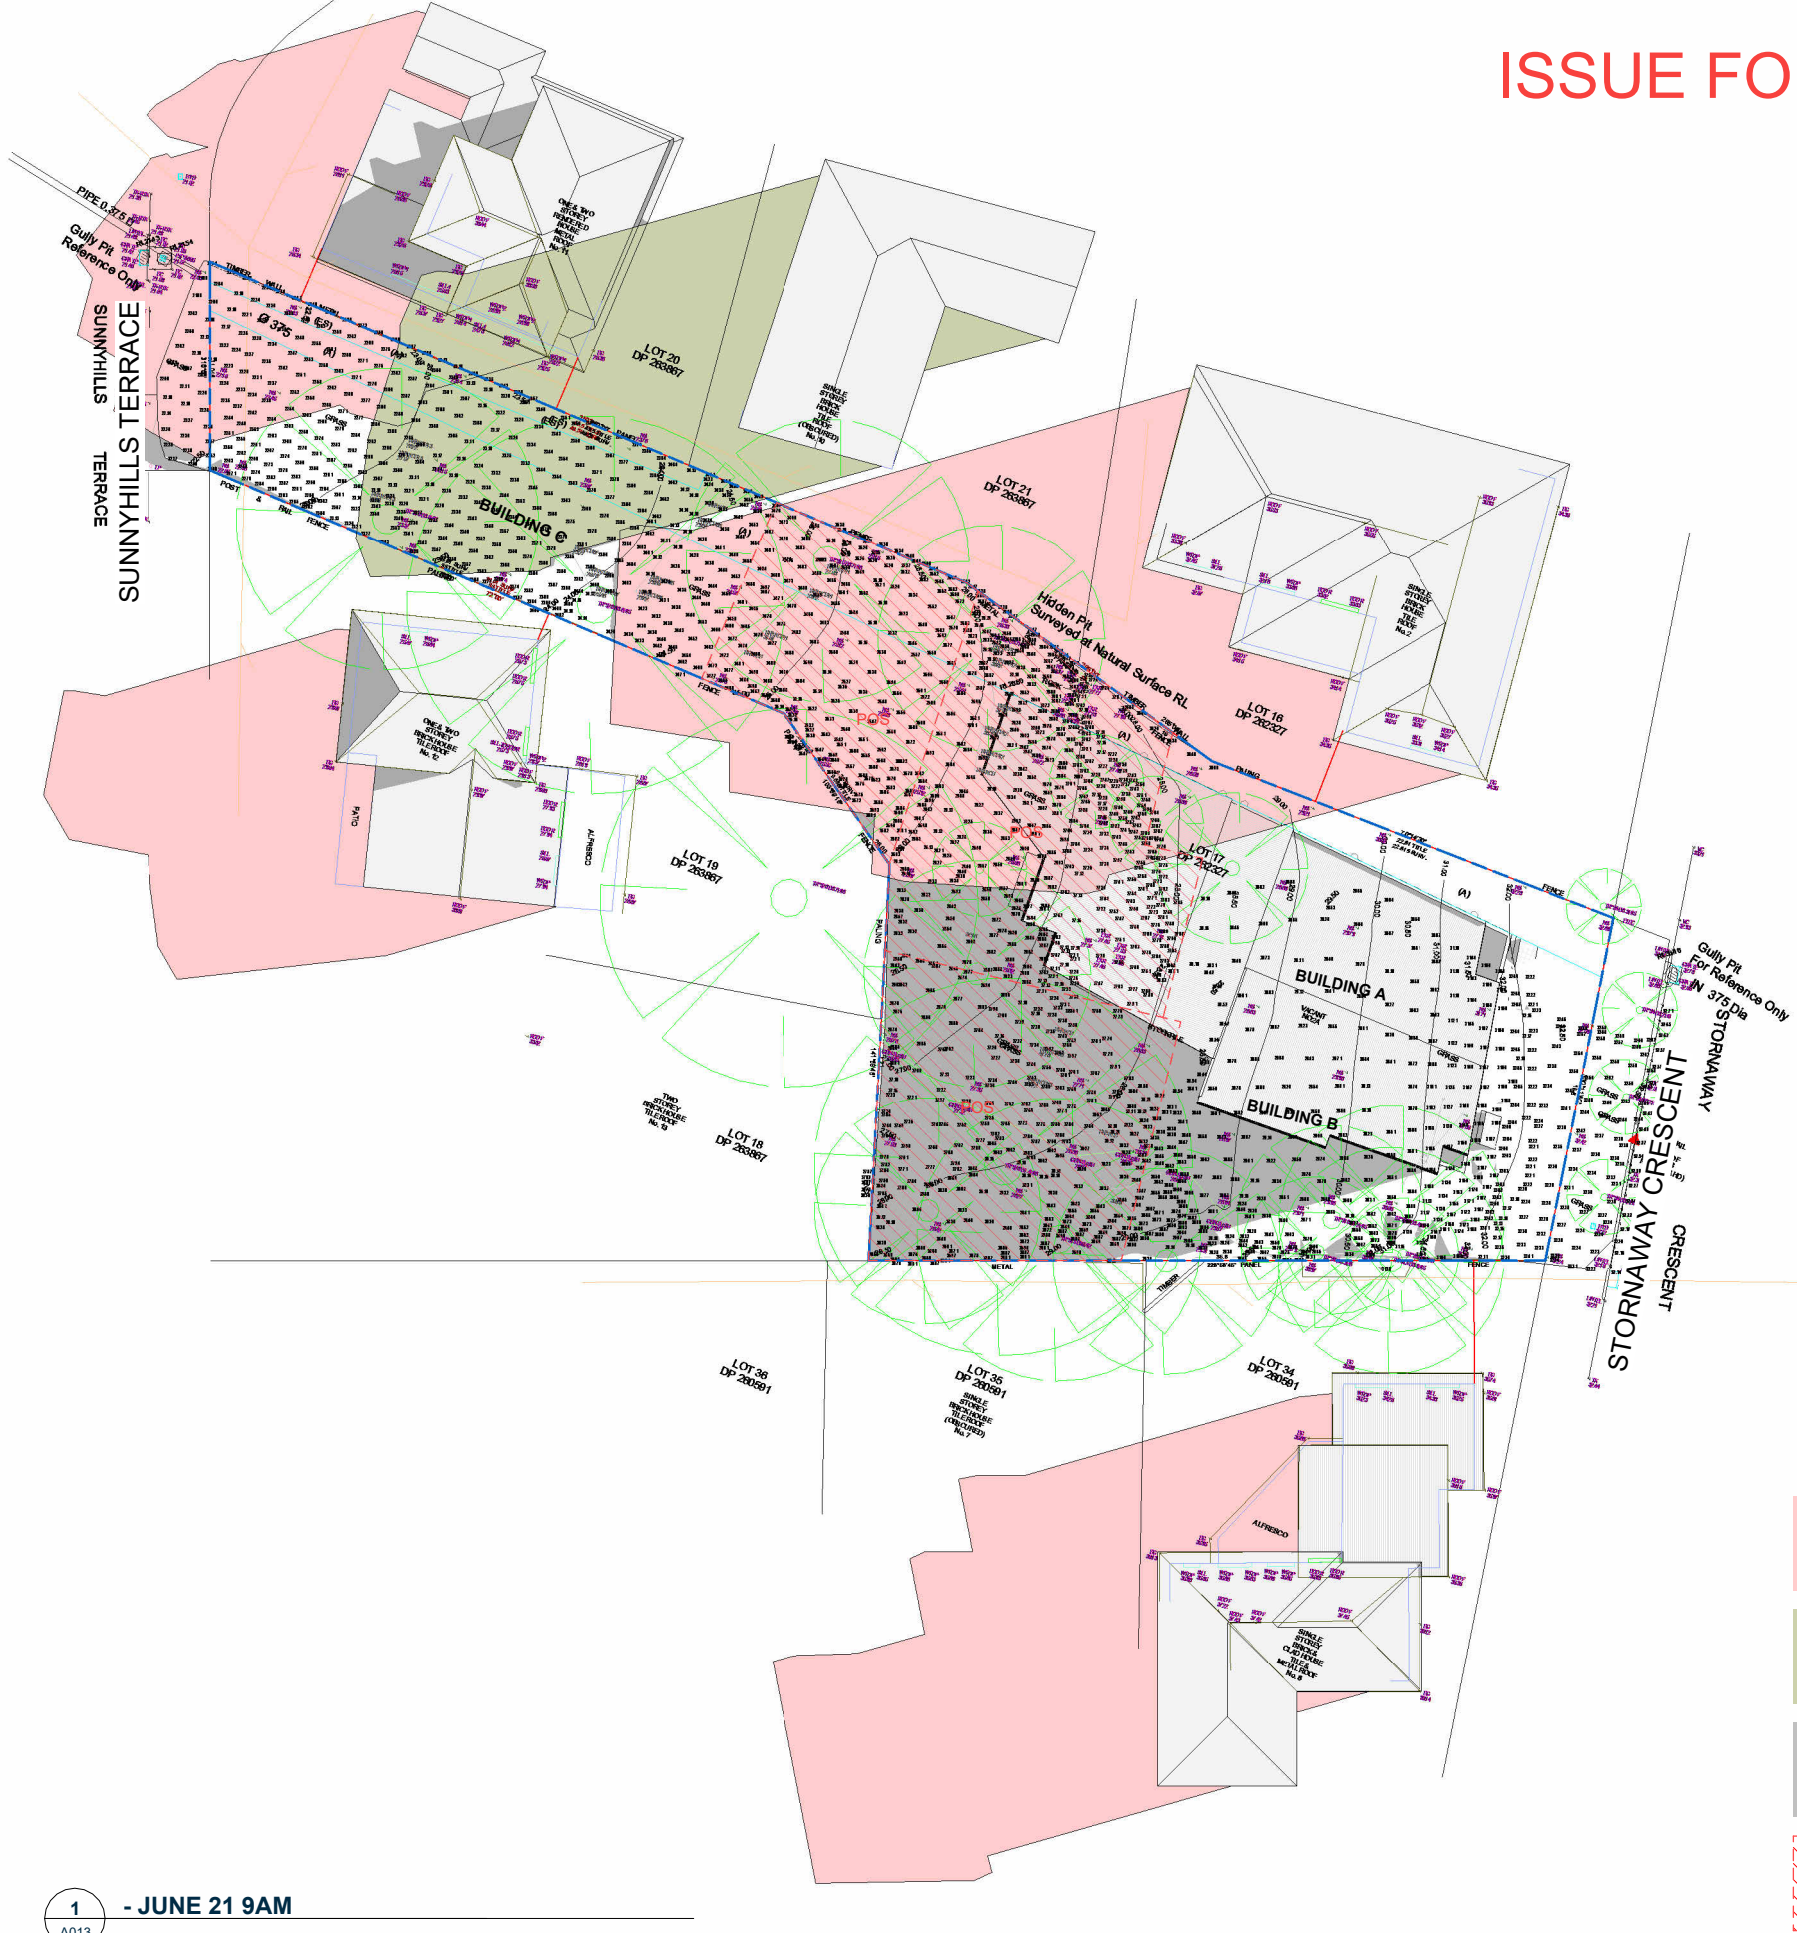

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any discrepancies must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the veracity of the information of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may proceed with.

A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Repairs or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.

A12 All brickwork is to comply with the requirements of the Light Timber Framing Code of Practice, S.A. Codes and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the "hazardous materials" clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt in the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION


PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

SHADOWS - JUNE 21 - 9AM


SCALE @ A1: 1 : 200	DRAWN: CK	DATE: 07.04.2026
SCALE @ A3:	CHECKER: CK	
JOB NO. 1500-24	DRAWING NO. A013	ISSUE: A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

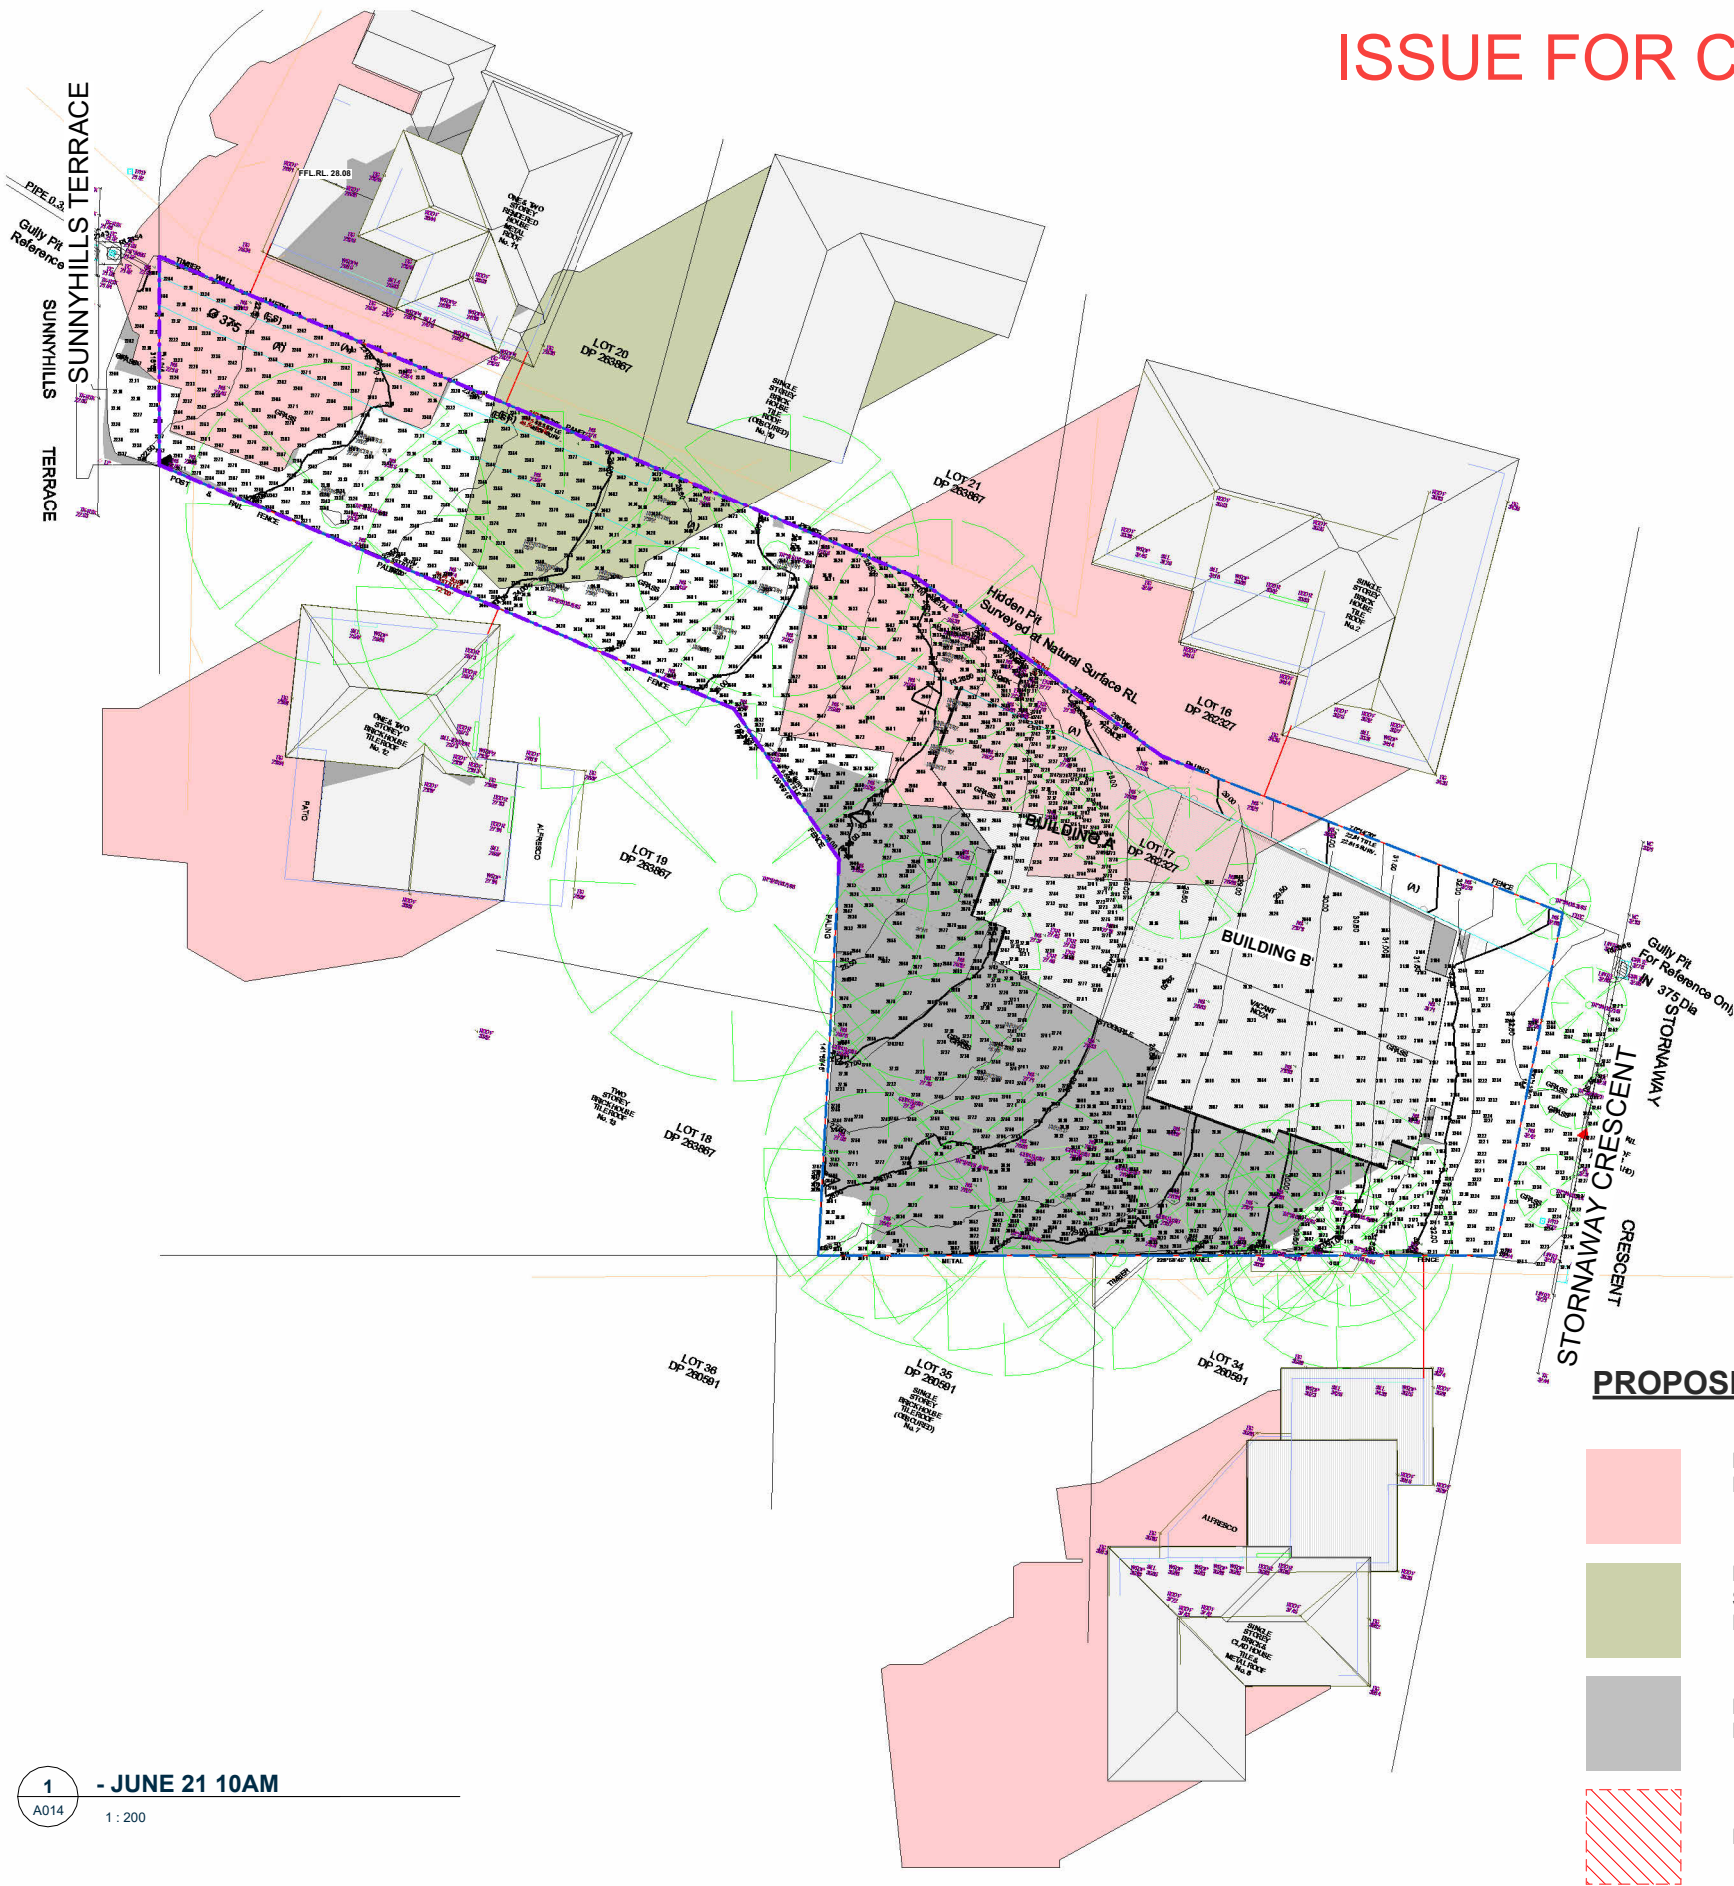

1 - JUNE 21 10AM
A014 1 : 200

PROPOSED SHADOW DIAGRAM LEGEND:

-  DENOTES EXISTING SHADOWS CASTED BY EXISTING NEIGHBOURING BUILDINGS
-  DENOTES EXISTING INDICATIVE SHADOWS CASTED BY 10 SUNNYHILLS TERRACE (NEIGHBOURING BUILDING) AS THERE IS NO SURVEY INFORMATION
-  DENOTES PROPOSED SHADOWS CASTED BY PROPOSED BUILDINGS AT 2A STORNAWAY CRESCENT, BERKELEY VALE NSW
-  DENOTES PRINCIPAL PRIVATE OPEN SPACE(S)

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any discrepancies must be reported to the Architect before commencement of any work.

A2 The Builder/Subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/Subcontractor will be held responsible for the easements of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.

A12 All labor work is to comply with the requirements of the Light Timber Framing Code 3 A A Code and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the "hazardous materials" clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION


PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

SHADOWS - JUNE 21 - 10AM

SCALE @ A1: 1 : 200
SCALE @ A3:

JOB NO.
1500-24

DRAWN: CK
CHECKER: CK
DATE: 07.04.2026

DRAWING NO.
A014

ISSUE:
A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia


P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

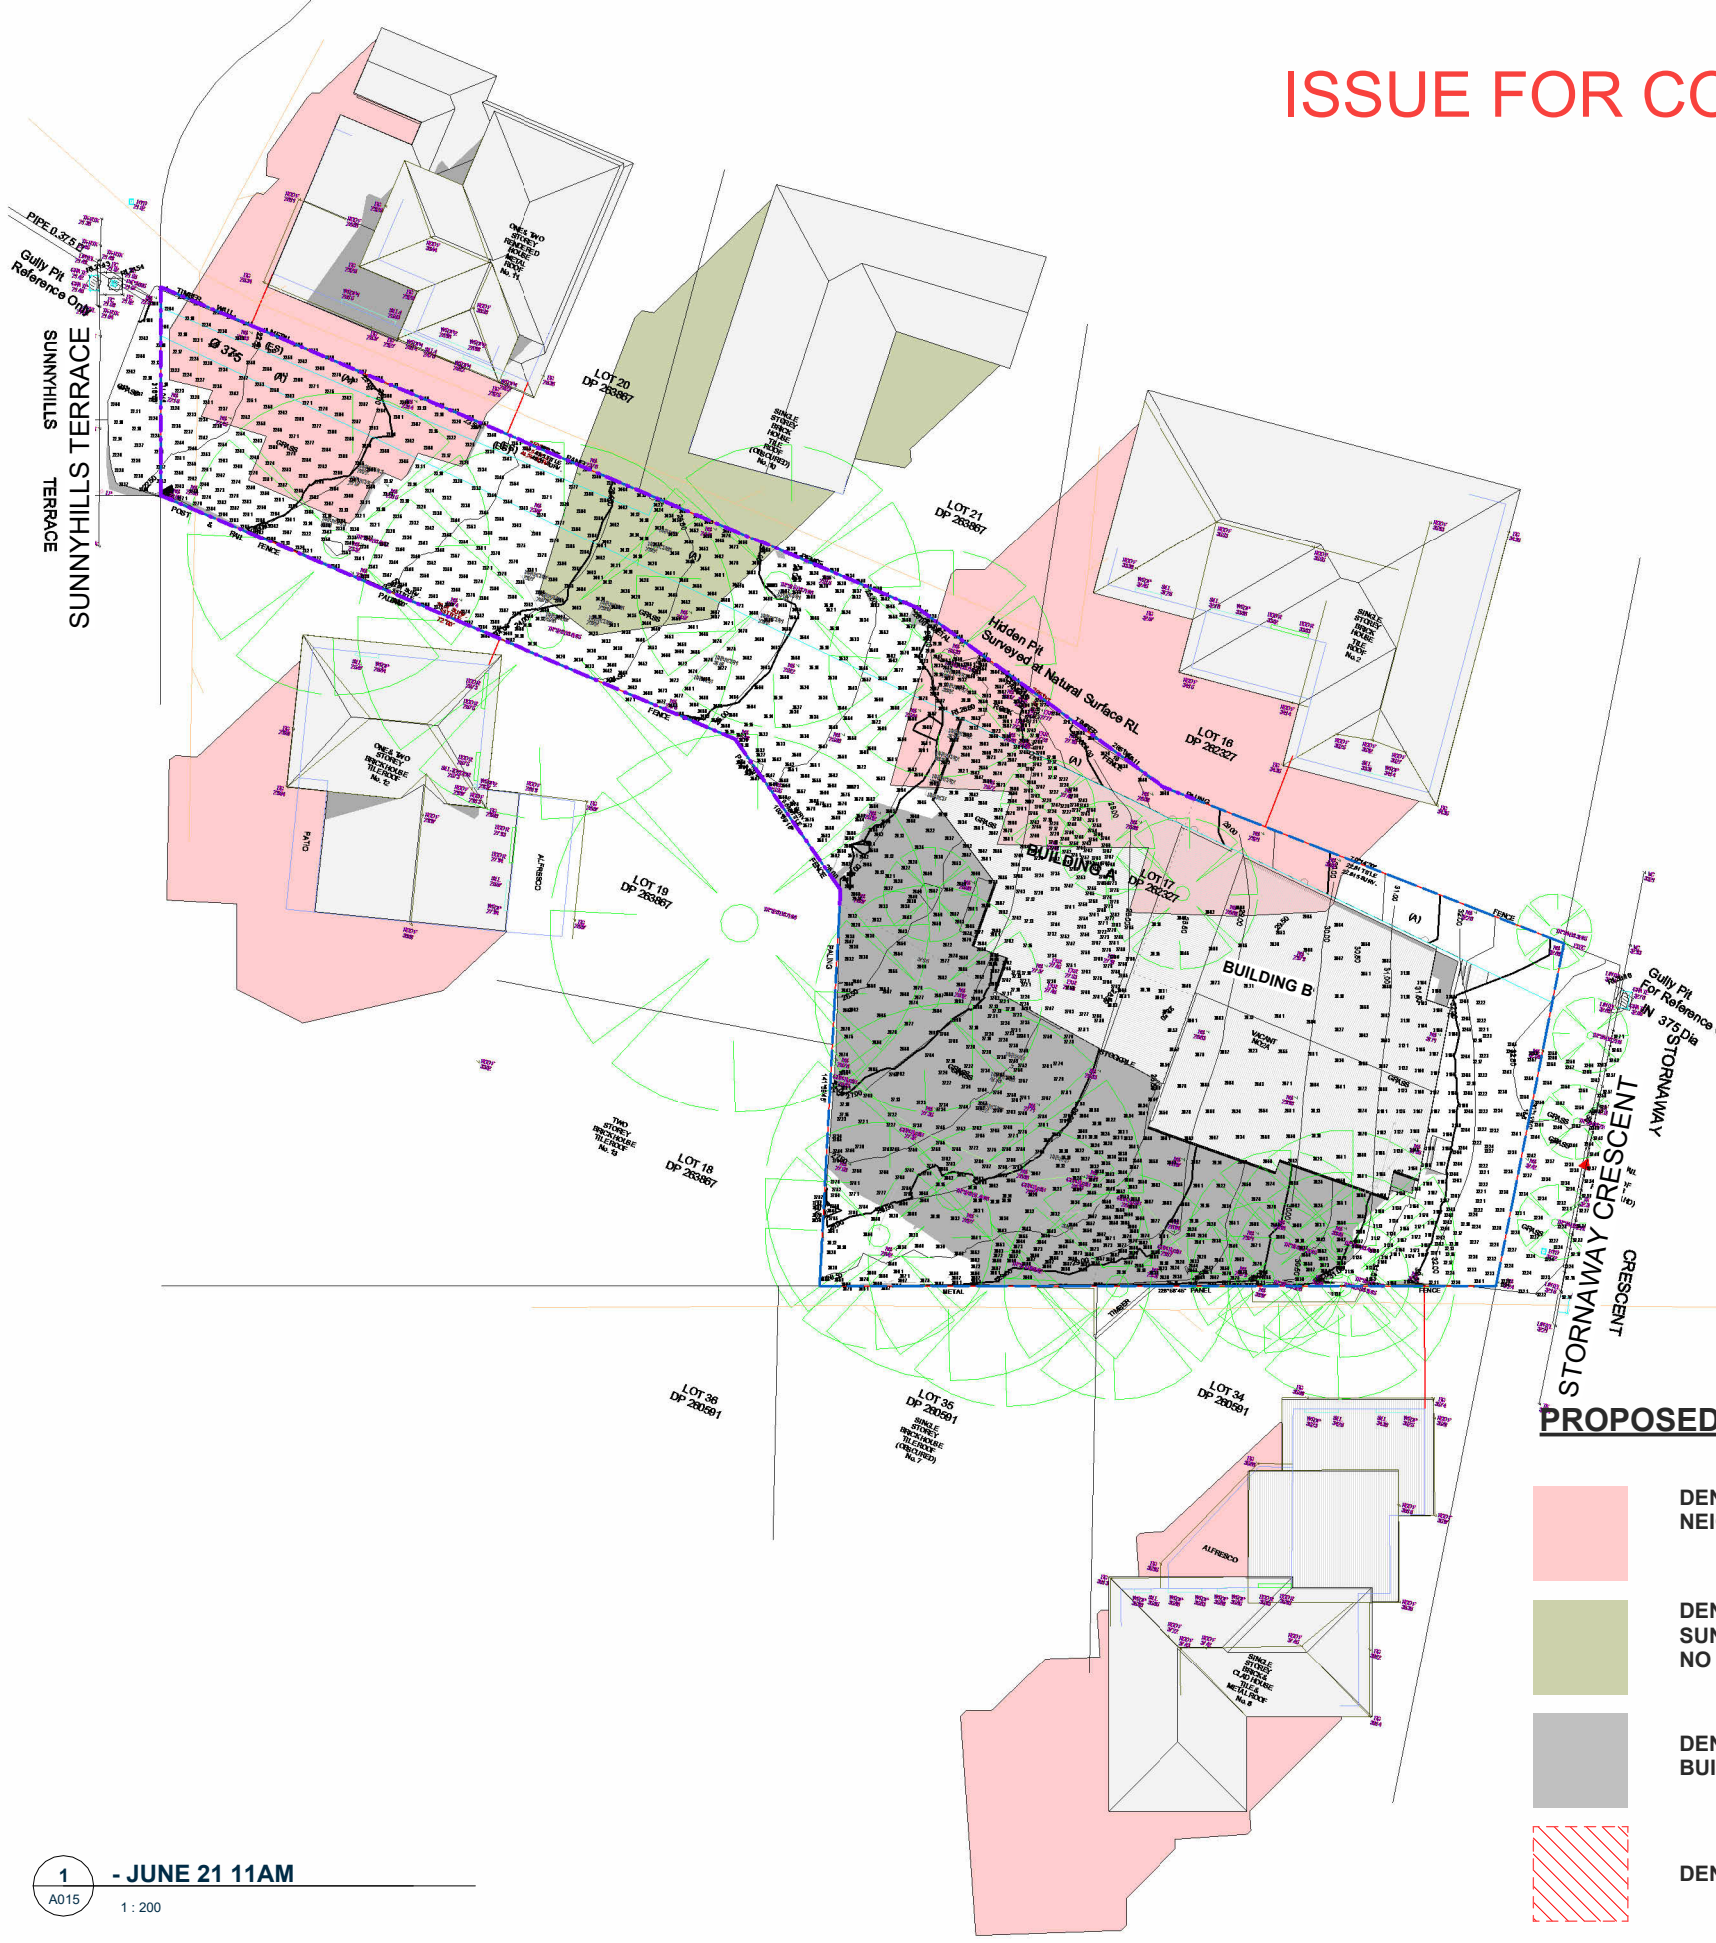

PROPOSED SHADOW DIAGRAM LEGEND:

- DENOTES EXISTING SHADOWS CASTED BY EXISTING NEIGHBOURING BUILDINGS
- DENOTES EXISTING INDICATIVE SHADOWS CASTED BY 10 SUNNYHILLS TERRACE (NEIGHBOURING BUILDING) AS THERE IS NO SURVEY INFORMATION
- DENOTES PROPOSED SHADOWS CASTED BY PROPOSED BUILDINGS AT 2A STORNAWAY CRESCENT, BERKELEY VALE NSW
- DENOTES PRINCIPAL PRIVATE OPEN SPACE(S)

1 - JUNE 21 11AM
A015
1 : 200

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.

A2 The Builder/Subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/Subcontractor will be held responsible for the easements of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Repairs or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details from part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.

A12 All labor work to comply with the requirements of the Light Timber Framing Code of A.A. Codes and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the "hazardous materials" clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION


PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

SHADOWS - JUNE 21 - 11AM

SCALE @ A1: 1 : 200	DRAWN: CK	DATE: 07.04.2026
SCALE @ A3:	CHECKER: CK	
JOB NO. 1500-24	DRAWING NO. A015	ISSUE: A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia


P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



ISSUE FOR CONSTRUCTION

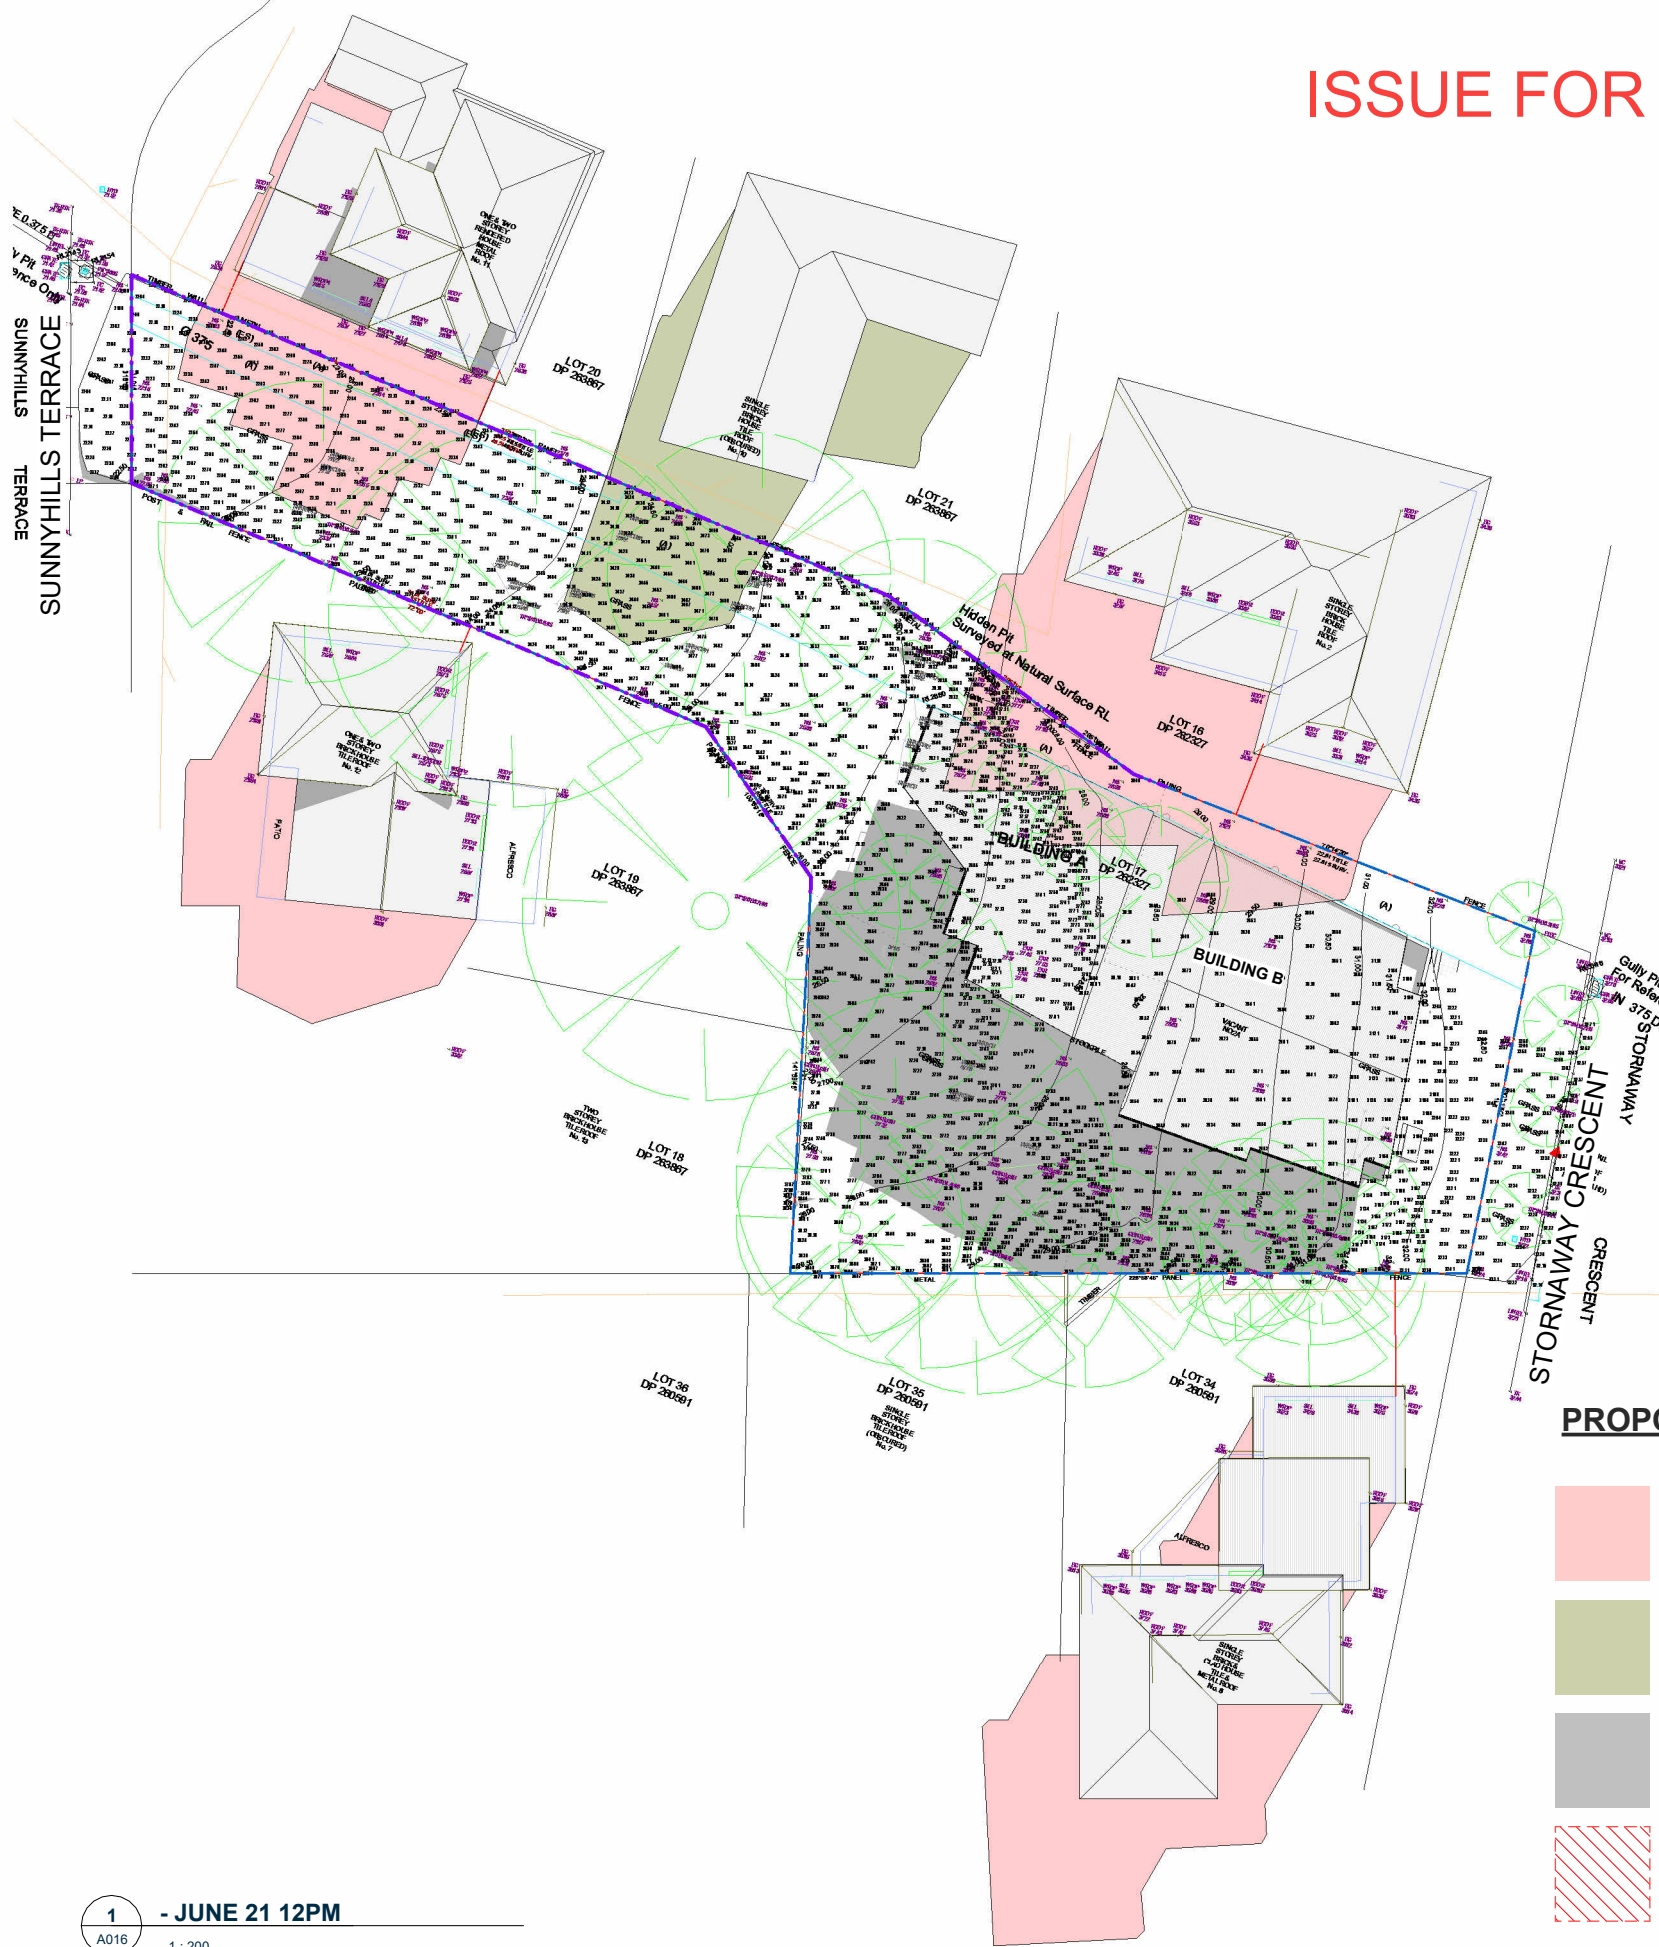

ARCHITECTURAL - GENERAL NOTES			
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.			
A2 The Builder/Subcontractor will be held responsible for any construction details which have not been approved by the Architect.			
A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/Subcontractor shall contact the Architect before proceeding further with any work.			
A4 The Builder/Subcontractor will be held responsible for the easement/egress of the whole building for a minimum period of two years after the date of practical completion.			
A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.			
A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.			
A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.			
A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.			
A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.			
A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.			
A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.			
A12 All brickwork to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification).			
A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.			
A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.			
A15 Comply with the "hazardous materials" clause of the specification.			
IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to integration of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.			

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT	
2A STORNAWAY CRESCENT, BERKELEY VALE NSW	
Lot 17 in DP 262327	
CLIENT	
GEGE CONSTRUCTIONS PTY LTD	



DRAWING NAME	
SHADOWS - JUNE 21 - 12PM	

SCALE @ A1: 1 : 200
SCALE @ A3:

DRAWN: CK
CHECKER: CK

DATE: 07.04.2026

JOB NO.
1500-24

DRAWING NO.
A016

ISSUE:
A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



SUNNYHILLS TERRACE



DENOTES PRINCIPAL PRIVATE OPEN SPACE(S)

1 : 200

SUNNYHILLS TERRACE




DENOTES PRINCIPAL PRIVATE OPEN SPACE(S)



ISSUE FOR CONSTRUCTION

SUNNYHILLS TERRACE

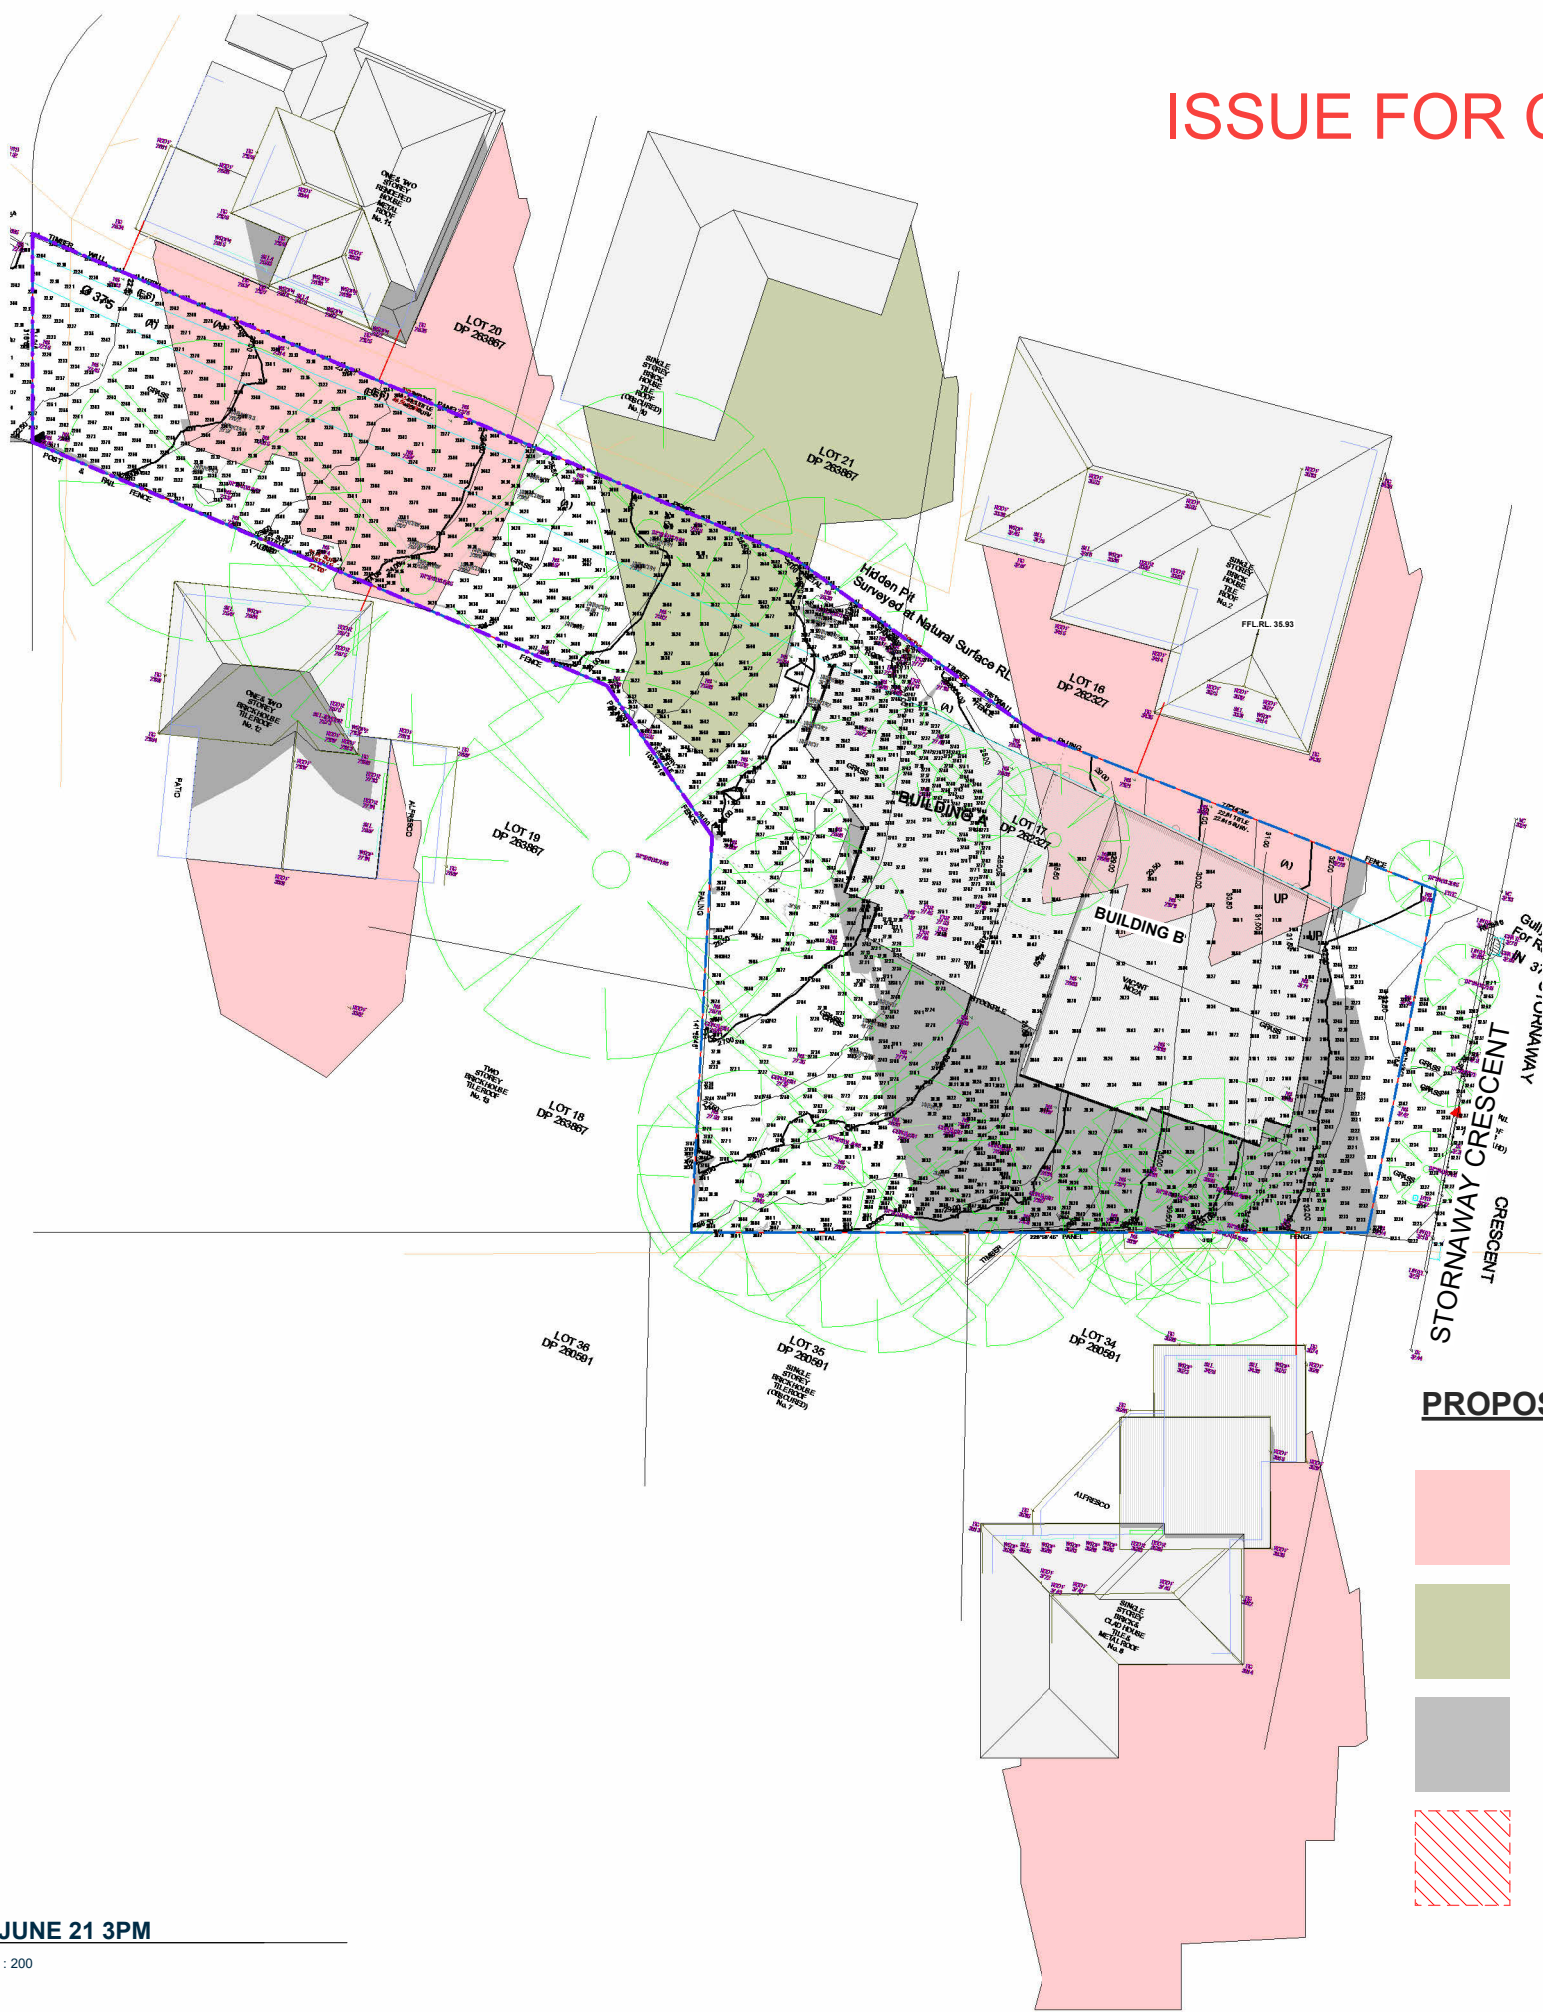

PROPOSED SHADOW DIAGRAM LEGEND:

- DENOTES EXISTING SHADOWS CASTED BY EXISTING NEIGHBOURING BUILDINGS
- DENOTES EXISTING INDICATIVE SHADOWS CASTED BY 10 SUNNYHILLS TERRACE (NEIGHBOURING BUILDING) AS THERE IS NO SURVEY INFORMATION
- DENOTES PROPOSED SHADOWS CASTED BY PROPOSED BUILDINGS AT 2A STORNAWAY CRESCENT, BERKELEY VALE NSW
- DENOTES PRINCIPAL PRIVATE OPEN SPACE(S)

1 - JUNE 21 3PM
A019 1 : 200

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruities must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the water-tightness of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and necessary pegs must be protected during construction.

A12 All labor work is to comply with the requirements of the Light Timber Framing Code of Practice, S.A.A. Codes and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the "hazardous materials" clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION


PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

SHADOWS - JUNE 21 - 3PM

SCALE @ A1: 1 : 200	DRAWN: CK	DATE: 07.04.2026
SCALE @ A3:	CHECKER: CK	
JOB NO. 1500-24	DRAWING NO. A019	ISSUE: A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134


PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970



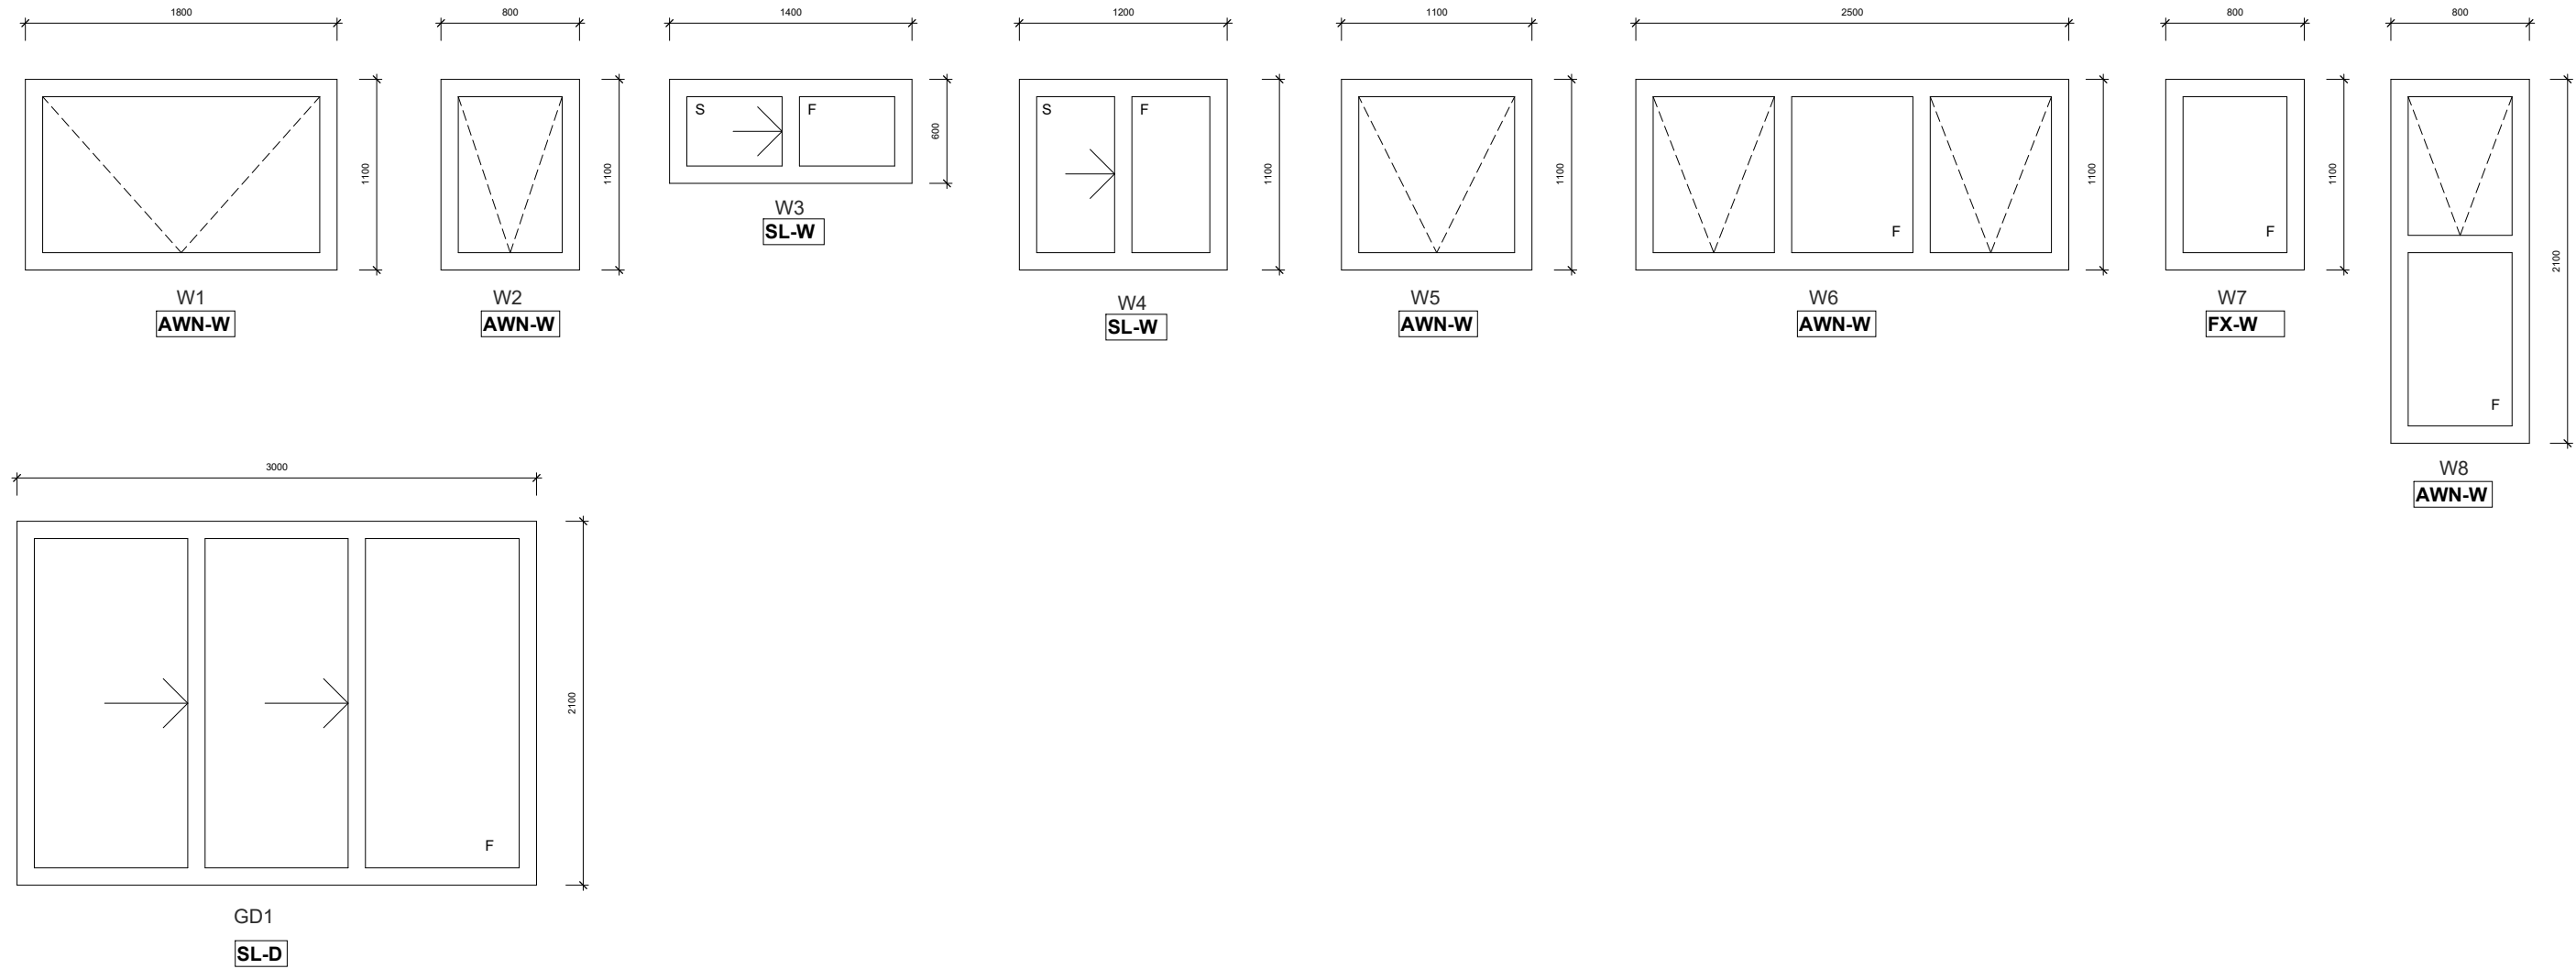

IMPORTANT NOTE - WINDOW AND DOOR SCHEDULE
IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CHECK THE WINDOW SCHEDULE AND DOOR SCHEDULES, INCLUDING, BUT NOT LIMITED TO, THE WINDOW AND DOOR SIZES, ELEVATIONS AND FLOOR PLANS AND CONFIRM ALL NUMBERS, SIZES, QUANTITIES AND WHICH WINDOWS AND DOORS REQUIRE ANY FIRE PROTECTION IF APPLICABLE. PRIOR TO CONSTRUCTION AND PLACING THE ORDER FOR ANY AND/OR ALL OF THESE WINDOWS AND DOORS, ALL DISCREPANCIES ARE TO BE REPORTED TO THE ARCHITECTS IMMEDIATELY PRIOR TO PLACING THE ORDER FOR ANY AND/OR ALL OF THESE WINDOWS AND DOORS. ALL GLAZING OF WINDOWS AND DOORS MUST COMPLY WITH THE BASIX REPORT AND THE ACOUSTIC REQUIREMENTS OF THE BCA. ALL WINDOWS AND SLIDING DOORS ARE TO COMPLY WITH 'PROTECTION OF OPENABLE WINDOWS' IN THE NATIONAL CONSTRUCTION CODE (BUILDING CODE OF AUSTRALIA) 2022. THE ARCHITECTS ARE NOT RESPONSIBLE WHATSOEVER IF THE CONTRACTOR FAILS TO ADHERE TO THIS VERY IMPORTANT NOTE.

GLAZED WINDOW & DOOR LEGEND	
SL-W	GLAZED SLIDING WINDOW PROVIDE POWDERCOATED ALUMINIUM FRAMED GLASS SLIDING WINDOW SIMILAR OR EQUIV. TO CARINYA SLIDING WINDOW AS PER BASIX. REFER TO ARCH SPEC AND MATERIALS AND FINISHES SCHEDULE.
AWN-W	GLAZED AWNING WINDOW PROVIDE POWDERCOATED ALUMINIUM FRAMED GLASS AWNING WINDOW SIMILAR OR EQUIV. TO CARINYA AWNING WINDOW AS PER BASIX. REFER TO ARCH SPEC AND MATERIALS AND FINISHES SCHEDULE.
SL-D	GLAZED SLIDING DOOR PROVIDE POWDERCOATED ALUMINIUM FRAMED GLASS SLIDING DOOR SIMILAR OR EQUIV. TO CARINYA SLIDING DOOR AS PER BASIX. REFER TO ARCH SPEC AND MATERIALS AND FINISHES SCHEDULE.
FX-W	GLAZED FIXED WINDOW PROVIDE POWDERCOATED ALUMINIUM FRAMED GLASS FIXED WINDOW SIMILAR OR EQUIV. TO CARINYA FIXED WINDOW AS PER BASIX. REFER TO ARCH SPEC AND MATERIALS AND FINISHES SCHEDULE.

CONSTRUCTION NOTES FOR BASIX
- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

ISSUE FOR CONSTRUCTION

ARCHITECTURAL - GENERAL NOTES
A1 All dimensions are to be confirmed on site by the builder/subcontractor, any incongruencies must be reported to the Architect before commencement of any work. A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect. A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work. A4 The Builder/subcontractor will be held responsible for the construction of the building for a minimum period of two years after the date of practical completion. A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with. A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer. A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed. A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification. A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work. A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor. A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction. A12 All timber work is to comply with the requirements of the Light Timber Framing Code (S.A.A. Code and Structural Engineer's details and specification). A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction. A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification. A15 Comply with the 'hazardous materials' clause of the specification. IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, The Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION

PROJECT
2A STORNAWAY CRESCENT, BERKELEY VALE NSW
Lot 17 in DP 262327
CLIENT
GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME WINDOW AND DOOR SCHEDULE			
SCALE @ A1: 1 : 20	DRAWN: CK		
SCALE @ A3:	CHECKER: CK	DATE: 07.04.2026	
JOB NO. 1500-24	DRAWING NO. A020	ISSUE: A	

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)
Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134
PO Box 703 Burwood 1805 NSW Australia
P 02 9744 5421 F 02 9747 5046
www.katris.com.au
ABN 79 001 639 970



FLORA AND FAUNA
FLORA AND FAUNA ON THE SITE WILL BE MANAGED THROUGH THE RECOMMENDATIONS OF THE FLORA AND FAUNA CONDITIONS DETAILED IN THE DA APPROVAL AND ANY SUBSEQUENT CONDITIONS WILL BE COMPLIED WITH AS DETAILED.

- GENERAL NOTES:**
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE STORMWATER CONCEPT PLANS AND OTHER RELEVANT CONSULTANT DRAWINGS & DOCUMENTS.
 - PROVIDE CATTLE GRID SHAKER PAD & TEMPORARY ENTRY WITH HOSE & WASH DOWN AREA 8.M. CUT IN KERB 25.0
 - SOIL AND EROSION CONTROL MEASURES AS PER DA CONDITIONS OF CONSENT:
 - NO PARKING OR STOCKPILING OF MATERIAL IS PERMITTED ON FOOTPATH.
 - SILT STOP FENCING TO BE PLACED ALONG ALL BOUNDARIES
 - ACCESS IS TO BE GAINED VIA TEMPORARY ENTRY
 - MAINTENANCE PROCEDURES DURING CONSTRUCTION:
 - ALL EROSION CONTROL MEASURES ARE TO BE MAINTAINED AT ALL TIMES SO THAT THOSE MEASURES ARE FULLY FUNCTIONAL/OPERATIONAL DURING THE CURRENCY OF WORKS. ALL SUCH CONTROLS MUST ALSO BE FULLY FUNCTIONAL/OPERATIONAL SHOULD WORK OPERATIONS CEASE TEMPORARILY (eg WEEKENDS, ROSTERED DAYS OFF, etc.)
 - ALL FILTER BARRIERS ARE TO BE REGULARLY INSPECTED, PARTICULARLY FOLLOWING RUNOFF EVENTS, SO THAT DISLODGED OR BROKEN BALES/BAGS CAN BE IMMEDIATELY REPLACED. SEDIMENT ACCUMULATION BEHIND STRAWBALE SANDBAGS SHALL BE REMOVED.
 - RESPREAD MATERIAL GAINED DURING MAINTENANCE OPERATION OR ALTERNATIVELY PLACE ON STOCKPILES.
 - ANY EXCAVATION AND/OR BACK FILLING MUST BE AS PER DA CONDITIONS OF CONSENT.

LOADING AND UNLOADING DURING CONSTRUCTION
THE FOLLOWING REQUIREMENTS APPLY:
(A) ALL LOADING AND UNLOADING ASSOCIATED WITH CONSTRUCTION ACTIVITY MUST BE ACCOMMODATED ON SITE.
(B) IF, DURING EXCAVATION, IT IS NOT FEASIBLE FOR LOADING AND UNLOADING TO TAKE PLACE ON SITE, A WORKS ZONE ON THE STREET MAY BE CONSIDERED BY COUNCIL.
(C) A WORKS ZONE MAY BE REQUIRED IF LOADING AND UNLOADING IS NOT POSSIBLE ON SITE. IF A WORKS ZONE IS WARRANTED AN APPLICATION MUST BE MADE TO COUNCIL AT LEAST 8 WEEKS PRIOR TO COMMENCEMENT OF WORK ON THE SITE. AN APPROVAL FOR A WORKS ZONE MAY BE GIVEN FOR A SPECIFIC PERIOD AND CERTAIN HOURS OF THE DAYS TO MEET THE PARTICULAR NEED FOR THE SITE FOR SUCH FACILITIES AT VARIOUS STAGES OF CONSTRUCTION. THE APPROVAL WILL BE REVIEWED PERIODICALLY FOR ANY ADJUSTMENT NECESSITATED BY THE PROGRESS OF THE CONSTRUCTION ACTIVITIES.
(D) IN ADDITION TO ANY APPROVED CONSTRUCTION ZONE, PROVISION MUST BE MADE FOR LOADING AND UNLOADING TO BE ACCOMMODATED ON SITE ONCE THE DEVELOPMENT HAS REACHED GROUND LEVEL.
(E) THE STRUCTURAL DESIGN OF THE BUILDING MUST ALLOW THE GROUND FLOOR TO BE USED AS A LOADING AND UNLOADING AREA FOR THE CONSTRUCTION OF THE REMAINDER OF THE DEVELOPMENT.
(F) WHERE HOISTING ACTIVITY OVER THE PUBLIC PLACE IS PROPOSED TO BE UNDERTAKEN INCLUDING HOISTING FROM A WORKS ZONE, A SEPARATE APPROVAL UNDER SECTION 68 OF THE LOCAL GOVERNMENT ACT 1993 MUST BE OBTAINED.
NOTE THAT A MINIMUM OF 2 MONTHS SHOULD BE ALLOWED FOR THE PROCESSING OF A WORK ZONE APPLICATION.

NUISANCE CONTROL & DUST MANAGEMENT
MEASURES THAT MAY BE EMPLOYED INCLUDE, BUT ARE NOT LIMITED TO THE FOLLOWING AND ALSO AS PER DA CONDITIONS OF CONSENT:
- SITE PERIMETER - A 1.8M SHEETED HOARDING WILL BE PROVIDED IN ALL AREAS WHERE EXTERNAL WORKS ARE OCCURRING
- DEMOLITION - ALL TRUCKS REMOVING MATERIALS FROM SITE WILL BE LOADED WHILST INSIDE THE SITE PERIMETER, WITH LOADS COVERED BEFORE EXITING
- EXCAVATION - WATER DOWN WORKING SURFACES AS REQUIRED. MINIMISE STOCK PILING OF MATERIAL. MAINTAINING STABILISED ACCESS ROADS AND DRIVEWAY
- CONSTRUCTION - MAINTAIN A HIGH LEVEL OF HOUSEKEEPING TO MINIMISE LIKELIHOOD OF WINDBLOWN DUST

TREE PROTECTION ZONES:
THE CONTRACTOR MUST ENSURE TREE PROTECTION ZONES (TPZs) ARE COMPLIED WITH AND CONFIRMED BY THE PROJECT ARBORIST AS PER THE CONDITIONS OF CONSENT

NO OBSTRUCTION OF PUBLIC WAY:
THE PUBLIC WAY MUST NOT BE OBSTRUCTED BY ANY MATERIALS, VEHICLES, REFUSE, SKIPS OR THE LIKE. UNDER ANY CIRCUMSTANCES, NON-COMPLIANCE WITH THIS REQUIREMENT WILL RESULT IN THE ISSUE OF A NOTICE BY COUNCIL TO STOP ALL WORK ON SITE.

MAINTENANCE PROCEDURES DURING CONSTRUCTION:
I) ALL EROSION CONTROL MEASURES ARE TO BE MAINTAINED AT ALL TIMES SO THAT THOSE MEASURES ARE FULLY FUNCTIONAL/OPERATIONAL DURING THE CURRENCY OF WORKS. ALL SUCH CONTROLS MUST ALSO BE FULLY FUNCTIONAL/OPERATIONAL SHOULD WORK OPERATIONS CEASE TEMPORARILY. (eg WEEKENDS, ROSTERED DAY OF, ETC.)
II) ALL FILTER BARRIERS ARE TO BE REGULARLY INSPECTED, PARTICULARLY FOLLOWING RUNOFF EVENTS, SO THAT DISLODGED OR BROKEN BALES/BAGS CAN BE IMMEDIATELY REPLACED. SEDIMENT ACCUMULATION BEHIND STRAWBALE SANDBAGS SHALL BE REMOVED.
III) RESPREAD MATERIAL GAINED DURING MAINTENANCE OPERATION OR ALTERNATIVELY PLACE ON STOCKPILES.
IV) MINIMISE DISTURBED AREAS.
V) ALL STOCKPILES TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATH.
VI) ROADS AND FOOTPATHS TO BE SWEEP DAILY.
VII) ALL TRUCK LOADS ARE TO BE COVERED WHEN ENTERING AND EXITING THE SIT SO AS TO AVOID SPILLAGE.

PEDESTRIAN ISSUES
THERE IS CURRENTLY FORMAL PEDESTRIAN FOOTWAYS ALONG STORNAWAY CRES. DURING DEMOLITION STAGES THESE PEDESTRIAN ACCESS WAYS SHOULD BE MAINTAINED ALONG BOTH SIDES OF THE ROAD. ONCE THE WORKS ZONE IS IN USE (CONSTRUCTION STAGE) AND/OR WHEN WORK IS TO BE PERFORMED IN THE ROAD FRONTAGE AREA, PEDESTRIAN ACCESS ALONG THE FRONTAGE OF THE SITE IS STILL TO BE MAINTAINED AT ALL TIMES. UNLESS A SPECIAL PERMIT FOR SPECIFIC WORKS ARE UNDERTAKEN, WHICH WOULD REQUIRE A FOOTPATH LEASE PERMIT, IF PEDESTRIAN ACCESS ALONG THE SITE FRONTAGE IS MAINTAINED DURING WORKS ZONE OPERATION, THEN WE STRESS THE IMPORTANCE OF MAINTAINING PEDESTRIAN SAFETY DURING LOADING/UNLOADING WHICH WILL OCCUR OVER THE FOOTPATH AREA. WE SUGGEST THAT EITHER A PROTECTING HOARDING TO BE PROVIDED OR TRAFFIC CONTROLLERS BE USED TO ENSURE PEDESTRIANS ARE TEMPORARILY STOPPED WHILE LOADING/UNLOADING OCCURS.

PROVISIONS FOR PUBLIC/WORKER SAFETY MUST BE AS PER BELOW AS WELL AS ANY ITEMS REGARDING SAFETY, HEALTH AND AMENITY MUST BE AS PER DA CONDITION OF CONSENT

ALL SITE STAFF AND SUBCONTRACTORS WILL BE REQUIRED TO COMPLETE A SITE SPECIFIC INDUCTION BEFORE COMMENCING WORK ON SITE. THE INDUCTION WILL COVER ASPECTS RELATING TO SAFETY AND AMENITY, INCLUDING ACCESS, EMERGENCY VACUATION PROCEDURES, LOCATION OF FIRST AID FACILITIES, LOCATION OF AMENITIES, SITE HOURS, MATERIAL HANDLING, NOISE AND DUST POLICIES AND ENVIRONMENTAL MANAGEMENT.

PROVISIONS FOR PUBLIC/WORKER SAFETY
MEASURES THAT MAY BE EMPLOYED INCLUDE:
- SITE PERIMETER - A 1.8M SHEETED HOARDING WILL BE PROVIDED IN ALL AREAS WHERE EXTERNAL WORKS ARE OCCURRING
- DEMOLITION - ALL TRUCKS REMOVING MATERIALS FROM SITE WILL BE LOADED WHILST INSIDE THE SITE PERIMETER, WITH LOADS COVERED BEFORE EXITING
- EXCAVATION (IF APPLICABLE) - WATER DOWN WORKING SURFACES AS REQUIRED. MINIMISE STOCK PILING OF MATERIAL. MAINTAINING STABILISED ACCESS ROADS AND DRIVEWAY
- CONSTRUCTION - MAINTAIN A HIGH LEVEL OF HOUSEKEEPING TO MINIMISE LIKELIHOOD OF WINDBLOWN DUST

- CONSTRUCTION NOTES FOR BASIX**
- BASEMENT SLAB ON GROUND,
 - GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
 - BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
 - PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
 - FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor. any incongruities must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been provided by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the construction of the whole building for a minimum period of ten years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. Negligence or breaches other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and no other party must be permitted during construction.

A12 All labor work to comply with the requirements of the Light Timber Framing Code S.A.A. Codes and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the hazardous materials clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Details that are any doubt to the availability of such documents to the Architect should be notified before further details be received. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for costs, due to interpretation of documentation, and the Architect's prior Engineer's decision shall be carried out at his/her cost.


PROVIDE 1800mm HIGH SAFETY & SECURITY FENCE FOR DURATION OF THE DEMOLITION & CONSTRUCTION WORKS. SILT FENCE, GEOTEXTILE \ FABRIC OR THE EQUIVALENT TO ALL BOUNDARIES

IMPORTANT NOTE 1:


ANY DAMAGE TO THE EXISTING &/OR ADJOINING PROPERTY &/OR SERVICES IS TO BE MADE GOOD WITH MINIMAL IF ANY INCONVENIENCE TO ALL PROPRIETORS. IF ANY DAMAGE IS DUE TO NEGLIGENCE, IT IS TO BE RECTIFIED AT THE COST OF THE NEGLIGENT PARTY WHICH CAUSED THAT DAMAGE.

IMPORTANT NOTE 2

DEMOLISH & REMOVE FROM THE SITE, AS PER THE SPECIFICATION, THE COUNCIL REQUIREMENTS & AS 2601 ALL THE EXISTING BUILDINGS, DRIVEWAY, PATHS AND THE LIKE, AS SHOWN HATCHED AND/OR AS REQUIRED TO ACHIEVE THE PROPOSED WORK. DISCONNECT, CAP OFF & SEAL ALL REDUNDANTS SERVICES PRIOR TO THE COMMENCEMENT OF DEMOLITION

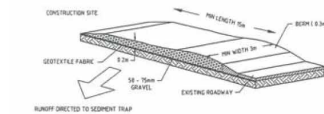

TEMPORARY CONSTRUCTION
EXIT / ENTRANCE
NTS

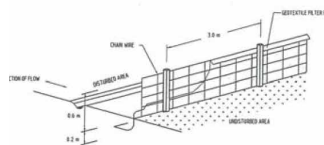

SEDIMENT FENCE
NTS

NB: PROVIDE SEDIMENT FENCE ALONG THE FULL LENGTH OF THE REAR BOUNDARY AND CLEAN AND MAINTAIN DAILY.

NOTES: SOIL & WATER MANAGEMENT

- ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSPECTED AND MAINTAINED DAILY BY SITE MANAGER.
- MINIMISE DISTURBED AREAS.
- ALL STOCKPILES TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATHS.
- DRAINAGE IS TO BE CONNECTED TO STORNAWAY WATER SYSTEM AS SOON AS POSSIBLE.
- ROADS AND FOOTPATH TO BE SWEEP DAILY.
- NO MATERIAL TO BE STORED ON FOOTPATH.
- IF YOU DO NOT COMPLY YOU MAY BE LIABLE TO A \$1500 FINE.

GRAPHICAL INDEX



INDICATES SEDIMENT CONTROL FENCE



INDICATES EXISTING TREES TO BE REMOVED

ISSUE FOR CONSTRUCTION

1. SOIL & EROSION CONTROL MEASURES:

- NO PARKING OR STOCKPILING OF MATERIAL IS PERMITTED ON FOOTPATH.
- ACCESS IS TO BE GAINED VIA

TEMPORARY ENTRY

SILT STOP FENCING TO BE PLACED ALONG THE NORTH, SOUTH & WEST BOUNDARIES. PROVIDE SILT STOP FENCING ON THE EASTERN SIDE WHERE SHOWN ON PLAN.

2. MAINTENANCE PROCEDURES DURING CONSTRUCTION:

- ALL EROSION CONTROL MEASURES ARE TO BE MAINTAINED AT ALL TIMES SO THAT THOSE MEASURES ARE FULLY FUNCTIONAL/ OPERATIONAL DURING THE CURRENCY OF WORKS. ALL SUCH CONTROLS MUST ALSO BE FULLY FUNCTIONAL/OPERATIONAL SHOULD WORK OPERATIONS CEASE TEMPORARILY. (eg WEEKENDS, ROSTERED DAY OF, etc.)
- ALL FILTER BARRIERS ARE TO BE REGULARLY INSPECTED, PARTICULARLY FOLLOWING RUNOFF EVENTS, SO THAT DISLODGED OR BROKEN BALES/BAGS CAN BE IMMEDIATELY REPLACED. SEDIMENT ACCUMULATION BEHIND STRAWBALE SANDBAGS SHALL BE REMOVED.
- RESPREAD MATERIAL GAINED DURING MAINTENANCE OPERATION OR ALTERNATIVELY PLACE ON STOCKPILES.
- MINIMISE DISTURBED AREAS.
- ALL STOCKPILES TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATH.
- ROADS AND FOOTPATHS TO BE SWEEP DAILY.
- ALL TRUCK LOADS ARE TO BE COVERED WHEN ENTERING AND EXITING THE SIT SO AS TO AVOID SPILLAGE.



www.dialbeforeyoudig.com.au

DRAWN DATE ISSUE AMENDMENT
CK 07.04.2026 A ISSUE FOR CONSTRUCTION

PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD

DRAWING NAME

WASTE MANAGMENT PLAN

SCALE @ A1: As indicated

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A023

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134



PO Box 703 Burwood 1805 NSW Australia

www.katris.com.au

ABN 79 001 639 970




STORNAWAY
CRESCENT

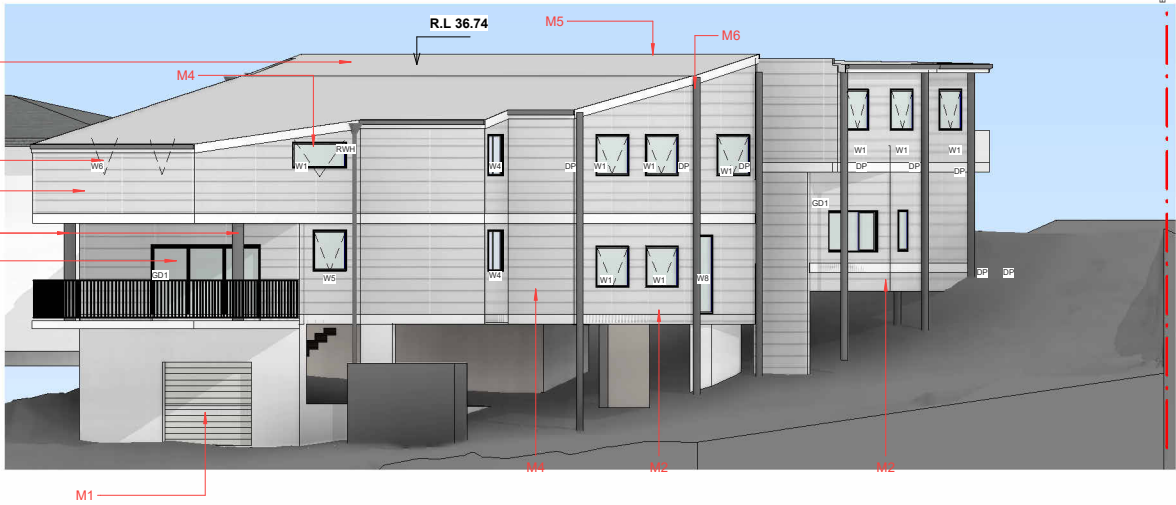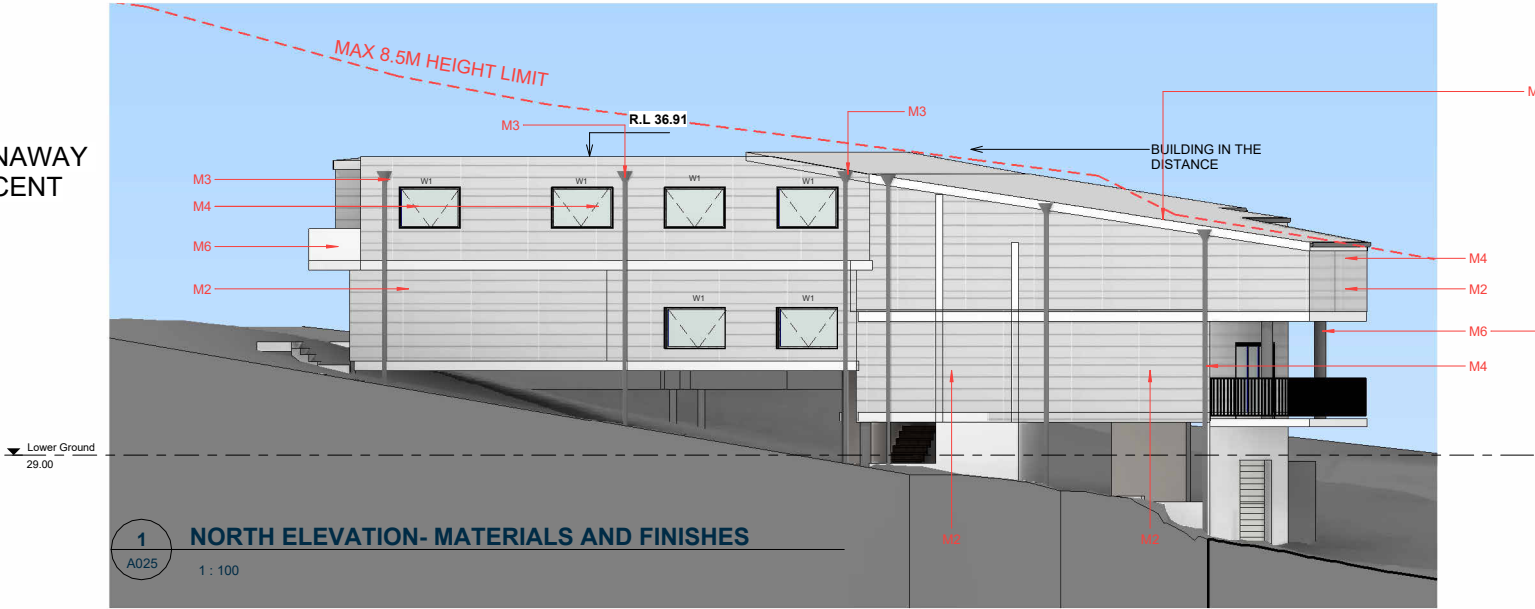

CONSTRUCTION NOTES FOR BASIX

- BASEMENT SLAB ON GROUND.
- GROUND FLOOR AND FIRST FLOOR SUB-FLOORS FOR BUILDING A ARE ALL CONCRETE SLABS.
- BUILDING B GROUND FLOOR AND FIRST FLOOR SUBFLOORS ARE TIMBER FRAMED STRUCTURES.
- PARTY WALLS ARE HEBEL WITH DOUBLE STUD. REFER TO WALL LEGEND
- FC CLADDING THROUGHOUT THE GROUND AND FIRST FLOOR FACADES. BLOCK TO BASEMENT WALLS (BUILDING A) ONLY.

STORNAWAY
CRESCENT

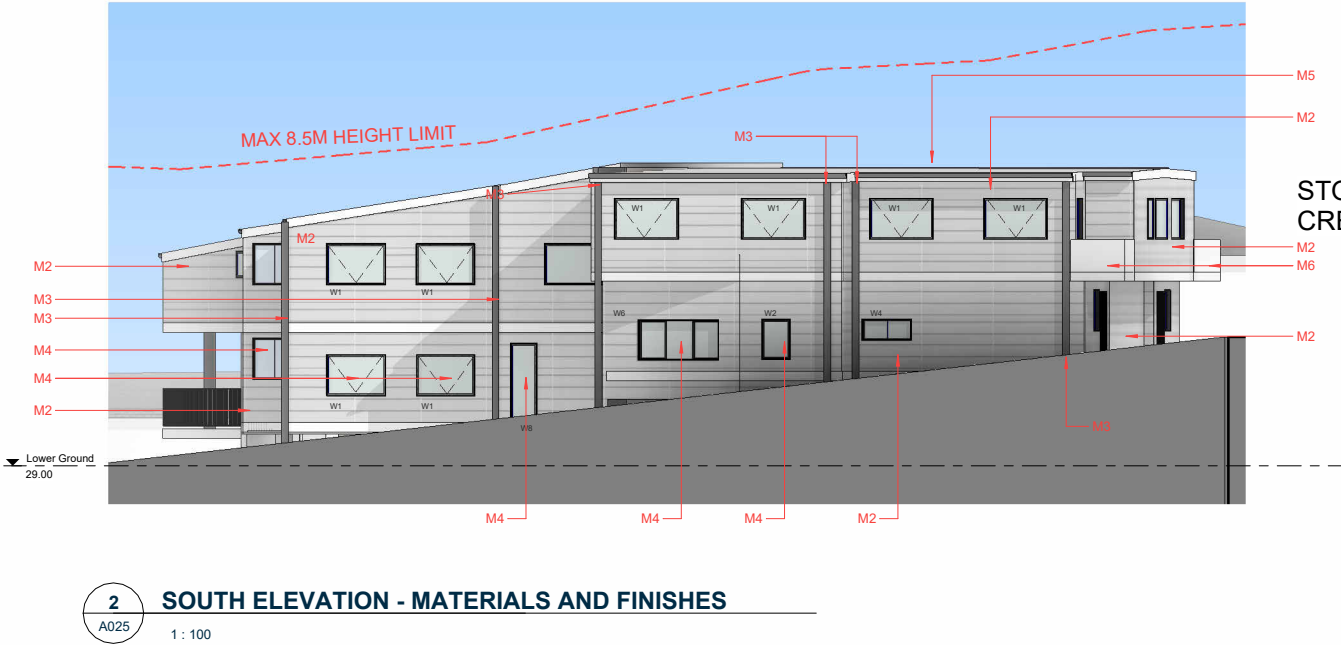

EXTERNAL MATERIALS & FINISHES SCHEDULE

M1 EAVES & DOWNPIPES & GARAGE DOOR COLOUR: DULUX SNOWY MOUNTAINS QUARTER	M2 LINEA WEATHERBOARDS EXTERNAL CFC SHEETING COLOUR: DULUX SNOWY MOUNTAINS QUARTER	M3 GUTTERS COLOUR: DULUX SNOWY MOUNTAINS	M4 WINDOW AND DOOR FRAMES AND GUTTERS AND DOWN PIPES AND FASCIAS TO BE ALUMINIUM WITH DULUX SNOWY MOUNTAINS	M5 METAL ROOFING IN 'SURFMIST' COLOUR.	M6 RENDERED AND PAINTED IN DULUX SNOWY MOUNTAINS

THE PROPOSED DEVELOPMENT MUST COMPLY WITH THE FOLLOWING:
BASIX CERTIFICATE 1817884M DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 0AECF3DW79 DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. 4D2W3YUD1S DATED 20 OCT 2025 PREPARED BY POSITIVE ECO
NATHERS® CERTIFICATE NO. Y1FNZTLEVR DATED 20 OCT 2025 PREPARED BY POSITIVE ECO

ISSUE FOR CONSTRUCTION

ARCHITECTURAL - GENERAL NOTES

A1 All dimensions are to be confirmed on site by the builder/subcontractor, any discrepancies must be reported to the Architect before commencement of any work.

A2 The Builder/subcontractor will be held responsible for any construction details which have not been approved by the Architect.

A3 In the event of encountering any discrepancies on these drawings, specification or subsequent instructions issued, the Builder/subcontractor shall contact the Architect before proceeding further with any work.

A4 The Builder/subcontractor will be held responsible for the water-tightness of the whole building for a minimum period of two years after the date of practical completion.

A5 It is the contractor's responsibility to have all Architectural & Structural documentation, including all site instructions any any details issued during the course of construction, approved by the relevant authorities including the local Council & the Water Board before any work may be proceeded with.

A6 All construction, control joints and expansion joints in the wall, floors, & other locations shall be in strict accordance with Architectural and/or Structural Engineering details. No joints or breaks other than specified, are allowed without written permission from the Architect and/or Engineer.

A7 Measurements for the fabrication of secondary components such as, windows, doors, internal frames, structural steel components and the like, are not to be taken from these documents. Measurements must be taken on site to suit the work as constructed.

A8 All structural components shall be in strict accordance to details and specifications as prepared by a structural engineer, and these details form part of the total specification.

A9 All existing structures need to be examined for structural adequacy, and it is the Contractor's responsibility to ensure that a certificate of structural adequacy is available prior to the start of any work.

A10 No construction work shall commence until a site survey has been completed. This work must be performed by a registered Surveyor.

A11 Foundation set-out, is to be performed by the Surveyor mentioned in A10 and recovery pegs must be protected during construction.

A12 All labour work is to comply with the requirements of the Light Timber Framing Code (S.A.A. Code) and Structural Engineer's details and specification.

A13 Copyrights of all documentation and designs relating to both Architectural and Structural Engineering, are retained by this office. Written authority is required for any reproduction.

A14 All Architectural documentation to be read in conjunction with the Structural Engineer's details and specification.

A15 Comply with the 'hazardous materials' clause of the specification.

IMPORTANT NOTE: It is the Tenderer's & Contractor's responsibility to check that all Architectural, Structural and all other job related documentation's have been received before tendering and/or construction may commence. Should there be any doubt to the availability of such documents the Architect should be notified before further details be needed. The tenderer and/or Contractor shall obtain such details before signing of contract documents. Failure to adhere to these conditions, the Tenderer and/or Contractor nullifies any right or claim for extras, due to interpretation of documentation, and the Architect's &/or Engineer's decision shall be carried out at no extra cost.

DRAWN	DATE	ISSUE	AMENDMENT
CK	07.04.2026	A	ISSUE FOR CONSTRUCTION


PROJECT

2A STORNAWAY CRESCENT, BERKELEY VALE NSW

Lot 17 in DP 262327

CLIENT

GEGE CONSTRUCTIONS PTY LTD



DRAWING NAME

MATERIALS AND FINISHES

SCALE @ A1: 1 : 100

SCALE @ A3:

DRAWN: CK

CHECKER: CK

DATE: 07.04.2026

JOB NO.

1500-24

DRAWING NO.

A025

ISSUE:

A

Katris Architects Pty Ltd

Nominated Architects: Chris Katris (Reg 9724), Nick Katris (Reg 3878), Peter Katris (Reg 4569)

Level 1, Suite 2, 28-30 Burwood Road, Burwood NSW 2134

PO Box 703 Burwood 1805 NSW Australia

P 02 9744 5421 F 02 9747 5046

www.katris.com.au

ABN 79 001 639 970

