PROPOSED
DUAL OCCUPANCY WITH POOL
16 TRENTINO RD TURRAMURRA

DWG NO.	TITLE	REV
01	COVER PAGE	AB
02	BUILDING SPECIFICATION	AB
03	COMPLIANCE TABLE	AB
04	BASIX COMMITMENTS 01	AB
05	BASIX COMMITMENTS 02	AB
06	BASIX COMMITMENTS 03	AB
07	DEMOLITION PLAN	AB
08	SITE PLAN	AB
09	LANDSCAPE AREA CALCULATION	AB
10	SITE WORK PLAN	AB
11	BASEMENT PLAN	AB
12	GROUND FLOOR PLAN	AB
13	FIRST FLOOR PLAN	AB
14	ROOF PLAN	AB
15	EAST AND WEST ELEVATIONS	AB

DWG NO.	TITLE	REV
16	NORTH AND SOUTH ELEVATIONS	AB
17	ELEVATIONS	AB
18	SECTIONS 01	AB
19	SECTIONS 02	AB
20	POOL DETAILS	AB
21	SCHEDULE	AB
22	GFA CALCULATION	AB
23	EXTERNAL FINISH SCHEDULE	AB

DESIGNERS WORK HEALTH AND SAFETY STATEMENT

1. FALLS, SLIPS, TRIPS

a. WORKING AT HEIGHT

DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of workers falling more than two meters. However, construction of this building will require workers to be working at heights where a fall in excess of two meters is possible and injury is likely to result from such a fall. The builder should provide a suitable barrier wherever a person is required to work in a situation were falling more than two meters is a possibility.

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings where scaffolding is appropriate:
Cleaning and maintenance of windows, walls, roof, or other components of this building will require persons to be situated where a fall from a height in excess of two meters is possible. Where this type of activity is required, scaffolding, fall barriers or Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practise, regulations, or legislation. For non-residential only - omit if not appropriate

ANCHORAGE POINTS

Anchorage points for scaffold or fall arrest have been included in the design for use by maintenance workers. Any persons engaged to work on the building after completion of construction work should be informed about the anchorage points.

b. SLIPPERY OR UNEVEN FLOORS

FLOOR FINISHES

Finishes have not been specified by the designer but should be selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/feet.

FLOOR FINISHES BY OWNER

As the designer has not been involved in the selection of surface finishes, the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with AS HB 197:1999 and AS/NZ 4589:2004.

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for this building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warnings during construction, maintenance, demolition and at all times when the building operates as a workplace.
Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects, or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways.
Contractors should be required to maintain a tidy work site during construction, maintenance, or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be stored in designated areas away from access ways and work areas.

2. FALLING OBJECTS

LOOSE MATERIAL AND SMALL OBJECTS

Construction, maintenance, or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the work is being carried out onto persons below:
1. Prevent or resist access to areas below where the work is being carried out.
2. Provide toe boards to scaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area have protective equipment (PPE).

BUILDING COMPONENTS

During construction, renovations or demolition of this building, parts of the structure including fabricated steel work, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times where collapse, which may injure persons in the area, is a possibility.
Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and the access to areas below the load is prevented or resisted.

3. TRAFFIC MANAGEMENT

For building on a major road, narrow road, or steeply sloping road:
Parking of vehicles or loading/unloading of vehicles on this roadway may cause a traffic hazard. During construction, maintenance, or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the subdivision of these areas.

For building where onsite loading/unloading is restricted:
Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading areas.

For all buildings:
Busy construction and demolition sites present a risk of collision where other traffic is moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

4. SERVICES

GENERAL

Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are identified on the plans, but the exact location and extent of services may vary from that indicated. Services should be located using appropriate services (such as Dial Before You Dig), appropriate excavation practise should be used and, where necessary, specialist contractors should be used.

Locations with underground power:
Underground power lines MAY be located in or around this site. All underground power lines must be disconnected, or carefully located and adequate warning signs used prior to any construction, maintenance or demolition commencing.

Locations with overhead power lines:
Overhead power lines MAY be near or on this site. These pose a risk of electrocution if struck or approached by lifting devises or other plant and persons working above ground level. Where there is a danger of this occuring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5. MANUAL TASK

Components within this design with a mass in excess of twenty-five kilograms should be lifted by two or more workers or by mechanical lifting devise. Where this is not practical, suppliers or fabricators should be required to limit the component mass.
All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methods in all areas where lifting may occur.

FINISHES NOTES:
1. RENDERED BRICK AND FOAM TO DWELLING
   a. QOINING AND CORBELLING WHERE INDICATED ON PLANS
2. TILED ROOF WITH COLORBOND FLAT ROOF TO MANSARD SECTION
3. PAINTED TIMBER DOORS
4. WINDOWS AS PER BASIX
5. HEBEL POWER FLOOR AS L1 FLOOR

Construction, maintenance, and demolition of this building will require the use of portable tools and equipment. This should be fully maintained in accordance with manufacturers specifications and not used where faulty or (in the case of electrical equipment) not carrying and electrical safety tag. All safety guards should be regularly checked, and Personal Protective Equipment should be used in accordance with manufacturer's specifications.

1. HAZARDOUS SUBSTANCES

ASBESTOS

For alterations to a building constructed prior to 1990:
If this existing building was constructed prior to:
1990 - It therefore may contain asbestos
1996 - It therefore is likely to contain asbestos
either in cladding material or in fire retardant insulation material. In either case, the builder should check and, if necessary, take appropriate action before demolition, cutting, sanding, drilling or otherwise disturbing the existing structure.

POWDERED MATERIALS

Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protections against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

TREATED TIMBER

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this material can be harmful. Persons working on or in the building during construction, operational, maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protections against inhalation of harmful material when sanding, drilling, cutting, or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS

Many types of glue, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturers recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Fiberglass, Rockwool, ceramic, and material used for either thermal or sound insulation may contain synthetic mineral which may be harmful if inhaled or if it comes in contact with the skin, eyes or athre sensitive parts of the body. Personal Protective Equipment including protections against inhalation of harmful material should be used when installing, removing, or working near bulk insulation material.

TIMBER FLOORS

This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufactures recommendations for use must be carefully considered at all times.

2. CONFINED SPACES

EXCAVATION

Construction of this building and some maintenance on the building will require excavation and installation of items within excavations. Where practical, installation should be carried out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated areas should be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations should be provided.

ENCLOSED SPACES

For buildings with enclosed spaces where maintenance or other access may be required:
Enclosed spaces within this building may present a risk to persons entering for construction, maintenance, or any other purpose. The designer requires warning signs and barriers to unauthorised areas. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal protective Equipment should be provided.

SMALL SPACES

For building with small spaces where maintenance may be required:
Some small spaces within this building may require access by construction or maintenance workers. The designer requires warning signs and barriers to unauthorised areas. These should be maintained throughout the life of the building. Where workers are required to enter small spaces, they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces;

3. PUBLIC ACCESS

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access should be provided. Where electrical installations, excavations, plant, or loose materials are present they should be secured when not fully supervised.

OPERATIONAL USE OF BUILD1IN. GS RESIDENTIAL BUILDINGS

This building has been designed as a residential building. If, at a later date, it is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new use.

NON-RESIDENTIAL BUILDINGS

For non-residential buildings where the end-use has not been identified:
This building has been designed to requirements of the classification identified on the drawings. The specific use of the building is not known at the time of the design and a further assessment of the workplace health and safety issues should be undertaken at the time of fit out for the end-user.

For non-residential buildings where the end-use is known:
This building has been designed to the specific use as identified on the drawings. Where a change of use occurs at a later date a further assessment of the workplace health and safety issues should be undertaken.

4. OTHER HIGH-RISK ACTIVITY

All electrical work should be carried out in accordance with Code of Practice: Managing Electrical Risks at Workplace, AS/NZ 3012 and all licensing requirements.
All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace.
All work should be carried out in accordance with Code of Practice: Managing Noise and Preventing Hearing Loss at Work.
Due to history of serious incidents, it is recommended that particular care be exercised when undertaking work involving teel construction and concrete placements. All the above applies.

NOTES: THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN THE PROJECT.
THIS INCLUDES (but is not excluded to): THE OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, MAINTAINERS AND DEMOLISHERS.

CONSTRUCTION NOTES:
1. TIMBER FRAMING TO AS1685-2010
2. CONCRETE FOOTING TO AS2870-2011
3. PLUMBING TO AS3500-2003
4. TERMITE CONTROL TO AS2049
5. DOORS AND WINDOWS TO AS2047
6. STEEL BEAMS WHERE REQUIRED TO ENGINEERING SPECIFICATIONS

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

COVER PAGE

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	@ A2

WD 01

ISSUE AB

BUILDING SPECIFICATIONS

Specifications- Compliance with National Construction Code 2022 & ABCB Housing Provisions Regulations & Notices:
The builder is to comply with the National Construction Code Volume 2 (NCC-2022), Australian Standards and any conditions required by local Authorities. Any standard referred to in this specification refers to the latest version of the standard. For Class 1 &10 building comply with Section H.

Setout
The builder shall be responsible for the accuracy and clear delineation of the site boundaries and location of the building. The builder is to setout and maintain the works in accordance with the drawings. Only use figured dimensions. Do not scale off drawings.

Plans
Any works obviously necessary to the construction or finish of the building that has been drawn and not in the specifications or vice versa is to be done as part of the contract.

Demolition
All demolition works to AS2601-2001: The Demolition of Structures

Asbestos Removal
Comply with Work Safe Australia: How to safely remove asbestos: Code of Practice 2016 & NSW Government Code of practice: How to safely remove asbestos 2019. All work to be carried out by specialist contractors. All asbestos to be disposed in authorized waste centers.

Part H1: Structure Comply with NCC 2022 parts H1D1 to H1D12 or Section 2 of the ABCB Housing Provisions or any combination thereof.

Earth Works
Identify site classification and comply with part H1D3 in accordance with part 4.22 of the ABCB Housing Provisions, provided that the site is classified as A, S, M, H or E in accordance with 4.2.2 of the ABCB Housing Provisions and the work is undertaken in normal site conditions.

Drainage
Comply with Part 3.3 of the ABCB Housing Provisions & AS/NZ 3500.3. All stormwater & surface water drainage to comply with AS/NZ 3500.

Retaining walls
Comply with Part H1D3(2) & AS 4678

Termite Protection
Comply with NCC part H1D3(3) in accordance with part 3.4 of the ABCB Housing Provisions, AS3660, local authority requirements & manufacturer's specifications. Install Durable notice in accordance with Part 3.4.3 of the ABCB Housing Provisions. Use Trithor Termite protection sheets. Install to manufacturer's written instructions.

Footings & Slabs
Comply with NCC Part H1D4(a) or NCC Part H1D4(b) in accordance with Part 4 of the ABCB Housing Provisions and in accordance with engineer's specifications. Use Forticon 200um thick waterproof layer under all slabs.

Masonry
Comply with NCC Part H1D5 and/or engineer's specifications.
Masonry Veneer Comply with NCC part H1D5(1) in accordance with Part 5.2 of the ABCB Housing Provisions; or AS370; or AS4773.1 and AS4773.2
Cavity Masonry Comply with NCC part H1D5(2) in accordance with Part 5.3 of the ABCB Housing Provisions; or AS370; or AS4773.1 and AS4773.2
Unreinforced single leaf masonry Comply with NCC part H1D5(3) in accordance with Part 5.4 of the ABCB Housing Provisions; or AS370; or AS4773.1 and AS4773.2
Reinforced Masonry Comply with NCC part H1D5(4) in accordance with AS370; or AS4773.1 and AS4773.2 Isolated Piers Comply with NCC part H1D5(5) in accordance one of the following s appropriate: -Part 5.5 of the ABCB Housing Provisions; or AS370; or AS4773.1 and AS4773.2
Masonry components Comply with NCC part H1D5(6) in accordance with Part 5.6 of the ABCB Housing Provisions; and AS370; or AS4773.1 and AS4773.2
Weatherproofing of masonry Comply with part 5.7 of the ABCB Housing Provisions

Framing
Comply with NCC part H1D6 and/or engineer's specifications.
Timber Framing Comply with NCC part H1D6(4), AS1720.1, AS1720.5, AS 1684.2, AS1684.3, AS1684.4, AS1860.2
Structural Steel Sections Comply with NCC part H1D6(5) and H1D6(6) and in accordance with part 6.3 of the ABCB Housing Provisions, AS4100, AS4600, AS1170.4, AS4055
Corrosion Protection Comply with part 6.3.9 of the ABCB Housing Provisions

Roof & Wall Cladding
Comply with NCC Part H1D7 and manufacturer's specifications.
Roof Sheeting Comply with one or a combination of NCC H1D7(2)-(a); H1D7(2)-(b); and/or Part 7.2 of the ABCB Housing provisions. Includes AS1562.1 & AS1563.3 as appropriate.
Gutters & Downpipes Comply with Part 7.4 of the ABCB Housing Provisions
Timber & Composite Wall Cladding Comply with H1D7(4)-(a) AS5146.1 or Part 7.5 of the ABCB Housing Provisions Metal Wall Cladding Comply with NCC Part H1D7(5) & AS 1652.1

Glazing
Glazing and windows Comply with NCC Part H1D8(1), AS2047, part 8.2 of the ABCB Housing Provisions & Basix Certificate
Glazing in Glazed assemblies Comply with NCC Part H1D8(2), AS1288 or part 8.3 of the ABCB Housing Provisions & Basix Certificate
Glazing Human Impact Comply with NCC Part H1D8(3), AS1288 and AS2047 or part 8.4 of the ABCB Housing Provisions & Basix Certificate

Attachment of framed decks and Balconies to external buildings
Comply with Part 12.3 of the ABCB Housing Provision

Piled Footings
Comply with NCC part H1D12 and AS2159

Part H2: Damp & Weatherproofing Comply with NCC Part H2D2 to H2D8 and compliance with performance requirement H2P4

Drainage
Comply with NCC part H2D2, AS/NZS3500.3 or Part 3.3 of the ABCB Housing Provisions

Footings & Slabs
External Walls Comply with NCC part H1D1(1)(a) or (b)
Weatherproofing of masonry comply with AS3700 or AS 4773.1 & AS4773.2 or part 5.7 of the ABCB Housing Provisions

Subfloor Ventilation
Comply with NCC part H2D6, AS/NZS3500.3 or part 7.4 of the ABCB Housing Provisions)

Roof & Wall Cladding
Comply with part 6.2 of the ABCB Housing Provisions

External Waterproofing
Comply with NCC part H2D8, AS4654.1 and AS4654.2

Part H3: Fire Safety Comply with NCC Part H3D2 to H3D6
Fire hazard properties and non-combustible building elements
Comply with NCC part H3D2(1) and (2)

Fire Separation of external Walls
Comply with NCC part H3D3 and part 9.2 of the ABCB Housing Provisions

Fire protection of separating walls & floors
Comply with NCC part H3D4 and part 9.3 of the ABCB Housing Provisions

Fire separation of garage-top-dwellings
Comply with NCC part H3D5 and part 9.4 of the ABCB Housing Provisions

Smoke alarms & evacuation lights
Comply with NCC part H3D6 and part 9.5 of the ABCB Housing Provisions

Part H4: Health & amenity Comply with NCC Part H4D2 to H4D9
Wet areas
Comply with NCC part H4D2, AS3740 or part 10.2 of the ABCB Housing Provisions

Materials and installation of wet area components and systems
Comply with NCC part H4D3, part 10.2.1 to 10.2.6 of the ABCB Housing Provisions; and AS3740 & clause 10.2.12 of the ABCB Housing provisions or 10.2.7 to 10.2.32 of the ABCB Housing Provisions

Room Heights
Comply with NCC part H4D4, part 10.3 of the ABCB Housing Provisions

Facilities
Comply with NCC part H4D5, part 10.4 of the ABCB Housing Provisions

Light
Comply with NCC part H4D6, part 10.5 of the ABCB Housing Provisions

Ventilation
Comply with NCC part H4D7, install mechanical ventilation is accordance with AS1668.2 and comply with part 10.6 of the ABCB Housing Provisions

Sound Insulation
Comply with NCC part H4D8, part 10.7 of the ABCB Housing Provisions

Condensation management
Comply with NCC part H4D9, part 10.8 of the ABCB Housing Provisions

Part H5: Safe movement & access Comply with NCC Part H5D2 to H5D3
Stairway & ramp construction
Comply with NCC part H5D2, part 11.2 of the ABCB Housing Provisions Barriers & handrails
Comply with NCC part H5D3, part 11.3 of the ABCB Housing Provisions

Part H6: Energy efficiency Comply with NCC Part H6D2
Application of Part H6
Comply with NCC part H6D2(1), S42C2, using the house energy rating software and S42C4(1) or complying with parts 13.2 to 13.5 of the ABCB Housing Provisions
Comply with NCC part H6D2(2), S42C2, using the house energy rating software and S42C4(2) or complying with parts 13.6 & 13.7 of the ABCB Housing Provisions

Part H7: Ancillary provisions & additional construction requirements Comply with NCC Part H7D2 to H7D5

Swimming pools
Comply with NCC part H7D2, AS1926.1, 1926.2 & 1926.3

Construction in bushfire prone areas
Comply with NCC part H7D4, AS3959 r NASH standard

Construction in Alpine areas
Comply with NCC part H7D3, part 12.2 of the ABCB Housing Provisions

Heating appliances, fireplaces, chimneys and flues
Comply with NCC part H7D5, install in accordance with AS/NZS2918 or part 12.4 of the ABCB Housing Provisions

Part H7: Livable housing design Comply with NCC Part H8D2

Livable housing design
A class 1a dwelling must comply with the ABCB Standard for Livable Housing Design

Plumbing
All plumbing works to comply with AS3500 & Sydney Water Requirements

Wall & Floor Tiling
Comply with AS3958 parts 1 & 2

Painting
All primers & undercoats to be of the same brand as the finishing paints or as recommended by manufacturers. Rub down all surfaces to a smooth finish prior to the application of each coat. All paints to be appropriate for the application.

Slip Resistance
Comply with NCC Part 11.2.1. Non-slip-resistant walking surfaces on stairway treads and landing(s) near the edge of the nosings. Or a nosing strip with a slip-resistance classification not less than that listed in Table 11.2.4

Plaster & Render
Minimum 13mm thick cement render to masonry walls. Do not cover weep holes and point up all flashings externally

Plasterboard
Provide 10mm plasterboard to walls & ceilings where framing is 450 centers and 13mm plasterboard where framing is at 600centres. Use water resistant plasterboard or 6mm thick fibre cement sheets in wet areas.

Electrical Installations
Comply with appropriate Australian Standard rules and the requirements of the local supply authority

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

BUILDING SPECIFICATION

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE @ A3

WD 02

ISSUE AB

CDC COMPLIANCE TABLE

SEPP (EXEMPT AND COMPLYING DEVELOPMENT) 2008

SITE DESCRIPTION

SITE AREA	1220m2
LOT WIDTH	20.115m
ZONING	R2

GROSS FLOOR AREA

MAX ALLOWABLE GFA	605
PROPOSED GFA	
BASEMENT GFA	98.66
FIRST FLOOR GFA	210.54
GROUND FLOOR GFA	295.21
	604.41 m²

PROPOSED UNIT A

UNIT A BASEMENT GFA	49.27
UNIT A FIRST FLOOR GFA	105.39
UNIT A GROUND FLOOR GFA	150.98
	305.64 m²

PROPOSED UNIT B

UNIT B BASEMENT GFA	49.39
UNIT B FIRST FLOOR GFA	105.15
UNIT B GROUND FLOOR GFA	144.23
	298.77 m²

BALCONY FLOOR AREA

MAX ALLOWABLE EACH	12m²
PROPOSED	
UNIT A	12m²
UNIT B	12m²

BUILDING HEIGHT

MAX ALLOWABLE	8.5m
PROPOSED	8.45m

FRONT SETBACK

MIN REQUIRED	13.22m
PROPOSED	13.22m

GF SIDE SETBACK (LHS)

MIN REQUIRED	0.9m
PROPOSED	0.9m

GF SIDE SETBACK (RHS)

MIN REQUIRED	0.9m
PROPOSED	0.9m

FF SIDE SETBACK (LHS)

MIN REQUIRED	1.9m
PROPOSED	1.9m

FF SIDE SETBACK (RHS)

MIN REQUIRED	1.9m
PROPOSED	1.9m

GF REAR SETBACK

MIN REQUIRED	5m
PROPOSED	19.6 m

FF REAR SETBACK

MIN REQUIRED	12m
PROPOSED	31m

GARAGE SETBACK

MIN from BUILDING LINE	1m
PROPOSED	1m

LANDSCAPED AREA

SITE AREA	1220m2
MIN REQUIRED	510m²
PROPOSED	
FRONT LANDSCAPED AREA	110.97
REAR LANDSCAPED AREA	399.87
	510.84 m²

FRONT LANDSCAPED AREA

FRONT AREA		265.94
MIN REQUIRED	25%	66.49
PROPOSED		
FRONT LANDSCAPED AREA		110.97
		110.97 m²

REAR LANDSCAPED AREA

MIN REQUIRED	255m²
PROPOSED	
REAR LANDSCAPED AREA	399.87
	399.87 m²

PRIMARY STREET ARTICULATION AREA

ARTICULATION ZONE	30.18
MAX. ENCROACHMENT	7.54
PROPOSED	
ARTICULATION AREA	7.37

SECONDARY STREET ARTICULATION AREA

ARTICULATION ZONE	
MAX. ENCROACHMENT	
PROPOSED	

PRIVATE OPEN SPACE

MAX ALLOWABLE	24m
PROPOSED	

NOTES

NON COMPLIANCE NOTES AND SITE RESTRAINTS

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

COMPLIANCE TABLE

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	@ A3

WD 03

ISSUE AB

Basix-Commitments

/for details: See the Basix certificate/

Fixtures

- Showerheads ……. 5 star (>4.5 but <= 6.0 L/min)
- Toilet flushing system……5 star
- Kitchen taps……5 star
- Basin taps in each bathroom…….…….5 star

Hot Water System: gas instantaneous with a performance of 5 stars or a system with a higher energy rating.

Heating/Cooling: In at least 1 living area and 1 bedroom: 3-phase Air-conditioning; Energy rating EER 3.0 - 3.5

Ventilation

- Bathroom: individual fan, ducted to façade or roof; Operation control: manual switch on/off
- Kitchen: individual fan, ducted to façade or roof; Operation control: manual switch on/off
- Laundry: ndividual fan, ducted to façade or roof; Operation control: manual switch on/off.

Natural lighting

- Unit A
  - The applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting.
  - The applicant must install a window and/or skylight in 4 bathroom(s)/toilet(s) in the development for natural lighting.
- Unit B
  - The applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting.
  - The applicant must install a window and/or skylight in 5 bathroom(s)/toilet(s) in the development for natural lighting.

Artificial lighting:

- The applicant must ensure that a minimum of 80% of light fixtures are fitted with fluorescent, compact fluorescent, or light-emitting-diode (LED) lamps.

OTHER

- The applicant must install a gas cooktop & electric oven in the kitchen of the dwelling.
- The applicant must install fixed outdoor clothes drying line as part of the development.

Swimming pool

- The swimming pool must not have a volume greater than 37.8 kilolitres.
- The swimming pool is shaded.
- The swimming pool is covered.
- The swimming pool must be outdoors.
- The development must not incorporate any heating system for the swimming pool.
- The applicant must install the following pump for the swimming pool in the development, or a pump with higher energy rating: single speed with a performance of 5 stars.
- The applicant must install a timer for the swimming pool pump in the development.

SPA

- The SPA must not have a volume greater than 6.3 kilolitres.
- The spa is shaded.
- The spa is covered.
- The development must not incorporate any heating system for the spa.
- The applicant must install a timer for the SPA pump in the development.

Alternative water source

- Each dwelling must have an individual water tank with a tank size of no less than 2000 litres.
- Each individual water tank is to collect run-off from at least: 186.3 square metres of roof area; 0 square metres of impervious area; 256.6 square metres of garden and lawn area; and 0 square metres of planter box area.
- Each individual water tank is to supply landscape connection and toilet connection.

Alternative energy

- The applicant must install a photovoltaic system as part of the development. The applicant must connect this system to the development's electrical system.
- The photovoltaic system must consist of photovoltaic collectors with the capacity to generate at least 4.5 peak kilowatts of electricity, installed at an angle of 0 - 10 degrees to the horizontal facing north.

The Basix certificate should be read in conjunction with the NatHERS certificate.

Building Elements

/For Details: see the NatHERS certificate

Thermal Comfort-Simulation method

A detailed method of assessment with greater flexibility of solution choice and capacity to assess complex dwelling designs.
The dwelling design has been assessed with NatHERS software from an accredited assessor

External Walls

- Cavity Brick Wall, No Insulation.
- Cavity Brick Wall, Bulk Insulation R1.5
- Brick Veneer Wall, Anti-glare Foil One Side, Bulk Insulation R3.5
- External Insulated Façade System Wall, Anti-glare Foil One Side, Bulk Insulation R3.5.
- 270mm Concrete Panel Wall, No Insulation.

Internal Wall

- Single Brick Wall, No Insulation.
- Single Brick Wall, No Air Gap, Bulk Insulation R1.5 (applied to all internal single brick walls of the following zones: GF - Garage.)
- Timber Stud Wall, No Insulation.

External Floor

- Concrete Slab on Ground 130mm.
- Concrete Slab Timber Framed Above Plasterboard, Bulk Insulation R3.5 (elevated)

Internal Floor/Ceiling

- Concrete Slab Timber Framed Above Plasterboard, No Insulation.
- Concrete Slab Timber Framed Above Plasterboard, Bulk Insulation R3.5 (above GF - GARAGE)

External Ceiling

R3.5 Bulk Insulation Unventilated roofspace.

Roof

- Pitched Metal Roof, Plasterboard with Timber Frame, Anti-glare Foil One Side.
- Concrete Roof, Plasterboard with Light Steel Frame.

Note: All downlights: IC-F /IC-4/ (insulation covered/ including the control gears/) rated as per AS/NZS standard 60598 and IP (sealed) rated as per BS EN 60529:1992, European IEC 60509:1989

Note: (where the roof is extended over an open area such as a deck or carport) A barrier is to be installed within the roof space to separate the space above the zoned part of the house and the space above the open veranda.

Note: The building fabric, including insulation and air cavity ventilation, must meet the requirements specified in Part H Energy Efficiency (Volume 2) of the NCC and the ABCB Housing Provisions 10.8 and 13.2. These standards are essential to ensure proper energy efficiency and compliance in construction practices.

Note: For the number and the location of ceiling fans, see the NatHERS certificate.

For additional information please refer to the additional notes on the NatHERS certificate.

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

BASIX COMMITMENTS 01

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE @ A3

WD 04

ISSUE AB

BASIX™ Certificate

Building Sustainability Index
www.planningportal.nsw.gov.au/development-and-assessment/basix

Multi Dwelling

Certificate number: 1865194M_02

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.planningportal.nsw.gov.au/definitions

Secretary
Date of issue: Saturday, 26 September 2026
To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.

When submitting this BASIX certificate with a development application or complying development certificate application, it must be accompanied by NatHERS certificate YX17L2N432.

Project summary	
Project name	16 Trentino Road, Turramurra_02
Street address	16 TRENTINO ROAD TURRAMURRA 2074
Local Government Area	KU-RING-GAI
Plan type and plan number	Deposited Plan 13703
Lot No.	2
Section no.	-
No. of residential flat buildings	0
Residential flat buildings: no. of dwellings	0
Multi-dwelling housing: no. of dwellings	2
No. of single dwelling houses	0

Project score		
Water	✔ 40	Target 40
Thermal Performance (Simulation method)	✔ Pass	Target Pass
Energy	✔ 73	Target 72
Materials	✔ -100	Target n/a

Certificate Prepared by
Name / Company Name: AM ARCH PTY LTD
ABN (if applicable): 70693329770

No common areas specified.

	Fixtures							Appliances	Individual pool			Individual spa		
Dwelling no.	All shower-heads	All toilet flushing systems	All kitchen taps	All bathroom taps	HW recirculation or diversion	All clothes washers	All dish-washers	Volume (max volume)	Pool cover	Pool location	Pool shaded	Volume (max volume)	Spa cover	Spa shaded
All dwellings	5 star (> 4.5 but <= 6 L/min)	5 star	5 star	5 star	-	-	-	37.8	yes	outdoors	yes	6.3	yes	yes

	Alternative water source							
Dwelling no.	Alternative water supply systems	Size	Configuration	Landscape connection	Toilet connection (s)	Laundry connection	Pool top-up	Spa top-up
A	Individual water tank (No. 1)	Tank size (min) 2000 liters	To collect run-off from at least: 180.3 square metres of roof area; 256.6 square metres of garden and lawn area; and	yes	yes	no	no	no
All other dwellings	Individual water tank (No. 1)	Tank size (min) 2000 liters	To collect run-off from at least: 186 square metres of roof area; 256.6 square metres of garden and lawn area; and	yes	yes	no	no	no

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must install each hot water system specified for the dwelling in the table below, so that the dwelling's hot water is supplied by that system. If the table specifies a central hot water system for the dwelling, then the applicant must connect that central system to the dwelling, so that the dwelling's hot water is supplied by that central system..	✔	✔	✔
(c) The applicant must install, in each bathroom, kitchen and laundry of the dwelling, the ventilation system specified for that room in the table below. Each such ventilation system must have the operation control specified for it in the table.		✔	✔
(d) The applicant must install the cooling and heating system/s specified for the dwelling under the "Living areas" and "Bedroom areas" headings of the "Cooling" and "Heating" columns in the table below, in/for at least 1 living/bedroom area of the dwelling. If no cooling or heating system is specified in the table for "Living areas" or "Bedroom areas", then no systems may be installed in any such areas. If the term "zoned" is specified beside an air conditioning system, then the system must provide for day/night zoning between living areas and bedrooms.		✔	✔

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(e) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), all thermal performance specifications set out in the Assessor Certificate, and all aspects of the proposed development which were used to calculate those specifications.		✔	
(f) The applicant must construct the development in accordance with all thermal performance specifications set out in the Assessor Certificate, and in accordance with those aspects of the development application or application for a complying development certificate which were used to calculate those specifications.		✔	✔
(g) Where there is an in-slab heating or cooling system, the applicant must:	✔	✔	✔
(aa) Install insulation with an R-value of not less than 1.0 around the vertical edges of the perimeter of the slab; or			
(bb) On a suspended floor, install insulation with an R-value of not less than 1.0 underneath the slab and around the vertical edges of the perimeter of the slab.			
(h) The applicant must construct the floors and walls of the development in accordance with the specifications listed in the table below.	✔	✔	✔
(i) The applicant must show on The plans accompanying The development application for The proposed development, The locations of ceiling fans set out in The Assessor Certificate.	✔		
(j) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), the locations of ceiling fans set out in the Assessor Certificate.		✔	

	Thermal loads		
Dwelling no.	Area adjusted heating load (in MJ/m²/yr)	Area adjusted cooling load (in MJ/m²/yr)	Area adjusted total load (in MJ/m²/yr)
A	22.6	7.4	30.000
All other dwellings	22.5	7.3	29.800

	Construction of floors and walls				
Dwelling no.	Concrete slab on ground (m²)	Suspended floor with open subfloor (m²)	Suspended floor with enclosed subfloor (m²)	Suspended floor above garage (m²)	Primarily rammed earth or mudbrick walls
A	136.5	48.2	-	29.7	no
All other dwellings	130.1	55.2	-	35.8	no

Description of project

Project address	
Project name	16 Trentino Road, Turramurra_02
Street address	16 TRENTINO ROAD TURRAMURRA 2074
Local Government Area	KU-RING-GAI
Plan type and plan number	Deposited Plan 13703
Lot No.	2
Section no.	-
Project type	
No. of residential flat buildings	0
Residential flat buildings: no. of dwellings	0
Multi-dwelling housing: no. of dwellings	2
No. of single dwelling houses	0
Site details	
Site area (m²)	1220
Roof area (m²)	372.3
Non-residential floor area (m²)	0
Residential car spaces	4
Non-residential car spaces	0

Common area landscape	
Common area lawn (m²)	0
Common area garden (m²)	0
Area of indigenous or low water use species (m²)	0
Assessor details and thermal loads	
Assessor number	HERA10314
Certificate number	YX17L2N432
Climate zone	56

Project score		
Water	✔ 40	Target 40
Thermal Performance (Simulation method)	✔ Pass	Target Pass
Energy	✔ 73	Target 72
Materials	✔ -100	Target n/a

Schedule of BASIX commitments

1. Commitments for multi-dwelling housing
   (a) Dwellings
      (i) Water
      (ii) Energy
      (iii) Thermal Performance and Materials
2. Commitments for single dwelling houses
   (a) Dwellings
      (i) Water
      (ii) Energy
      (iii) Thermal Performance and Materials
3. Commitments for common areas and central systems/facilities for the development (non-building specific)
   (b) Common areas and central systems/facilities
      (i) Water
      (ii) Energy

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(e) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Artificial lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that the "primary type of artificial lighting" for each such room in the dwelling is fluorescent lighting or light emitting diode (LED) lighting. If the term "dedicated" is specified for a particular room or area, then the light fittings in that room or area must only be capable of being used for fluorescent lighting or light emitting diode (LED) lighting.		✔	✔
(f) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Natural lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that each such room or area is fitted with a window and/or skylight.	✔	✔	✔
(g) This commitment applies if the applicant instals a water heating system for the dwelling's pool or spa. The applicant must:			
(aa) install the system specified for the pool in the "Individual Pool" column of the table below (or alternatively must not install any system for the pool). If specified, the applicant must install a timer, to control the pool's pump; and		✔	
(bb) install the system specified for the spa in the "Individual Spa" column of the table below (or alternatively must not install any system for the spa). If specified, the applicant must install a timer to control the spa's pump.		✔	
(h) The applicant must install in the dwelling:			
(aa) the kitchen cook-top and oven specified for that dwelling in the "Appliances & other efficiency measures" column of the table below;		✔	
(bb) each appliance for which a rating is specified for that dwelling in the "Appliances & other efficiency measures" column of the table, and ensure that the appliance has that minimum rating; and		✔	✔
(cc) any clothes drying line specified for the dwelling in the "Appliances & other efficiency measures" column of the table.		✔	
(i) If specified in the table, the applicant must carry out the development so that each refrigerator space in the dwelling is "well ventilated".		✔	
(j) The applicant must install the photovoltaic system specified for the dwelling under the "Photovoltaic system" heading of the "Alternative energy" column of the table below, and connect the system to that dwelling's electrical system.	✔	✔	✔

	Hot water	Bathroom ventilation system		Kitchen ventilation system		Laundry ventilation system	
Dwelling no.	Hot water system	Each bathroom	Operation control	Each kitchen	Operation control	Each laundry	Operation control
All dwellings	gas instantaneous - 5 star	individual fan, ducted to façade	manual on / timer off	individual fan, ducted to façade	manual on / timer off	individual fan, ducted to façade	manual on / timer off

	Floor types									
	Concrete slab on ground				Suspended floor above enclosed subfloor			Suspended floor above open subfloor		
Dwelling no.	Area (m²)	Insulation	Low emissions option	Dematerialisation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation
A	136.5	-	-	conventional slab	-	-	-	concrete - suspended, frame: light steel frame	48.2	fibreglass batts or roll
All other dwellings	130.1	-	-	conventional slab	-	-	-	concrete - suspended, frame: light steel frame	55.2	fibreglass batts or roll

	Floor types										
	First floor above habitable rooms or mezzanine			Suspended floor above garage			Garage floor				
Dwelling no.	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Low emissions option	Dematerialisation
A	concrete - suspended, frame: light steel frame	123.4	-	concrete - suspended, frame: light steel frame	29.7	fibreglass batts or roll	concrete slab on ground	30.9	-	-	conventional slab
All other dwellings	concrete - suspended, frame: light steel frame	110	-	concrete - suspended, frame: light steel frame	35.8	fibreglass batts or roll	concrete slab on ground	30.9	-	-	conventional slab

	External walls							
	External wall type 1				External wall type 2			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option
A	cavity brick	118.2	-	none	brick veneer, frame : timber - H2 treated softwood	40.7	polystyrene	none

Description of project

The tables below describe the dwellings and common areas within the project

Multi-dwelling houses

Dwelling no.	No. of bedrooms	Conditioned floor area (m²)	Unconditioned floor area (m²)	Area of garden & lawn (m²)	Indigenous species (min area m²)
A	4+	269.1	47.4	256.6	200

Dwelling no.	No. of bedrooms	Conditioned floor area (m²)	Unconditioned floor area (m²)	Area of garden & lawn (m²)	Indigenous species (min area m²)
B	4+	259.7	53.1	256.6	200

Schedule of BASIX commitments

The commitments set out below regulate how the proposed development is to be carriedout. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

1. Commitments for multi-dwelling housing

(a) Dwellings

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must plant indigenous or low water use species of vegetation throughout the area of land specified for the dwelling in the "indigenous species" column of the table below, as private landscaping for that dwelling. (This area of indigenous vegetation is to be contained within the "Area of garden and lawn" for the dwelling specified in the "Description of Project" table).	✔	✔	
(c) If a rating is specified in the table below for a fixture or appliance to be installed in the dwelling, the applicant must ensure that each such fixture and appliance meets the rating specified for it.		✔	✔
(d) The applicant must install an on demand hot water recirculation system which regulates all hot water use throughout the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below.		✔	✔
(e) The applicant must install:			
(aa) a hot water diversion system to all showers, kitchen sinks and all basins in the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below; and		✔	✔
(bb) a separate diversion tank (or tanks) connected to the hot water diversion systems of at least 100 litres. The applicant must connect the hot water diversion tank to all toilets in the dwelling.		✔	✔
(e) The applicant must not install a private swimming pool or spa for the dwelling, with a volume exceeding that specified for it in the table below.	✔	✔	
(f) If specified in the table, that pool or spa (or both) must have a pool cover or shading (or both).		✔	
(g) The pool or spa must be located as specified in the table.	✔	✔	
(h) The applicant must install, for the dwelling, each alternative water supply system, with the specified size, listed for that dwelling in the table below. Each system must be configured to collect run-off from the areas specified (excluding any area which supplies any other alternative water supply system), and to divert overflow as specified. Each system must be connected as specified.	✔	✔	✔

	Cooling		Heating		Natural lighting	
Dwelling no.	living areas	bedroom areas	living areas	bedroom areas	No. of bathrooms or toilets	Main kitchen
A	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	4	yes
All other dwellings	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	3-phase airconditioning / EER 3.0 - 3.5	5	yes

	Individual pool		Individual spa			Appliances other efficiency measures				
Dwelling no.	Pool heating system	Pool Pump	Timer	Spa heating system	Timer	Kitchen cooktop/oven	Dishwasher	Clothes dryer	Indoor or sheltered clothes drying line	Private outdoor or unsheltered clothes drying line
All dwellings	no heating	single speed-5 stars	yes	no heating	yes	gas cooktop & electric oven	-	-	no	yes

	Alternative energy	
Dwelling no.	PV System Panel Group 1 (peak kW/Slope/Orientation)	PV System Panel Group 2 (peak kW/Slope/Orientation)
All dwellings	4.5 / between >0° to <=10° degree to the horizontal / N	/ /

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must attach the certificate referred to under "Assessor details" on the front page of this BASIX certificate (the "Assessor Certificate") to the development application and construction certificate application for the proposed development (or, if the applicant is applying for a complying development certificate for the proposed development, to that application). The applicant must also attach the Assessor Certificate to the application for a final occupation certificate for the proposed development.			
(b) The Assessor Certificate must have been issued by an Accredited Assessor in accordance with the Thermal Comfort Protocol.			
(c) The details of the proposed development on the Assessor Certificate must be consistent with the details shown in this BASIX Certificate, including the details shown in the "Thermal Loads" table below.			
(d) The applicant must show on the plans accompanying the development application for the proposed development, all matters which the Thermal Comfort Protocol requires to be shown on those plans. Those plans must bear a stamp of endorsement from the Accredited Assessor, to certify that this is the case.	✔		

	External walls							
	External wall type 1				External wall type 2			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option
All other dwellings	cavity brick	105.2	-	none	brick veneer, frame : timber - H2 treated softwood	59.7	polystyrene	none

	External walls							
	External wall type 3				External wall type 4			
Dwelling no.	Wall type	Area (m²)	Insulation	Low emissions option	Wall type	Area (m²)	Insulation	Low emissions option
A	external insulated façade system (EIFS), frame : timber - H2 treated softwood	43.9	polystyrene	none	cavity brick	172	polystyrene	none
All other dwellings	external insulated façade system (EIFS), frame : timber - H2 treated softwood	39.4	polystyrene	none	cavity brick	188.3	polystyrene	none

	Internal walls								
	Internal walls shared with garage			Internal wall type 1			Internal wall type 2		
Dwelling no.	Wall type	Area (m²)	Insulation	Wall type	Area (m²)	Insulation	Wall type	Area (m²)	Insulation
A	single skin masonry	24.7	polystyrene	single skin masonry	100.5	-	plasterboard, frame: timber - H2 treated softwood	124	-
All other dwellings	single skin masonry	21.8	polystyrene	single skin masonry	103.7	-	plasterboard, frame: timber - H2 treated softwood	123.2	-

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

BASIX COMMITMENTS 02

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE @ A3

WD 05

ISSUE AB

Ceiling and roof									
	Flat ceiling / pitched roof			Raked ceiling / pitched or skillion roof			Flat ceiling / flat roof		
Dwelling no.	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation	Construction type	Area (m²)	Insulation
A	framed - metal roof, frame: timber - H2 treated softwood	114.2	Ceiling:fibreglass batts or roll,Roof: foil/ sarking	-	-	Ceiling,:Roof:	concrete - plasterboard internal, frame: light steel frame	72.1	Ceiling:fibreglass batts or roll,Roof: none
All other dwellings	framed - metal roof, frame: timber - H2 treated softwood	114	Ceiling:fibreglass batts or roll,Roof: foil/ sarking	-	-	Ceiling,:Roof:	concrete - plasterboard internal, frame: light steel frame	72	Ceiling:fibreglass batts or roll,Roof: none

	Glazing type			Frame types				
Dwelling no.	Single glazing (m²)	Double glazing (m²)	Triple glazing (m²)	Aluminium frames (m²)	Timber frames (m²)	uPVC frames (m²)	Steel frames (m²)	Composite frames (m²)
A	1.13	96.2	-	96.2	1.13	-	-	-
All other dwellings	1.13	110.96	-	110.96	1.13	-	-	-

(iii) Thermal Performance and Materials	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(b) The Assessor Certificate must have been issued by an Accredited Assessor in accordance with the Thermal Comfort Protocol.			
(c) The details of the proposed development on the Assessor Certificate must be consistent with the details shown in this BASIX Certificate, including the details shown in the "Thermal Loads" table below.			
(d) The applicant must show on the plans accompanying the development application for the proposed development, all matters which the Thermal Comfort Protocol requires to be shown on those plans. Those plans must bear a stamp of endorsement from the Accredited Assessor, to certify that this is the case.	✔		
(e) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), all thermal performance specifications set out in the Assessor Certificate, and all aspects of the proposed development which were used to calculate those specifications.		✔	
(f) The applicant must construct the development in accordance with all thermal performance specifications set out in the Assessor Certificate, and in accordance with those aspects of the development application or application for a complying development certificate which were used to calculate those specifications.		✔	✔
(g) Where there is an in-slab heating or cooling system, the applicant must:	✔	✔	✔
(aa) Install insulation with an R-value of not less than 1.0 around the vertical edges of the perimeter of the slab; or			
(bb) On a suspended floor, install insulation with an R-value of not less than 1.0 underneath the slab and around the vertical edges of the perimeter of the slab.			
(h) The applicant must construct the floors and walls of the development in accordance with the specifications listed in the table below.	✔	✔	✔
(i) The applicant must show on The plans accompanying The development application for The proposed development, The locations of ceiling fans set out in The Assessor Certificate.	✔		
(j) The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), the locations of ceiling fans set out in the Assessor Certificate.		✔	

Notes

1. In these commitments, "applicant" means the person carrying out the development.
2. The applicant must identify each dwelling, building and common area listed in this certificate, on the plans accompanying any development application, and on the plans and specifications accompanying the application for a construction certificate / complying development certificate, for the proposed development, using the same identifying letter or reference as is given to that dwelling, building or common area in this certificate.
3. This note applies if the proposed development involves the erection of a building for both residential and non-residential purposes (or the change of use of a building for both residential and non-residential purposes). Commitments in this certificate which are specified to apply to a "common area" of a building or the development, apply only to that part of the building or development to be used for residential purposes.
4. If this certificate lists a central system as a commitment for a dwelling or building, and that system will also service any other dwelling or building within the development, then that system need only be installed once (even if it is separately listed as a commitment for that other dwelling or building).
5. If a star or other rating is specified in a commitment, this is a minimum rating.
6. All alternative water systems to be installed under these commitments (if any), must be installed in accordance with the requirements of all applicable regulatory authorities. NOTE: NSW Health does not recommend that stormwater, recycled water or private dam water be used to irrigate edible plants which are consumed raw, or that rainwater be used for human consumption in areas with potable water supply.

Legend

1. Commitments identified with a "✔" in the "Show on DA plans" column must be shown on the plans accompanying the development application for the proposed development (if a development application is to be lodged for the proposed development).
2. Commitments identified with a "✔" in the "Show on CC/CDC plans and specs" column must be shown in the plans and specifications accompanying the application for a construction certificate / complying development certificate for the proposed development.
3. Commitments identified with a "✔" in the "Certifier check" column must be certified by a certifying authority as having been fulfilled. (Note: a certifying authority must not issue an occupation certificate (either interim or final) for a building listed in this certificate, or for any part of such a building, unless it is satisfied that each of the commitments whose fulfilment it is required to monitor in relation to the building or part, has been fulfilled).

2. Commitments for single dwelling houses

(a) Dwellings

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must plant indigenous or low water use species of vegetation throughout the area of land specified for the dwelling in the "Indigenous species" column of the table below, as private landscaping for that dwelling. (This area of indigenous vegetation is to be contained within the "Area of garden and lawn" for the dwelling specified in the "Description of Project" table).	✔	✔	
(c) If a rating is specified in the table below for a fixture or appliance to be installed in the dwelling, the applicant must ensure that each such fixture and appliance meets the rating specified for it.		✔	✔
(d) The applicant must install an on demand hot water recirculation system which regulates all hot water use throughout the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below.		✔	✔
(e) The applicant must install:			
(aa) a hot water diversion system to all showers, kitchen sinks and all basins in the dwelling, where indicated for a dwelling in the "HW recirculation or diversion" column of the table below; and		✔	✔
(bb) a separate diversion tank (or tanks) connected to the hot water diversion systems of at least 100 litres. The applicant must connect the hot water diversion tank to all toilets in the dwelling.		✔	✔
(e) The applicant must not install a private swimming pool or spa for the dwelling, with a volume exceeding that specified for it in the table below.	✔	✔	
(f) If specified in the table, that pool or spa (or both) must have a pool cover or shading (or both).		✔	
(g) The pool or spa must be located as specified in the table.	✔	✔	
(h) The applicant must install, for the dwelling, each alternative water supply system, with the specified size, listed for that dwelling in the table below. Each system must be configured to collect run-off from the areas specified (excluding any area which supplies any other alternative water supply system), and to divert overflow as specified. Each system must be connected as specified.	✔	✔	✔

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) The applicant must comply with the commitments listed below in carrying out the development of a dwelling listed in a table below.			
(b) The applicant must install each hot water system specified for the dwelling in the table below, so that the dwelling's hot water is supplied by that system. If the table specifies a central hot water system for the dwelling, then the applicant must connect that central system to the dwelling, so that the dwelling's hot water is supplied by that central system.	✔	✔	✔
(c) The applicant must install, in each bathroom, kitchen and laundry of the dwelling, the ventilation system specified for that room in the table below. Each such ventilation system must have the operation control specified for it in the table.		✔	✔

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(d) The applicant must install the cooling and heating system/s specified for the dwelling under the "Living areas" and "Bedroom areas" headings of the "Cooling" and "Heating" columns in the table below, in/for at least 1 living/bedroom area of the dwelling. If no cooling or heating system is specified in the table for "Living areas" or "Bedroom areas", then no systems may be installed in any such areas. If the term "zoned" is specified beside an air conditioning system, then the system must provide for day/night zoning between living areas and bedrooms.		✔	✔
(e) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Artificial lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that the "primary type of artificial lighting" for each such room in the dwelling is fluorescent lighting or light emitting diode (LED) lighting. If the term "dedicated" is specified for a particular room or area, then the light fittings in that room or area must only be capable of being used for fluorescent lighting or light emitting diode (LED) lighting.		✔	✔
(f) This commitment applies to each room or area of the dwelling which is referred to in a heading to the "Natural lighting" column of the table below (but only to the extent specified for that room or area). The applicant must ensure that each such room or area is fitted with a window and/or skylight.	✔	✔	✔
(g) This commitment applies if the applicant installs a water heating system for the dwelling's pool or spa. The applicant must:			
(aa) install the system specified for the pool in the "Individual Pool" column of the table below (or alternatively must not install any system for the pool). If specified, the applicant must install a timer, to control the pool's pump; and		✔	
(bb) install the system specified for the spa in the "Individual Spa" column of the table below (or alternatively must not install any system for the spa). If specified, the applicant must install a timer to control the spa's pump.		✔	
(h) The applicant must install in the dwelling:			
(aa) the kitchen cook-top and oven specified for that dwelling in the "Appliances & other efficiency measures" column of the table below;		✔	
(bb) each appliance for which a rating is specified for that dwelling in the "Appliances & other efficiency measures" column of the table, and ensure that the appliance has that minimum rating; and		✔	✔
(cc) any clothes drying line specified for the dwelling in the "Appliances & other efficiency measures" column of the table.		✔	
(i) If specified in the table, the applicant must carry out the development so that each refrigerator space in the dwelling is "well ventilated".		✔	
(j) The applicant must install the photovoltaic system specified for the dwelling under the "Photovoltaic system" heading of the "Alternative energy" column of the table below, and connect the system to that dwelling's electrical system.	✔	✔	✔
(iii) Thermal Performance and Materials	**Show on DA plans**	**Show on CC/CDC plans & specs**	**Certifier check**
(a) The applicant must attach the certificate referred to under "Assessor details" on the front page of this BASIX certificate (the "Assessor Certificate") to the development application and construction certificate application for the proposed development (or, if the applicant is applying for a complying development certificate for the proposed development, to that application). The applicant must also attach the Assessor Certificate to the application for a final occupation certificate for the proposed development.			

Central energy systems	Type	Specification
Other	-	-

3. Commitments for common areas and central systems/facilities for the development (non-building specific)

(b) Common areas and central systems/facilities

(i) Water	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) If, in carrying out the development, the applicant installs a showerhead, toilet, tap or clothes washer into a common area, then that item must meet the specifications listed for it in the table.		✔	✔
(b) The applicant must install (or ensure that the development is serviced by) the alternative water supply system(s) specified in the "Central systems" column of the table below. In each case, the system must be sized, be configured, and be connected, as specified in the table.	✔	✔	✔
(c) A swimming pool or spa listed in the table must not have a volume (in kLs) greater than that specified for the pool or spa in the table.	✔	✔	
(d) A pool or spa listed in the table must have a cover or shading if specified for the pool or spa in the table.		✔	
(e) The applicant must install each fire sprinkler system listed in the table so that the system is configured as specified in the table.		✔	✔
(f) The applicant must ensure that the central cooling system for a cooling tower is configured as specified in the table.		✔	✔

Common area	Showerheads rating	Toilets rating	Taps rating	Clothes washers rating
All common areas	no common facility	no common facility	no common facility	no common laundry facility

(ii) Energy	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
(a) If, in carrying out the development, the applicant installs a ventilation system to service a common area specified in the table below, then that ventilation system must be of the type specified for that common area, and must meet the efficiency measure specified.		✔	✔
(b) In carrying out the development, the applicant must install, as the "primary type of artificial lighting" for each common area specified in the table below, the lighting specified for that common area. This lighting must meet the efficiency measure specified. The applicant must also install a centralised lighting control system or Building Management System (BMS) for the common area, where specified.		✔	✔
(c) The applicant must install the systems and fixtures specified in the "Central energy systems" column of the table below. In each case, the system or fixture must be of the type, and meet the specifications, listed for it in the table.	✔	✔	✔

Nationwide House Energy Rating Scheme® Multiple Class 1 Dwellings Summary NatHERS® Certificate No. YX17L2N432

Generated on 21 Sep 2026 using FirstRate5 v5.5.5a

Property

Address	16 Trentino Road, Turramurra, NSW, 2074
Lot/DP	
NatHERS Climate Zone	Mascot (Sydney Airport)

Accredited assessor

Name	Estel Sun
Business name	
Email	sunestel@gmail.com
Phone	+61450923316
Accreditation No.	HERA10314
Assessor Accrediting Organisation	HERA

Verification

To verify this certificate, scan the QR code or visit https://www.frs.com.au/QRCodeLanding/?PublicId=YX17L2N432&GrpCart=1
When using either link, ensure you are visiting www.frs.com.au.

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Summary of all dwellings

Certificate number and link	Unit number	Heating load (load limit) [MJ/m²/p.a.]	Cooling load (load limit) [MJ/m²/p.a.]	Total load [MJ/m²/p.a.]	Star rating	Whole of Home Rating
9CC1ZPGPCX-02	A	22.6 (N/A)	7.4 (N/A)	30.0	7	NA
SMSKM8112I-01	B	22.5 (N/A)	7.3 (N/A)	29.8	7	NA

Nationwide House Energy Rating Scheme (NatHERS) is an initiative of the Australian, state and territory governments. For more details see www.nathers.gov.au.
Generated on 21 Sep 2026 using FirstRate5 v5.5.5a for 16 Trentino Road, Turramurra, NSW, 2074

Nationwide House Energy Rating Scheme® NatHERS® Certificate No. 9CC1ZPGPCX-02

Generated on 21 Sep 2026 using FirstRate5: 5.5.5a (3.22)

Property

Address	A, 16 TRENTINO ROAD, TURRAMURRA, NSW, 2074
Lot/DP	LOT2 DP13703
NCC Class*	Class 1a
Floor/all Floors	
Type	New Home

Plans

Main plan	04/09/2026
Prepared by	XW

Construction and environment

Assessed floor area [m²]*		Exposure type	
Conditioned*	269.1	suburban	
Unconditioned*	47.4	NatHERS climate zone	
Total	316.5	56 Mascot AMO	
Garage	30.9		

Accredited assessor

Name	KEXUAN SUN
Business name	Estel Sun
Email	sunestel@gmail.com
Phone	+61450923316
Accreditation No.	HERA10314
Assessor Accrediting Organisation	HERA
Declaration of interest	No

NCC Requirements

NCC provisions	Volume 2
State/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance star rating

7
The more stars the more energy efficient

NATIONWIDE HOUSE ENERGY RATING SCHEME®

29.9 MJ/m²
Predicted annual energy load for heating and cooling based on standard occupancy assumptions.

For more information on your dwelling's rating visit www.nathers.gov.au

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	22.6	7.4
Load limits	N/A	N/A

Features determining load limits

Floor type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	N/A
Outdoor living area	N/A
Outdoor living area ceiling fan	N/A

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate

Verification

To verify this certificate, scan the QR code or visit https://www.frs.com.au/QRCodeLanding/?PublicId=9CC1ZPGPCX-02 When using either link, ensure you are visiting www.frs.com.au.

*Refer to glossary
Generated on 21 Sep 2026 using FirstRate5: 5.5.5a (3.22) for LOT2 DP13703, A, 16 TRENTINO ROAD, TURRAMURRA, NSW, 2074

Nationwide House Energy Rating Scheme® NatHERS® Certificate No. SMSKM8112I-01

Generated on 21 Sep 2026 using FirstRate5: 5.5.5a (3.22)

Property

Address	B, 16 TRENTINO ROAD, TURRAMURRA, NSW, 2074
Lot/DP	LOT2 DP13703
NCC Class*	Class 1a
Floor/all Floors	
Type	New Home

Plans

Main plan	04/09/2026
Prepared by	XW

Construction and environment

Assessed floor area [m²]*		Exposure type	
Conditioned*	259.7	suburban	
Unconditioned*	53.1	NatHERS climate zone	
Total	312.8	56 Mascot AMO	
Garage	30.9		

Accredited assessor

Name	KEXUAN SUN
Business name	Estel Sun
Email	sunestel@gmail.com
Phone	+61450923316
Accreditation No.	HERA10314
Assessor Accrediting Organisation	HERA
Declaration of interest	No

NCC Requirements

NCC provisions	Volume 2
State/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance star rating

7
The more stars the more energy efficient

NATIONWIDE HOUSE ENERGY RATING SCHEME®

29.9 MJ/m²
Predicted annual energy load for heating and cooling based on standard occupancy assumptions.

For more information on your dwelling's rating visit www.nathers.gov.au

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	22.5	7.3
Load limits	N/A	N/A

Features determining load limits

Floor type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	N/A
Outdoor living area	N/A
Outdoor living area ceiling fan	N/A

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate

Verification

To verify this certificate, scan the QR code or visit https://www.frs.com.au/QRCodeLanding/?PublicId=SMSKM8112I-01 When using either link, ensure you are visiting www.frs.com.au.

*Refer to glossary
Generated on 21 Sep 2026 using FirstRate5: 5.5.5a (3.22) for LOT2 DP13703, B, 16 TRENTINO ROAD, TURRAMURRA, NSW, 2074

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

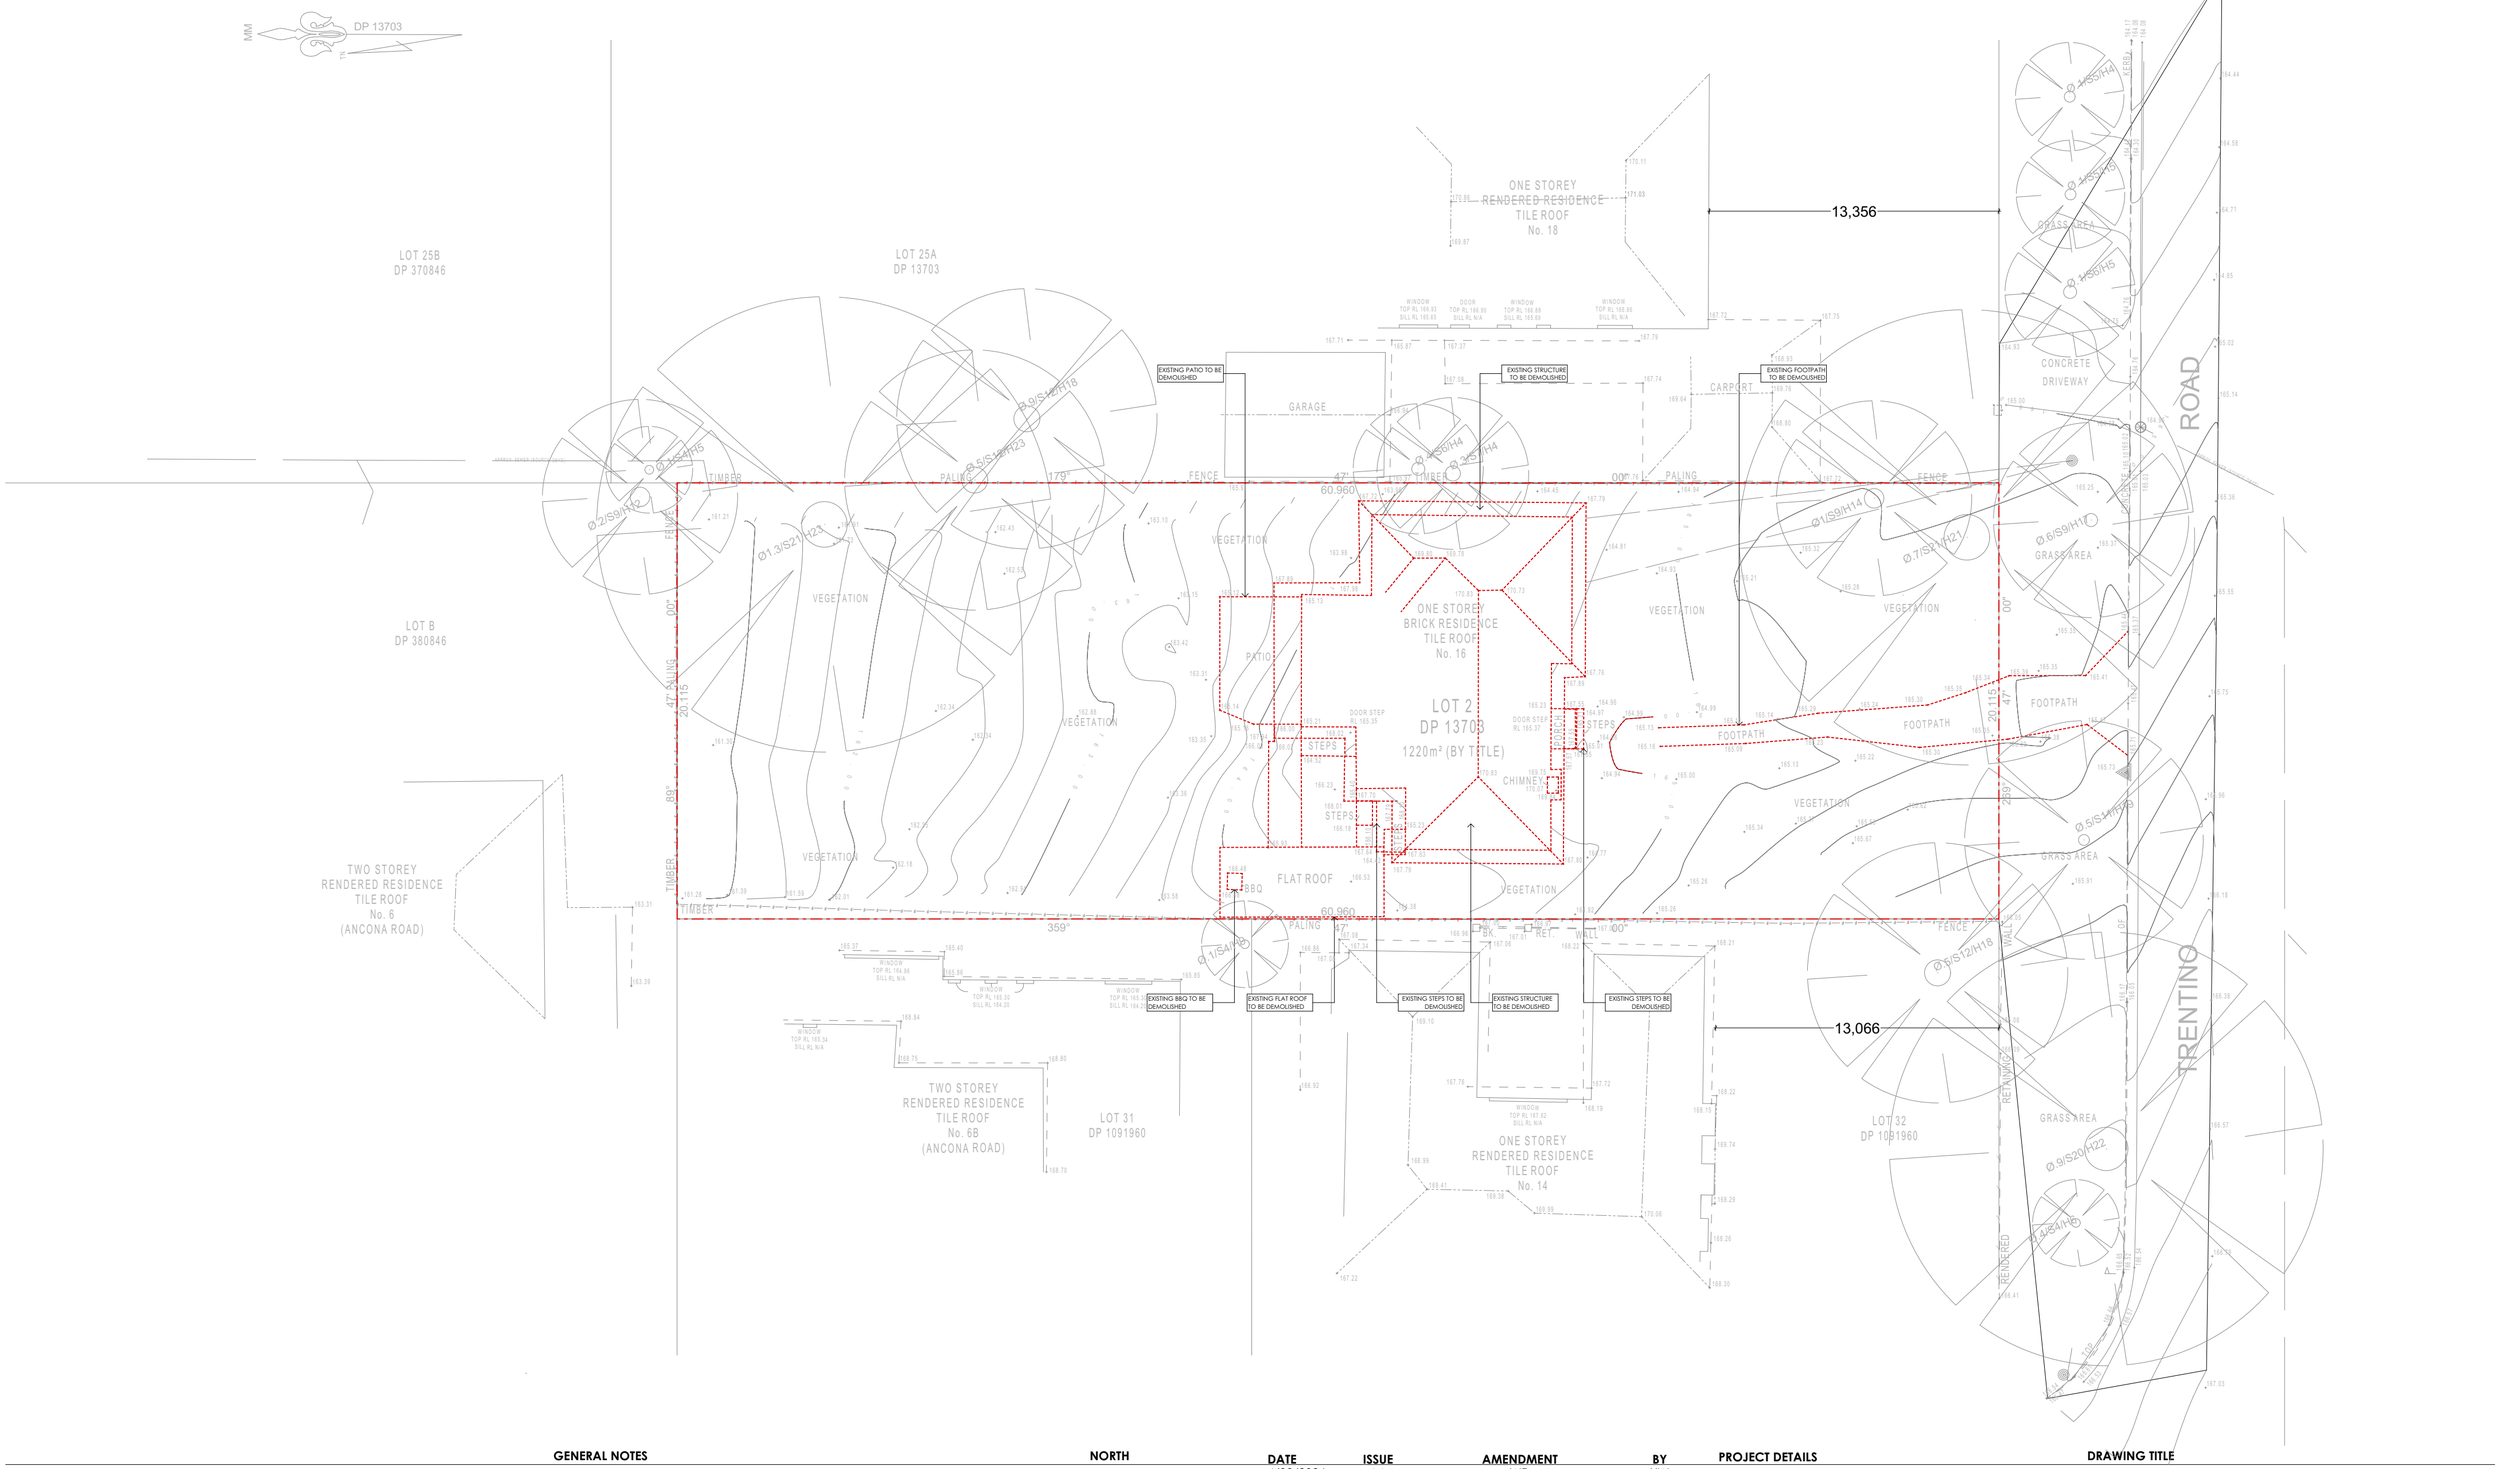
DRAWING TITLE

BASIX COMMITMENTS 03

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	@ A3

WD 06	ISSUE AB

NOTE:
- EXISTING TREE AND STRUCTURES SHOWN IN RED DASHED LINE TO BE DEMOLISHED



GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

ARCHX DESIGNS

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT


DRAWING TITLE

DEMOLITION PLAN

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:200@ A2

WD 07

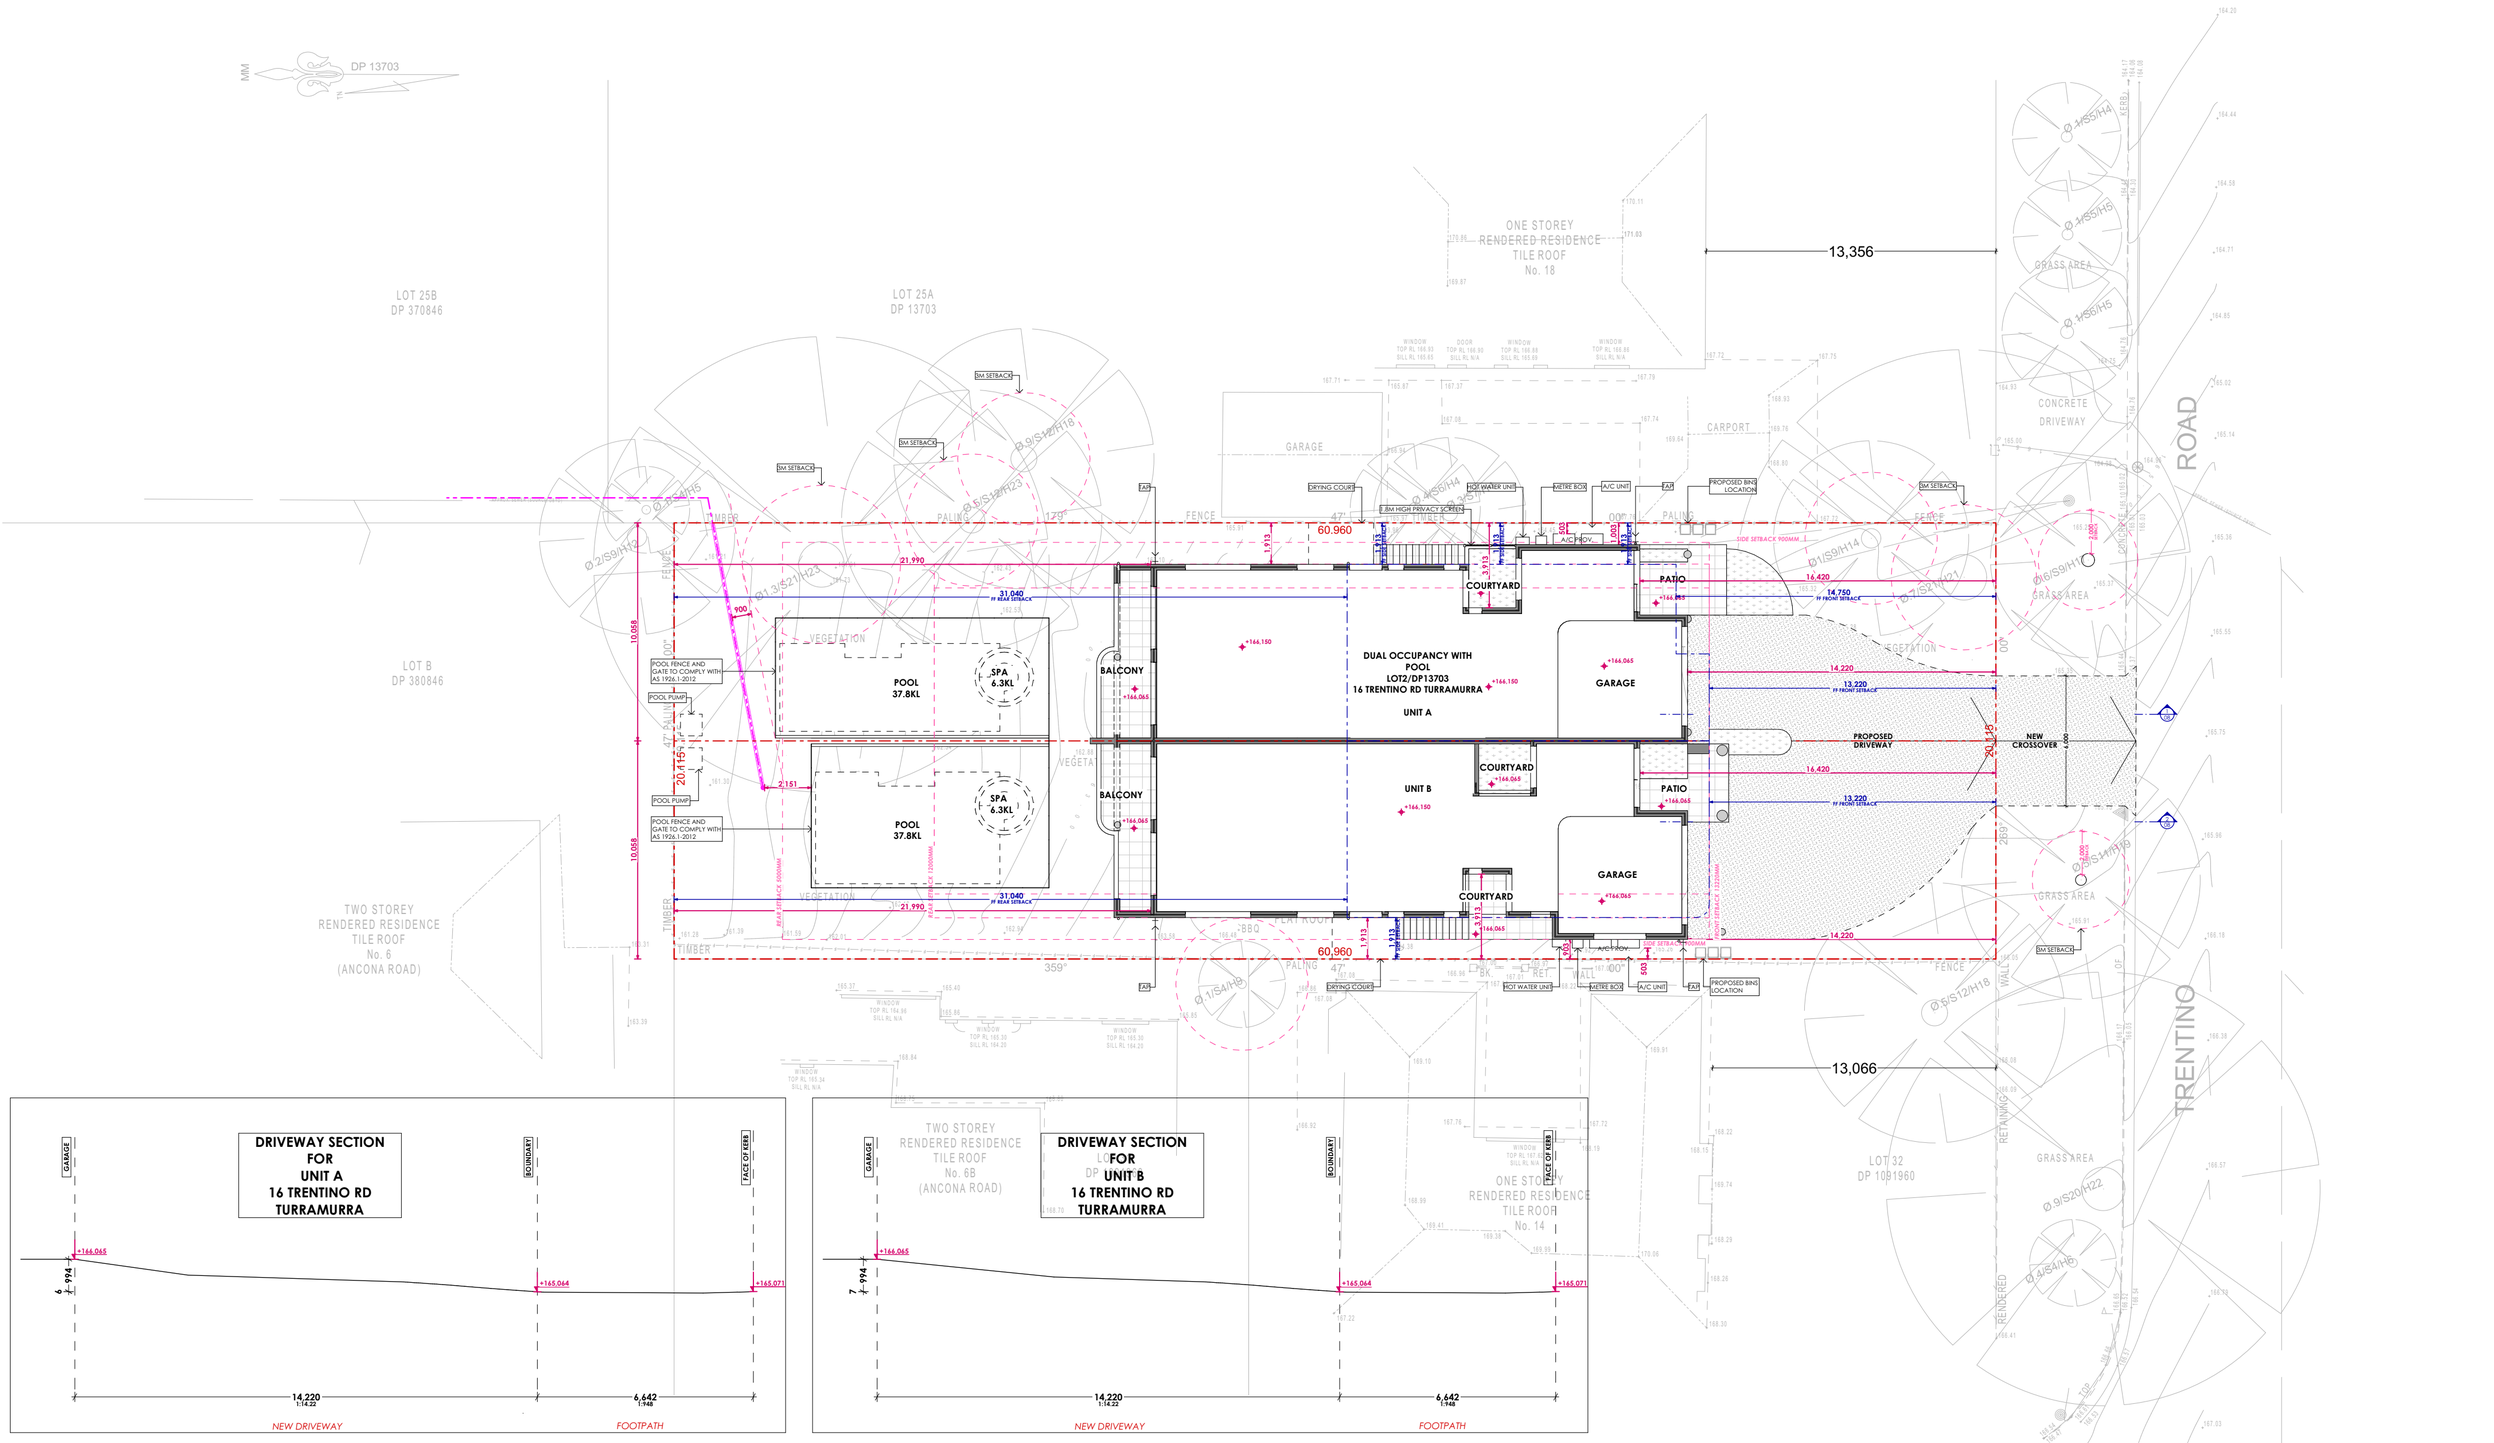ISSUE AB



1 UNIT A - DRIVEWAY PROFILE 1:33.33

2 UNIT B - DRIVEWAY PROFILE 1:33.33

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE


SITE PLAN

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE 1:200@ A2

WD 08

ISSUE AB

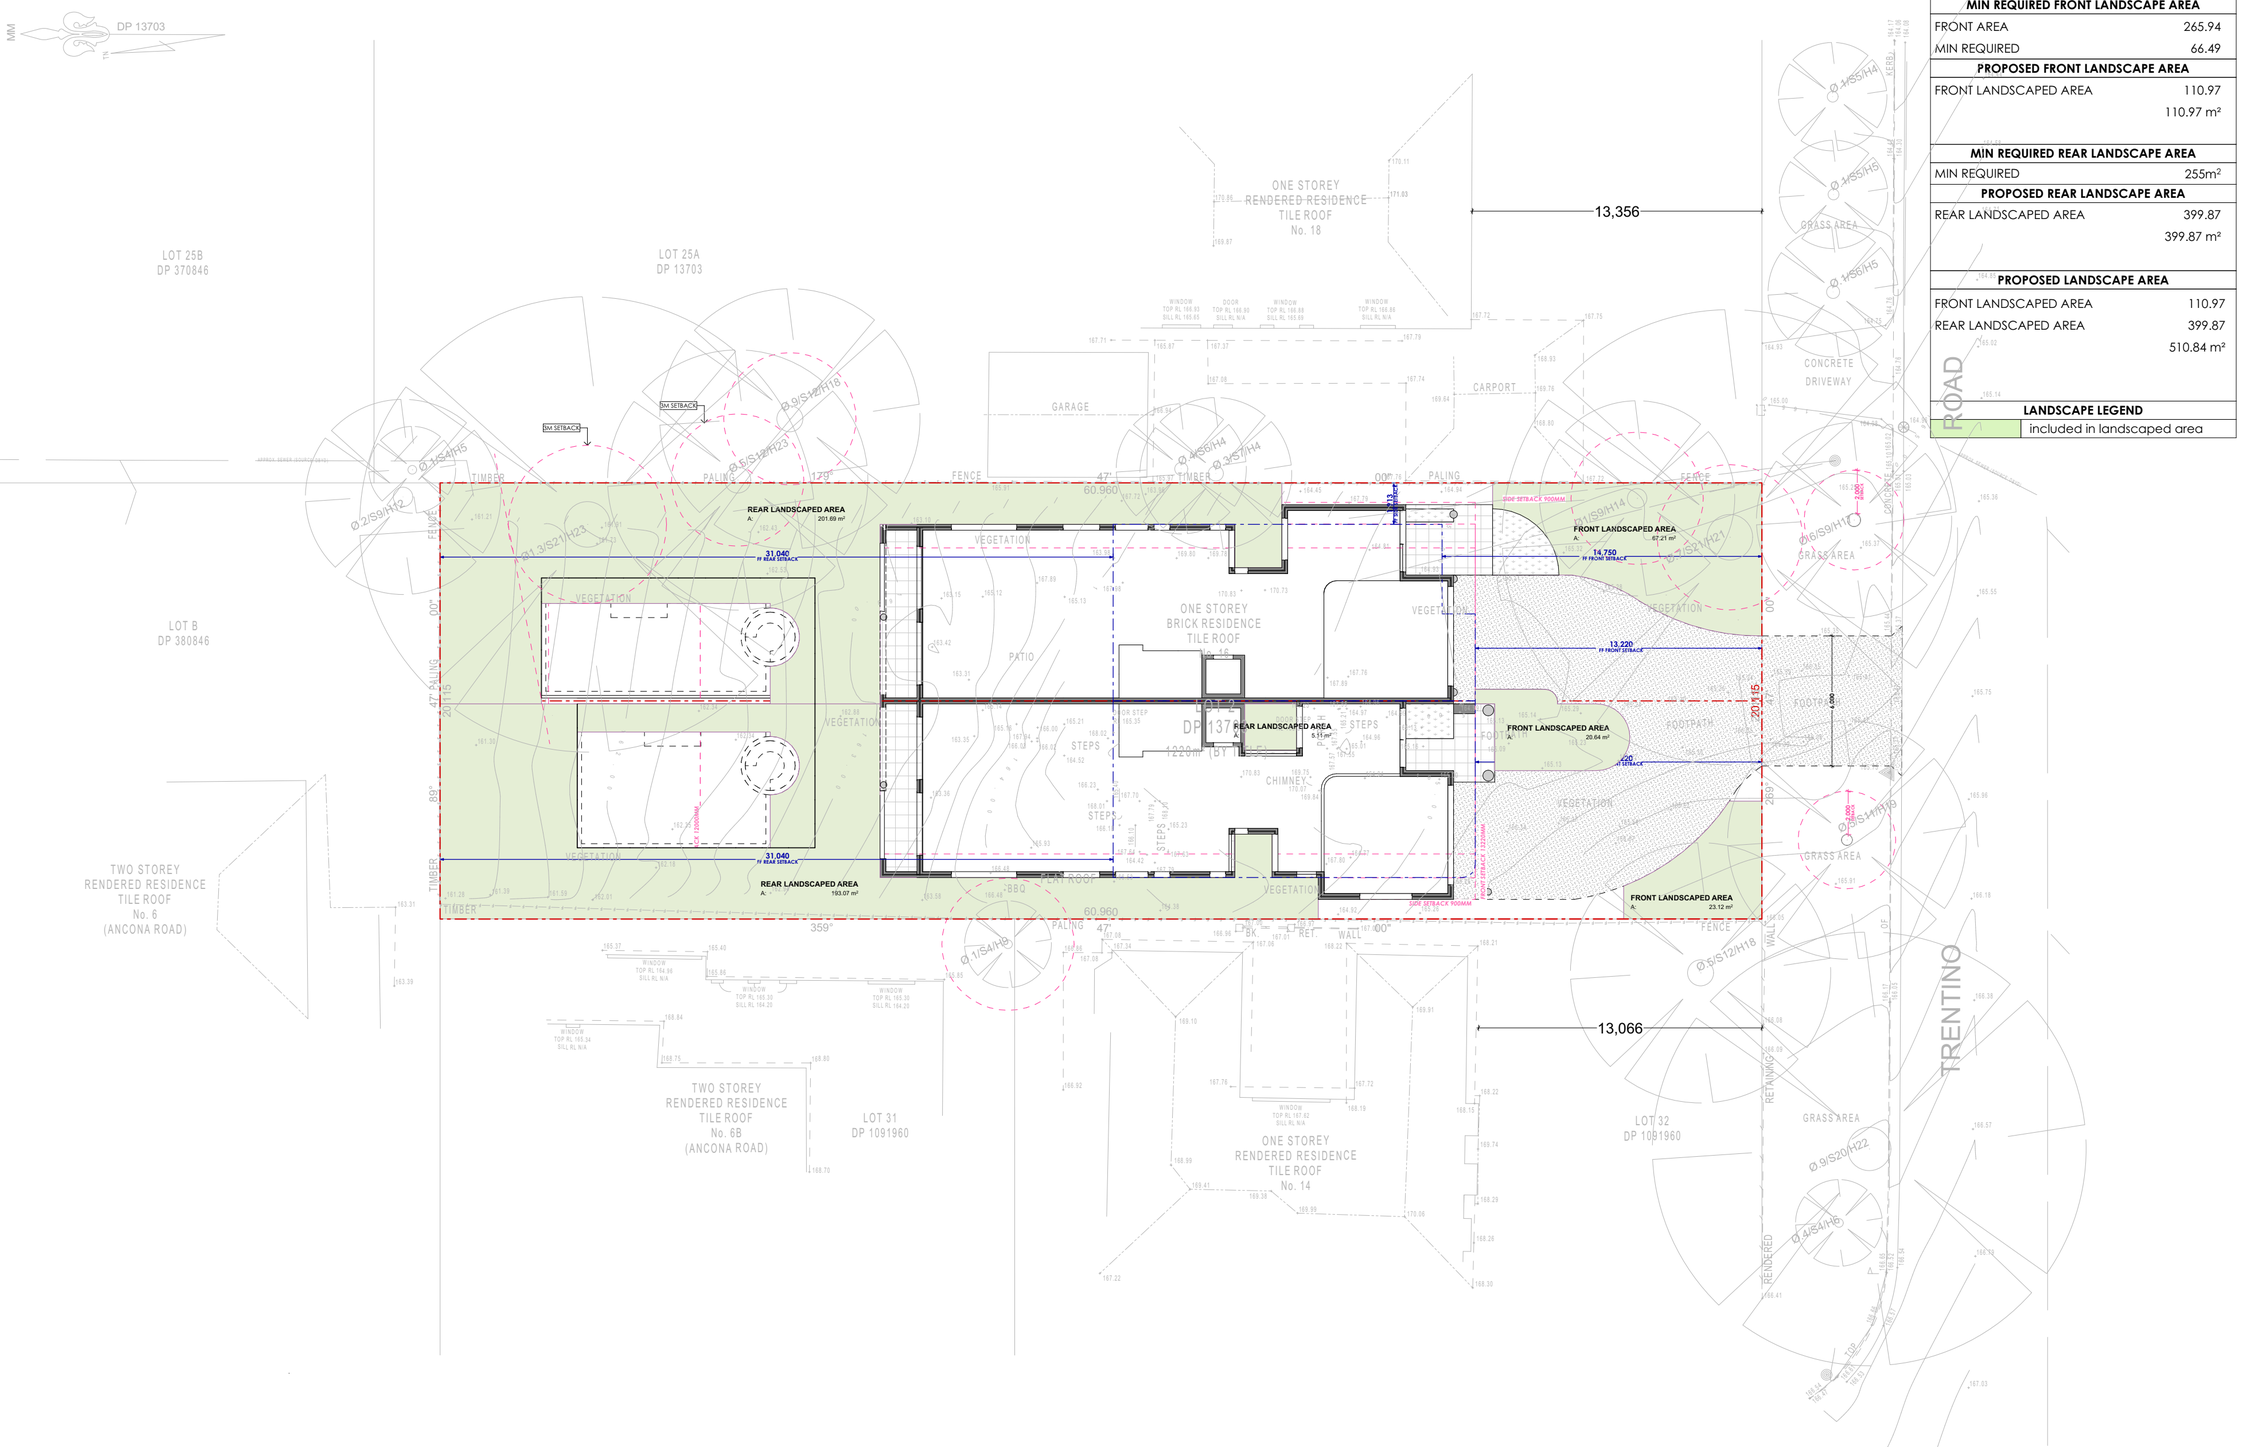ARCHX DESIGNS



REQUIRED TOTAL LANDSCAPE AREA (40%)	
SITE AREA	1220m2
MIN REQUIRED	510 m²
MIN REQUIRED FRONT LANDSCAPE AREA	
FRONT AREA	265.94
MIN REQUIRED	66.49
PROPOSED FRONT LANDSCAPE AREA	
FRONT LANDSCAPED AREA	110.97
	110.97 m²
MIN REQUIRED REAR LANDSCAPE AREA	
MIN REQUIRED	255m²
PROPOSED REAR LANDSCAPE AREA	
REAR LANDSCAPED AREA	399.87
	399.87 m²
PROPOSED LANDSCAPE AREA	
FRONT LANDSCAPED AREA	110.97
REAR LANDSCAPED AREA	399.87
	510.84 m²

LANDSCAPE LEGEND	
	included in landscaped area

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT


DRAWING TITLE


LANDSCAPE AREA CALCULATION

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:200@ A2

WD 09

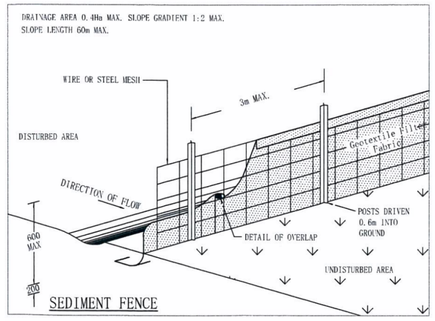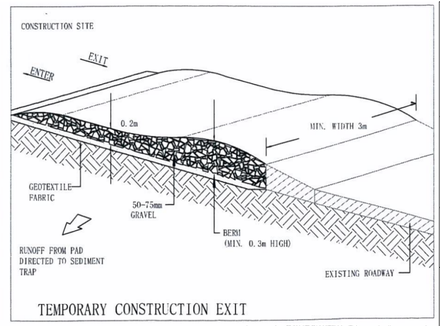ISSUE AB





SITE WORK NOTE:

- EXCAVATE SITE APPROX. TO FORM JOB DATUM. DATUM POINT 320MM BELOW FINISH FLOOR LEVEL. EXTENDT OF EXCAVATION AND BATTERS TO BE DETERMINED ON SITE.
- BUILDING PLATFORM HEIGHT SHOWN IS APPROX. ONLY & MAY VARY ON SITE DUE TO SITE CONDITION. SUCH VARIATION WHILE COMPLYING WITH COUNCIL/SEPP REQUIREMENTS REMAINS AT THE DISCRETION OF THE BUILDER
- ALL SITE WORKS INDICATED ARE ILLUSTRATIVE ONLY
- RETAINING WALL GREATER THAN 600mm IN HEIGHT AND ON THE BOUNDARY TO BE CONSTRUCTED IN ACCORDANCE WITH ENGINEER'S DETAILS

SEDIMENT NOTE:


1. ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSPECTED AND MAINTAINED DAILY BY THE SITE MANAGER.
2. MINIMISE DISTURBED AREAS, REMOVE EXCESS SOIL FROM EXCAVATED AREA AS SOON AS POSSIBLE.
3. ALL MATERIAL STOCKPILE TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATHS, OR WITHIN SEDIMENT FENCE AREA.
4. DRAINAGE TO BE CONNECTED TO STORMWATER AS SOON AS POSSIBLE. IF STORED ON SITE, IT MUST BE FILTERED BEFORE RELEASING INTO STORMWATER SYSTEM OR WATERWAYS.
5. ROADS AND FOOTPATHS TO BE SWEPT DAILY.

DUST CONTROL:

TO REDUCE DUST GENERATED BY WIND ACTION, THE REMOVAL OF THE TOP SOIL IS TO BE MINIMISED. TO PREVENT DUST GENERATION, WATERING DOWN OF THE SITE, ESPECIALLY DURING THE MOVEMENT OF MACHINERY IS REQUIRED. WHERE EXCAVATING INTO ROCK, KEEP THE SURFACE MOIST TO MINIMISE DUST. CONSTRUCT A GRAVEL ENTRY/EXIT POINT USING BLUE METAL AND RESTRICT ALL VEHICLE MOVEMENTS WITHIN THE SITE TO A MINIMUM. ENSURE WIND BREAKS, SUCH AS EXISTING FENCES ARE MAINTAINED DURING THE CONSTRUCTION PHASE UNTIL NEW LANDSCAPING IS PROVIDED OR REINSTATED. PREVENT DUST BY COVERING STOCKPILES

LEGEND:

	SEDIMENT FENCE
	SAFTY FENCE

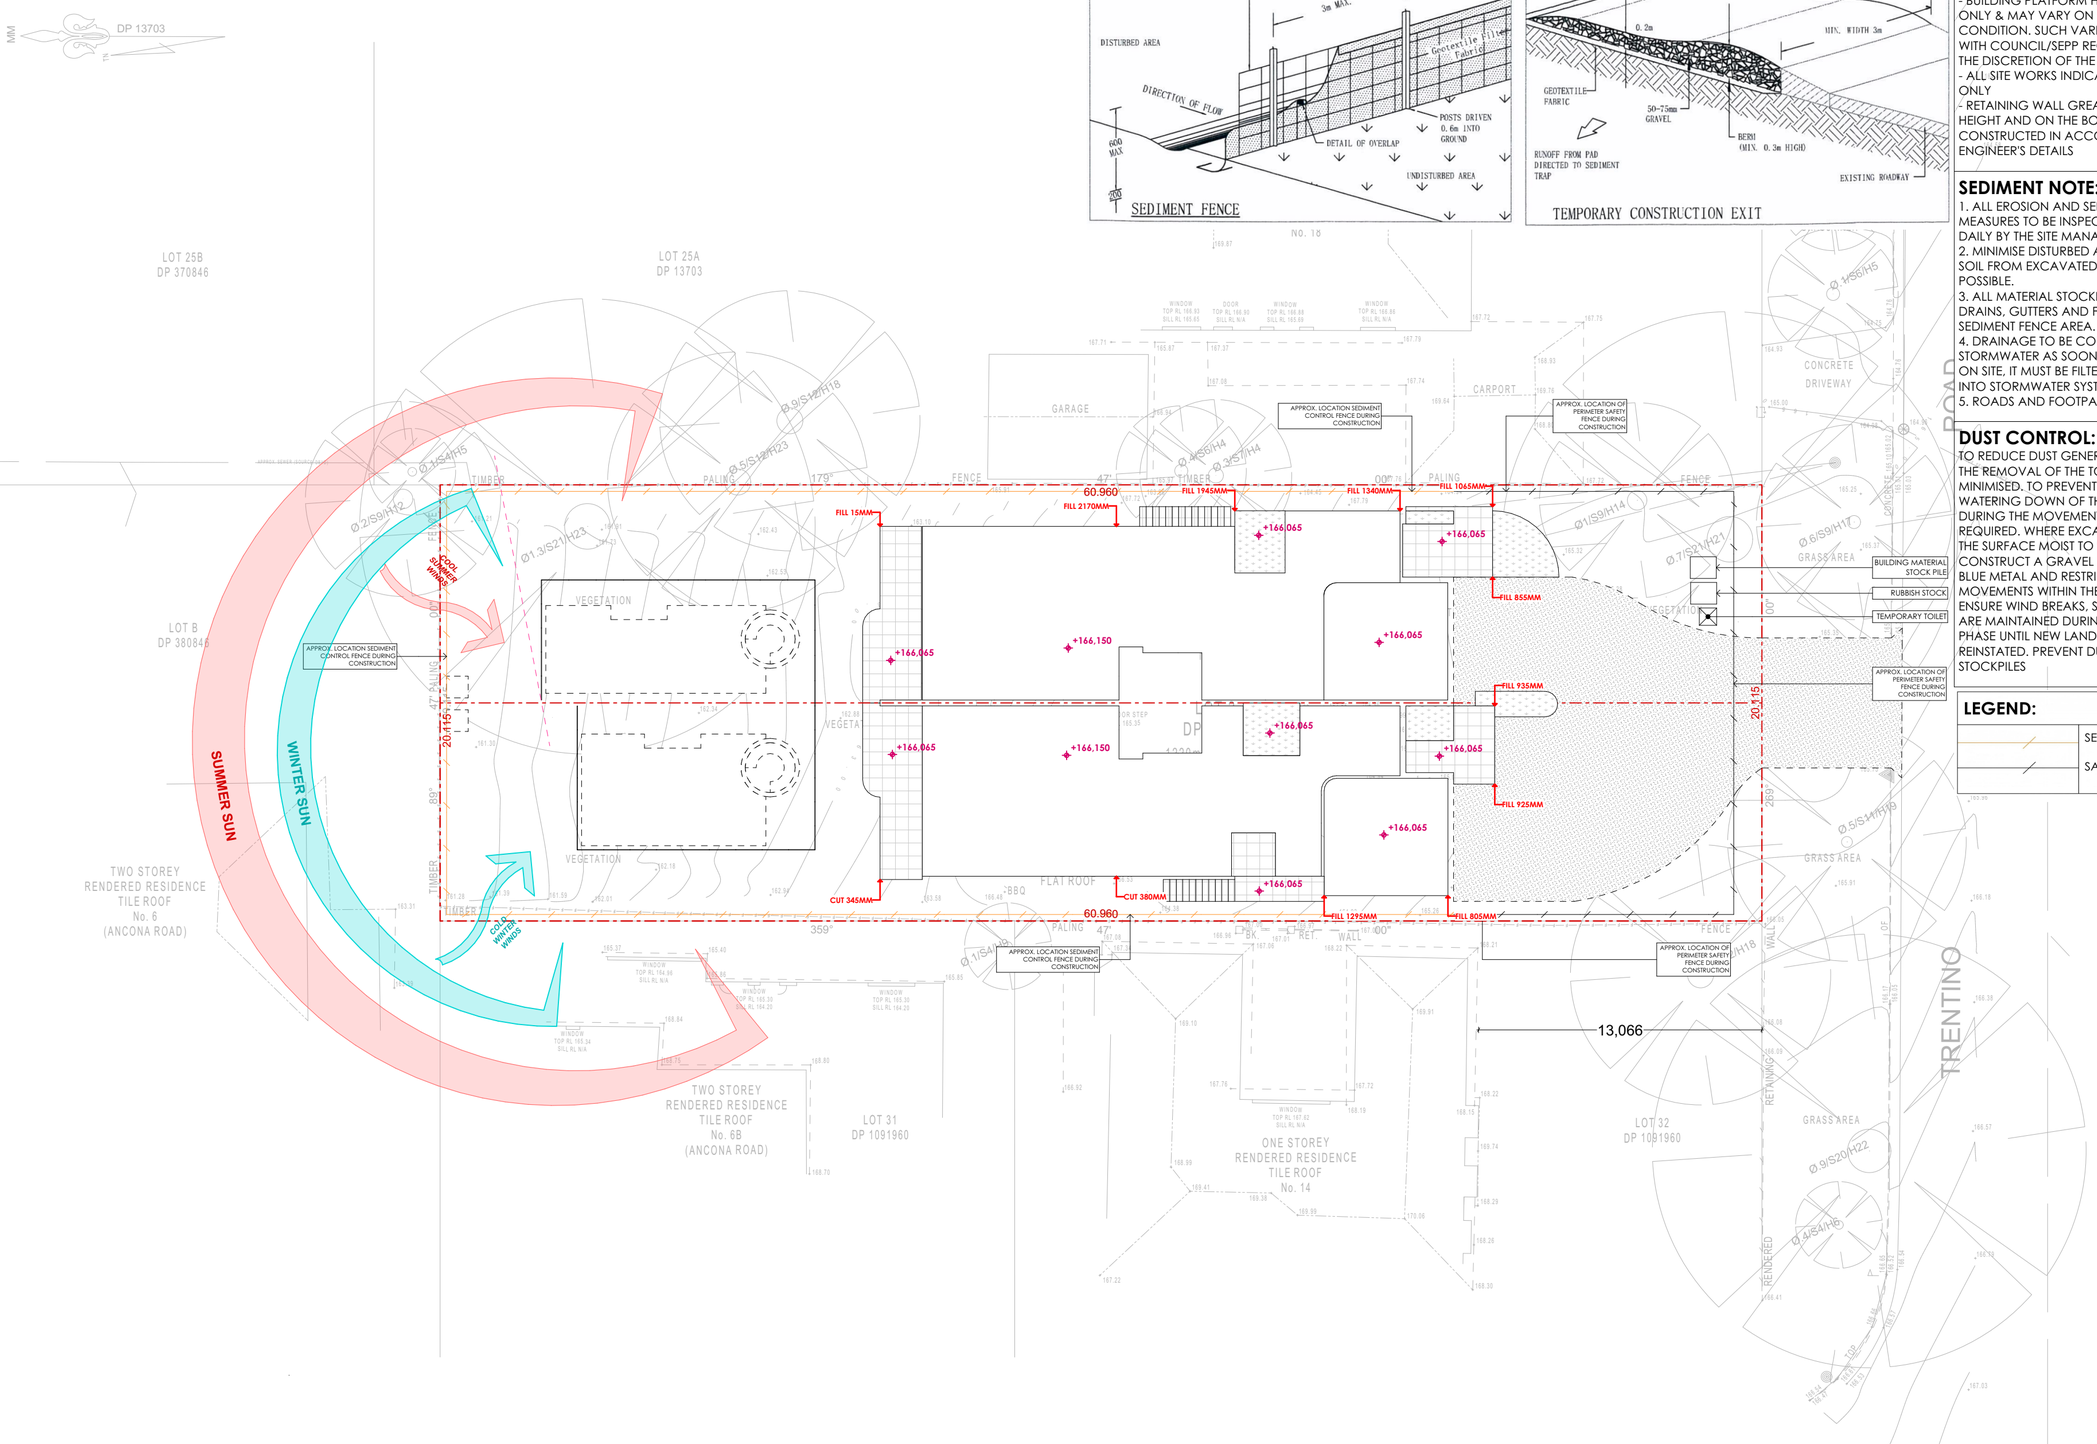

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take preference to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT

DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT

GALAXY HOME DEVELOPMENT

DRAWING TITLE

SITE WORK PLAN

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:200@ A2


WD 10

ISSUE AB

GENERAL NOTE:
- FRAMING TO AS1685 - 2010
- CONCRETE FOOTING TO AS2870 - 2011
- PLUMBING TO AS3500 - 2003
- MASONRY TO AS4773 & 3700
- TERMITE CONTROL TO AS2049
- DOORS AND WINDOWS TO AS2047

NOTE:
- POOL DESIGN ARE ILLUSTRATIVE ONLY
- POOL TO BE CONSTRUCTED IN ACCORDANCE AS PER MANUFACTURER DETAILS

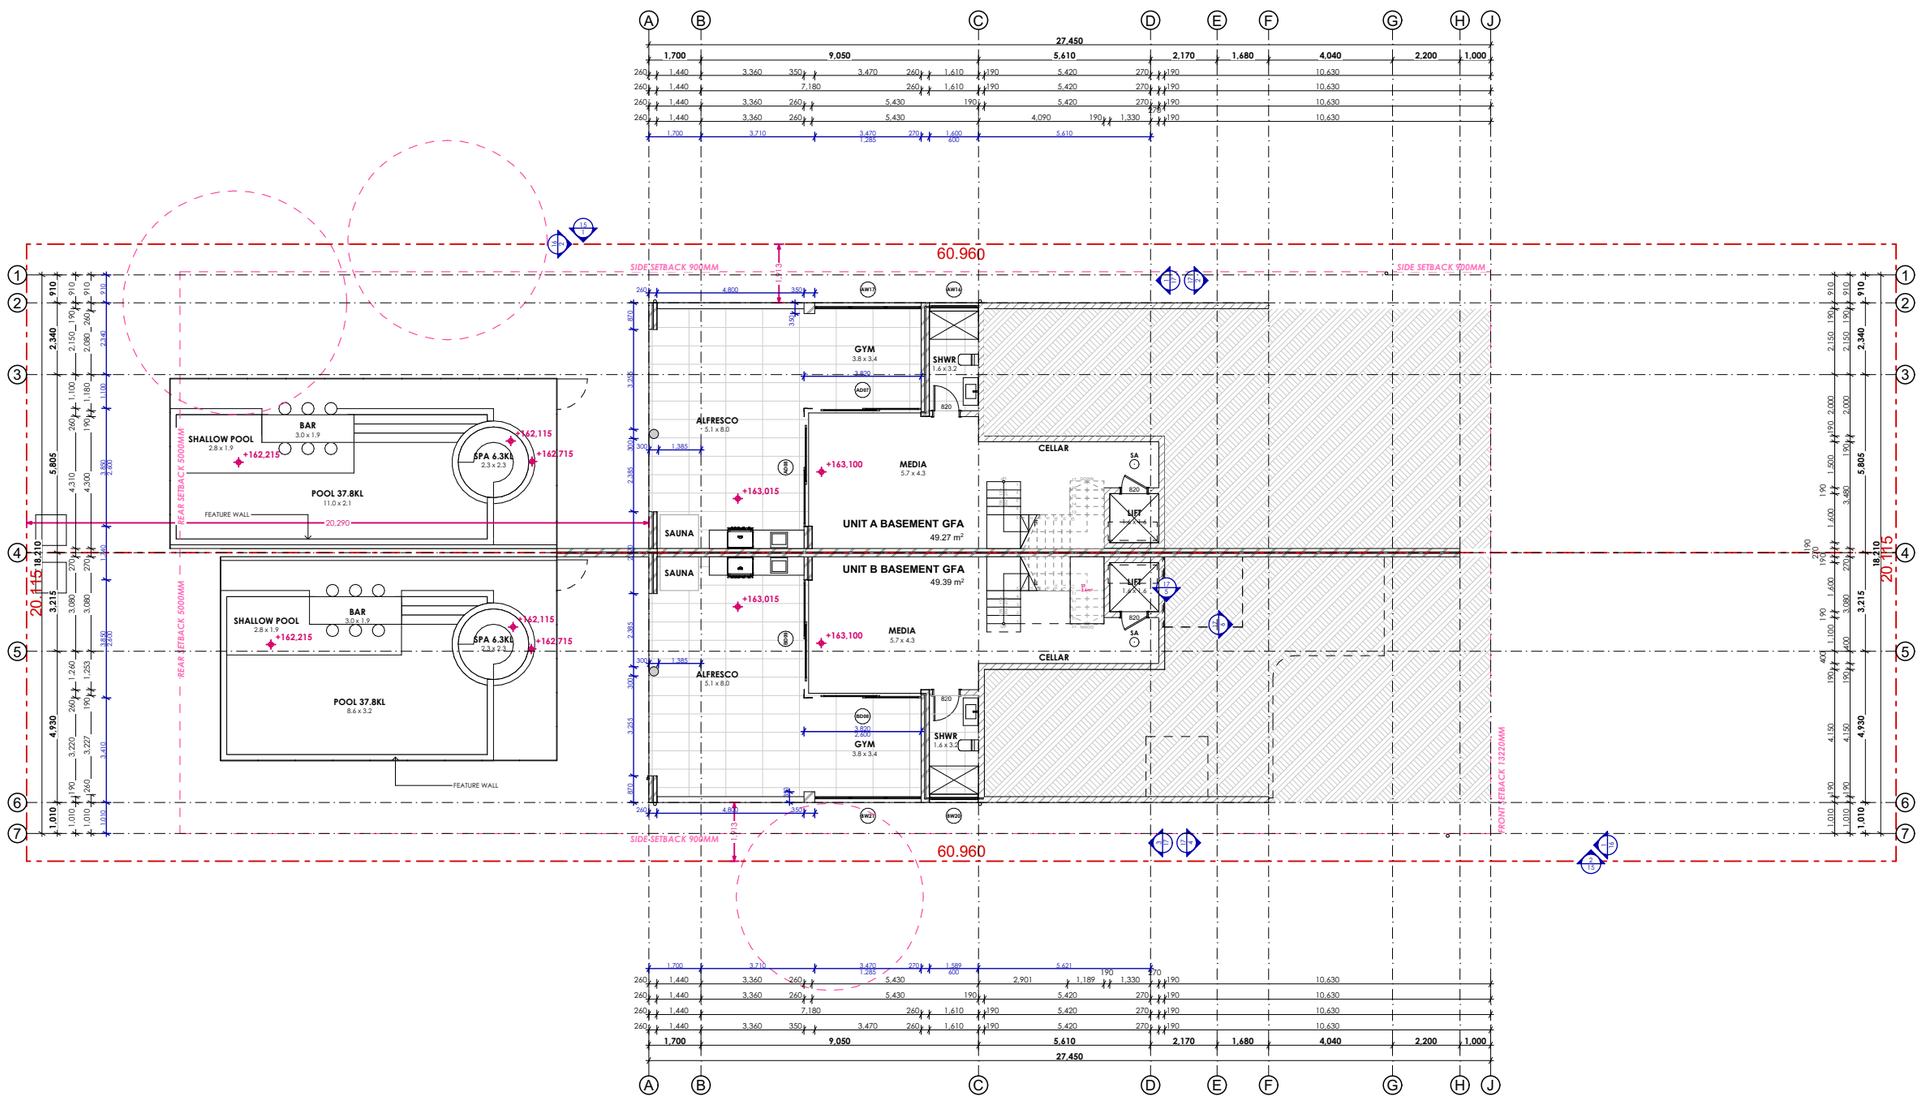SA SMOKE ALARM



ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

BASEMENT PLAN


JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:200@ A3

WD 11

ISSUE AB

GENERAL NOTE:
- FRAMING TO AS1685 - 2010
- CONCRETE FOOTING TO AS2870 - 2011
- PLUMBING TO AS3500 - 2003
- MASONRY TO AS4773 & 3700
- TERMITE CONTROL TO AS2049
- DOORS AND WINDOWS TO AS2047

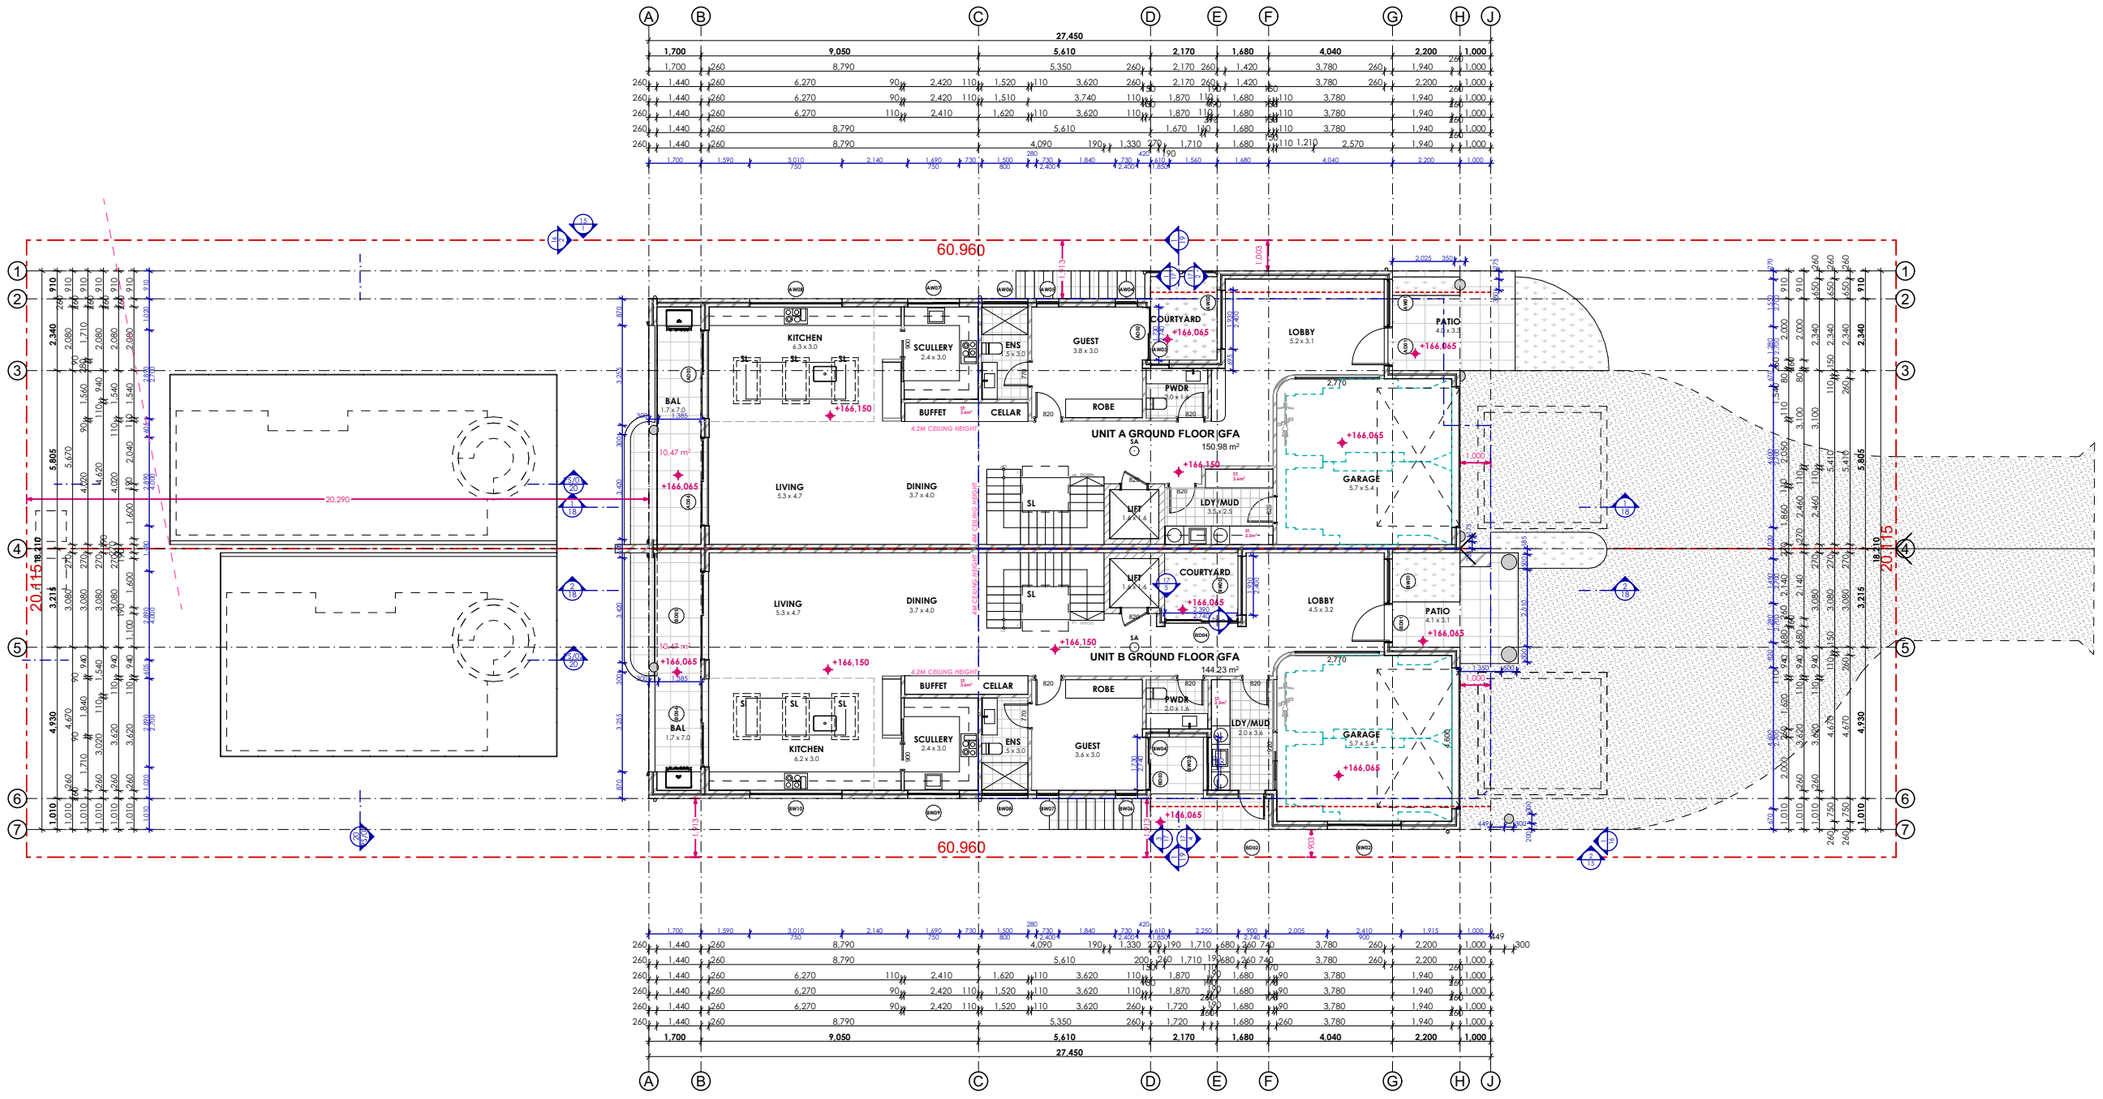SA SMOKE ALARM



ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

GROUND FLOOR PLAN


JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE 1:200@ A3

WD 12

ISSUE AB

GENERAL NOTE:
- FRAMING TO AS1685 - 2010
- CONCRETE FOOTING TO AS2870 - 2011
- PLUMBING TO AS3500 - 2003
- MASONRY TO AS4773 & 3700
- TERMITE CONTROL TO AS2049
- DOORS AND WINDOWS TO AS2047

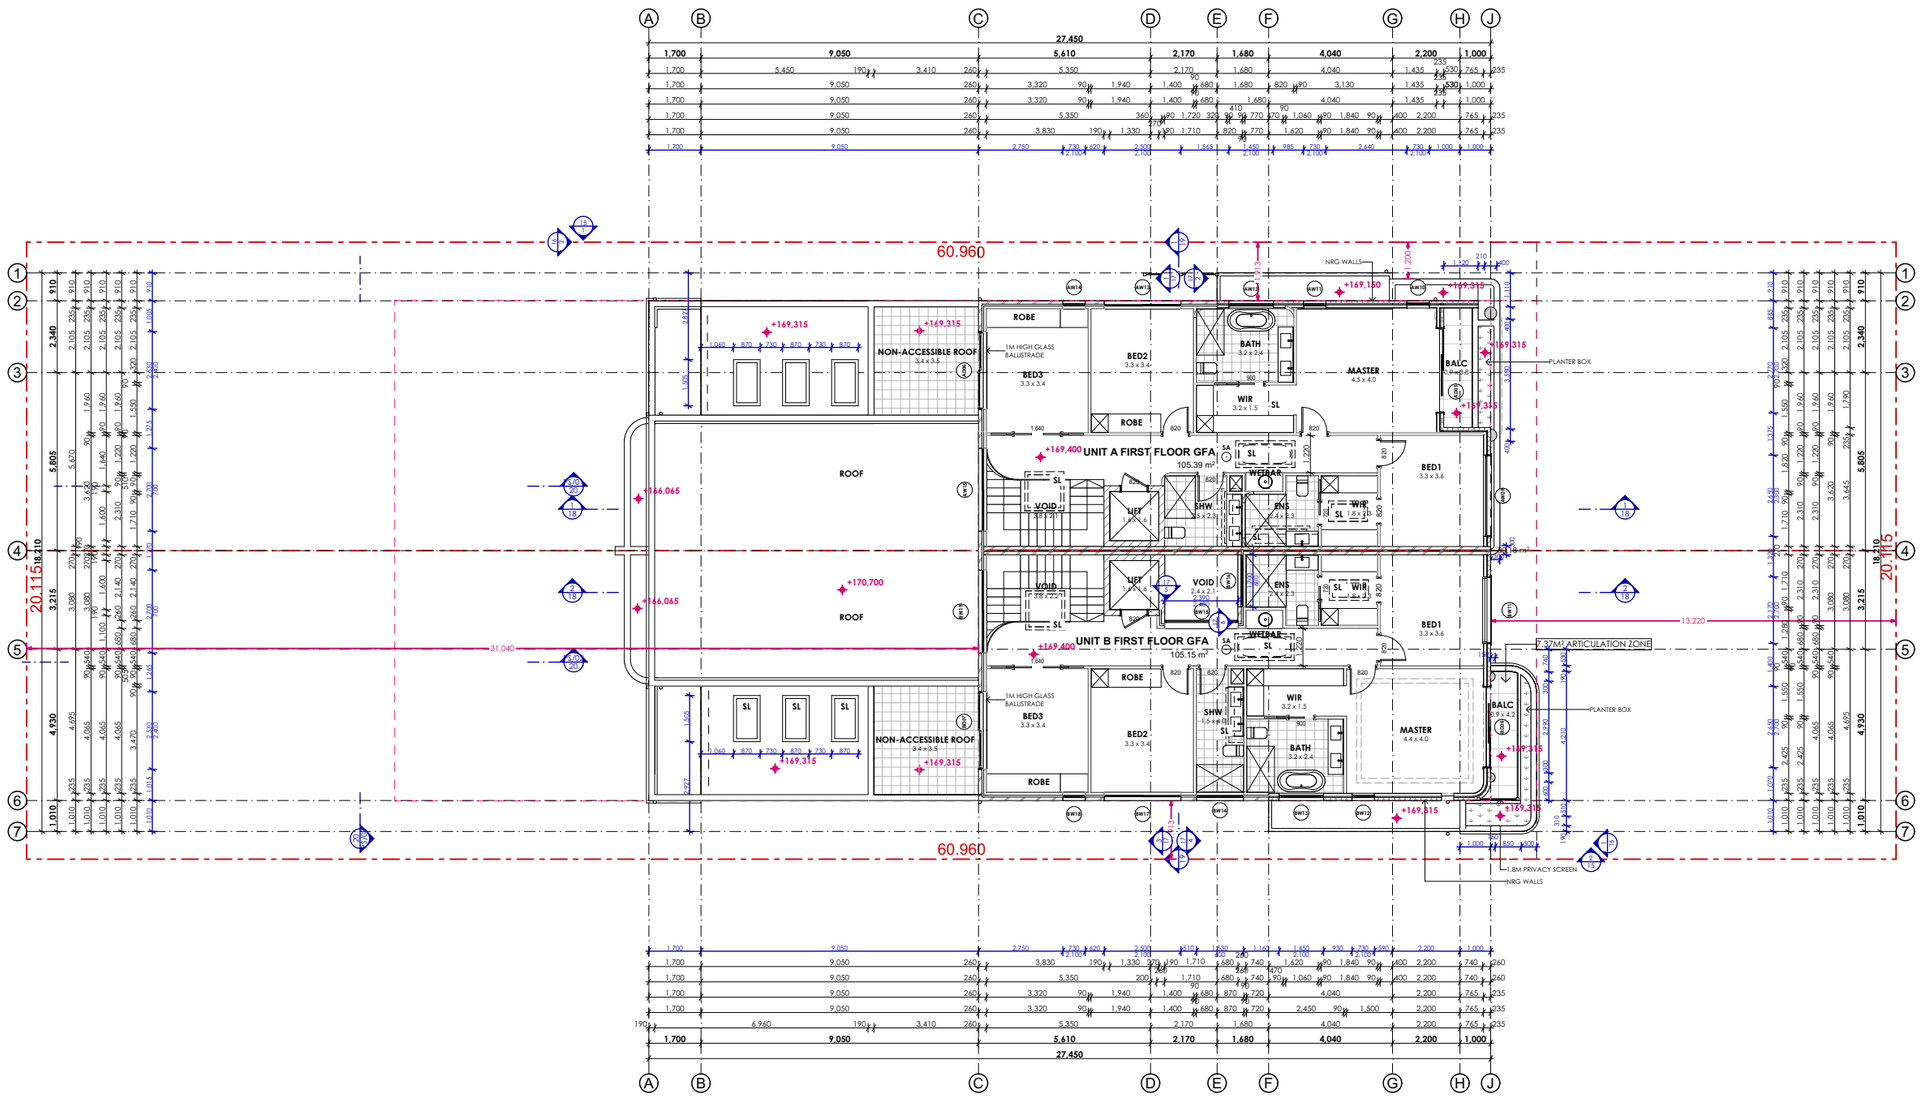5A SMOKE ALARM



ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE


FIRST FLOOR PLAN

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:200@ A3

WD 13

ISSUE AB

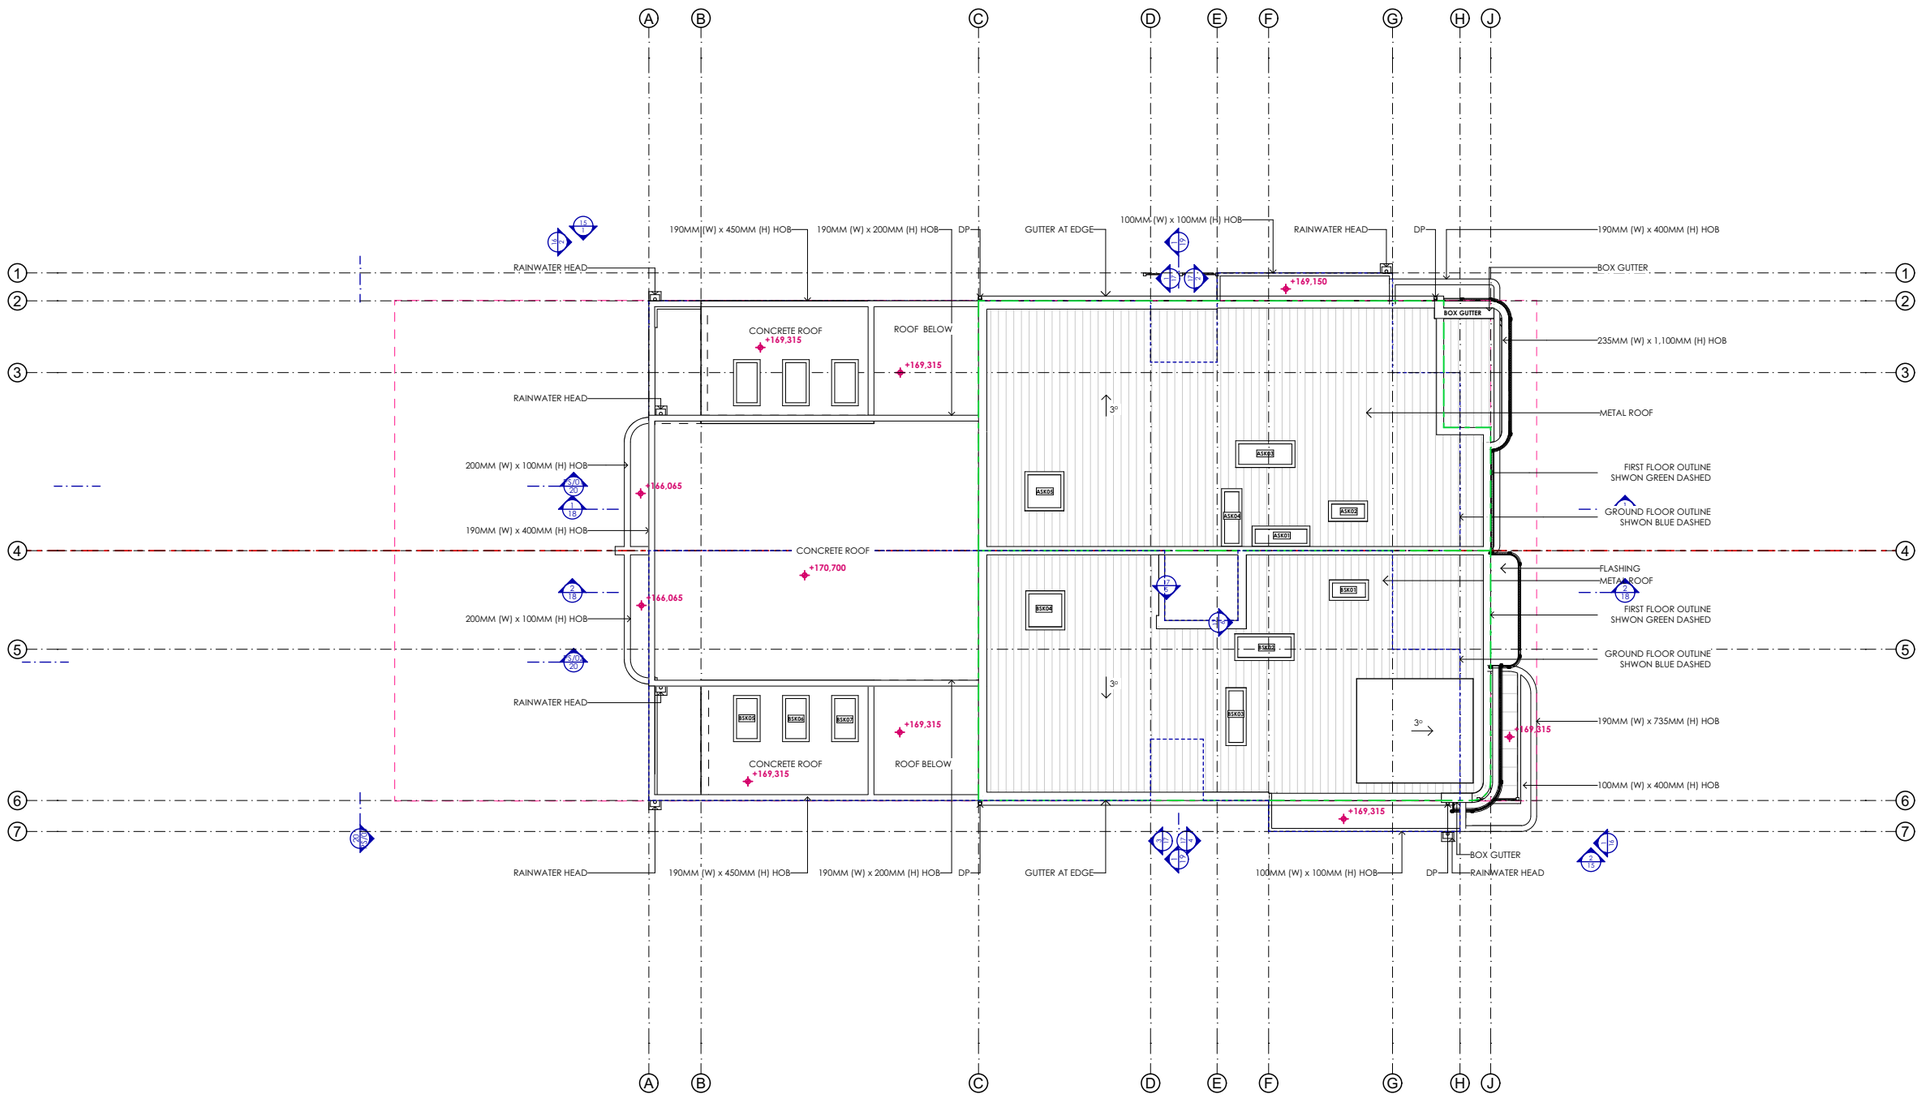GENERAL NOTE:
- FRAMING TO AS1685 - 2010
- CONCRETE FOOTING TO AS2870 - 2011
- PLUMBING TO AS3500 - 2003
- MASONRY TO AS4773 & 3700
- TERMITE CONTROL TO AS2049
- DOORS AND WINDOWS TO AS2047



GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

ROOF PLAN


JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE 1:200@ A3

WD 14


ISSUE AB

ARCHX DESIGNS

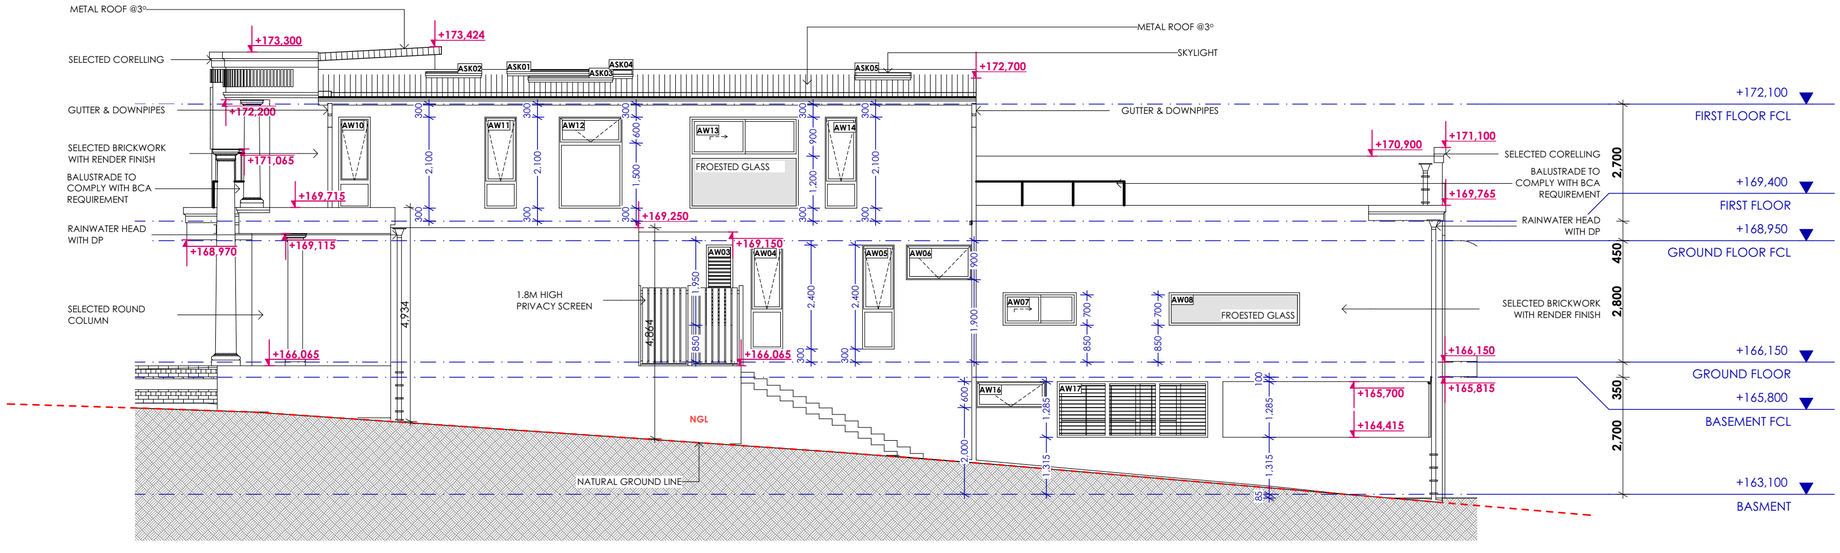NOTE:
- POOL DESIGN ARE ILLUSTRATIVE ONLY
- POOL TO BE CONSTRUCTED IN ACCORDANCE AS PER MANUFACTURER DETAILS



1 **EAST ELEVATION**

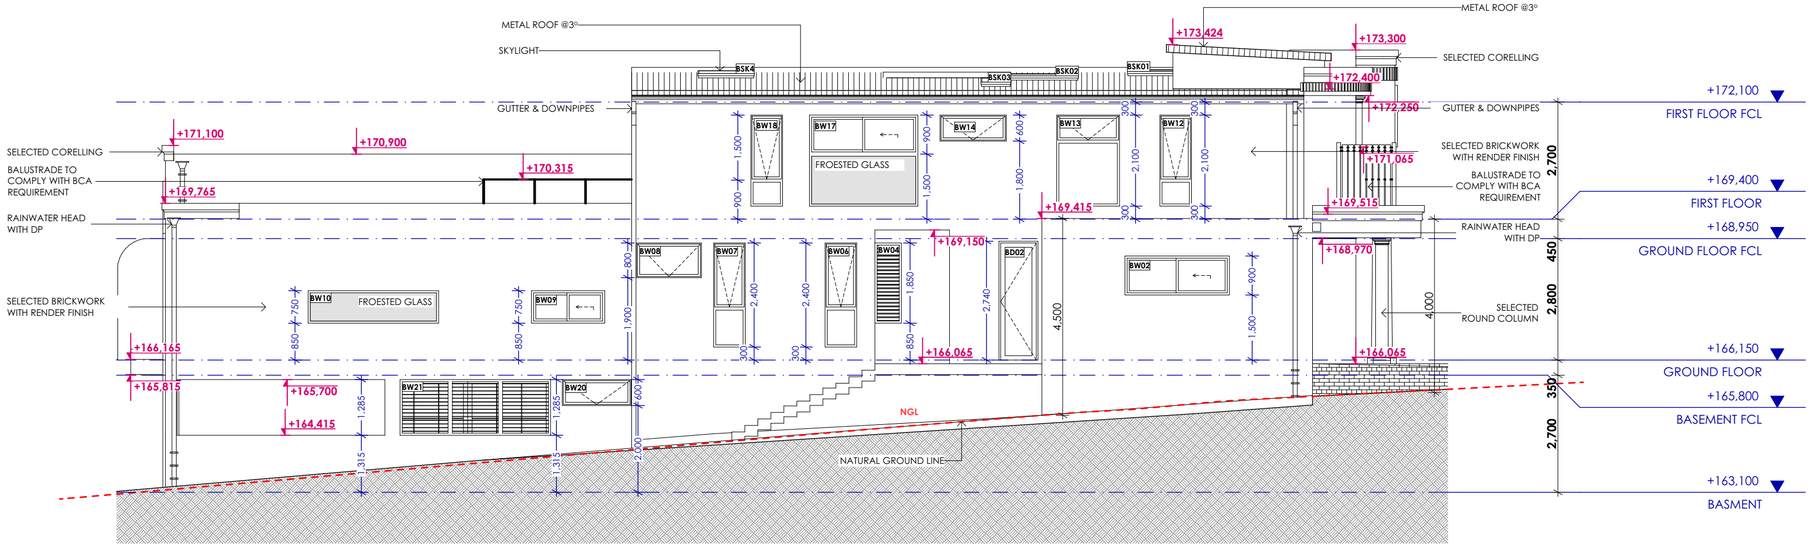

2 **WEST ELEVATION**

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take preference to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE


EAST AND WEST ELEVATIONS

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:100@ A2


WD 15

ISSUE AB

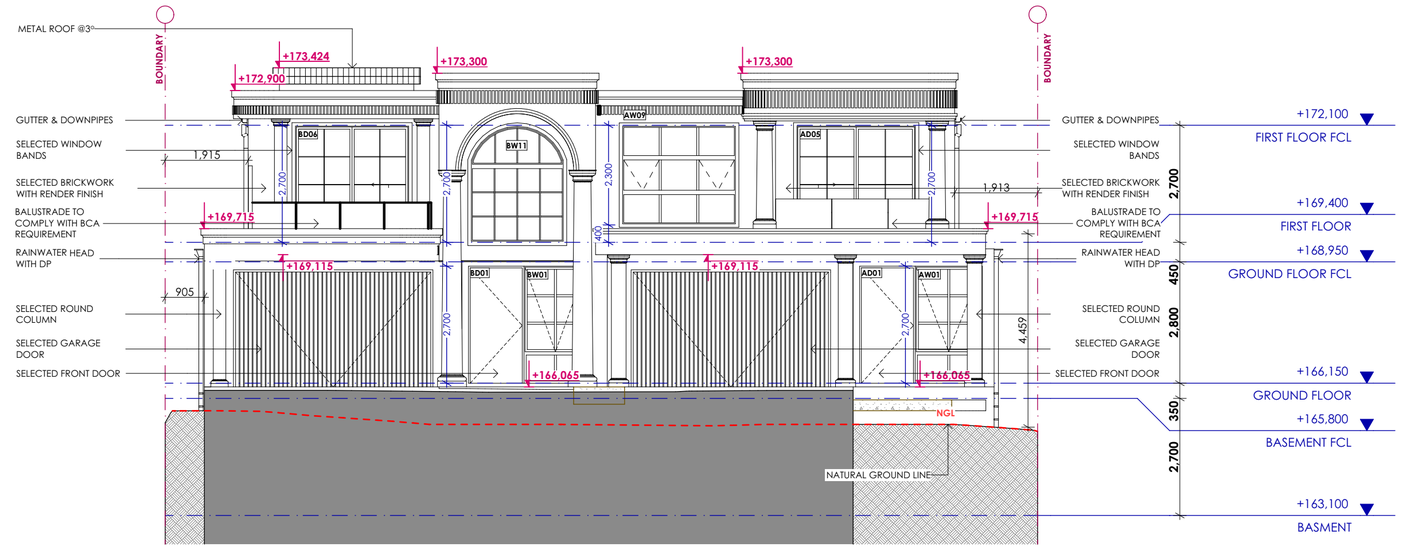NOTE:
- POOL DESIGN ARE ILLUSTRATIVE ONLY
- POOL TO BE CONSTRUCTED IN ACCORDANCE AS PER MANUFACTURER DETAILS



1 SOUTH ELEVATION

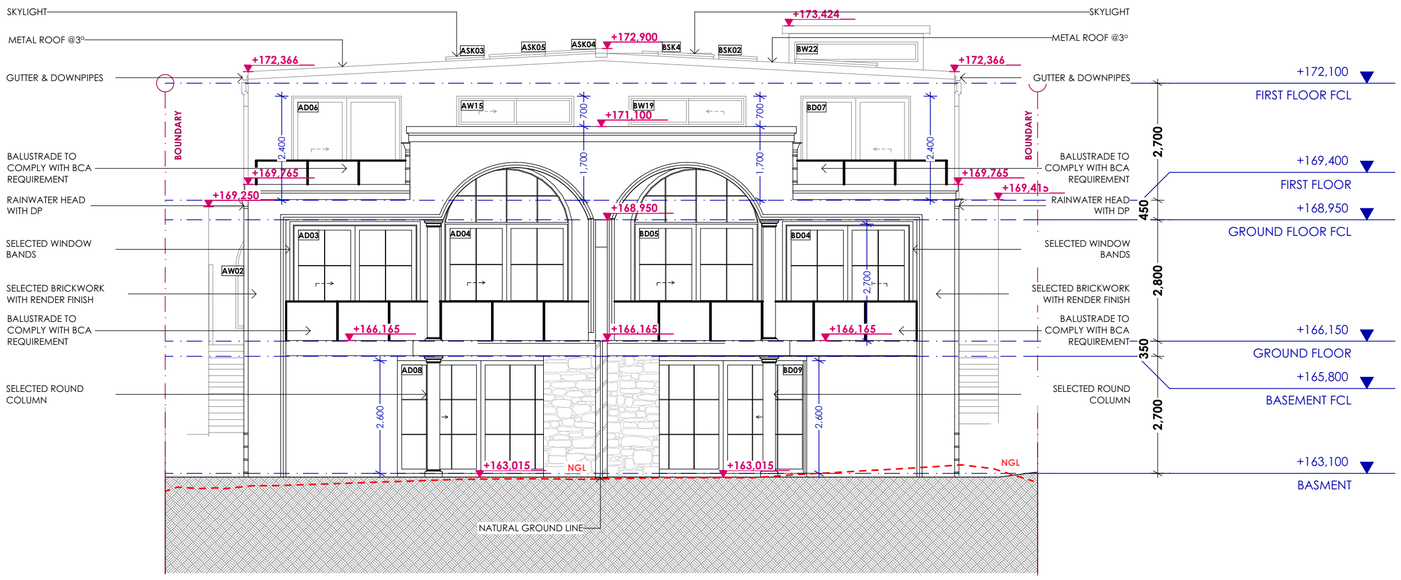

2 NORTH ELEVATION

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE


NORTH AND SOUTH ELEVATIONS

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:100@ A2


WD 16

ISSUE AB

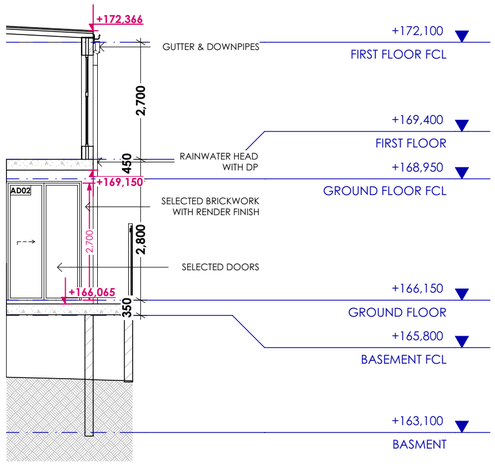
NOTE:
- POOL DESIGN ARE ILLUSTRATIVE ONLY
- POOL TO BE CONSTRUCTED IN ACCORDANCE AS PER MANUFACTURER DETAILS




1 **ELEVATION A-1**

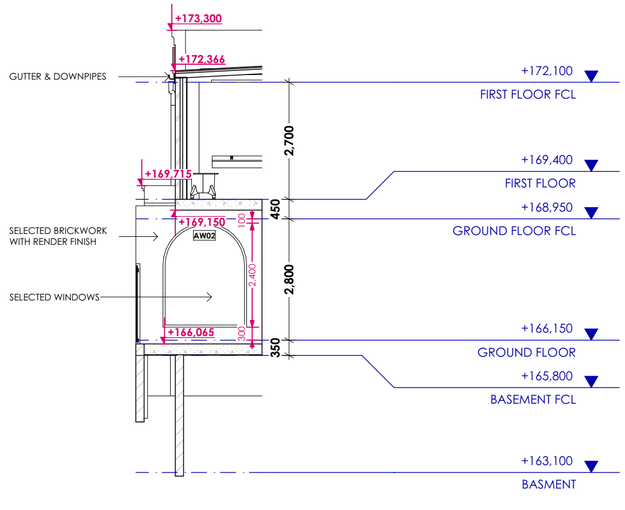


2 **ELEVATION A-2**

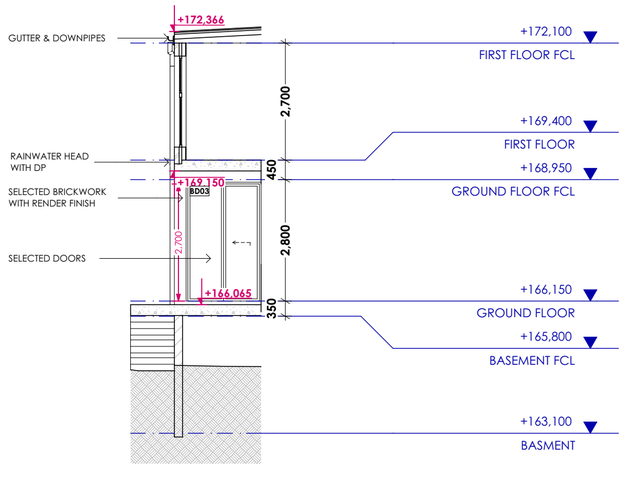


3 **ELEVATION B-1**

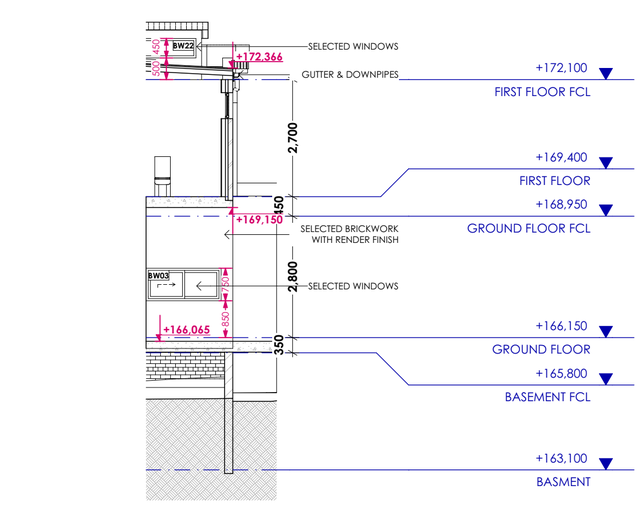

4 **ELEVATION B-2**

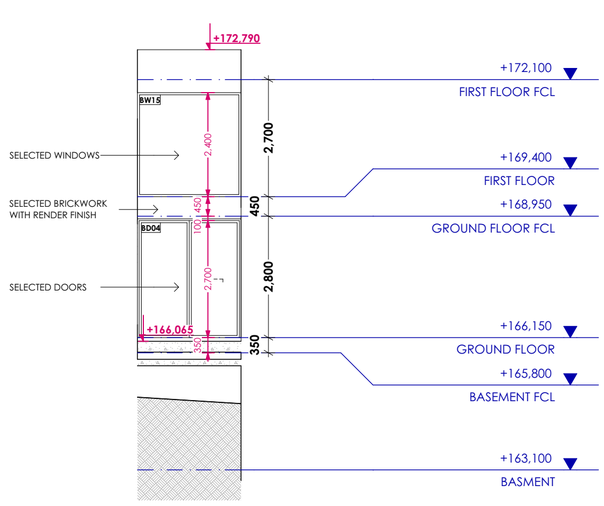

5 **ELEVATION B-3**

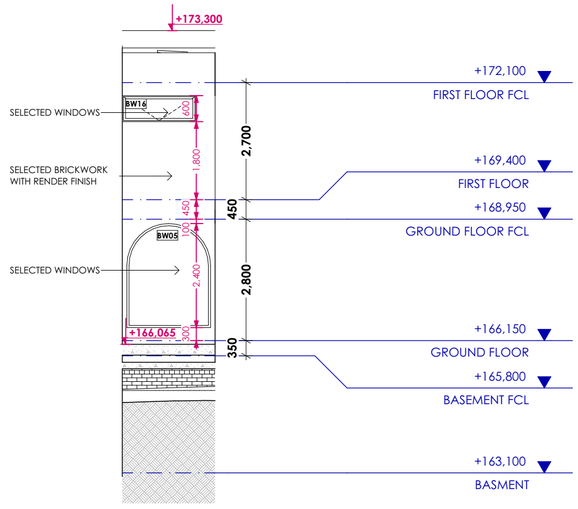

6 **ELEVATION B-4**

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT


DRAWING TITLE

ELEVATIONS


JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:100@ A2

WD 17

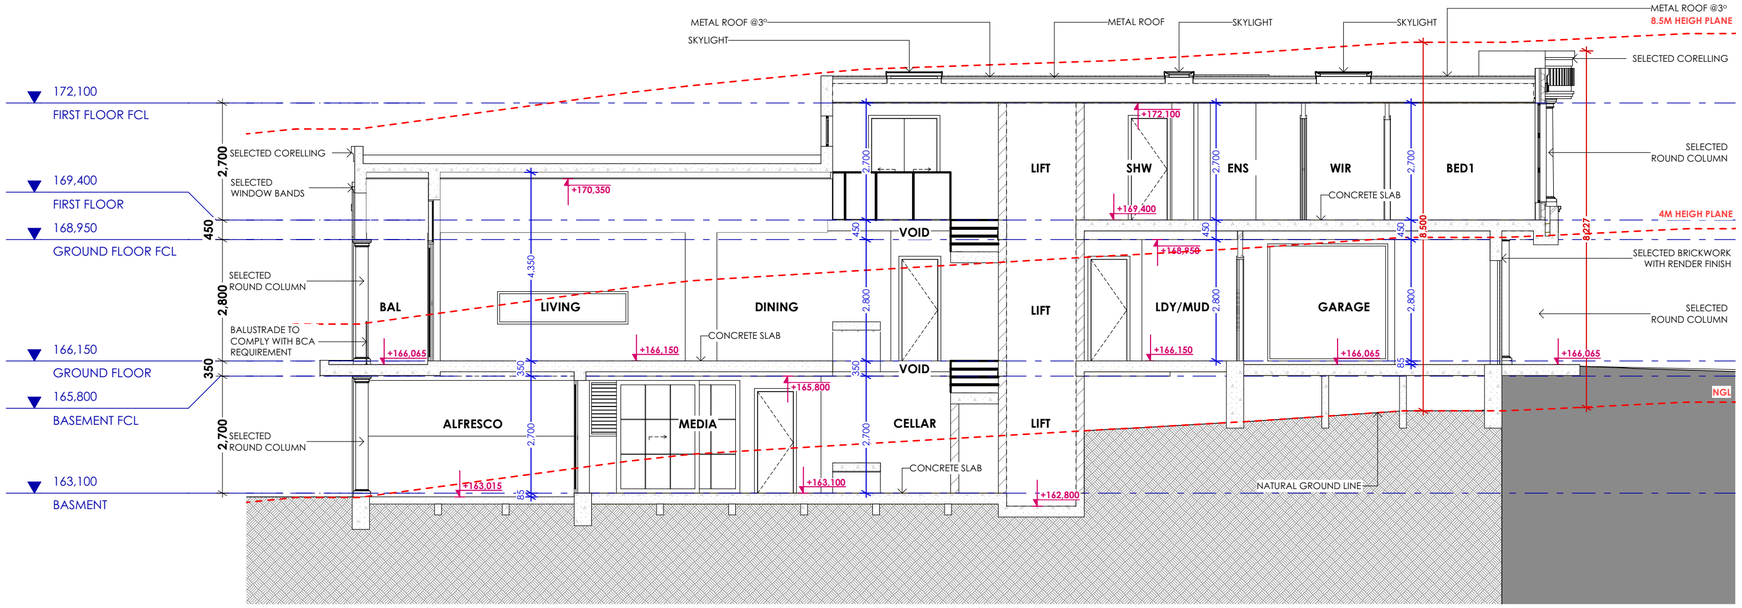ISSUE AB



1 SECTION 01

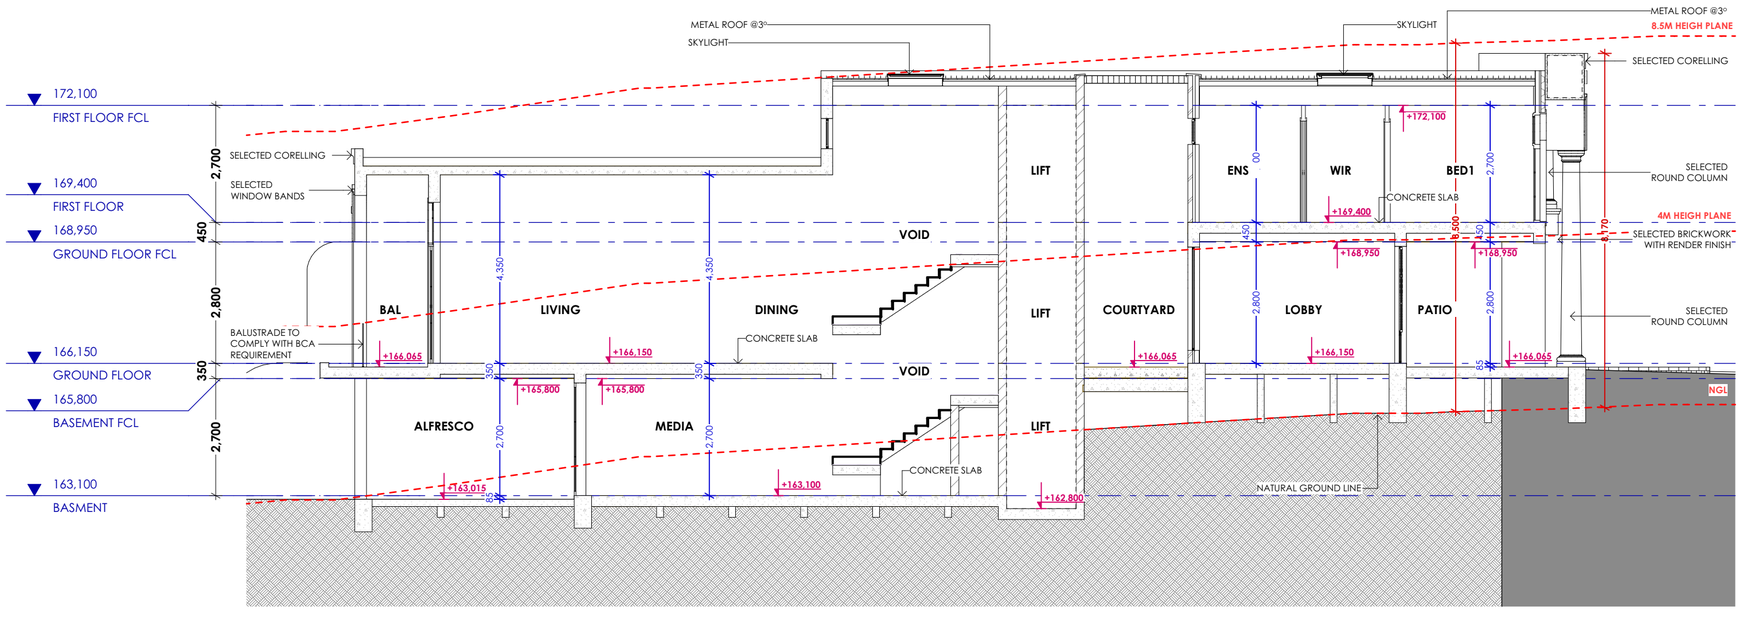

2 SECTION 02

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT


DRAWING TITLE

SECTIONS 01

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE 1:100@ A2

WD 18

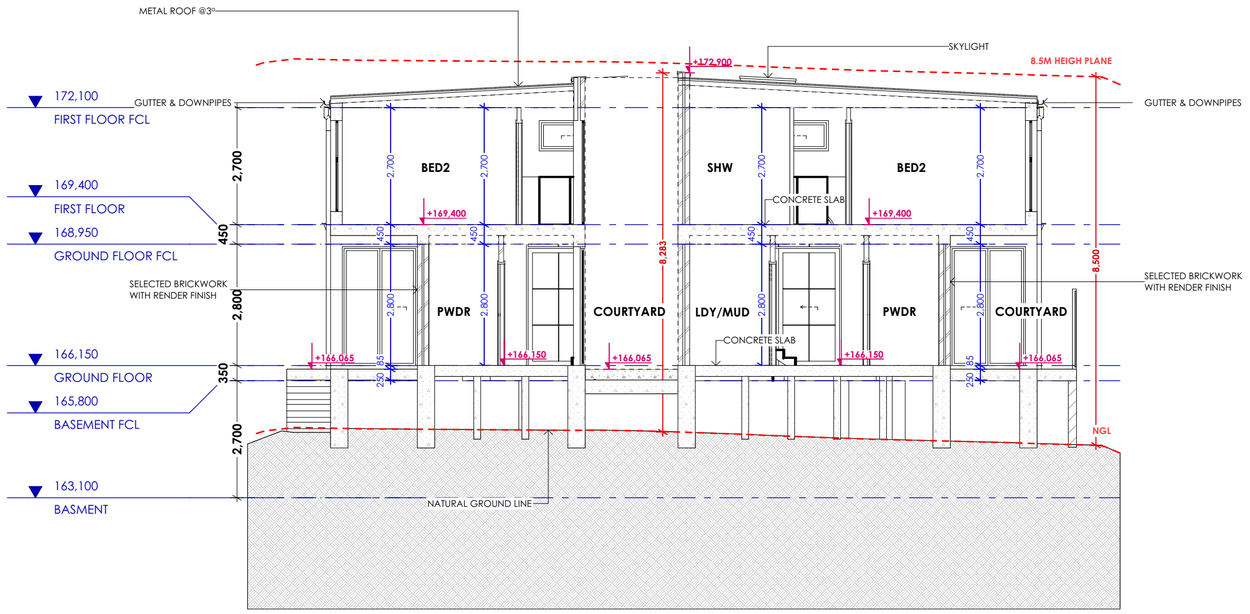ISSUE AB



1 SECTION 03

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE


SECTIONS 02

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE 1:100@ A2


WD 19

ISSUE AB

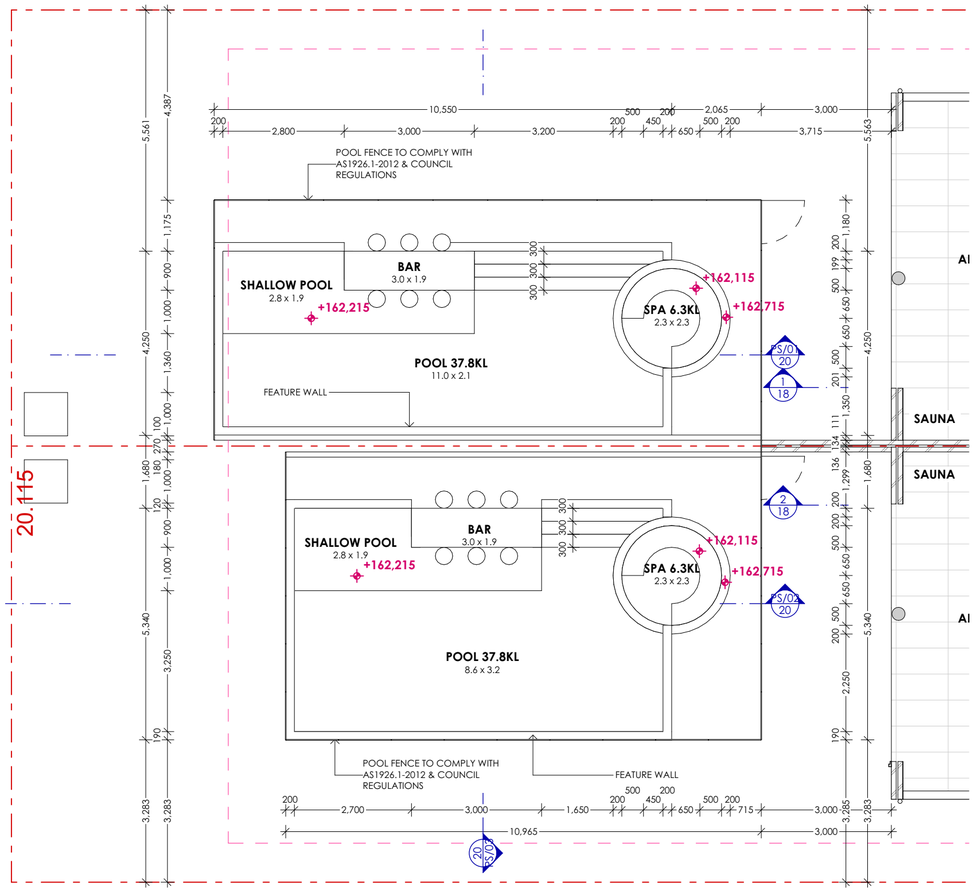
NOTE:
- POOL DESIGN ARE ILLUSTRATIVE ONLY
- POOL TO BE CONSTRUCTED IN ACCORDANCE AS PER MANUFACTURER DETAILS




POOL PLAN

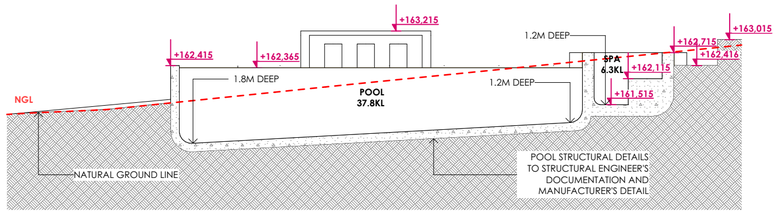

PS/01 SECTION 01

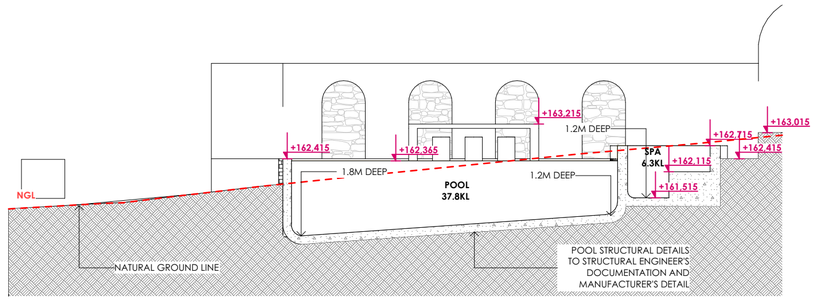

PS/02 SECTION 02

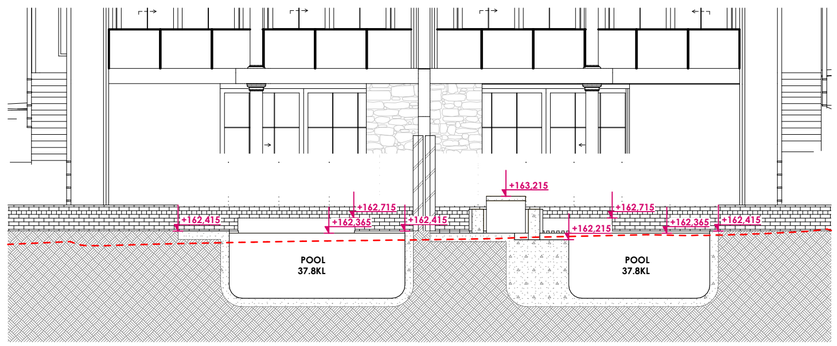

PS/03 SECTION 03

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT
















DRAWING TITLE














POOL DETAILS









JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	1:100@ A2

WD 20
















ISSUE AB



WINDOW SCHEDULE															
ID	AW01	AW02	AW03	AW04	AW05	AW06	AW07	AW08	AW09	AW10	AW11	AW12	AW13	AW14	AW15
W x H	1,550×2,700	1,930×2,400	610×1,850	730×2,400	730×2,400	1,500×800	1,690×750	3,010×750	2,650×2,300	730×2,100	730×2,100	1,450×2,100	2,500×2,100	730×2,100	2,700×700
ELEVATION															
NOTE								FROESTED GLASS					FROSTED GLASS		

WINDOW SCHEDULE															
ID	AW16	AW17	BW01	BW02	BW03	BW04	BW05	BW06	BW07	BW08	BW09	BW10	BW11	BW12	BW13
W x H	1,600×600	3,470×1,285	1,450×2,700	2,410×900	1,730×750	610×1,850	1,930×2,400	730×2,400	730×2,400	1,500×800	1,690×750	3,010×750	2,170×2,700	730×2,100	1,450×2,100
ELEVATION															
NOTE												FROSTED GLASS			







WINDOW SCHEDULE									
ID	BW14	BW15	BW16	BW17	BW18	BW19	BW20	BW21	BW22
W x H	1,530×600	2,390×2,400	1,700×600	2,500×2,100	730×2,100	2,700×700	1,589×600	3,470×1,285	2,840×450
ELEVATION									
NOTE				FROSTED GLASS					

SKYLIGHT SCHEDULE

DOOR SCHEDULE														
ID	AD01	AD02	AD03	AD04	AD05	AD06	AD07	AD08	BD01	BD02	BD03	BD04	BD05	BD06	BD07
W x H	1,200×2,660	1,650×2,700	2,890×2,700	2,890×4,000	2,770×2,700	2,530×2,400	3,820×2,600	3,850×2,600	1,200×2,660	820×2,700	1,650×2,700	2,890×2,700	2,890×4,000	2,650×2,700	2,530×2,400
ELEVATION															

DOOR SCHEDULE		
ID	BD08	BD09
W x H	3,820×2,600	3,850×2,600
ELEVATION		

1 DOOR SCHEDULE

SKYLIGHT SCHEDULE															
ID	ASK01	ASK02	ASK03	ASK04	ASK05	ASK06	ASK07	ASK08	BSK01	BSK02	BSK03	BSK4	BSK05	BSK06	BSK07
W x H	1,885×665	1,275×665	1,935×870	665×1,885	1,275×1,275	1,505×870	1,505×870	1,505×870	1,275×665	1,935×870	665×1,885	1,275×1,275	1,505×870	1,505×870	1,505×870
Elevation															

2 SKYLIGHT SCHEDULE

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT


DRAWING TITLE

SCHEDULE


JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	@ A2

WD 21

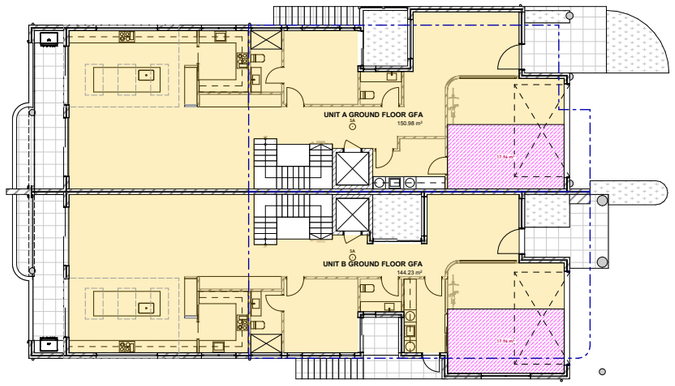
ISSUE AB



1 GROUND FLOOR GFA

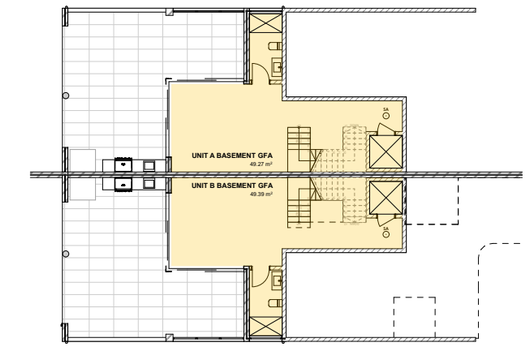

3 BASMENT GFA

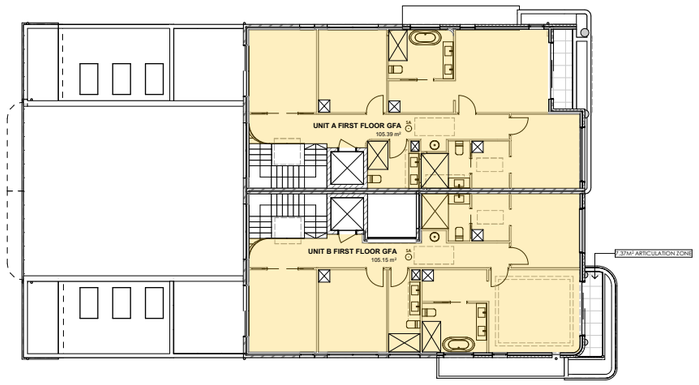

2 FIRST FLOOR GFA

GROSS FLOOR AREA

MAX ALLOWABLE GFA	605
PROPOSED GFA	
BASEMENT GFA	98.66
FIRST FLOOR GFA	210.54
GROUND FLOOR GFA	295.21
	604.41 m²

18M2 GARGE EXCLUDED FROM GFA

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any building work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.
COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

GFA CALCULATION

JOB NUMBER: 25010
DRAWN: XW
CHECKED JY
SCALE @ A3

WD 22

ISSUE AB



P1

Acrylic Render
Dulux Royal Beige Quarter

S1

Honey sand cobbles



A1

WINDOW FRAME
Dover White

A2

ENTRY DOOR AND WINDOWS
Domino Grey

ARCHX DESIGNS

GENERAL NOTES

1) All dimensions and floor areas are to be verified by the Builder prior to the commencement of any buildng work.Any discrepancies are to be brought to the attention of the designer.
2) Levels shown are approximate unless accompanied by reduced levels.
3) Figured dimensions must be taken in preference to scaling.
4) All boundary clearances must be verified by the surveyor prior to commencement of any building work.
5) Where engineering drawings are required such must take prefernce to this drawings.
6) Stormwater to be discharged to Councils' requirements and AS 3500.3-1990.
7) All services to be located and verified by the Builder with relevant authorities before any building work commences.

COPYRIGHT:
This design and the associated documents is subject to copyright laws and may not be reproduced in any form without written consent from the designer.

NORTH

DATE	ISSUE	AMENDMENT	BY
4/09/2026	AA	WD	XW
8/10/2026	AB	WD	XU

PROJECT DETAILS

PROJECT
DUAL OCCUPANCY WITH POOL
LOT2/DP13703
16 TRENTINO RD TURRAMURRA

CLIENT
GALAXY HOME DEVELOPMENT

DRAWING TITLE

EXTERNAL FINISH SCHEDULE

JOB NUMBER:	25010
DRAWN:	XW
CHECKED	JY
SCALE	@ A2

WD 23

ISSUE AB