101 Gascoigne Rd Birrong NSW 2143

DEMOLISHING OF EXISTING BUILDING & PROPOSED ATTACHED DUAL OCCUPANCY

LOT: 17 SEC: A DP: 23377 TOTAL SITE AREA: 580.6 m2



ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 1 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

STANDARD SPECIFICATION

BE ADVISED : SOME CLAUSES IN THIS SPECIFICATION MAY NOT BE RELEVANT TO THIS PROJECT

1.0 GENERAL
1.1
1.2 - ALL MATERIALS SHALL COMPLY WITH RELEVANT CURRENT AUSTRALIAN STANDARDS AND UNLESS OTHERWISE STATED ON THE PLANS SHALL BE NEW AND THE BEST OF THE THEIR RESPECTIVE KIND AND SUITABLE FOR THEIR INTENDED PURPOSES.
1.3 - ALL WORKMANSHIP SHALL COMPLY WITH RELEVANT CURRENT AUSTRALIAN STANDARDS AND TO GOOD TRADE PRACTICES
1.4 - ALL WORK SHALL BE IN ACCORDANCE WITH REQUIREMENTS OF THE RESPECTIVE AUTHORITY HAVING JURISDICTION OVER THE WORKS.
1.5 - THE ARCHITECTURAL DRAWINGS SHOULD BE READ IN CONJUNCTION WITH THE SPECIFICATION, SCHEDULES AND
CONSULTANTS DRAWINGS THAT FORM PART OF THE CONSTRUCTION DOCUMENTS REFERRED TO IN THE "BUILDING CONTRACT".
1.6 - DO NOT SCALE FROM DRAWINGS. NOTIFY OF ANY ERRORS OR OMISSIONS BEFORE PROCEEDING WITH ANY WORKS
1.7 - ENSURE THAT SUBSTRATES ARE SUITABLE FOR THE INTENDED SUBSEQUENT FINISHES. COMMENCEMENT OF WORK ON THE SUBSTRATES IMPLIES ACCEPTANCE BY THE SUBCONTRACTOR OF THE SUBSTRATES ON WHICH FINISHES ARE APPLIED.
1.8 - CONTRACTOR IS TO SUPPLY ALL EQUIPMENT NECESSARY FOR THE COMPLETION OF THE RESPECTIVE WORKS.
1.9 - CONTRACTOR IS RESPONSIBLE FOR THE PROGRESSIVE CLEAN UP DURING AND AFTER THE COMPLETION OF RESPECTIVE WORKS
2.0 EARTHWORKS
2.1 - UNLESS OTHERWISE STATED, REMOVE TOPSOIL TO A MINIMUM DEPTH OF 200mm INCLUDING ALL ROOTS, AND OTHER MATTER, AND REQUIRED BY THE SOIL CONDITION AND/OR BUILDER. PROVIDE SUITABLE CLEAN FILL AND COMPACT IN LAYERS NOT GREATER THAN 300mm TO REDUCE LEVELS AS SHOWN.
2.2 - DO NOT EXCAVATE SERVICES TRENCHES WITHIN AN ANGLE OF 45 DEGREES DOWN FROM THE BOTTOM EDGE OF
THE FOOTING.
2.3 - ALL RETAINING WALLS TO BE TREATED WITH "BITKOTE" WATERPROOFING AGENT
3.0 CONCRETE
3.1 - ALL CONCRETE REINFORCEMENT AND FORMWORK SHALL BE TO STRUCTURAL ENGINEERS DETAILS, RELEVANT BUILDING CODES AND STANDARDS
3.2 - THE FOOTING AND SLAB CONSTRUCTION IS TO COMPLY WITH AS 2870
3.3 - PROVIDE A PROPRIETARY VAPOUR BARRIER WHICH CONSISTS OF HIGH IMPACT RESISTANT POLYTHENE FILM MIN 0.2mm THICK WHICH HAS BEEN PIGMENTED AND BRANDED BY THE MANUFACTURER.
4.0 TERMITE PROTECTION:
4.1 - PROVIDE ANTI-TERMITE TREATMENT UNDER THE BUILDING AREAS IN ACCORDANCE WITH AS 2057, AS 3660.1 AND
APPENDIX D, FOR RETICULATED SYSTEMS.
4.2 - BUILDER SHALL PROVIDE "BIFLEX" OR SIMILAR APPROVED ANTI-TERMITE TREATMENT IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARD CODES
5.0 BRICKWORK
5.1 - BRICK WORK SHALL COMPLY WITH :
AS 3700 MASONRY CODE
AS A123 MASONRY CODE
MORTAR FOR MASONRY CONSTRUCTION
5.2 - BRICK GAUGE 7 STANDARD COURSES = 600mm.
5.3 - TIES SHALL BE 3.5mm DIAMETER GALVANIZED WIRE KINKED FOR AND BUILT IN EVERY 5TH COURSE AT APPROXIMATELY 900mm CENTRES, WITH ADDITIONAL TIES AT THE RATE OF 1 TIE/300mm HEIGHT OF OPENINGS AND VERTICAL CONTROL JOINTS AND WITHIN 150mm OF OPENINGS. BUILD TIES INTO EACH LEAF AT LEAST 50mm.
5.4 - VERTICAL CONTROL JOINTS SHALL BE 12mm WIDE FILLED AT COMPLETION WITH A CONTINUOUS FILLER STRIP.
5.5 - CAVITIES TO BE KEPT CLEAR OF MORTAR. PROVIDE CAVITY BOARDS. TEMPORARILY OMIT BRICKS TO PERMIT RAKING OUT OF CAVITY BOTTOMS.
5.6 - FORM WEEP HOLES EVERY FOURTH PERPEND ABOVE FLASHING AND CAVITY FILL KEEP CLEAR OF MORTAR. DO NOT LOCATE WEEPHOLES CLOSER THAN 500mm TO JOINTS IN DAMP PROOF COURSES OR FLASHING.
5.7 - PROVIDE DAMP PROOF COURSES (DPC) IN THE BOTTOM 3 COURSES OF BRICK WORK AND SLAB AND/OR FOOTINGS. DPC ADDITIVE SHALL BE CLEAR IN ALL FACEWORK.
5.8 - SETOUT BRICKWORK ACCURATELY, PLUMP, LEVEL AND PROPERLY BONDED. RISING WORK TO BE RAKED BACK, JAMBS, REVEALS, CORNERS, PERPENDS, ETC TO BE TRUE, PLUMB AND IN LINE WITH PERPENDS TRUE LINE. SETOUT DOOR FRAMES NEAR PERPENDICULAR WALL WITH A MERGIN OF 12mm OR GREATER THAN 50mm
5.9 - PROVIDE 12mm PLASTERING MARGIN BETWEEN WINDOW FRAME AND INTERNAL BRICKWORK TO BE PLASTERED.
5.10 - WHERE NECESSARY REINFORCE BELOW AND OVER OPENINGS WITH GALVANISED WOVEN WIRE FABRIC 75mm WIDE IN CENTRE OF EACH LEAF OPENING EXTENDING ALUMINIUM OF 600mm BEYOND THE OPENING.
5.11 - BUILD IN ALCOR/PGI FLASHINGS AS FOLLOWS:
· WHEREVER SHOWN ON DRAWINGS
· CAVITY WALLS BUILT OF SLAB ON GROUND (WHERE NOT PARGED)
· OVER LINTELS TO EXPOSED OPENINGS - EXTEND THE FULL WIDTH OF OUTER LEAF CONTINUOUS ACROSS CAVITY 50mm INTO INNER LEAF 2c ABOVE
· OVER ROOF - EXTEND THE FULL WIDTH OF EXTERNAL LEAF, STEPPED TO ROOF SLOPE TURNED DOWN MIN. 50mm OVER BASE FLASHING. TURN UP IN CAVITY SLOPING INWARDS AND BUILT INTO INNER LEAF 1c ABOVE.
· DOOR/WINDOW STILES - EXTEND THE FULL HEIGHT 150mm WIDE FIXED TO FRAMES INTERLEAVED WITH SILL AND HEAD FLASHING AT EACH END.
· STRUCTURE OR SERVICES WITHIN 30mm OF OUTER BRICK LEAF IN CAVITY: VERTICAL FLASHING CONTINUOUS 1c BELOW FL TO ABOVE STRUCTURE OR FRAME. NOMINAL 300m WIDE.
· FOR HORIZONTAL STRUCTURES/SERVICES: CONTINUOUS FLASHING BUILT IN AS FOR OVER LINTELS
· AT CAVITY WALLS WITH GLASS BLOCK 300mm WIDE FIXED TO GLASS BLOCK FRAME AND TURNED AWAY IN CAVITY FROM INNER LEAF.
5.12 - WHERE NECESSARY REINFORCE BELOW AND OVER OPENINGS WITH GALVANISED WOVEN WIRE FABRIC 75mm WIDE IN CENTRE OF EACH LEAF OPENING EXTENDING ALUMINIUM OF 600mm BEYOND THE OPENING.
5.13 - UNLESS OTHERWISE SHOWN ON DRAWINGS
EXTERNAL FACE WORK: 230x110x76mm
WINDOW SILLS: 2c FACE BRICK SPLAYED SILLS
WINDOW HEADS: SOLID FACEBRICK COURSE
6.0 LINTELS
MAX SPAN LINTELS SIZE BEARING
(mm) (VERT x HORIZ x THICK) EACH END (mm)
900 75x10 150
1200 75x75x8 150
1500 90x90x8 150
1800 100x75x8 230
2100 125x75x8 230
2400 125x75x10 230
2500 100x100x8 230
3000 150x90x10 230
7.0 CARPENTRY WORK
7.1 - ROOF AND CEILING FRAMING SHOULD COMPLY WITH AS 1684 LIGHT TIMBER FRAMING CODE. DRAW STRAP FIRMLY OVER WALL PLATES AND SECURELY FIX TO TOP OF PLATE BY 2x30mm GALV. CLOUTS/STRAP.
7.2 - REFER TO AS 1684 FOR ROOF FRAMING SIZES UNLESS SPECIFIED ON DRAWINGS.
7.3 - SUPPLY AND FIX ALL BULKHEADS & FALSE CEILINGS AS SHOWN ON THE DRAWINGS.
8.0 ROOFING
8.1 - SELECTED ROOFING MATERIAL SHALL BE INSTALLED AND FIXED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATION AND RELEVANT BUILDING CODES
8.2 - GUTTER, FASCIA, DOWNPIPES, FLASHING SHALL BE IN LONGEST POSSIBLE LENGTHS
8.3 - ALLOW FOR ALL JOINTS AND JOINING MATERIALS, COLLARS, STRAPS & FASTENINGS NECESSARY TO COMPLETE WORK.
8.4 - ALLOW FOR ALL ROOF PENETRATIONS, ROOF COWLS, FLASHING, FLUMES THROUGH ROOF
8.5 - FIX GUTTERS & FLASHING TO PERMIT THERMAL MOVEMENT IN THEIR FULL LENGTH
8.6 - SEAL BETWEEN OVERLAPPING FLASHING; FLASHING TURNED DOWN OVER BASE OR APRON FLASHING; FLASHING OVER METAL ROOF; FLASHING OVER SECRET GUTTERS; AROUND ROOF PENETRATIONS ETC.
9.0 WINDOWS/GLAZING
9.1 - UNLESS OTHERWISE STATED ON THE DRAWINGS WINDOW FRAMES SHALL BE ALUMINIUM RESIDENTIAL OR COMMERCIAL IN SECTION WITH POWDERCOAT FINISH AS SELECTED BY OWNER.
9.2 - ALLOW FOR FLYSCREENS TO BE FITTED TO ALL WINDOWS.
9.3 - ANGLED WINDOW UNITS SHALL BE FACTORY MADE AND FIXED AND DELIVERED ON SITE AS A COMPLETE UNIT.
9.4 - WHERE RELEVANT WINDOWS ARE TO COMPLY WITH THE SPECIFICATIONS PROVIDED BY THE THERMAL PERFORMANCE ASSESSOR.
9.5 - CLEAR GLASS GENERALLY: OBSCURE GLASS TO BATHROOMS, REFER TO DRAWINGS.
9.6 - WHERE GLASS BLOCKS HAVE BEEN NOMINATED, THEY SHALL BE IN FRAMES AND INSTALLED TO MANUFACTURERS SPECIFICATIONS
10.0 JOINERY
10.1 - ALL JOINERY SHALL BE OF HIGHEST QUALITY MATERIALS TO BEST TRADE PRACTICES AND HIGH QUALITY FINISH.
10.2 - EXTERNAL DOOR FRAMES SHALL BE: 110x40 DOUBLE REBATED FRAME WITH 130x40 WEATHERED THRESHOLD U.N.O.
10.3 - SUPPLY AND BUILD IN TIMBER DOOR FRAMES TO EXTERNAL LOCATIONS AS SHOWN ON ARCHITECTURAL DRAWINGS.
11.0 CEILINGS
11.1 - CEILINGS SHALL BE RECESSED EDGE, MINIMUM 8.0mm PLASTERGLASS OR GYPROCK.
11.2 - FLUSH JOINTS, SCREW HEADS, AND OTHER BLEMISHES IN THE SHEETS USING APPROVED SYSTEMS TO PROVIDE FLUSH SMOOTH CONTINUOUS SURFACE
11.3 - PROVIDE AND FIX ALL FLUSH STOP BEADS & CASING BEADS TO ALL CORNERS & EDGES
11.4 - PROVIDE ALL SELECTED MOLDINGS AND CORNICES TO ALL CEILINGS AS SHOWN ON THE DRAWINGS.
12.0 PLASTERING
12.1 - INTERNAL WALL FINISHES INCLUDING CUPBOARD, BIN & FRIDGE RECESSES ETC SHALL BE (OTHER THAN FACE FINISHES OR WHERE COVERED BY FEATURE MATERIALS) FLOAT AND SET IN HARDWALL PLASTER U.N.O.
12.2 - PLASTERED WALLS SHALL BE NOMINAL 12mm THICK CONSISTING OF 1:1:9, CEMENT:LIME:SAND RENDER, AND FINISHED WITH NOMINALLY 3mm HARDWALL PLASTER
12.3 - SUPPLY AND FIX EXTERNAL CORNER BEADS TO ALL EXTERNAL CORNERS.
12.4 - PROVIDE STOP BEADS WHERE PLASTER WORK ABUTS TIMBER FRAMES, OR FACEWORK
12.5 - EXTERNAL RENDER WHEN APPLICABLE SHALL BE 2 COAT SAND FINISH. (FOR PAINTING).
12.6 - NIBS IN INTERNAL CORNERS ADJACENT TO DOOR FRAMES GREATER THAN 40mm SHALL NOT BE FLUSHED UP WITH FRAMES.
12.7 - PROVIDE V-JOINTS IN RENDER & FINISHING PLASTER WHERE BRICK WORK ABUTS OR JOINS ONTO CONCRETE WORK.
13.0 FLOORING FINISHES
13.1 - CARPET FLOOR COVERINGS TO NOMINATED AREAS COMPLETE WITH SELECTED UNDERLAY SMOOTH EDGE, DIMINISHING STRIPS ETC, TO COMPLETE THE WORKS: REFER TO DRAWINGS AND FINISHES SCHEDULE
13.2 - PROVIDE TILED FLOOR FINISHES TO NOMINATED AREAS COMPLETE WITH ALL MATERIALS, ANGLE TRIMS ETC. TO COMPLETE THE WORKS: REFER TO DRAWINGS AND FINISHES SCHEDULE
13.3 - PROVIDE TIMBER FLOOR FINISHES TO NOMINATED AREAS COMPLETE WITH ALL MATERIALS, DIMINISHING BOARDS ETC TO COMPLETE THE WORKS: FLOOR BOARDS TO BE SANDED AND POLISHED TO HIGH STANDARD WITH PREMIUM QUALITY SEALER (2 COATS). REFER TO DRAWINGS AND FINISHES SCHEDULE.
14.0 SIGNAGE
14.1 - WHERE NECESSARY SUPPLY & FIX SELECTED UNIT AND HOUSE NUMBERS TO EACH UNIT AND TO LETTERBOXES AS SCHEDULED.
14.2 - "SUPERDRAFT" RESERVES THE RIGHT TO ERECT A BUILDERS SIGN ON THE PROPERTY FACING THE STREET FRONTAGE IN COMPLIANCE WITH AUTHORITY REQUIREMENTS.
15.0 PAVING
15.1 - GENERALLY: WHEN PAVING IS INCLUDED IN THE BUILDING CONTRACT THE FOLLOWING SHALL APPLY AS A MINIMUM STANDARD
· SUPPLY AND LAY ALL PAVING TO EXTERNAL AREAS AS SHOWN ON WORKING DRAWINGS.
· CUT, FILL & COMPACT SAND TO REQUIRED LEVELS. SCREED TO UNIFORM THINNESS AND LEVELS
· PROVIDE BRICK EDGE RETAINING FOOTING EMBEDDED IN MORTAR BENEATH THE PAVING BRICK
· TO DRIVEWAY AREAS, PROVIDE NOMINAL 300x150mm CONCRETE FOOTING ALONG PERIMETER OF DRIVEWAY AND BED EDGE BRICK IN MORTAR.
15.2 - PROVIDE 100mm COMPACTED LIMESTONE BASE TO DRIVEWAY TOPPED WITH 50mm CLEAN SAND AND GRADE TO FALLS.
15.3 - UNLESS NOTED PAVING PATTERN IS TO CLIENTS DETAIL
15.4 - BRICK PAVERS SHALL BE:
TRAFFICABLE AREAS: MIN. 65mm SOLID CLAY OR CONCRETE
PEDESTRIAN AREAS: MIN. 43mm SOLID CLAY OR CONCRETE
16.0 ENERGY EFFICIENCY
16.1 - INSULATION MUST FORM A CONTINUOUS BARRIER WITH CEILINGS, WALLS AND FLOORS BY ABUTTING OR OVERLAPPING ADJOINING INSULATION
16.2 - INSULATION MUST NOT ADVERSELY AFFECT DOMESTIC SERVICES OR FITTINGS
16.3 - REFLECTIVE INSULATION IS TO BE PROVIDED WITH A MINIMUM 25mm AIRSPACE AND IS FITTED CLOSE TO OPENINGS SUCH AS WINDOWS/DOORS ETC. AND IS PROVIDED WITH ADEQUATE SUPPORT.
16.4 - BULK INSULATION MUST MAINTAIN ITS POSITION, THICKNESS.
ENSURE THAT CEILING INSULATION OVERLAPS UN-INSULATED WALLS
16.5 - CONSTRUCTION JOINTS, SUCH AS BETWEEN WALL AND FLOOR, ARE TO BE TIGHT FITTING OR SEALED USING CAULKING OR JOINERY ITEMS SUCH AS SKIRTING OR CORNICES
16.6 - EXHAUST FANS ARE TO BE FITTED WITH A SELF CLOSING DAMPER
16.7 - ROOF LIGHTS MUST BE SEALED WITH WEATHERPROOF SEALS
16.8 - HEATED WATER PIPING MUST BE THERMALLY INSULATED AND PROTECTED AGAINST THE WEATHER AND SUN
16.9 - INTERNAL HEATED WATER PIPING TO HAVE AN R VALUE OF 0.2
16.10 - ENCLOSED SUB-FLOOR AND ROOF SPACE TO HAVE AN R VALUE OF 0.45

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 2 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

101 Gascoigne Rd Birrong NSW 2143


DEMOLISHING OF EXISTING BUILDING & PROPOSED ATTACHED DUAL OCCUPANCY

LOT: 17 SEC: A DP: 23377 TOTAL SITE AREA: 580.6 m2

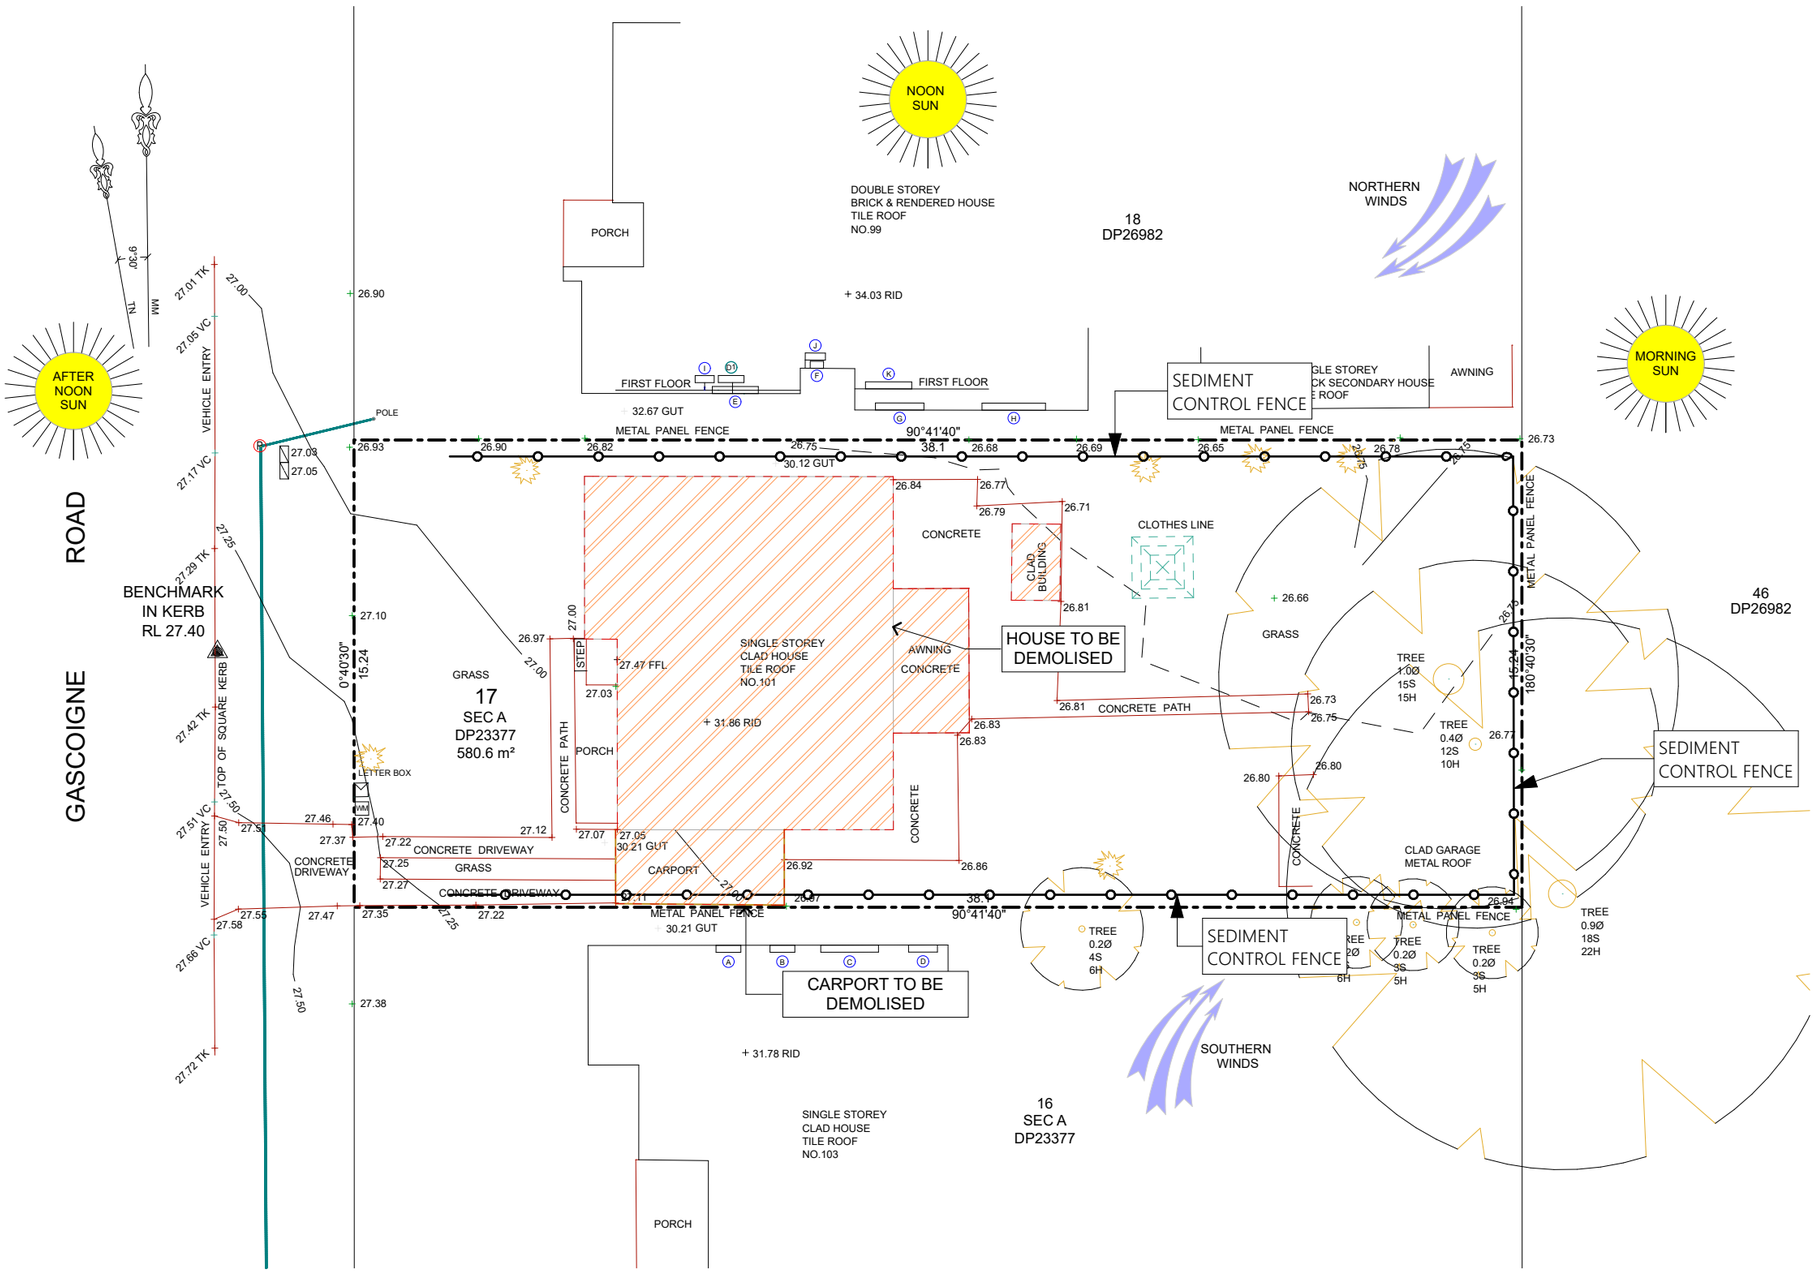

SITE ANALYSIS / DEMOLITION PLAN

1:200

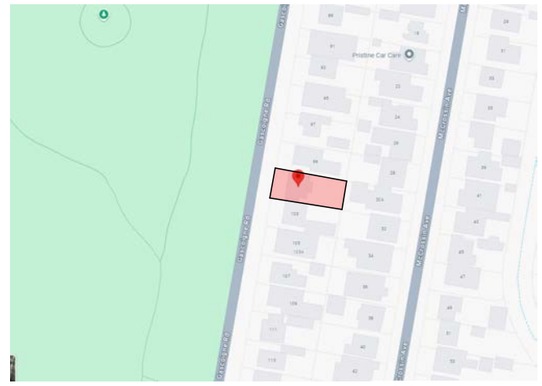

LOCATION MAP

Demolion WorkPlan

Overall Height of the structure APROX 5.8M

The type of building, structural support system and principle materials of construcon FIBRO HOUSE ON TIMBER SALB

Demolion Scope of Works HOUSE AND GARAGE WTH CONCRETE ON GROUND

The proposed methods of demolion
Proposed methods for handling and disposing of demolished materials in parcular hazardous materials to Australian Standards.
Scaffolding will be used to gain access to the roof then roof les will be removed by hand. Roof framing will then be removed.
Heavy machinerywill be ulised the removalof the brick foongs main mber frame.
Dust will be controlled with wet techniques.
Licensed demolion specialistswill manage the site at all mes . The following signage will be put in place “Danger demolion works in progress. Do Not Enter.”
Waste is to be stored in skip bins and removed regularly.
Timbers, metal, roof les and bricks will be recycledat local facilies . Dust will be controlled with wet techniques.
Methods for controlling, maintaining access and egress to the workplace
Vehicle access will not be affected. There will be minimal impact on traffic in the street. There is clear access to the site and the street. The access to the building will be restricted by temporary fencing.
The proposedsequenceof carryingout the demolion worksand me esmate of stages.
The demolion work will be carried out in line with the Safe Work Method Statements.
The site supervisor will determine the ming for the project as it progresses.
The proposed hoardings, scaffolding and fencing and of any overhead sidewalk protecon
Temporary site fencing will be installed to restrict access to the property.
Scaffolding will be erected at the rear of the property to gain access to the roof level to remove roof les and structure
Traffic Management Arrangements
There will be minimal impact on traffic in the street.
Locaon and condion of services
All services will be located and isolated prior to any demolion works commencing.
Confined spaces
No confined spaces are present on site
Emergency Arrangements
Signage will be displayed on the temporary fencing at the front advising Emergency Contact Numbers. An EmergencyMeeng Point will be idenfied at the Site Inducon.
Development Standards
All demolion will be completed in compliance with AS 2601 2001: The demolion of structures and VH Transport Pty Ltd SWMS and procedures.
Air and Noise
Watering down will be completed with a spray hose where necessary. All work will be completed between the hours of 7am to 6pm and noise will be minimized as much as possible.
Erosion and Sediment Control
Dust will be controlled with water spraying. The footpath will be swept clean wherever necessary. Sand bags will be placed in guers and surrounding drains as per Sediment Control Plan

www.dialbeforeyoudig.com.au
DIAL 1100 BEFORE YOU DIG

LEGEND

OUTLINE FOR BOUNDARY

OUTLINE FOR DEMOLITION TO BE CARRIED OUT

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 3 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

101 Gascoigne Rd Birrong NSW 2143

DEMOLISHING OF EXISTING BUILDING & PROPOSED ATTACHED DUAL OCCUPANCY

LOT: 17 SEC: A DP: 23377 TOTAL SITE AREA: 580.6 m2

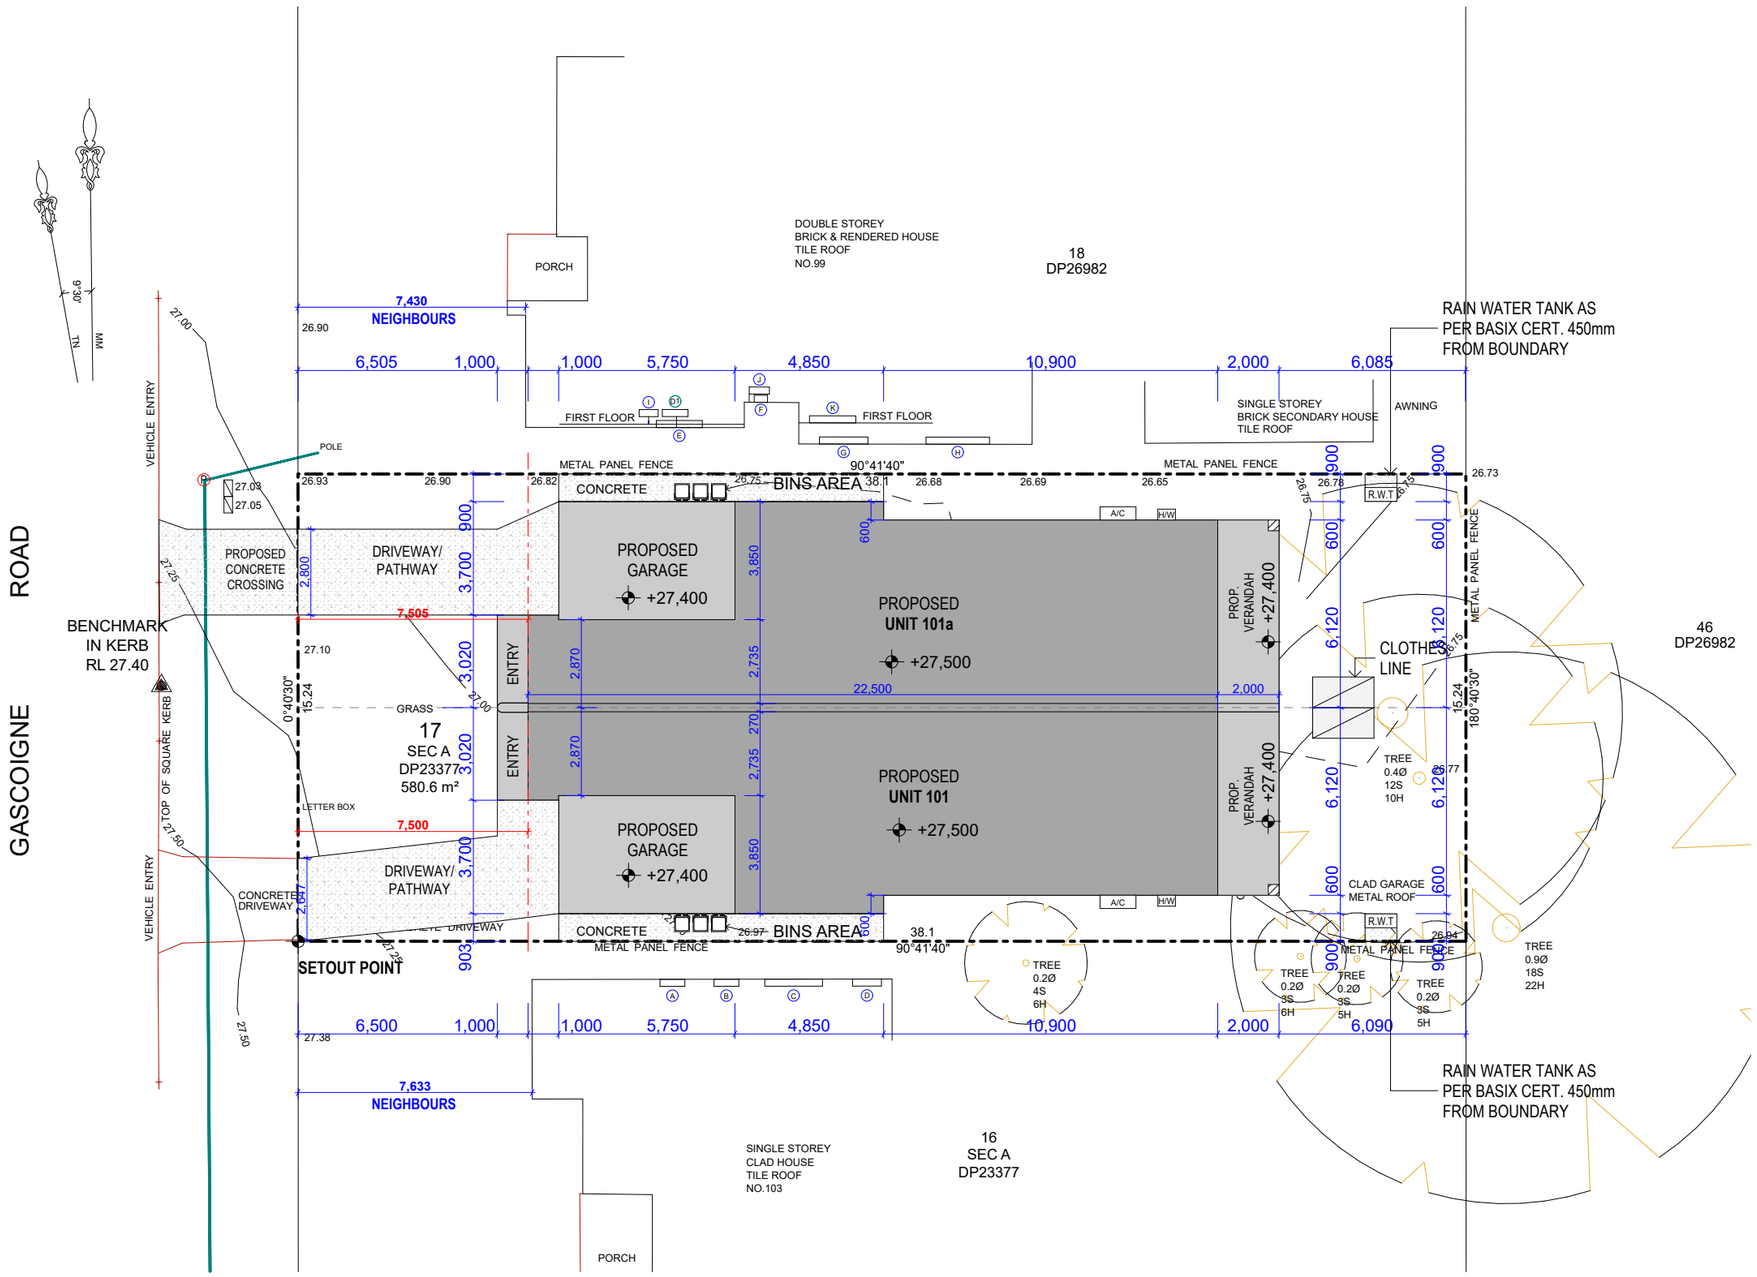

SITE PLAN

1:200

GENERAL SITE VERIFICATION NOTE

The Builder shall review all drawings and verify all site dimensions, levels, wall locations, openings, window and door sizes, stair dimensions, structural elements, and all other relevant details **before commencing construction**.

If any discrepancy, conflict, omission, or uncertainty is identified, **no work is to proceed** in the affected area until the Builder has notified the Building Designer and received written clarification.

The Builder is responsible for verifying all information prior to construction. The Building Designer accepts **no responsibility or liability** for any costs, delays, variations, or rectification works resulting from construction commencing without verification or from the Builder failing to notify the Building Designer of any discrepancies before the affected work is carried out.

STAIR CONSTRUCTION NOTE

IMPORTANT: The Builder and Stair Manufacturer are responsible for verifying all site dimensions, levels, floor heights, openings, and structural conditions before manufacturing or installing the staircase.

The staircase must not be manufactured until all relevant site measurements have been checked and confirmed.

If any discrepancy, conflict, or unforeseen site condition is identified, all work must stop and the Designer must be notified immediately for review and written confirmation before proceeding.

The Builder and Stair Manufacturer are responsible for ensuring the staircase complies with the approved drawings, the National Construction Code (NCC), relevant Australian Standards, and all applicable statutory requirements.

Any staircase manufactured or installed without first verifying site conditions, or without notifying the Designer of any discrepancies, shall be entirely at the Builder's and/or Stair Manufacturer's risk. The Designer accepts no responsibility or liability for costs associated with removal, modification, replacement, delays, or rectification resulting from failure to verify site dimensions or failure to seek clarification before commencing manufacture or installation

Notes:

"All off-street car parking spaces and vehicle access must comply with AS/NZS 2890.1:2004, Parking facilities, Part 1: Off-street car parking."

"A living area and POS in each dwelling is able to receive a minimum of 3 hours of direct sunlight between 9am & 3pm on the wintersolsce "

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 4 OF 19


DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

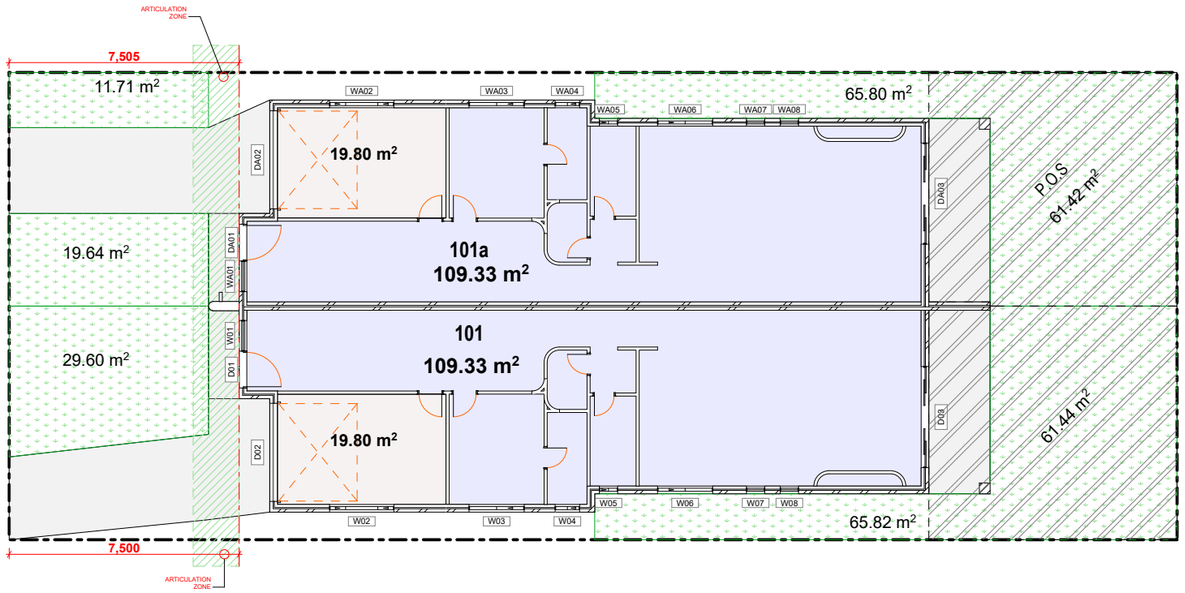

GROUND FLOOR GFA Diagram 1:200

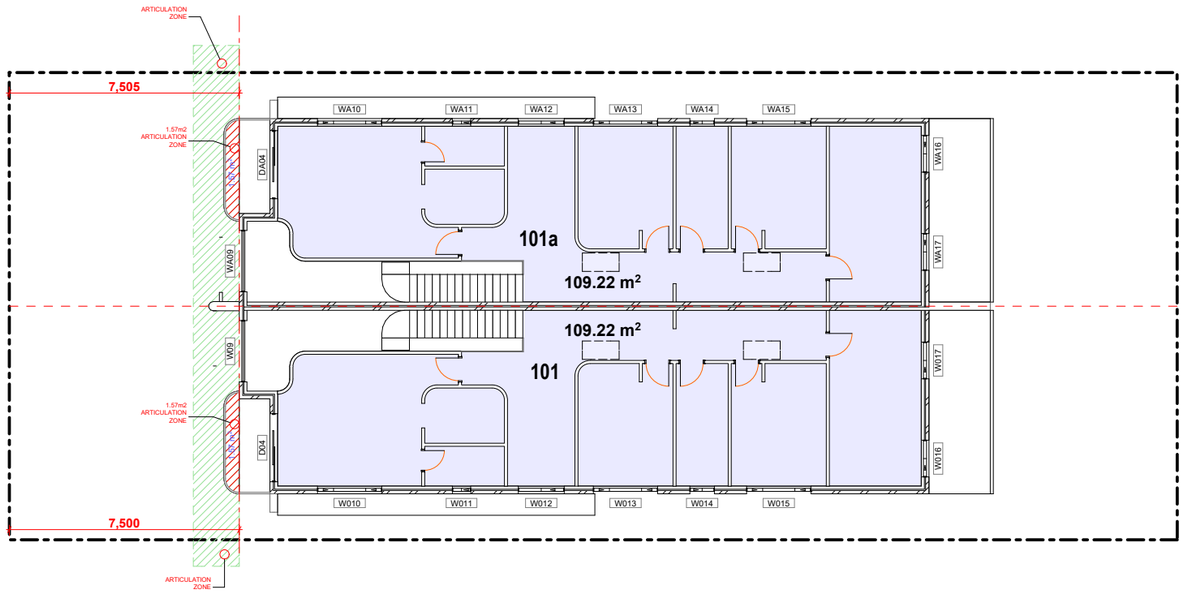

FIRST FLOOR GFA Diagram 1:200

State Environmental Planning Policy (Exempt and Complying Development Codes) 2008

CDC- CALCULATIONS

TOTAL SITE AREA: 580.6m2

zone R2

3B.10 Maximum gross floor area of all buildings

The maximum gross floor area of all buildings on a lot is shown in the following table—

Lot area of parent lot	Maximum GFA
400m2–2,000m2	25% of lot area + 300m2

Total stie area 580.6m2

580.6m2 divided by 4 = 159.525m2 + 300m2 = 445.15m2 to parent lot

445.15 Divied by 2 = 222.57m2

Each side unit total GFA of = 222.57m2

3B.15 Minimum landscaped area

(1) The minimum landscaped area that must be provided is 50% of the parent lot area minus 100m2.

(2) At least 25% of the area of the lot forward of the building line must be landscaped.

(2A) At least 50% of the area required to be landscaped under subclause (1) must be located behind the building line.

(3) Each landscaped area must have—

(a) a minimum width of 1.5m, and

(b) a minimum length of 1.5m.

Site area 580.6m2 divied by 2 (50%) = 290.3m2 minus 100m2 = 190.3m2

190.3m2 divided by 2 = 95.15m2 for each unit

Each side unit total landscape of = 95.15m2

articulation zone

(3) The maximum total area of all building elements in the articulation zone, other than a building element specified in subclause (2)(e), (f), (g) or (h), must not comprise more than 25% of the area of the articulation zone.

Proposed 3.14m2

UNIT 101

	Required	Proposed	Comply
Floor area 101	222.57m2	218.55m2	Yes
Green area 101	95.15m2	95.42m2	Yes
Garage area	18m2	19.8m2	Yes
Principal P.O.S	16m2	61.4m2	Yes
Side Setback Ground Floor	0.9	0.9	Yes
STOREAGE SPCAE	10m3	10m3	Yes
Parking Spaces	1 Car	2 Cars	Yes

UNIT 101a

	Required	Proposed	Comply
Floor area 101A	222.57m2	218.55m2	Yes
Green area 101A	95.15m2	97.1m2	Yes
Garage area	18m2	19.8m2	Yes
Principal P.O.S	16m2	61.4m2	Yes
Side Setback Ground Floor	0.9	0.9	Yes
STOREAGE SPCAE	10m3	10m3	Yes
Parking Spaces	1 Car	2 Cars	Yes

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 5 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

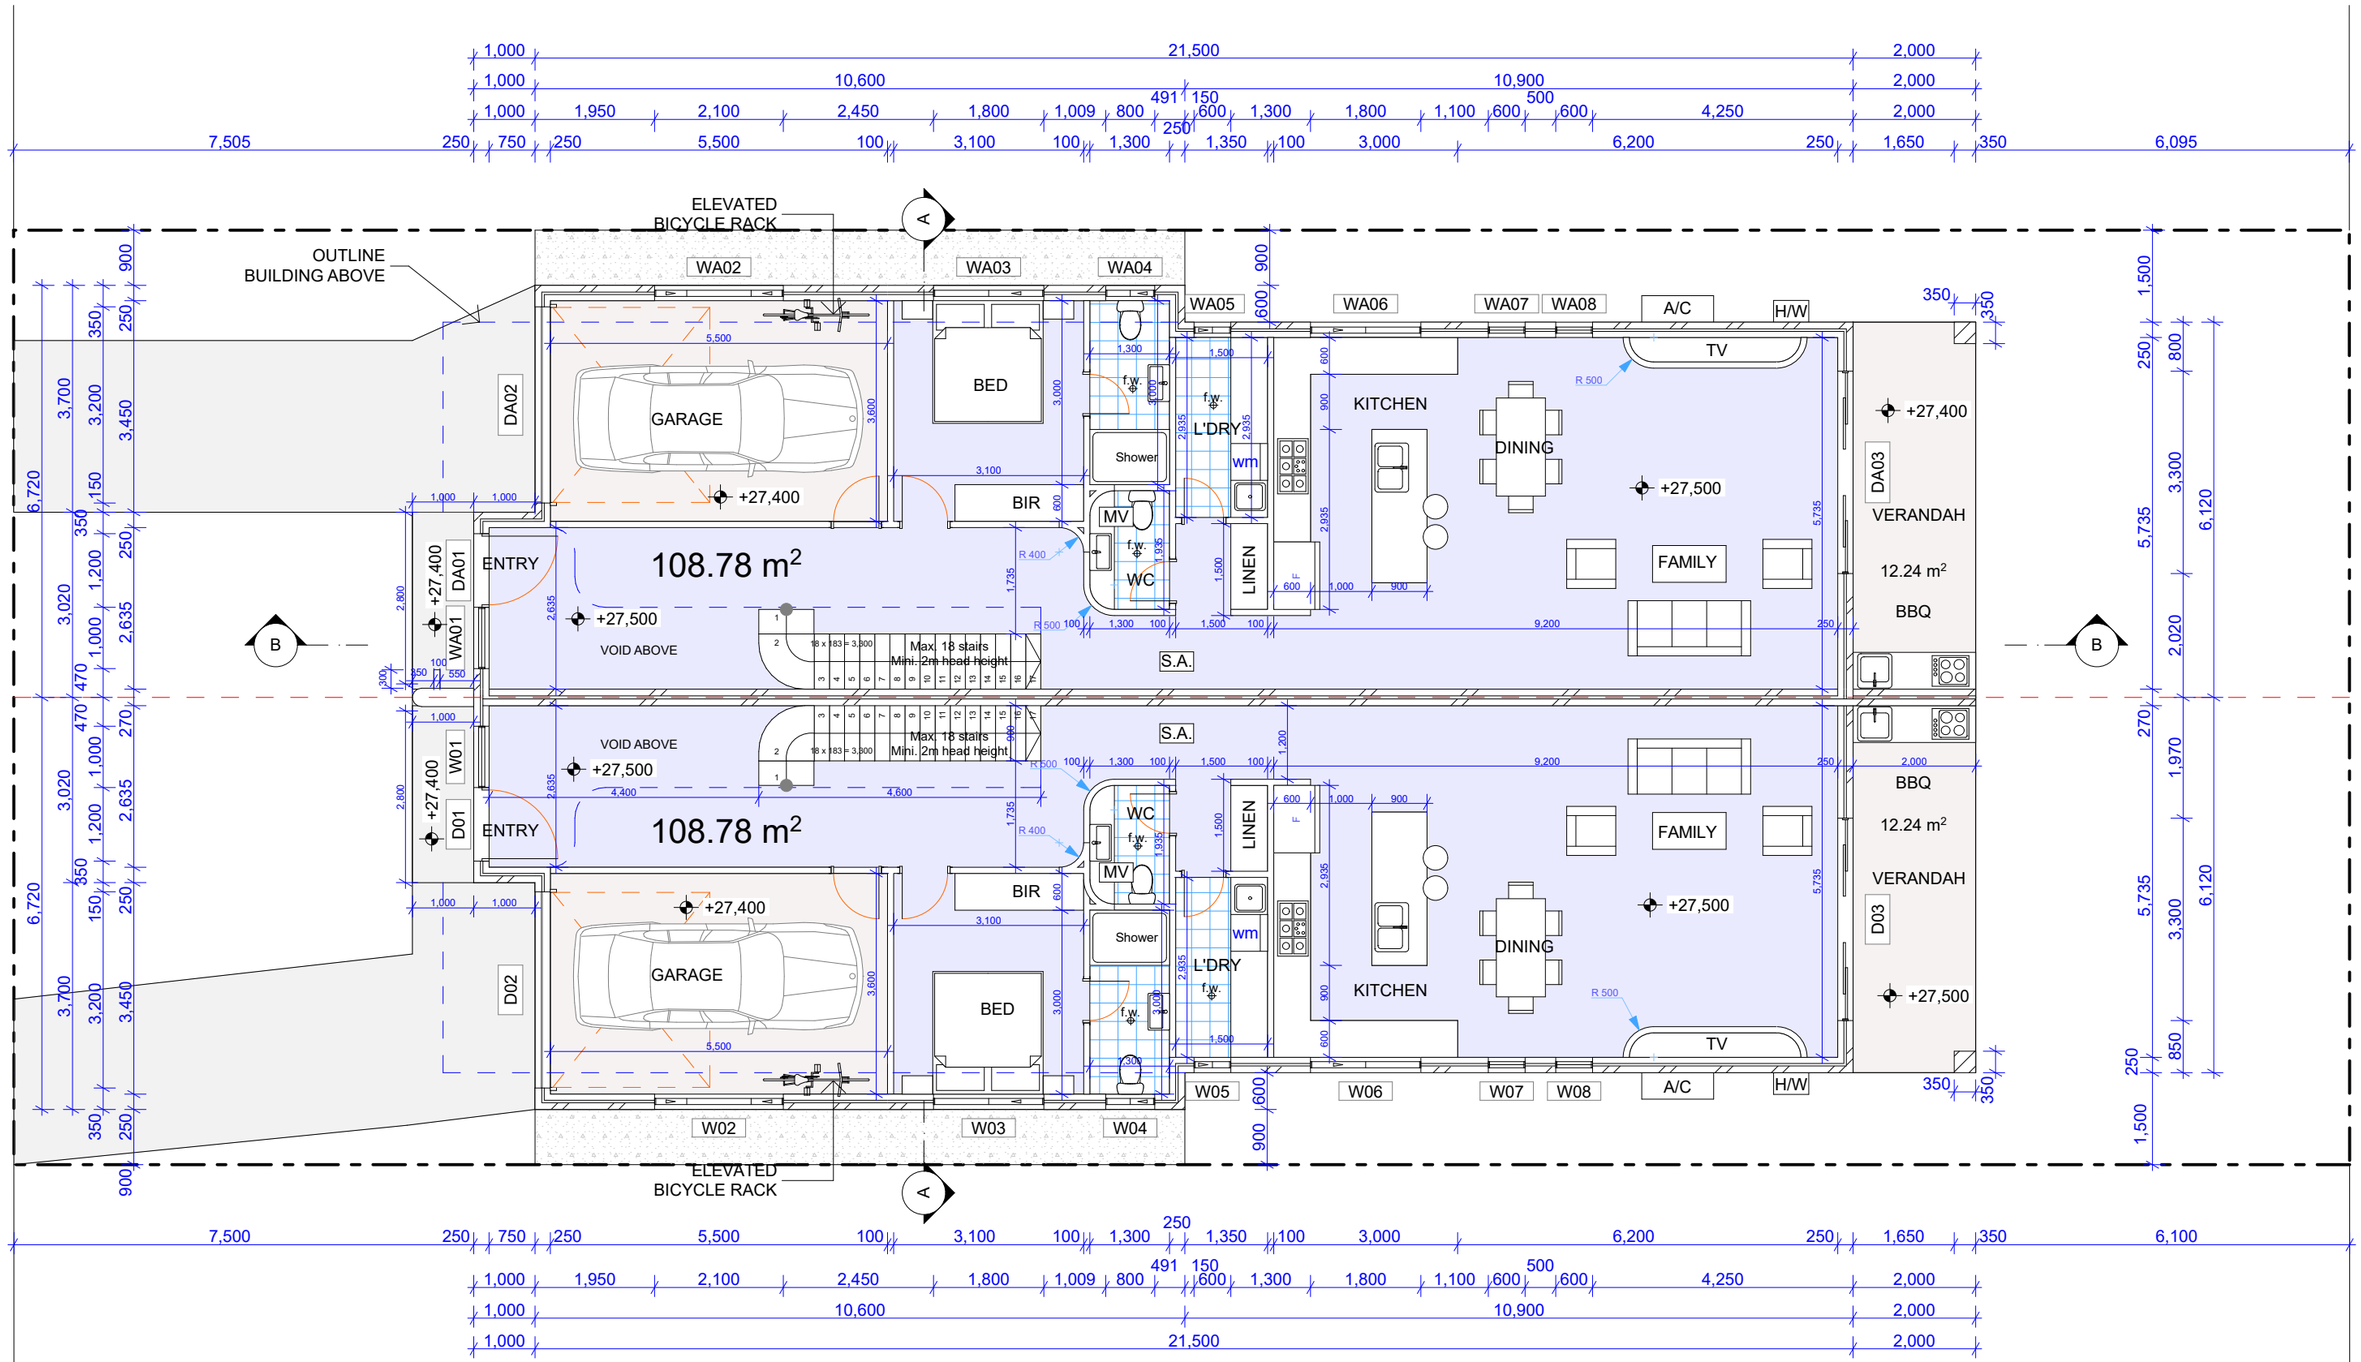

NOTE: ALL INTERNAL DOOR STUD OPENING 890mm

GROUND FLOOR PLAN

Notes:

I. Separating Wall to be Fire Rated from footing to underside of roof to comply with NCC & achieve an FRL of 60/60/60
II. Separating wall from footing to underside of the roof
III. Separating wall to achieve a minimum sound insulation of not less than 50 [Rw + Ctr (airborne)]
IV. Services for separating walls must comply with Part 9.3.2
V. Steel and timber beams not to penetrate party wall

LEGEND

- f.w. FLOOR WASTE
- S.A. SMOKE ALARM
- H/W HOT WATER SYSTEM
- A/C AIR-CONDITIONING UNIT
- MV MECHANICAL VENTILATION
- STUD WALL
- CAVITY BRICK WALL
- BRICK VENEER WALL
- R.W.T. RAIN WATER TANK

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 6 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

AJ Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

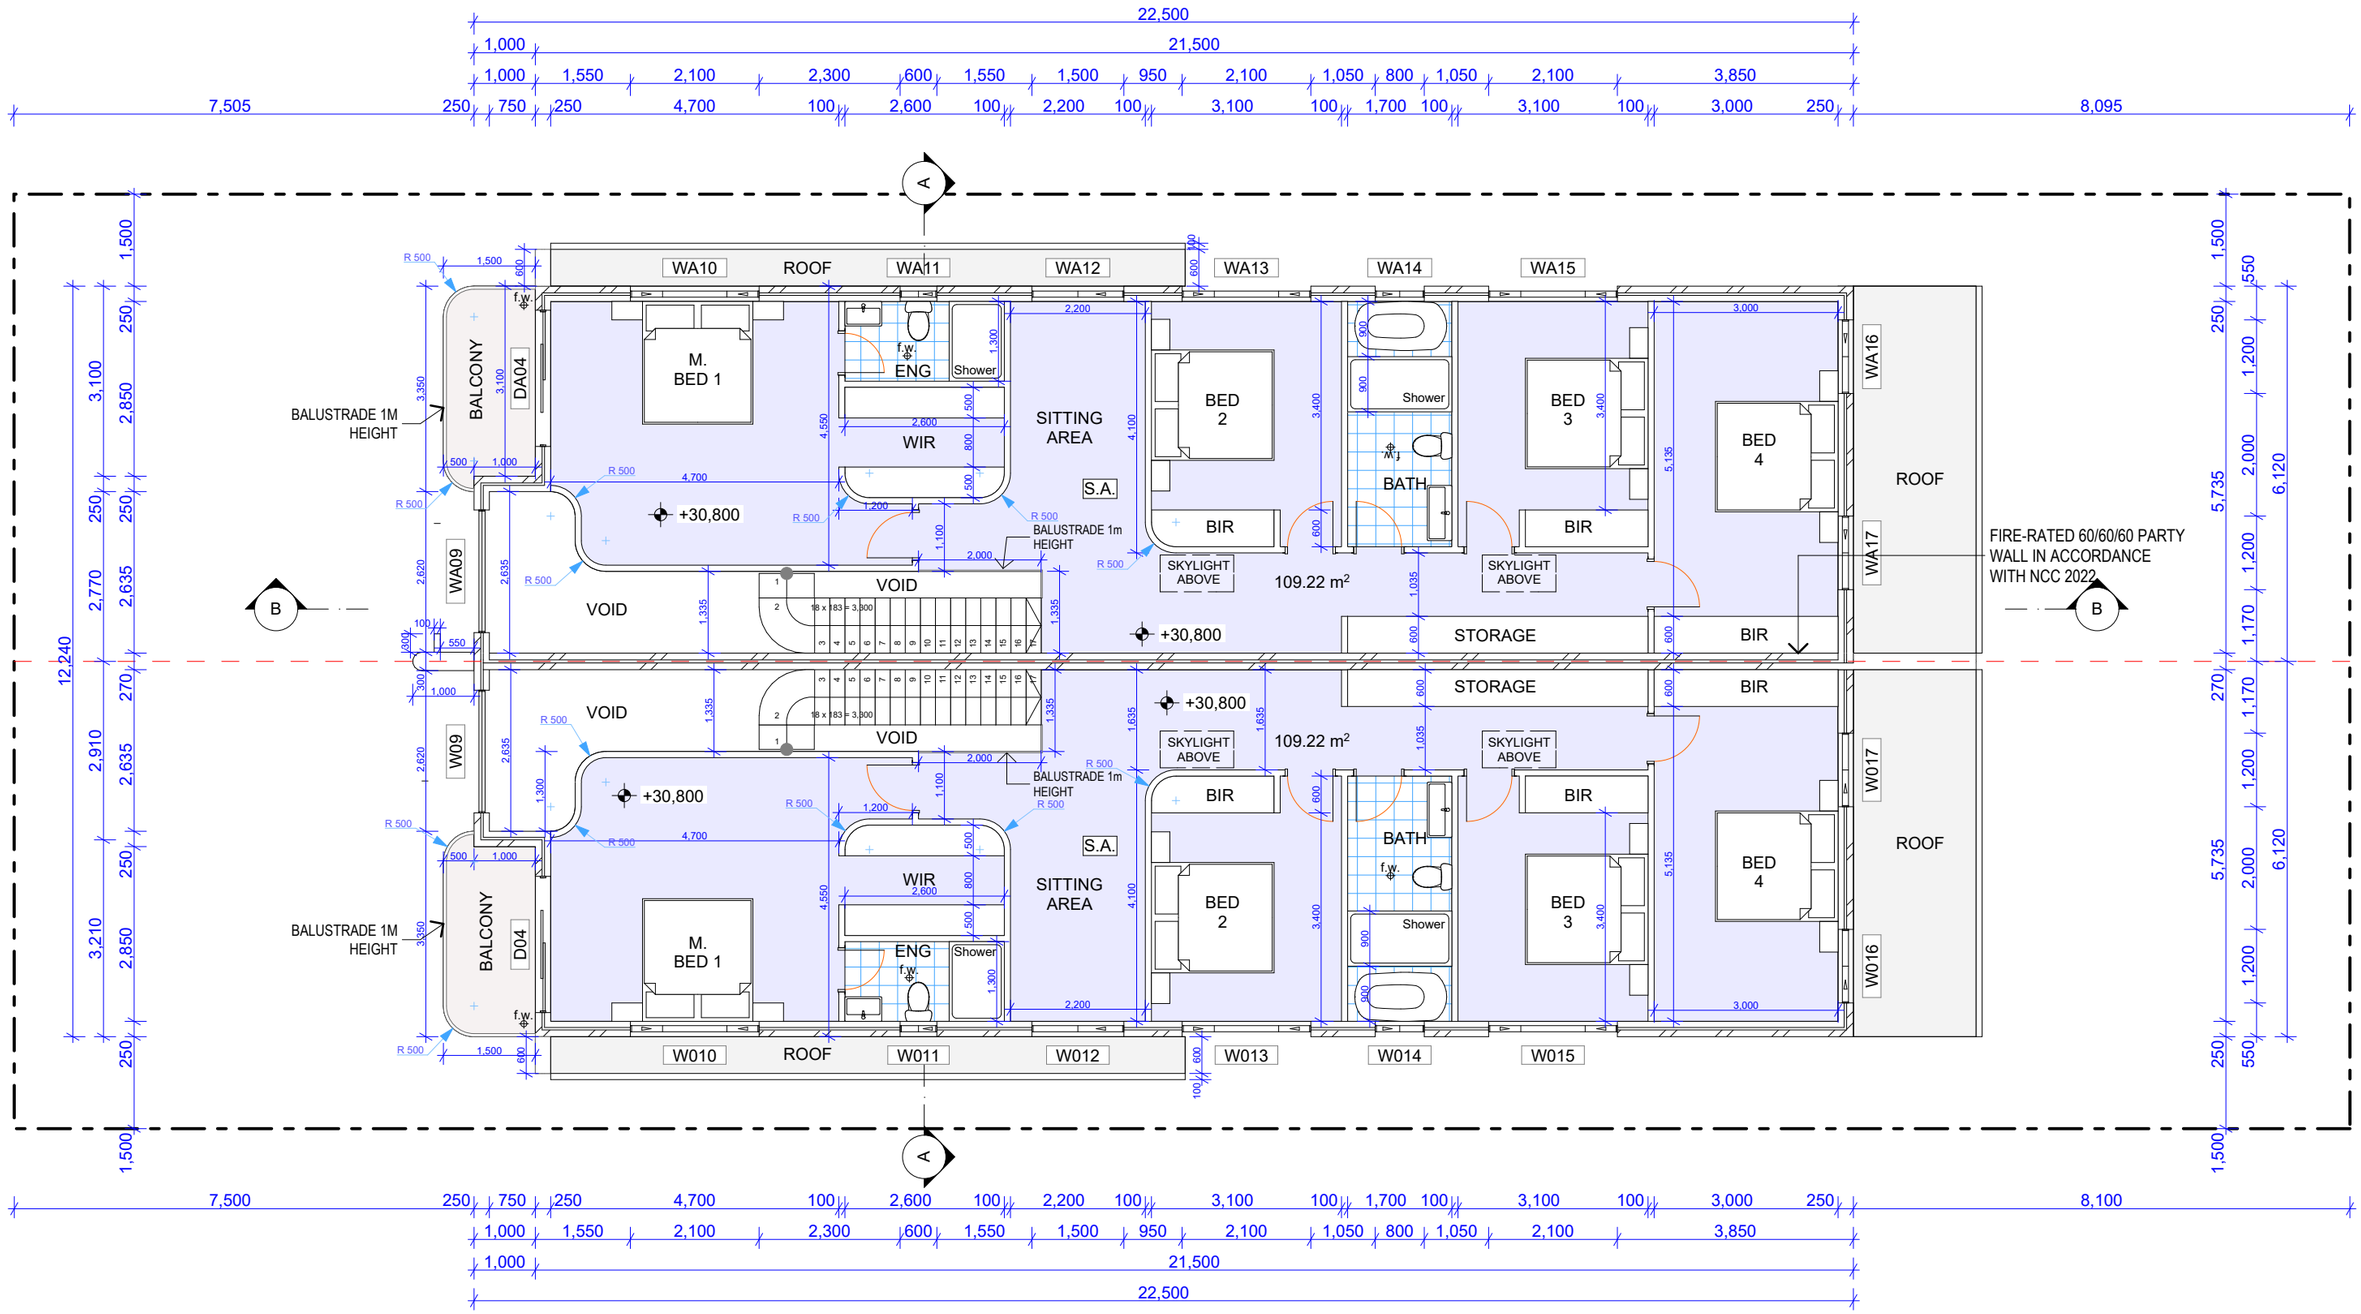

NOTE: ALL INTERNAL DOOR STUD OPENING 890mm

FIRST FLOOR PLAN

1:100

Notes:

I. Separating Wall to be Fire Rated from footing to underside of roof to comply with NCC & achieve an FRL of 60/60/60
II. Separating wall from footing to underside of the roof
III. Separating wall to achieve a minimum sound insulation of not less than 50 [Rw + Ctr (airborne)]
IV. Services for separating walls must comply with Part 9.3.2
V. Steel and timber beams not to penetrate party wall

LEGEND

- f.w. FLOOR WASTE
- S.A. SMOKE ALARM
- H/W HOT WATER SYSTEM
- A/C AIR-CONDITIONING UNIT
- MV MECHANICAL VENTILATION
- STUD WALL
- CAVITY BRICK WALL
- BRICK VENEER WALL
- R.W.T. RAIN WATER TANK

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 7 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

AJ Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

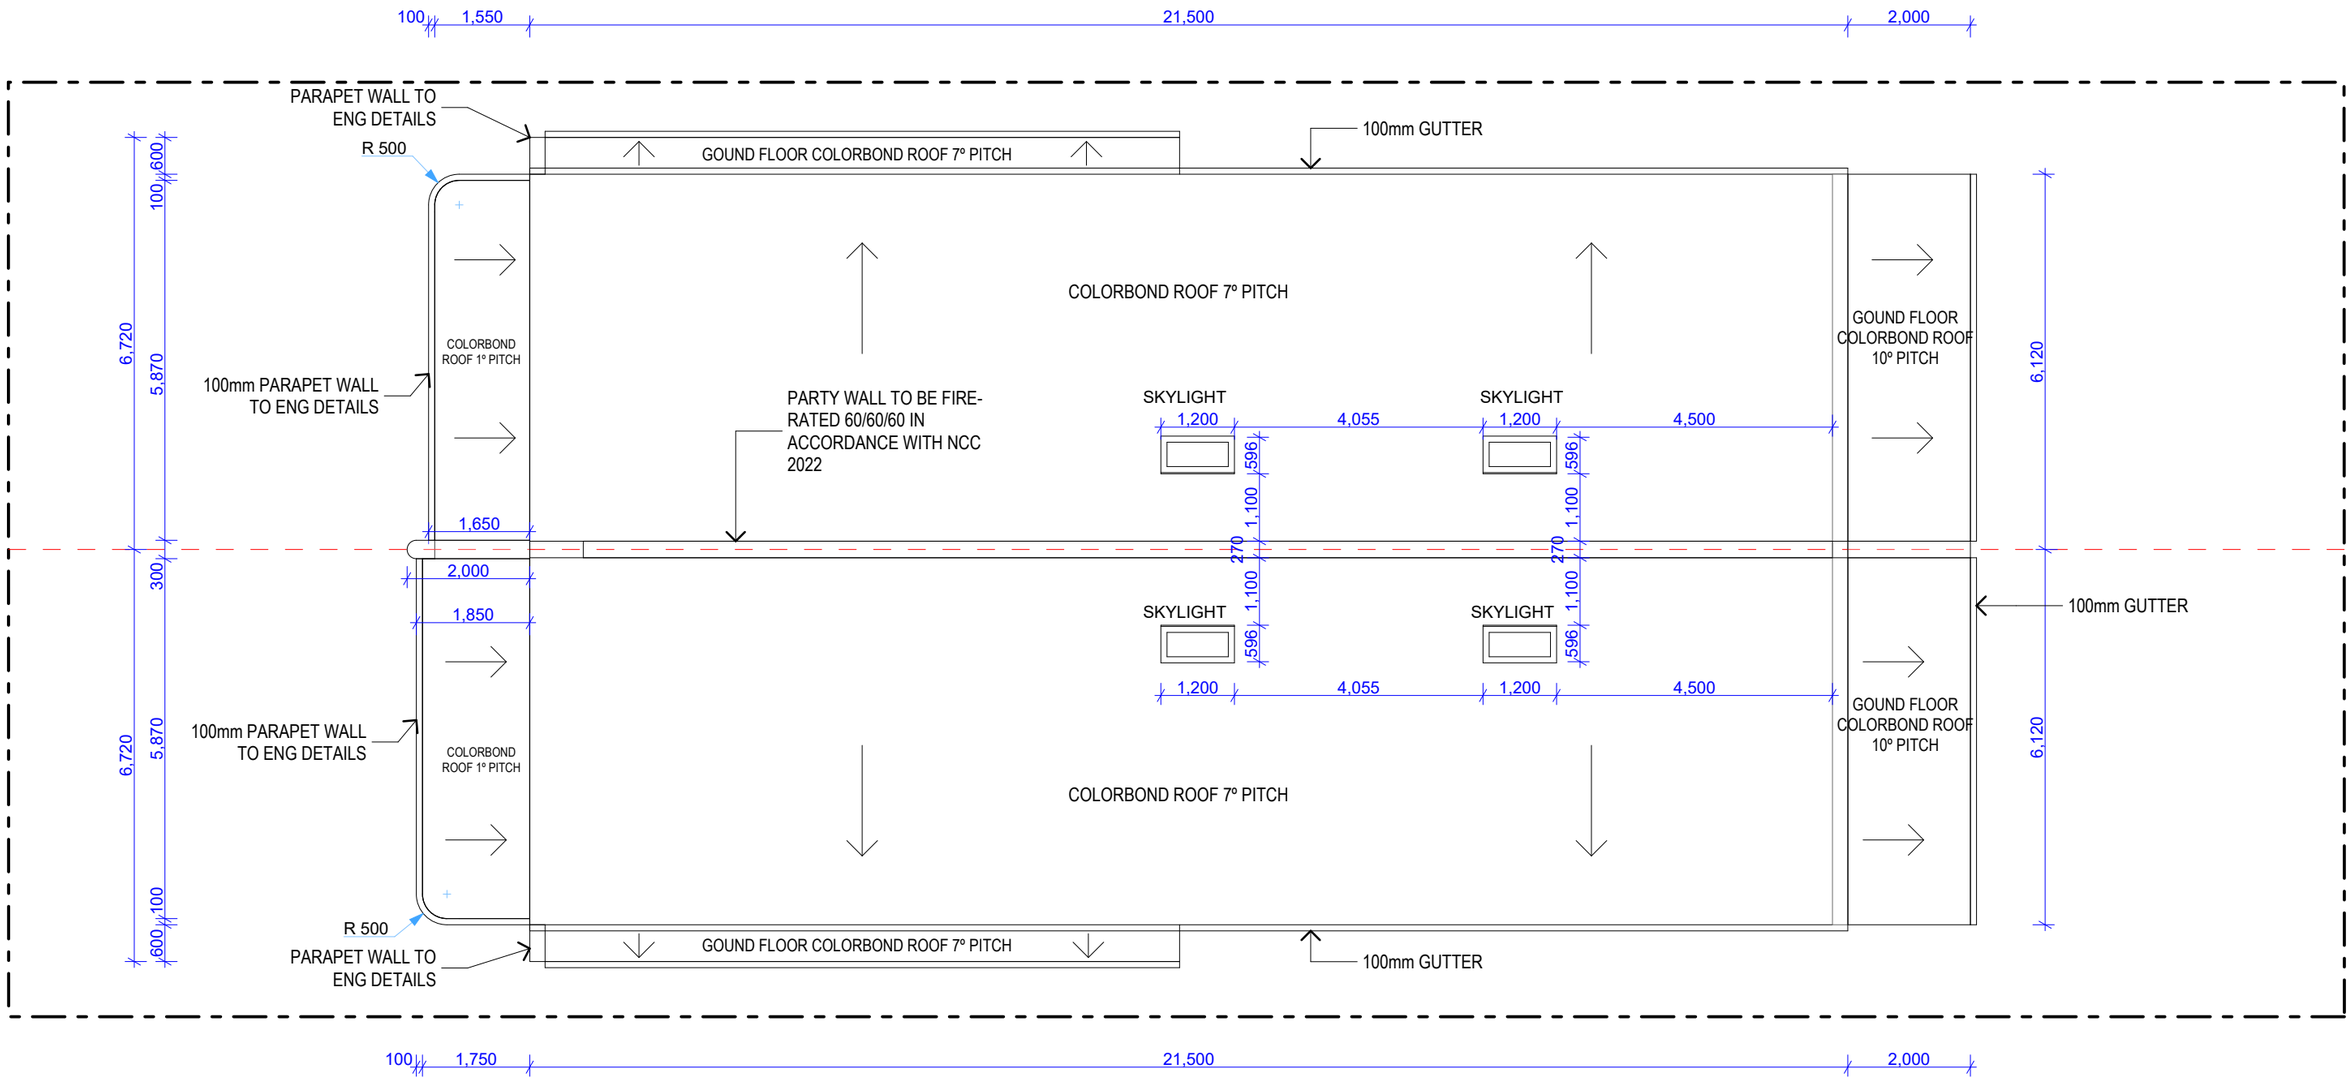

ROOF PLAN

1:100

Notes:

I. Part 3.4 – Termite compliance/note on plan
II. Part 5.7 – Masonry walls to be weatherproofed
III. Part 8.3 – Glazing to comply with AS1288-2006, AS2047-2014, H1D8 of the NCC 2022 & manufacturers technical specification.
IV. Part 6.2.1 – Sub-Floor Ventilation to comply
V. Part 9.3.1(5) – Vertical lining eave separation
VI. Part 9.2.9(4)(b) – Non-Combustible Eave Lining
VII. Part 10.2, H2D8 – Waterproofing to comply with NCC 2022 Part 10.2, H2D8, AS 3740, AS 4654.1 and AS 4654.2
VIII. Concrete roof notes on plans:
a. Concrete roof is to be constructed in accordance with the engineering specifications and H1D4 of NCC 2022
b. Concrete roof is to be waterproofed in accordance with H2D8 of NCC 2022, AS4654.1 & AS4654.2

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 8 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

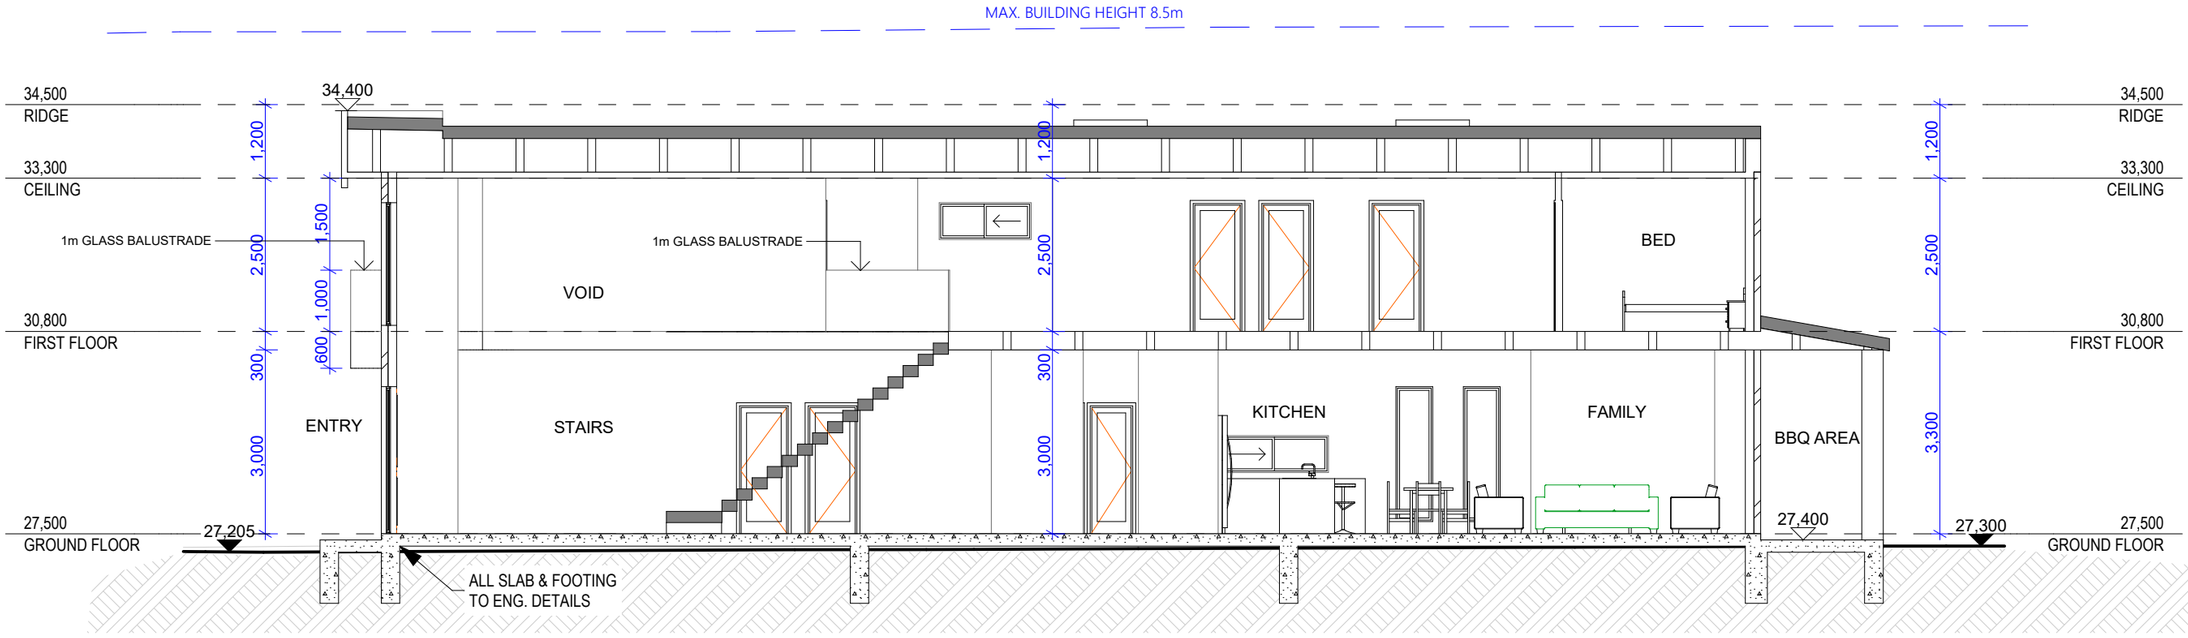

B-B Section

1:100

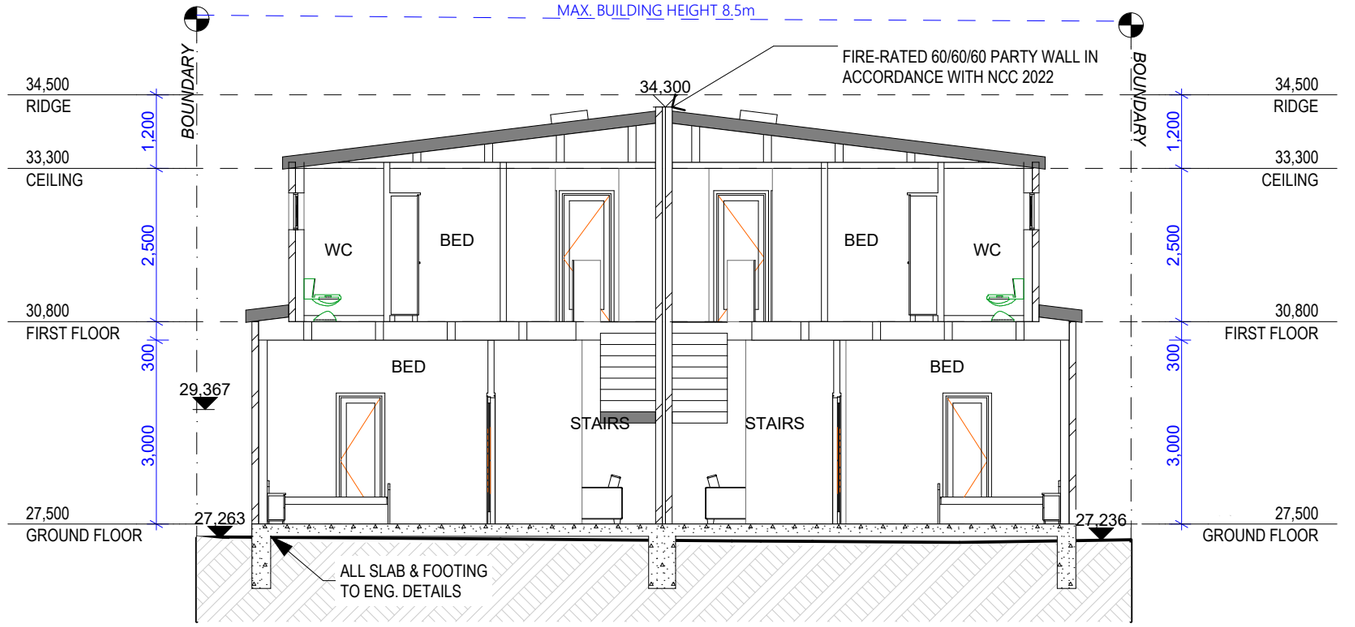

A-A Section

1:100

UNIT 101 DOORS SCHEDULE		
ID	W x H SIZE	ORIENTATION
D01	1,200x2,400	WEST
D02	3,200x2,600	WEST
D03	3,300x2,400	EAST
D04	2,222x2,100	WEST

UNIT 101A DOORS SCHEDULE		
ID	W x H SIZE	ORIENTATION
DA01	1,200x2,400	WEST
DA02	3,200x2,600	WEST
DA03	3,300x2,400	EAST
DA04	2,222x2,100	WEST

UNIT 101 WINDOWS SCHEDULE			
ID	W x H SIZE	SILL HEIGHT	ORIENTATION
W01	1,000x2,400	0	WEST
W02	2,100x900	1,600	SOUTH
W03	1,800x1,400	1,000	SOUTH
W04	800x900	1,500	SOUTH
W05	600x900	1,500	SOUTH
W06	1,800x600	1,000	SOUTH
W07	600x2,200	200	SOUTH
W08	600x2,200	200	SOUTH
W09	2,000x2,000	100	WEST
W010	2,100x600	1,500	SOUTH
W011	600x600	1,500	SOUTH
W012	1,500x600	1,500	SOUTH
W013	2,100x600	1,500	SOUTH
W014	800x600	1,500	SOUTH
W015	2,100x600	1,500	SOUTH
W016	1,200x600	1,500	EAST
W017	1,200x600	1,500	EAST

UNIT 101A WINDOWS SCHEDULE			
ID	W x H SIZE	SILL HEIGHT	ORIENTATION
WA01	1,000x2,400	0	WEST
WA02	2,100x900	1,600	NORTH
WA03	1,800x1,400	1,000	NORTH
WA04	800x900	1,500	NORTH
WA05	600x900	1,500	NORTH
WA06	1,800x600	1,000	NORTH
WA07	600x2,200	200	NORTH
WA08	600x2,200	200	NORTH
WA09	2,000x2,000	100	WEST
WA10	2,100x600	1,500	NORTH
WA11	600x600	1,500	NORTH
WA12	1,500x600	1,500	NORTH
WA13	2,100x600	1,500	NORTH
WA14	800x600	1,500	NORTH
WA15	2,100x600	1,500	NORTH
WA16	1,200x600	1,500	EAST
WA17	1,200x600	1,500	EAST

Notes:

I. Separating Wall to be Fire Rated from footing to underside of roof to comply with NCC & achieve an FRL of 60/60/60
II. Separating wall from footing to underside of the roof
III. Separating wall to achieve a minimum sound insulation of not less than 50 [Rw + Ctr (airborne)]
IV. Services for separating walls must comply with Part 9.3.2
V. Steel and timber beams not to penetrate party wall

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT:
101 Gascoigne Rd Birrong NSW 2143

CLIENT:
Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 9 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3


AJ Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

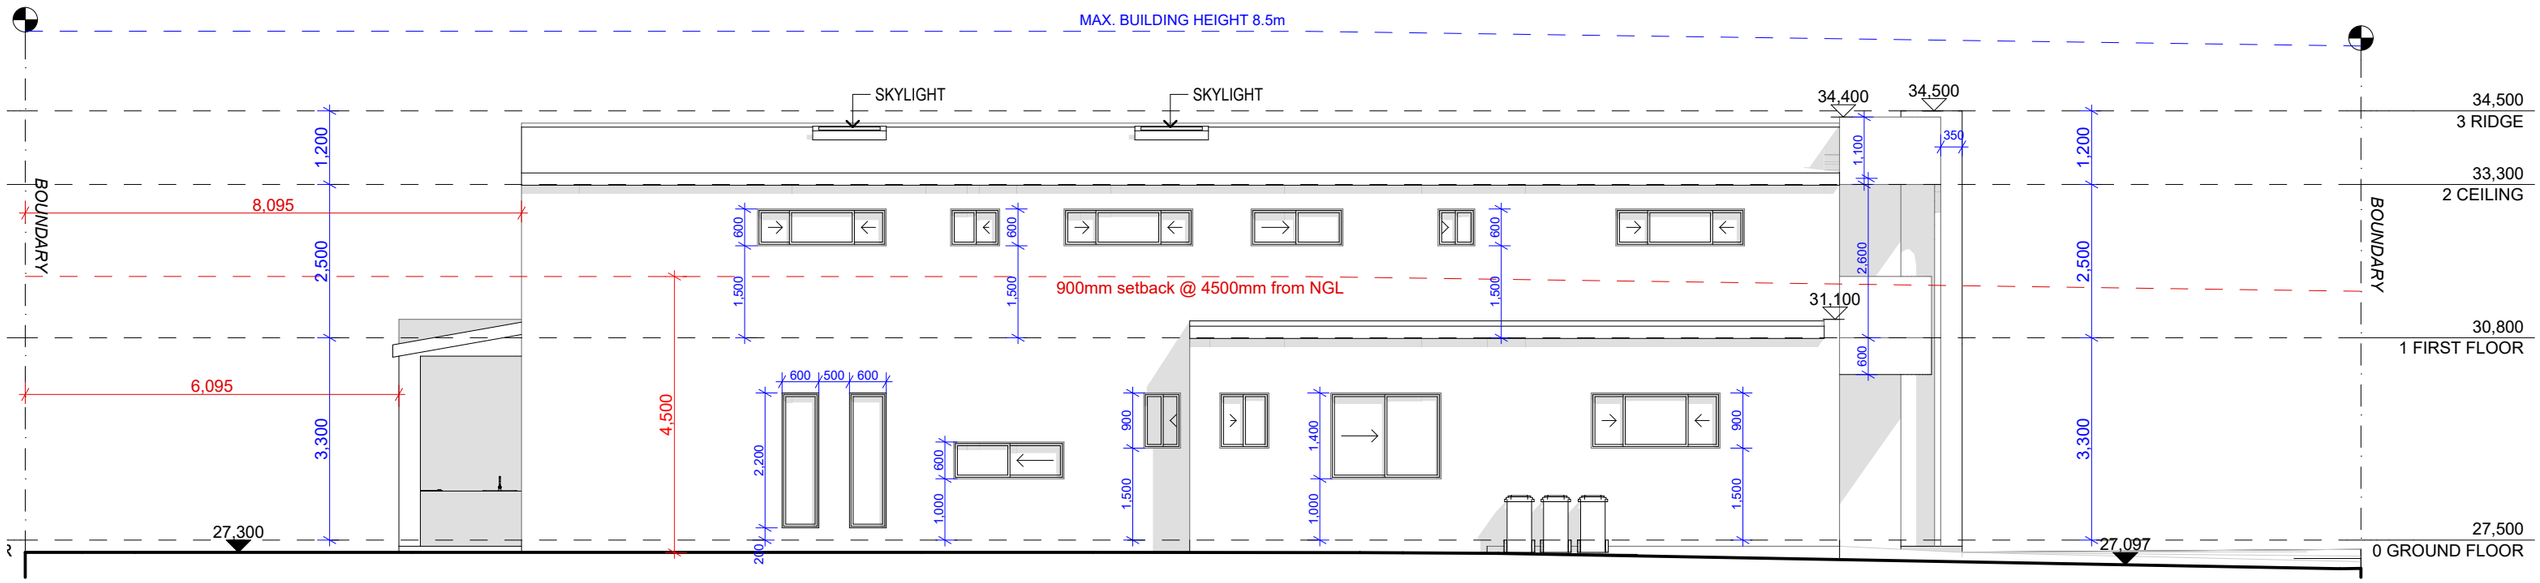

NORTH ELEVATION

1:100

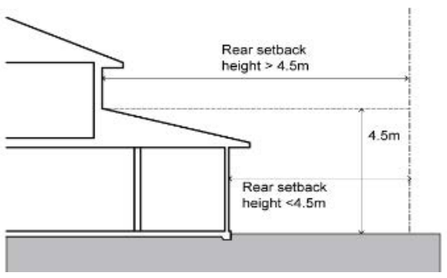

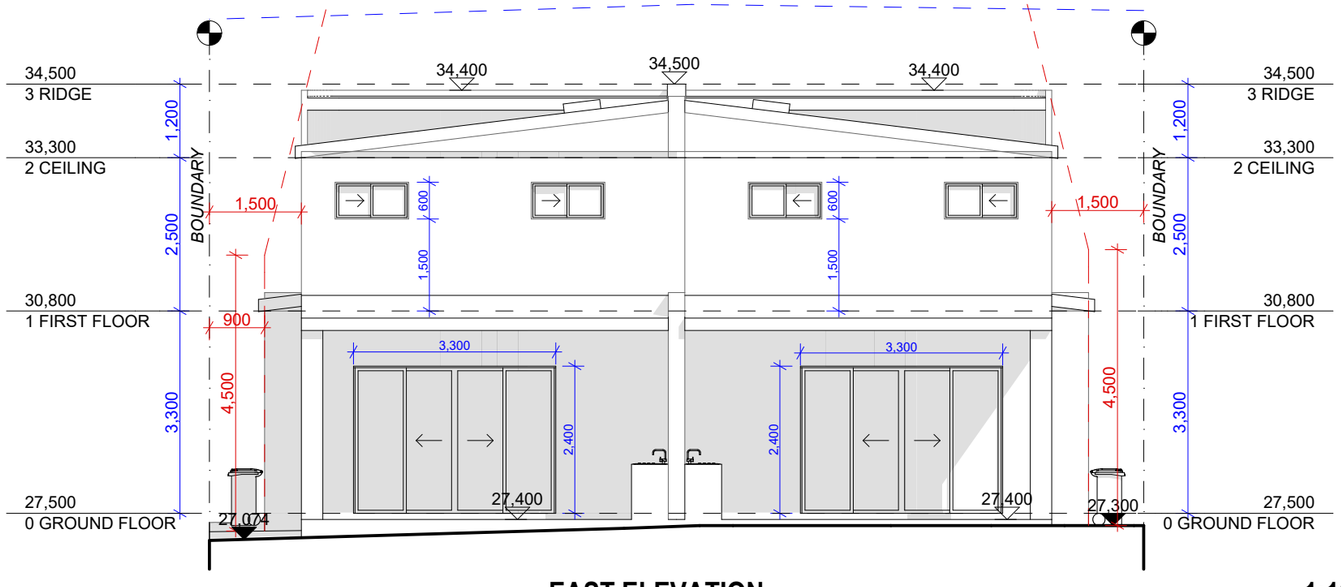

EAST ELEVATION

1:100

Notes:

I. Part 3.4 – Termite compliance/note on plan
II. Part 5.7 – Masonry walls to be weatherproofed
III. Part 8.3 – Glazing to comply with AS1288-2006, AS2047-2014, H1D8 of the NCC 2022 & manufacturers technical specification.
IV. Part 6.2.1 – Sub-Floor Ventilation to comply
V. Part 9.3.1(5) – Vertical lining eave separation
VI. Part 9.2.9(4)(b) – Non-Combustible Eave Lining
VII. Part 10.2, H2D8 – Waterproofing to comply with NCC 2022 Part 10.2, H2D8, AS 3740, AS 4654.1 and AS 4654.2
VIII. Concrete roof notes on plans:
a. Concrete roof is to be constructed in accordance with the engineering specifications and H1D4 of NCC 2022
b. Concrete roof is to be waterproofed in accordance with H2D8 of NCC 2022, AS4654.1 & AS4654.2

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 10 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3


Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

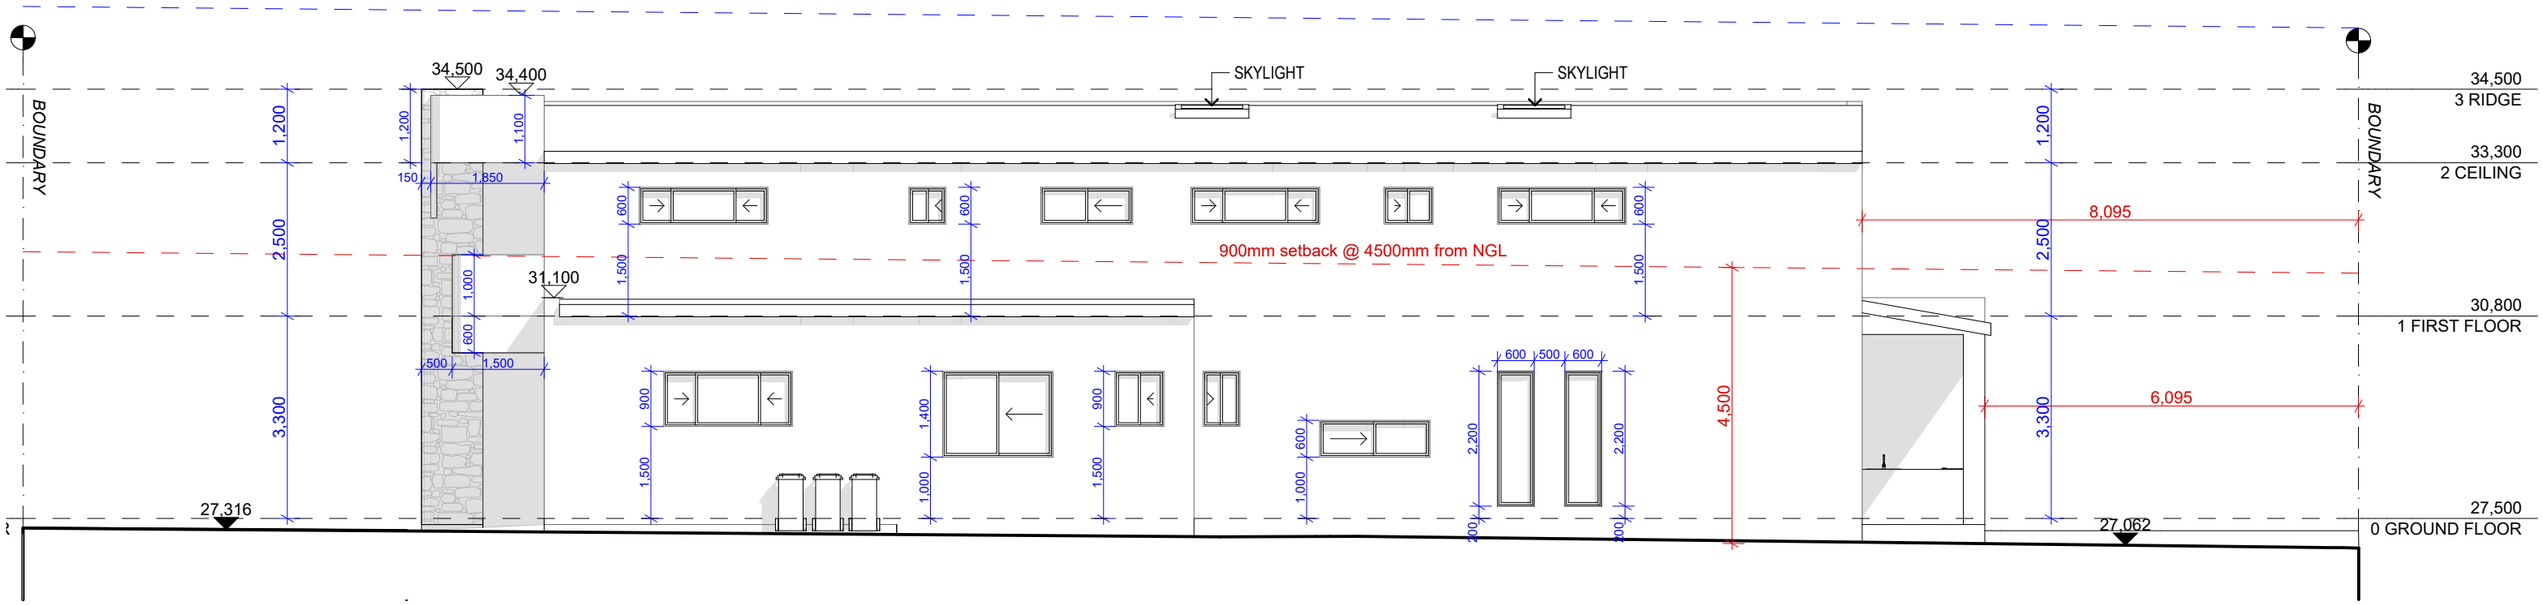


SOUTHELEVATION.

1:100

Setback above 4.5m =
(Building height - 4.5m) ÷ 4 + 0.9

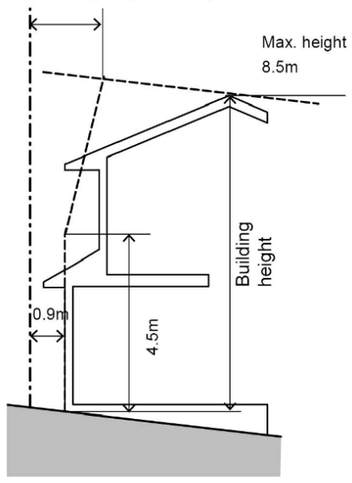


Parent lot width: 12-24m

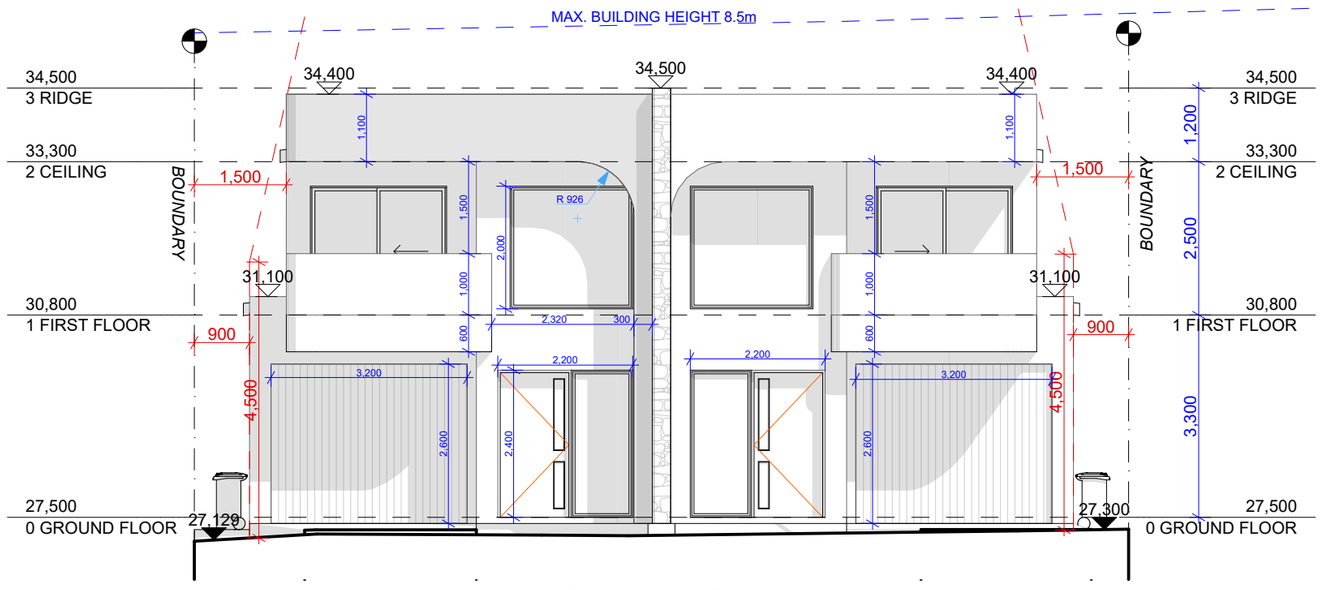

WEST ELEVATION

1:100

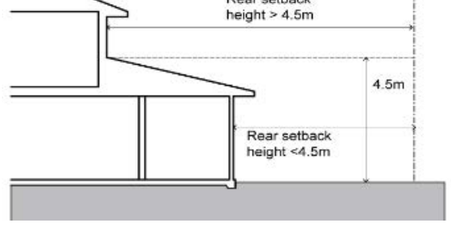

Notes:

I. Part 3.4 – Termite compliance/note on plan
II. Part 5.7 – Masonry walls to be weatherproofed
III. Part 8.3 – Glazing to comply with AS1288-2006, AS2047-2014, H1D8 of the NCC 2022 & manufacturers technical specification.
IV. Part 6.2.1 – Sub-Floor Ventilation to comply
V. Part 9.3.1(5) – Vertical lining eave separation
VI. Part 9.2.9(4)(b) – Non-Combustible Eave Lining
VII. Part 10.2, H2D8 – Waterproofing to comply with NCC 2022 Part 10.2, H2D8, AS 3740, AS 4654.1 and AS 4654.2
VIII. Concrete roof notes on plans:
a. Concrete roof is to be constructed in accordance with the engineering specifications and H1D4 of NCC 2022
b. Concrete roof is to be waterproofed in accordance with H2D8 of NCC 2022, AS4654.1 & AS4654.2

Notes:

Electrical, mechanical, hydraulic and air conditioning "equipment is housed so that it does not create an 'offensive noise' as defined in the Protection of the Environment Operations Act 1997".
Mechanical Ventilations to be installed in accordance with Part 10.8.2 of the BCA 2022
All Glazing to be in accordance with H1 D8 of BCA 2022
Energy Efficiency Requirements to be installed in accordance with Part 13 and NSW Part 13 of the BCA 2022
Smoke Alarm to be located and interconnected with each other in accordance with Part 9.5.2 and 9.5.4 of BCA 2022

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 11 OF 19


DATE: 31/08/2026

SCALE: AS SHOWN @A3


Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

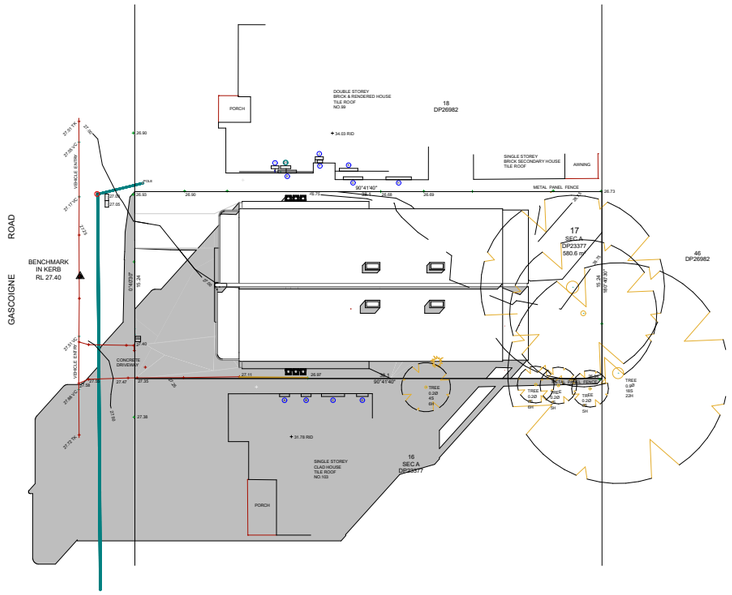

21 Jun @9am **1:500**

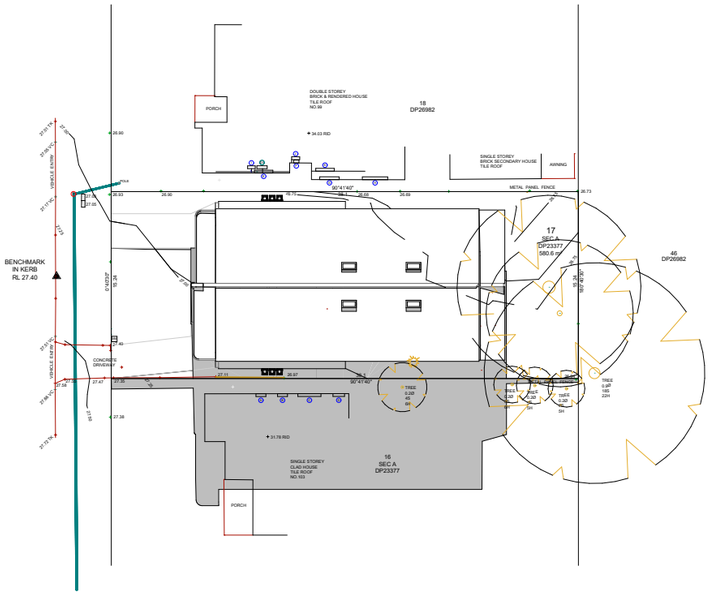

21 Jun @12noon **1:500**

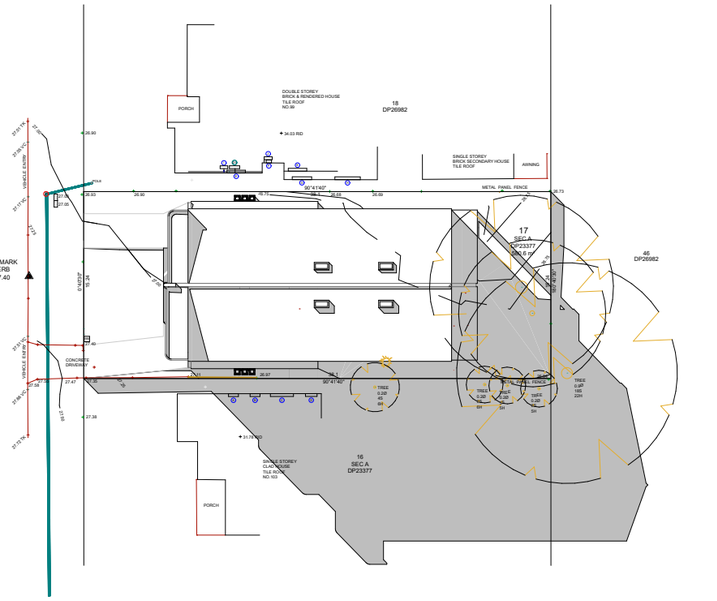

21 Jun @3pm **1:500**

Notes:

"A living area and POS in each dwelling is able to receive a minimum of 3 hours of direct sunlight between 9am & 3pm on the wintersolsce "

Notes:

I. Part 3.4 – Termite compliance/note on plan
II. Part 5.7 – Masonry walls to be weatherproofed
III. Part 8.3 – Glazing to comply with AS1288-2006, AS2047-2014, H1D8 of the NCC 2022 & manufacturers technical specification.
IV. Part 6.2.1 – Sub-Floor Ventilation to comply
V. Part 9.3.1(5) – Vertical lining eave separation
VI. Part 9.2.9(4)(b) – Non-Combustible Eave Lining
VII. Part 10.2, H2D8 – Waterproofing to comply with NCC 2022 Part 10.2, H2D8, AS 3740, AS 4654.1 and AS 4654.2
VIII. Concrete roof notes on plans:
a. Concrete roof is to be constructed in accordance with the engineering specifications and H1D4 of NCC 2022
b. Concrete roof is to be waterproofed in accordance with H2D8 of NCC 2022, AS4654.1 & AS4654.2

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group


PROJECT No.: 023-26

DRAWING No: 12 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3


Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

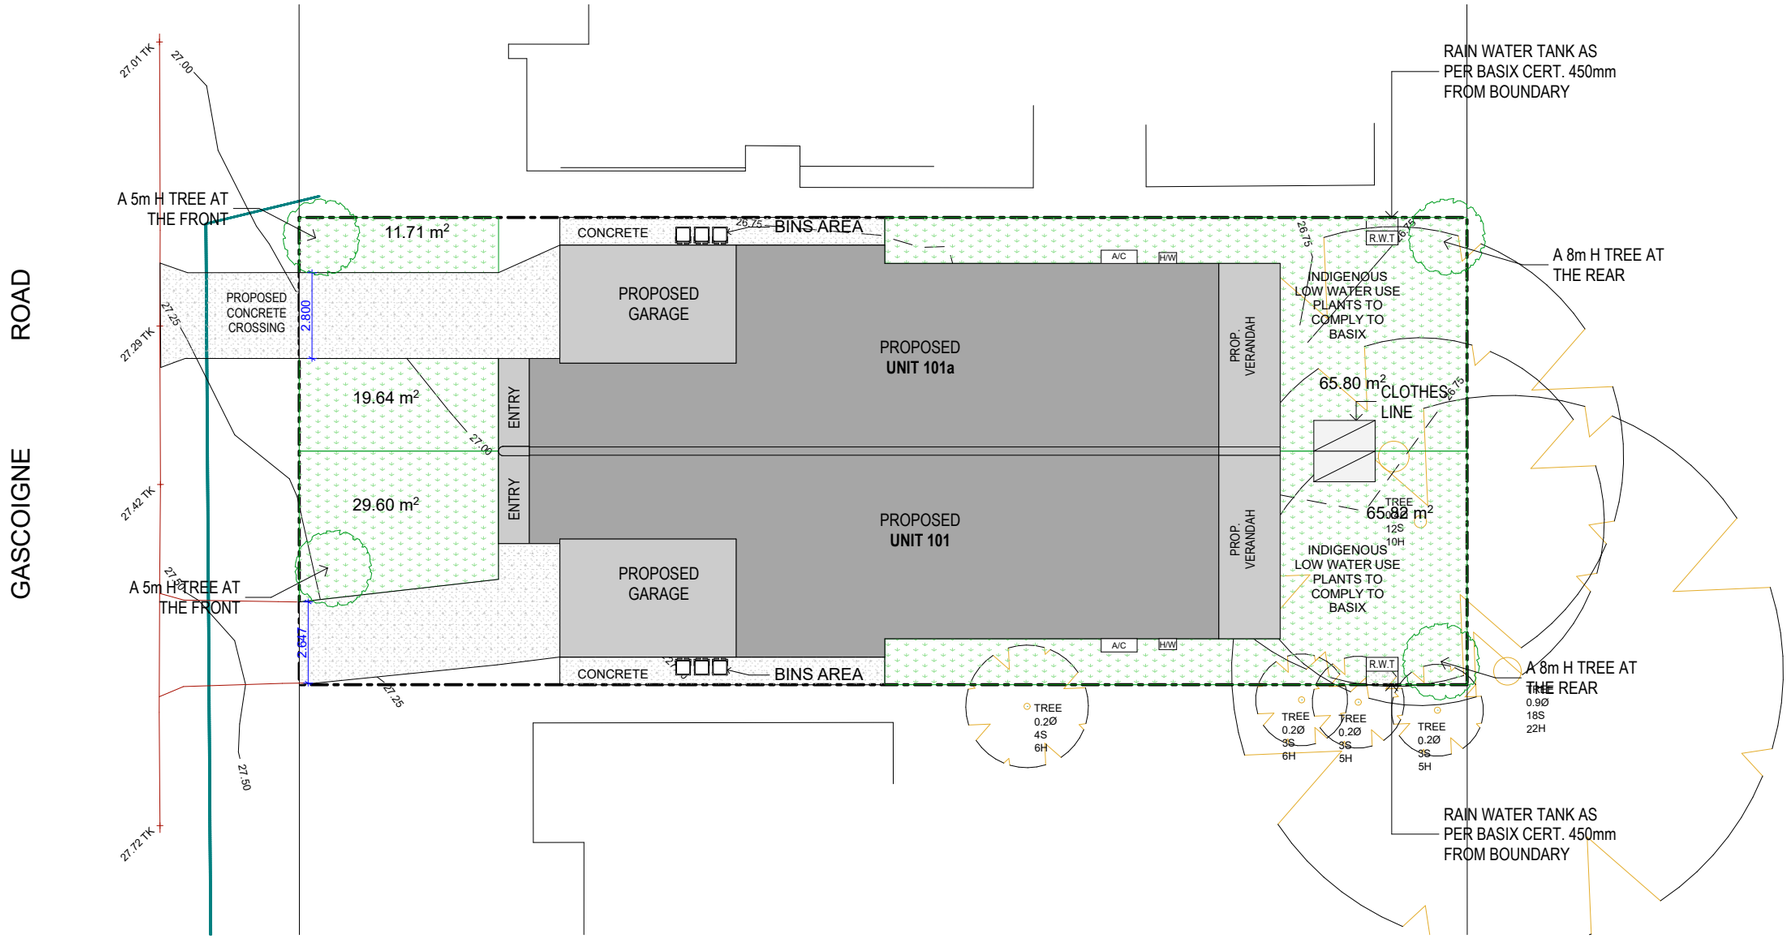

LANDSCAPE PLAN


1:200

VEGETATION

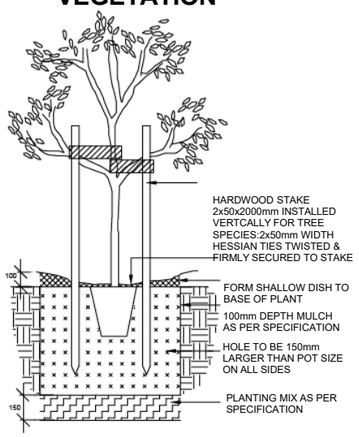


TYPICAL PLANTING DETAILS N.T.S

RIP BASE TO 150mm



PLAN HESSIAN TIES N.T.S

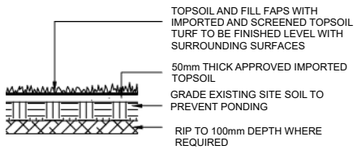

TURFING DETAIL N.T.S

PLANT SCHEDULE

TREE	KEY	QTY	POT SZIE	HT (M)
Elaeocarpus Reticulatus	ER	02	45LTR	5+
Hymenosporum Flavum	HF	02	45LTR	8+

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 13 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010


RETAINING WALL NOTES

- RETAINING WALL SECTIONS/LOCATIONS SHOWN ARE INDICATIVE ONLY, AND SITE CONDITIONS, AND ENGINEERS SPECIFICATIONS, SHALL TAKE PRECEDENCE.
- RETAINING WALL TOP AND BOTTOM OF WALL HEIGHTS ARE "BEST GUESS" INDICATIVE ONLY, BASED ON INFORMATION PROVIDED, AND THE SITE CONTRACTOR SHALL ADAPT CONSTRUCTED WALLS TO SITE CONDITIONS ACCORDINGLY.
- RETAINING WALL MATERIAL SELECTION AND CONSTRUCTION ARE THE OWNERS/CONTRACTORS RESPONSIBILITY.
- ALL RETAINING WALLS SHALL BE CONSTRUCTED TO THE MANUFACTURERS/ENGINEERS SPECIFICATION, AND BE CONSISTENT WITH AS.4678-2002.
- ALL RETAINING WALLS SHALL BE PROVIDED WITH SUFFICIENT DRAINAGE TO MANUFACTURERS/ENGINEERS AND COUNCIL SPECIFICATION. DRAINAGE SHALL NOT CONNECT TO ANY PIPES LEADING TO A RAINWATER TANK.
- ALL RETAINING WALL CONSTRUCTION SHALL TAKE INTO ACCOUNT SITE CONDITIONS AND ADAPT ACCORDINGLY.
- IF RETAINING WALLS ARE TO BE CONSTRUCTED WITHIN THE ZONE OF INFLUENCE OF ANY SERVICES FOUND ON SITE, OR ON THE SURVEY PROVIDED, THE SERVICES OF A QUALIFIED AND REGISTERED ENGINEER AND/OR ADVICE FROM SERVICE PROVIDER SHALL BE SOUGHT.
- ALL RETAINING WALLS AND ASSOCIATED WORKS SHALL BE CONSTRUCTED WHOLLY WITHIN THE BOUNDS OF THE SUBJECT PROPERTY, CONSISTENT WITH THE INDICATIVE SECTIONS PROVIDED.
- ALL FILL PLACEMENT IS TO BE CARRIED OUT IN ACCORDANCE WITH AS3798-2007 "GUIDELINES ON EARTHWORKS FOR COMMERCIAL AND RESIDENTIAL DEVELOPMENT".
- HANDRAILS SHALL BE CONSTRUCTED TO ALL RETAINING WALLS AS REQUIRED BY NCC-3.9.2.
- RETAINING WALL DRAINAGE POINTS, AND ALL OTHER WORKS, SHALL BE INSPECTED AT REGULAR (ONCE YEARLY MINIMUM) INTERVALS AND ALL ISSUES AND BLOCKAGES RECTIFIED IMMEDIATELY, FOR THE LIFE OF THE WALL.


PLANTING/MAINTENANCE NOTES

- GLAZED OR POLISHED PLANTING HOLES, PARTICULARLY IN CLAY SOILS SHOULD BE AVOIDED. PLANTS TO BE MOUNDED WITHIN THESE SOIL TYPES.
- CONTRACTOR SHALL CHECK AND AMEND pH AS REQUIRED BY SITE CONDITIONS.
- SOIL MIX SHALL MEET AS.4419-2018, AND SOIL CONDITIONERS, MULCHES, AND COMPOSTS SHALL MEET AS.4454-2012.
- TREE STOCK SHALL MEET AS.2303-2018.
- PLANTS SHOULD BE PLANTED STRAIGHT, WITH THE TOP OF THE ROOT BALL LEVEL WITH THE SOIL SURFACE.
- PLANTS SHOULD BE WATERED AS SOON AS POSSIBLE AFTER PLANTING, ONCE WEEKLY FOR A PERIOD OF NO LESS THAN 12 MONTHS, AND A MINIMUM ONCE MONTHLY THEREAFTER. THE VOLUME OF WATER SHALL BE THE SAME AS THE POT SIZE AT PLANTING TIME.
- PLANTING SHOULD BE AVOIDED AT THE HEIGHT OF SUMMER (DECEMBER - JANUARY)
- WATER CRYSTALS MAY BE USED TO REDUCE THE AMOUNT OF WATER STRESS SUFFERED BY THE PLANT.
- IF A FERTILISER IS TO BE APPLIED, A SLOW RELEASE 8 - 9 MONTH PLANT FOOD PREFERRED. LOW PHOSPHOROUS FERTILISER SHALL BE USED FOR ALL NATIVE SPECIES.
- THE OWNER, OR THEIR REPRESENTATIVE, IS TO MAINTAIN THE HEALTH OF THE LANDSCAPED AREAS FOR THE LIFE OF THE DEVELOPMENT.
- ONLY SPECIES WITHIN THE LANDSCAPE PLAN SHOULD BE PLANTED. PERMISSION SHOULD BE SOUGHT BEFORE ALTERING THE PLANT SPECIES LIST (ON MOST OCCASIONS NURSERIES CAN SUBSTITUTE).
- STOCK SHOULD BE FREE OF PESTS, DISEASE AND WEEDS AND NOT POT BOUND.
- REPLACEMENT PLANTS SHOULD BE MADE AVAILABLE FOR ANY LOSSES OF PLANT STOCK THAT MAY OCCUR FOR A MINIMUM 12 MONTH PERIOD.
- WEEDS SHOULD BE TREATED/REMOVED ON A FORTNIGHTLY BASIS, IN ACCORDANCE WITH BIODIVERSITY CONSERVATION ACT 2016 AND ANY LOCAL COUNCIL POLICY.
- PEST OR DISEASE SAMPLES SHOULD BE TAKEN TO THE LOCAL NURSERY FOR IDENTIFICATION AND APPROPRIATE REMEDY.

ALL FENCING SURROUNDING ANY POOL / OSD BASIN ARE TO BE CONSTRUCTED, INSTALLED AND MAINTAINED IN COMPLIANCE WITH THE SWIMMING POOLS ACT 1992, AS.1926.2-2007 AND AS.1926.1-2012. IF THE ACTS AND STANDARDS HAVE CHANGED PRIOR TO CONSTRUCTION THEN THE CURRENT ACTS AND STANDARDS SHALL TAKE PRECEDENCE.
-A "NON-CLIMBABLE ZONE", AS PER THE RELEVANT STANDARDS, IS BE MAINTAINED IN PERPETUITY TO THE FENCED AREA.
-THE FENCE SHALL BE MAINTAINED, TO THE RELEVANT

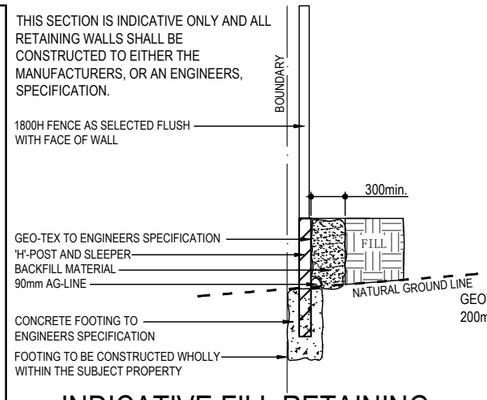


INDICATIVE FILL RETAINING WALL SECTION (NTS)

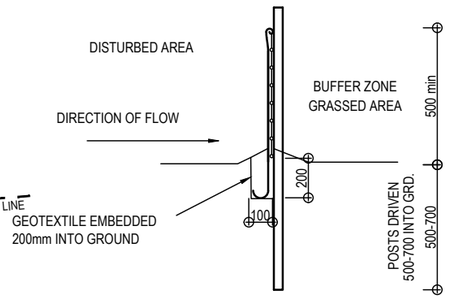


SEDIMENT BARRIER (NTS)

(PROVIDE ON ALL DOWN HILL SLOPES - UNLESS STATED OTHERWISE)

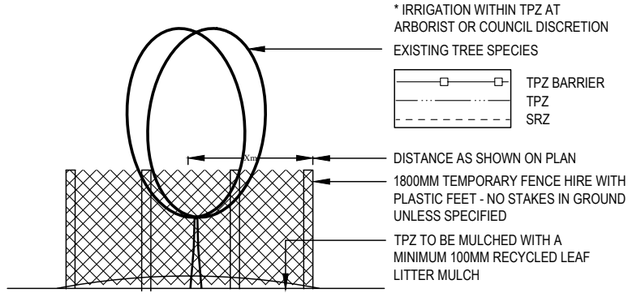


TYPICAL TREE PROTECTION DETAIL - (NTS)


(IF NO ARBORIST REPORT REQUIRED)

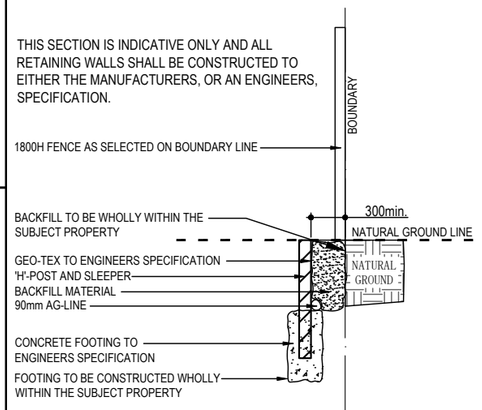

INDICATIVE CUT RETAINING WALL SECTION (NTS)

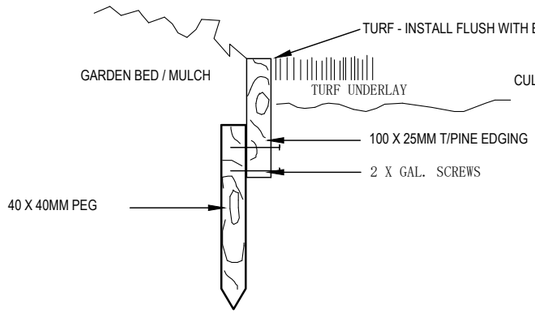

TIMBER EDGING (NTS)

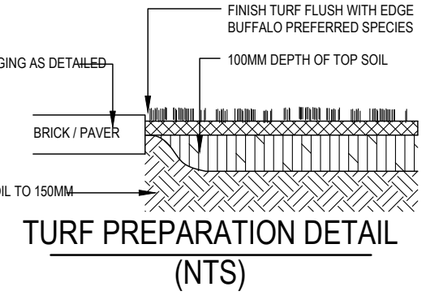

TURF PREPARATION DETAIL (NTS)

LANDSCAPE MAINTENANCE SCHEDULE

MAINTENANCE TASK MINIMUM 12 MONTHS	WEEKLY	BI-WEEKLY	MONTHLY	QUARTERLY	YEARLY	AS R'QUIRED
TREES/SHRUBS GARDEN BEDS						
WATER	■		■			
HEDGE			■			
PRUNE			■			
FERTILIZER (SLOW RELEASE)				■		
WEED (SPRAY/HAND WEED)			■			■
MULCH (MIN. 75mm)					■	
TURF						
WATER	■					■
MOW	■					
FERTILIZER				■		
WEED (SPRAY/HAND WEED)						■

TYPICAL PLANT SELECTION CRITERIA - AS2303-2015 'TREE STOCK FOR LANDSCAPE USE' FOR FULL SPEC.

ENSURE GOOD HEALTH AND VIGOUR. ENSURE FREEDOM FROM PESTS, DISEASES AND INJURY.

SPECIMENS SHOULD BE SELF SUPPORTING AT TIME OF PLANTING - STAKING ONLY TO BE USED WHEN NECESSARY- 1 GROWING SEASON MAX.

ENSURE EVIDENCE OF STEM TAPER - (INCREASE IN CALIPER DOWN THE STEM).


PRUNING:-
*ENSURE CLEAN STEM HEIGHT DOES NOT EXCEED 40% OF PLANT HEIGHT.
*ENSURE CUTS ARE AT BRANCH COLLAR ARE CLEAN WITH NO TEARS.

ENSURE APICAL DOMINANCE FOR TREES WITH TYPICAL EXCURRENT FORM - LEADER DEVIATION <15%.

ENSURE GOOD CROWN SYMMETRY AND SOUND STEM JUNCTIONS - NO INCLUDED BARK.

ENSURE SPECIMENS ARE FREE OF GIRDLING AND SUCKERING ROOTS.

ENSURE TRUNK POSITION IS WITHIN 10% OF POT CENTRE. IF TREE IS GRAFTED ENSURE SCION AND ROOTSTOCK ARE SOUND.

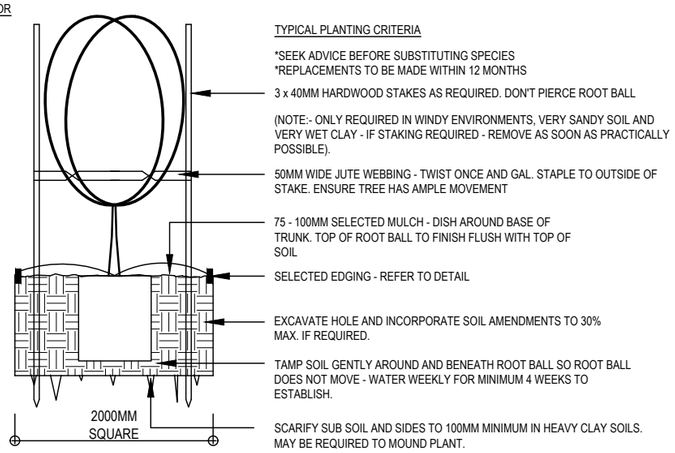

45-75LTR TYPICAL PLANTING (NTS)

NOTES

-PRIOR TO COMMENCEMENT OF WORKS CLIENT SHALL VERIFY THAT CONTRACTORS ARE LICENSED AND INSURED TO CARRY OUT ALL WORKS.
- CLIENT/CONTRACTOR TO CHECK CERTIFICATION AND STAMPED LANDSCAPE PLAN PRIOR TO WORKS COMMENCING.
- CONTRACTOR TO LOCATE AND PROTECT ALL SERVICES PRIOR TO COMMENCEMENT OF WORKS. ALL SERVICE LIDS, PITS, AND VENTS ARE TO BE LEFT EXPOSED AND UNCOVERED BY LANDSCAPE WORKS. ON-SITE ADJUSTMENT OF SERVICES TO ACCOMMODATE LANDSCAPE WORKS SHALL BE WITH THE APPROVAL OF, AND AT THE DIRECTION OF, THE RELEVANT REGULATORY BODY. ANY DAMAGE TO SERVICES CAUSED BY WORKS SHALL BE MADE GOOD BY CONTRACTOR, AT CONTRACTORS EXPENSE, AND TO PROJECT MANAGER, OR REGULATORY BODIES', SATISFACTION.
- ALL LEVELS, AND LOCATION OF WORKS, ON THIS PLAN ARE "BEST GUESS" INDICATIVE ONLY, BASED ON THE INFORMATION PROVIDED, AND SITE CONTRACTOR SHALL ADAPT WORKS TO SITE CONDITIONS ACCORDINGLY.
- ALL LANDSCAPE WORKS SHALL COMPLY WITH ALL COUNCIL DA & CC SPECIFICATION, AND AUS-SPEC-1-NSW C273 "LANDSCAPING" SPECIFICATION.
- ALL IRRIGATION SHALL COMPLY WITH ALL RELEVANT WATER AUTHORITY REGULATIONS, AS WELL AS AS.2698 SPECIFICATION.
- ALL MATERIALS SHALL BE FIXED TO MANUFACTURERS SPECIFICATION.
- ALL GARDEN BEDS NOT DIRECTLY IN CONTACT WITH THE EXISTING SITE SOIL SHALL BE PROVIDED WITH SUFFICIENT DRAINAGE.
- EDGING TO BE PROVIDED TO ALL MEETINGS OF DIFFERENT MATERIALS UNLESS OTHERWISE STATED. TRIP HAZARDS ARE TO BE IDENTIFIED AND RECTIFIED AS PART OF THE CONSTRUCTION PROCESS.
- WEEDMAT SUGGESTED UNDERNEATH GRAVEL PATHWAYS.
- GARDEN BEDS IN OSD BASINS TO BE NON-FLOATABLE DECORATIVE GRAVEL.
- BUFFALO TURF, OR NON-WEED SPECIES TURF/LAWN, SUGGESTED.
- CONTRACTOR TO MAKE GOOD NATURE STRIP TURF TO COUNCIL SPECIFICATION.
- REFER TO HYDRAULICS PLAN FOR OSD BASIN, & DRAINAGE DESIGN, FINAL LEVELS. ALL SITE WORKS AND DRAINAGE ARE TO BE SUBJECT TO ENGINEERS DETAILS AND CERTIFICATION. IN THE ABSENCE OF ENGINEERS SPECIFICATION ALL SITE AREAS ARE TO BE PROVIDED WITH SUFFICIENT PITS AND DRAINAGE, AND ALL AREAS TO BE GRADED TOWARDS SUCH PITS.
- DIMENSIONS SHOULD ALWAYS TAKE PRECEDENCE OVER SCALING.
- ARCHITECTURAL SET-OUT NOT TO BE TAKEN FROM LANDSCAPE PLANS
- ALL WORKS SHALL BE CONSTRUCTED TO AUSTRALIAN STANDARD, CODE, COUNCIL CONDITION, OR BCA/NCC GUIDELINES. IN THE EVENT OF ANY DISCREPANCY BETWEEN THIS LANDSCAPE PLAN AND ANY RELEVANT STANDARD, CONDITION, GUIDELINE, OR CODE, THE STANDARD, CONDITION, GUIDELINE, OR CODE SHALL TAKE PRECEDENCE.
- ALL PLANS, DESIGNS, AND IDEAS REMAIN THE PROPERTY OF D.A LANDSCAPE PLANS AND SHOULD NOT BE COPIED, REPRODUCED OR CONSTRUCTED WITHOUT THE WRITTEN PERMISSION FROM THE OWNER.

DISCLAIMERS

- SITE SURVEY PROVIDED BY OTHERS. ALL DISCLAIMERS CARRIED BY PROVIDED SURVEY ARE CARRIED OVER TO THIS DOCUMENT.
- ALL LEVELS AND LOCATIONS OF SERVICES MUST BE LOCATED AND PROTECTED ON SITE BY CONTRACTOR PRIOR TO COMMENCEMENT OF WORKS. "DIAL BEFORE YOU DIG" SHOULD BE CONTACTED FOR RELEVANT INFORMATION.
- EXISTING TREE SPREAD APPROXIMATE ONLY.
- CALCULATED AREAS ARE APPROXIMATE ONLY AND SHOULD BE VERIFIED PRIOR TO CONSTRUCTION OR TENDERING. STANDARD PERCENTAGES SHOULD BE ALLOWED FOR CUTTING AND WASTAGE.
- NO LIABILITY WILL BE ACCEPTED FOR ANY LOSS, DAMAGE, HARM, OR INJURY, WHETHER SPECIAL, CONSEQUENTIAL, DIRECT, OR INDIRECT, SUFFERED BY YOU OR ANY OTHER PERSON AS A RESULT OF THE USE OF THIS DRAWING.
-D.A. LANDSCAPE PLANS TAKES NO RESPONSIBILITY FOR ANY VARIATIONS IN DESIGN, CONSTRUCTION METHODS, MATERIALS OR SPECIFICATIONS WITHOUT WRITTEN APPROVAL.

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 14 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

AJ Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010



The NCC Performance Requirements can be met using either a Performance Solution, Deemed-to-Satisfy (DTS) Solution, or a combination of both.

The following is a general representation and introduction to the DTS Provisions for waterproofing in Class 1 buildings (houses). The NCC 2022 waterproofing provisions in Volume Two, aim to safeguard the occupants from illness or injury and protect the building from damage caused by the accumulation of internal moisture arising from the use of wet areas in a building.

The waterproofing provisions in NCC Volume Two require a building to be constructed in a way that prevents potential health risk, dangerous conditions or any damage to building elements which can caused by dampness or waterflow from wet areas such as bathrooms, laundries or the like in a building.

The information presented provides a national overview of the NCC and does not contain any state or territory variations. For further information about floor waste requirements in Queensland, please refer to Newsflash 622.

This information is useful for architects, building designers, building surveyors (certifiers), plumbers, builders, and educators.

Requirements for wet areas: A history lesson

Before we start outlining the NCC 2022 requirements for wet areas, it is important to provide some background to the history of the wet area requirements.

The first edition of NCC Volume Two was issued in 1996, and that edition had construction details for wet areas. In NCC 2012, it was decided to remove construction details from Volume Two. This meant Volume Two set out what needed to be waterproofed or made water resistant– and then you had to go to waterproofing of domestic wet areas Australian Standard (AS) 3740 for construction details. In summary from 2012 to 2019, the NCC told us what to do, and AS 3740 told us how to do it.

Fast forward to NCC 2022 and a review of the wet area provisions resulted in a decision to reinstate the construction details back into code itself, with the option to choose AS 3740 for a construction solution if desired.

In addition, NCC 2022 introduced changes to clause numbering due to the introduction of a consistent volume structure (CVS) across all 3 volumes of the NCC and with it, the introduction of the ABCB Housing Provisions Standard (Housing Provisions).

Understanding the NCC
Waterproofing in houses

Where are the requirements in NCC 2022 located and what compliance options do I have?

The requirements for wet areas in NCC 2022 are in:

- Volume Two, Part H4 Health and amenity,
- the Housing Provisions, Part 10.2 Wet area waterproofing, and
- AS 3740 (depending which option you use).


Let's unpack this further.

H4P1 is the only Performance Requirement for wet areas in Class 1 buildings (houses).

H4D2 and H4D3 are the relevant DTS Provisions for wet areas in Volume Two. H4D2 sets out where protection is required for wet areas and H4D3 (new for 2022) sets out what materials must be used and how they must be installed.

Together, these 2 DTS Provisions outline 2 compliance options to meet H4P1. These options are outlined in the figure below.

Figure 1 Waterproofing compliance options for houses

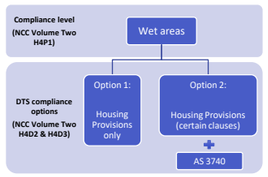

This means the available options and where they are located is as follows:

- **Option 1:** Use of the Housing Provisions only – Part 10.2 in full (i.e., 10.2.1 to 10.2.32)
- **Option 2:** Use of the Housing Provisions (10.2.1 to 10.2.6 and 10.2.12) and AS 3740.

Next let's have a look at these requirements in more detail.

What are the requirements?

In short, the actual technical requirements to tell us what needed to be waterproofed or made water resistant have not changed very much compared to NCC 2019, but they look different as they are no longer contained in tables.

Clauses 10.2.1 to 10.2.5 closely replicate the requirements contained in Table 3.8.1.1 from NCC 2019, with an additional clause to cover waterproofing requirements for toilets with a bidet spray, refer 10.2.5. There is also a modification to 10.2.2 which now mandates the walls of the shower area to be waterproofed to a height of 1800mm.

Clause 10.2.12 is a new requirement for falls in the Housing Provisions. It isn't making you install a floor waste. But – if you do put a floor waste in – then the NCC will now require you to grade the floor towards that waste. It's always been a good idea, but now it's mandatory in NCC 2022.

Example
A floor waste may be installed outside an enclosed shower area in a residential bathroom even though a floor waste may not be required by the NCC outside the shower area in Class 1 buildings (houses). In that case, if you do decide to install a waste outside an enclosed shower area, the NCC requires the floor to be graded to the floor waste as specified in 10.2.12 of Housing Provisions.

We will not go into the details of these clauses (10.2.6 to 10.2.32) and construction details in the Housing Provisions, however, to provide an overview on their inclusions, they are grouped and presented in Figure 2.

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 15 OF 19


DATE: 31/08/2026

SCALE: AS SHOWN @A3

AJ Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

SEDIMENT CONTROL FENCE & POS DIAGRAM

1:200

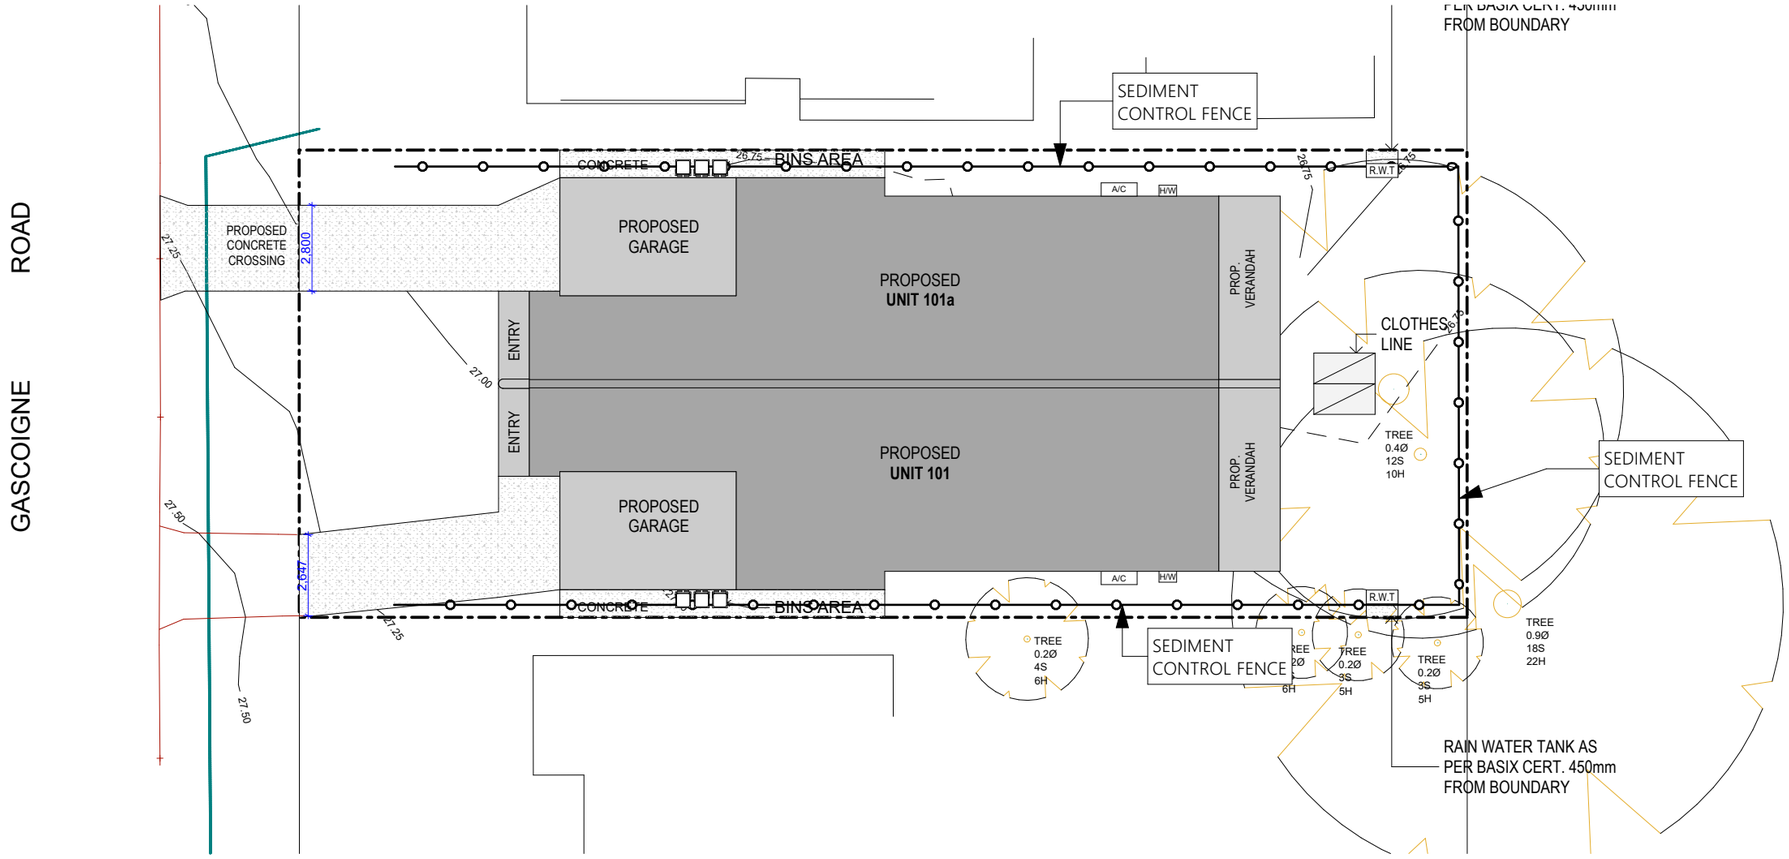

SEDIMENT CONTROL DEVICE DETAILS

Extracts from "Managing Urban Stormwater - Soils and Construction" August 1998 produced by Department of Housing

SD6-7 SEDIMENT FENCE

1) CONSTRUCT SEDIMENT FENCE AS CLOSE AS POSSIBLE AND PARALLEL TO THE CONTOURS OF THE SITE.

2) DRIVE 1.5 m LONG STAR PICKETS INTO GROUND Max 3 m Ctrs.
3) DIG A 150 mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.

4) BACKFILL TRENCH OVER BASE OF FABRIC.
5) FIX SELF SUPPORTING GEOTEXILE TO UPSLOPE SIDE OF POSTS WITH WIRE TIES OR AS RECOMMENDED BY GEOTEXILE MANUFACTURER.

6) JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH A Min LAP OF 150 mm.


SD 5-7 STABILISED SITE ACCESS


1) STRIP TOPSOIL AND LEVEL SITE.
2) COMPACT SUBGRADE.
3) COVER AREA WITH GEOTEXILE.
4) CONSTRUCT 200 mm THICK PAD OVER GEOTEXILE USING ROADBASE OR 30mm AGGREGATE. Min 15 m LONG OR TO BUILDING ALIGNMENT. Min 3m WIDE.

5) CONSTRUCT HUMP IMMEDIATELY WITHIN BOUNDARY TO DIVERT WATER TO A SEDIMENT FENCE OR OTHER SEDIMENT TRAP.

NOTE:

WHEELS OF VEHICLES LEAVING SITE TO BE WASHED DOWN TO PREVENT SEDIMENT LEAVING SITE.

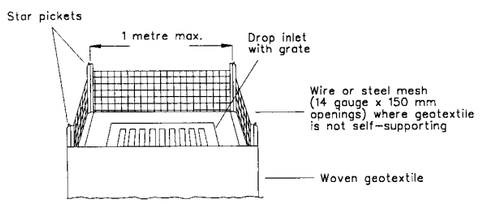

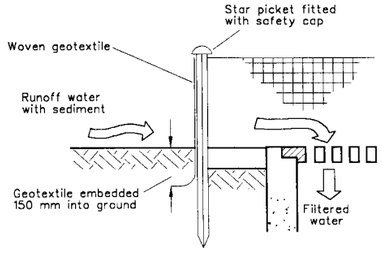



SD 6-9 GEOTEXTILE INLET FILTER


1) FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXILE. REFER SD6-7 FOR DETAILS.


2) SUPPORT GEOTEXILE WITH MESH TIED TO POSTS AT 1 m Ctrs.

3) DO NOT COVER INLET WITH GEOTEXILE.

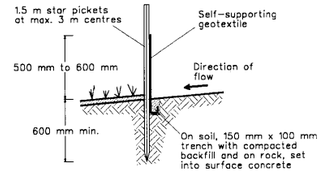

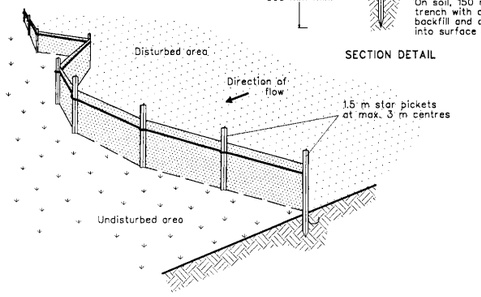

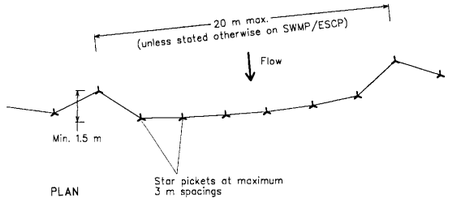

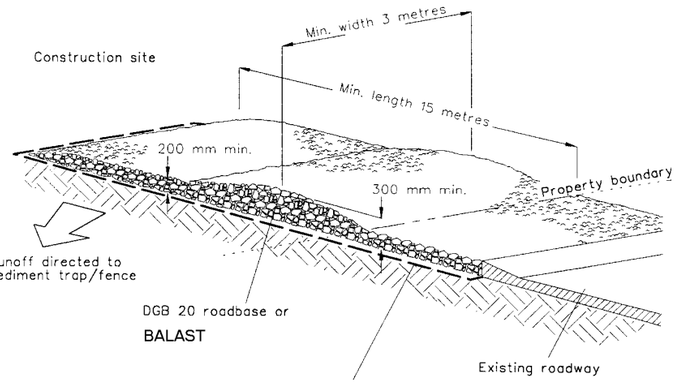

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT:
101 Gascoigne Rd Birrong NSW 2143

CLIENT:
Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 16 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3


Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010


WET AREA DETAILS

OVERFLOWS


The membrane must be turned into the overflow to prevent moisture from tracking behind the membrane.

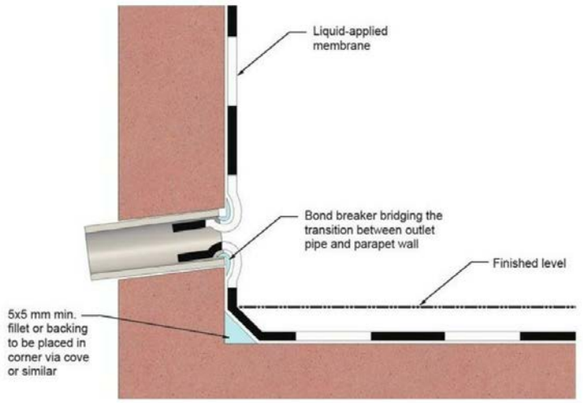


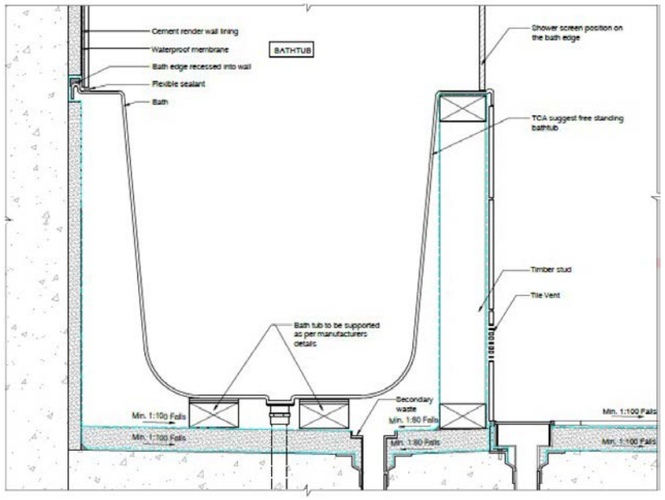


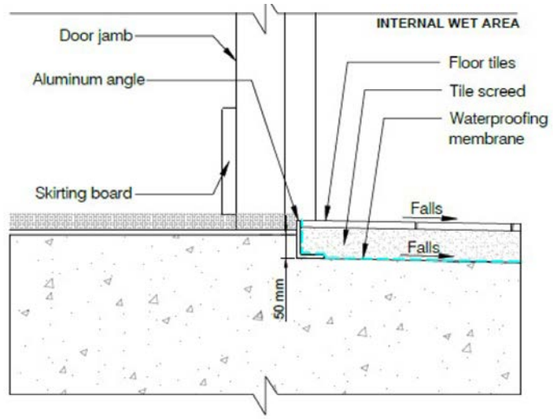


INTERNAL WET AREA DOOR THRESHOLD

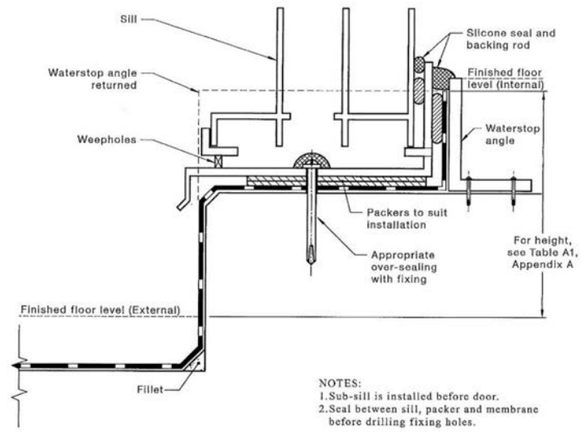

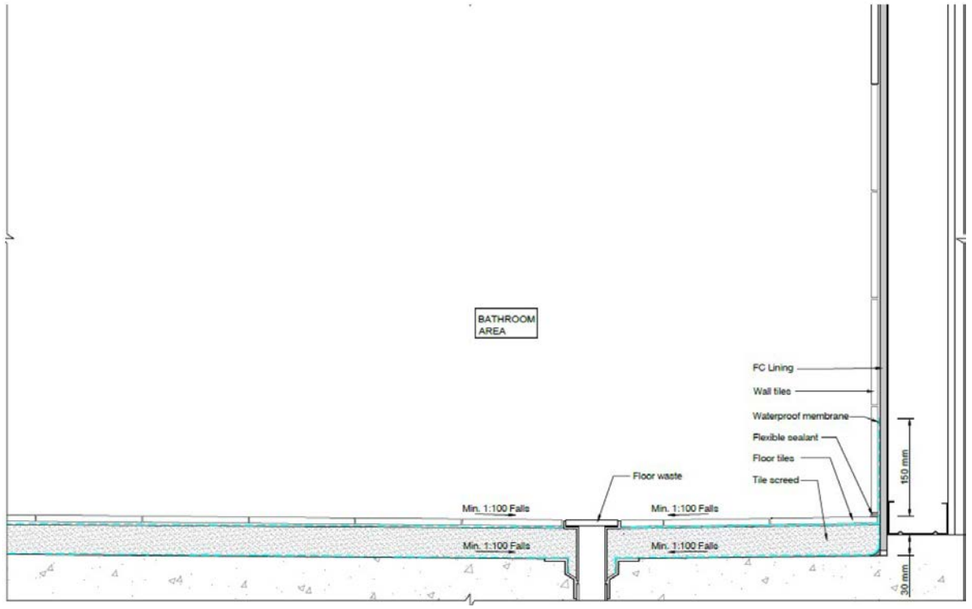

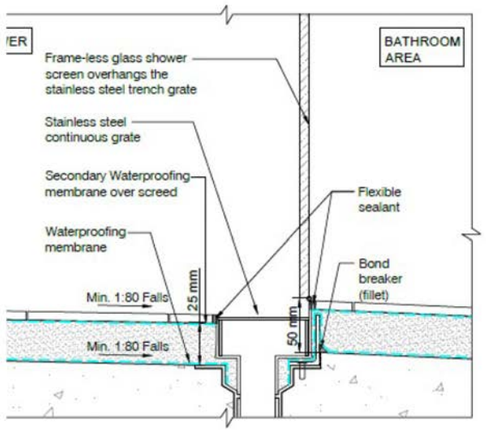

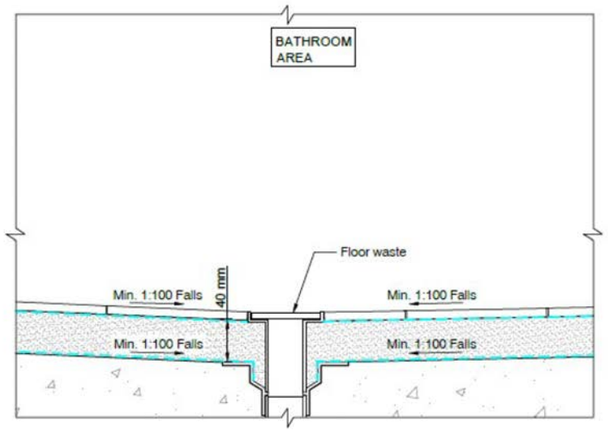

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 17 OF 19

DATE: 31/08/2026


SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010


WET AREA DETAILS

NOTES:
ALL WATERPROOFING MUST BE COMPLIED WITH:

- AS 3740:2021
- NCC 2022 - VOLUME 2 - HOUSING PROVISIONS

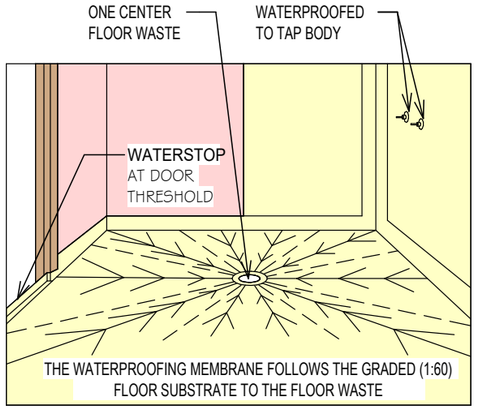

C01 CROSS FALL TO FLOOR WASTE

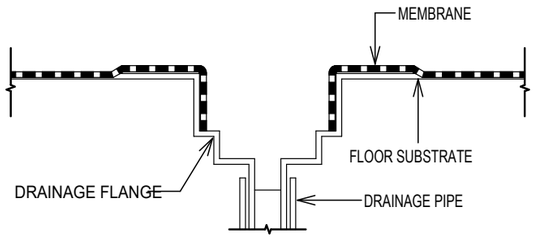


TYPICAL MEMBRANE TERMINATION AT DRAINAGE OUTLET
NOT TO SCALE

C02 LEAK CONTROL FLANGES




PUDDLE / LEAK CONTROL DRAINAGE FLANGES


NOTE: MUST BE APPLIED TO ALL FLOOR WASTES IN WET AREA FOR GROUND AND UPPER FLOOR / ENTIRE BUILDING
(CLASS 1 BUILDING: CONCRETE FLOOR - MAY SIT ON TOP OF CONCRETE OR TILE BED FOR - CONCRETE FLOOR ONLY,
OTHER FLOORS - RECESSED INTO FLOOR SUBTRATE OR TILE BED)

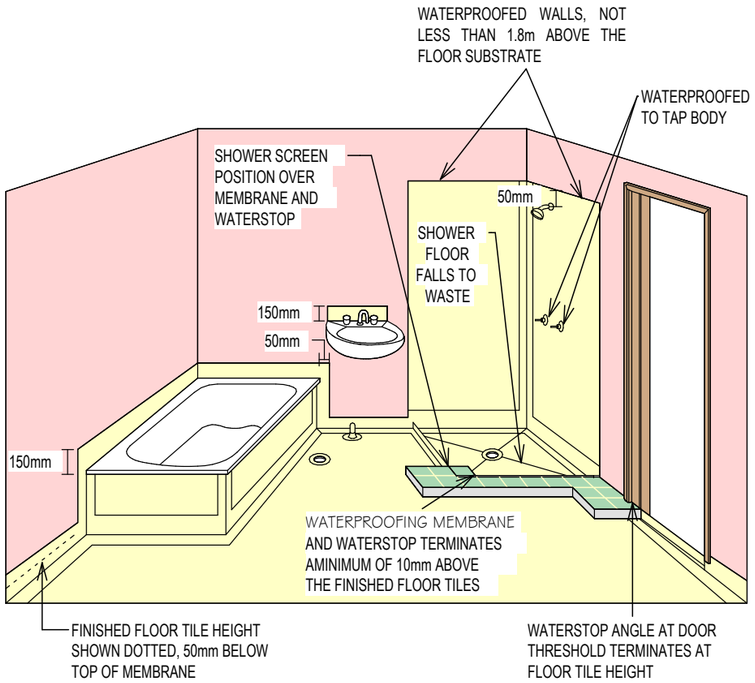

C03 WATERPROOFING DETAILS AROUND BATHROOM

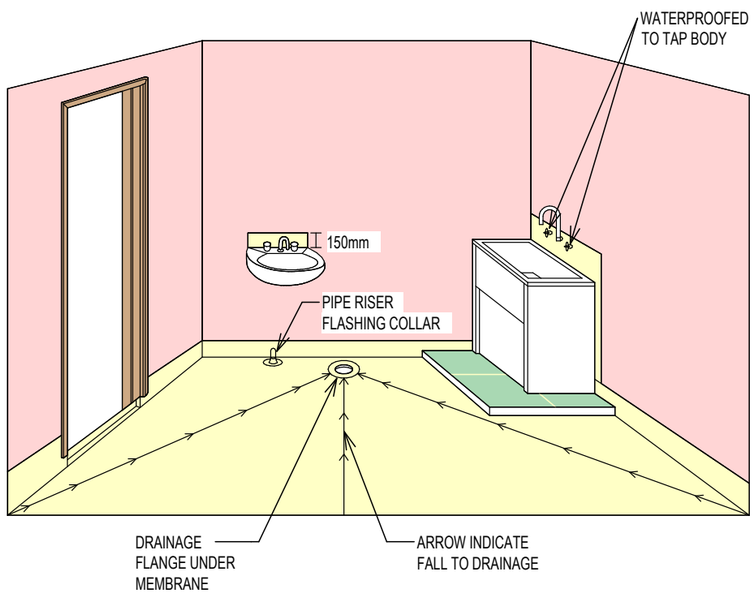

C04 WATERPROOFING DETAILS AROUND LAUNDRY

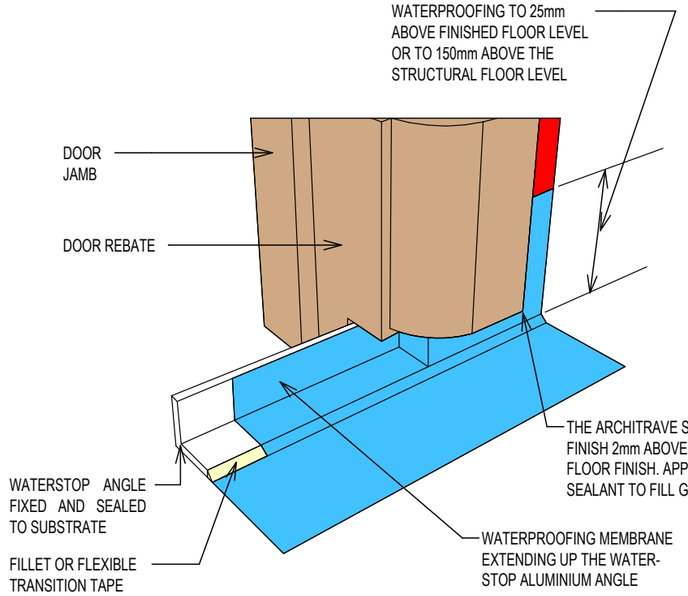

NOTE: THE WATERSTOP ANGLE MAY BE LOCATED AT THE FACE OF THE DOOR JAMP OR AT THE REBATE.

C05 WATERPROOFING UNDER DOOR ARCHITRAVE

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 18 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010

01 

ALUMINIUM FRAME WINDOWS

02 


WHITE RENDER WALL

03 

RENDER WALL

04 

DARCK RENDER WALL

05 

SELECTED GLASS BALUSTRADE

06 

SELECTED CRAZY STONE WALL OR SIMILAR

07 

SELECTED ENTRY DOOR

09 

DARCK TIMBER LOOK BATTENS FINISH / WALL OR SIMILAR



EXTERNAL FINISHES & MATERIALS
NTS

ISSUE	REVISION	DATE
A	Concept plan	25/08/2026
D	Initial submission	31/08/2026

PROJECT: 101 Gascoigne Rd Birrong NSW 2143

CLIENT: Hi Tech Group

PROJECT No.: 023-26

DRAWING No: 19 OF 19

DATE: 31/08/2026

SCALE: AS SHOWN @A3

Design Studio
E: info@aj-designstudio.com M: +61 433 613 566
A: Suite 41/ Level 1, 285a Crown Street Surry Hills NSW 2010