18 CARRAMAR CRESCENT, MIRANDA.

Proposed New Construction Certificate: New Two Storey Dual Occupancy with Inground Pools, Front Fence with Torrens Title Subdivision



DRAWING REGISTER:
ARCHITECTURAL PLANS

DWG No.	DRAWING TITLE	REV
Dwg 01	COVER PAGE / REGISTER	A
Dwg 02	DA CONDITIONS / BASIX COMMITMENTS	A
Dwg 03	NCC 2022 NOTES	A
Dwg 04	SITE MANAGEMENT PLAN / DEMOLITION PLAN.	A
Dwg 05	GROUND FLOOR PLANS	A
Dwg 06	FIRST FLOOR PLANS	A
Dwg 07	SITE / ROOF PLAN	A
Dwg 08	ELEVATIONS A	A
Dwg 09	ELEVATIONS B	A
Dwg 10	SECTIONS	A
Dwg 11	WINDOW SCHEDULE : GROUND FLOOR	A
Dwg 12	WINDOW SCHEDULE : FIRST FLOOR	A
Dwg 13	STAIRS / CONST. DETAILS	A
Dwg 14	SCHEDULE OF COLOURS AND FINISHES	A
Dwg 15	EROSION,SEDIMENT CONST. MANAG.	A
Dwg 16	CONSTRUCTION / WET AREA & ROOF DETAILS	A
Dwg 17	WET AREA DETAILS	A
Dwg 18	POOL DETAILS AND REQUIREMENTS	A
Dwg 19	SAFE DESIGN SHEET	A
Dwg 20	NATHERS REQUIREMENTS	A

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL, ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO.DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

0007668900 27 Apr 2022
Assessor Noura Al Hazzouri
Accreditation No. DMN18/1891
Address
18 Carramar Crescent
Miranda , NSW , 2228
hstar.com.au

13. Removal and/or Pruning of Trees on Council Land
A. Design
Council has preferred supplier agreements in place with arborists who are approved to carry out arbor works on Council land. Removal / Pruning of the tree/s listed below must only be undertaken using Council's preferred supplier at the applicant's expense. The applicant is responsible for contract management and payment of the arborist prior to works being undertaken.
Alternatively, if Council's Contractor is unavailable, the applicant may engage their own contractor with appropriate qualifications, licences and insurances and forward their name and details to Council prior to the commencement of work. This information will be kept on record in the event of any reportable incidents. The applicant is responsible for contract management and payment of the Arborist. Any contractor used must undertake all work according to the Australian Standard for Amenity Pruning (AS4373).
Select from Council's list of preferred suppliers listed on Council's website:
www.sutherlandshire.nsw.gov.au/Residents/Trees/Trees-on-Council-or-Public-Land.
The following trees have been approved for removal within the road reserve:
Tree No. 1
Tree Species - Callistemon viminallis (Bottle Brush)
Location - Road Reserve

14. Tree Retention and Protection
The following condition applies to all trees on the subject site, trees on the adjoining sites (which are potentially affected by the development works), as well as trees on the adjoining Council land that are not approved for removal.
A. Before Works
Prior to the commencement of any demolition, excavation or construction works on site, the following tree protection measures must be put in place and maintained during the course of construction to prevent damage to trees.
i) Protective fencing constructed of 1.8m high chain wire mesh supported by robust posts must be installed at the distance required by Australian Standards AS4970- Protection of Trees on Development Sites. Signage must be erected on the fence with the following words clearly displayed "TREE PROTECTION ZONE, DO NOT ENTER".
ii) The tree protection zone within the protective fencing must be mulched with a maximum depth 75mm of suitable organic mulch (woodchips or composted leaf chip mulch) and kept regularly watered for the duration of the works subject to this consent.
iii) No development or associated activity is permitted within the fenced tree protection zone for the duration of works subject to this consent. This includes vehicular or pedestrian access, sheds, washout areas, excavations, backfilling, installation of services (including stormwater), removal of top soil, stockpiling of soil or building materials.
Sutherland Shire Council Development Application No.: DA22/0548 Page 10
iv) Where site access/egress is required over the roots of trees identified for retention and protection, provide hardwood rumble boards over a 200mm thick layer of wood chip.
B. During Construction
i) The tree protection measures detailed in 'A' above must be maintained during construction.
ii) A supervising Arborist must be present during any approved hand excavation or under boring works within the Tree Protection Zone (TPZ) of any tree identified for retention and protection and have the authority to direct works to ensure the trees long term preservation;
iii) A supervising Arborist must strictly supervise that there is no disturbance or severing of roots greater than 30mm diameter and to cleanly cut those roots between 10-30mm in diameter.
iv) If the tree/s identified for retention in 'A' above are damaged or destabilised during construction then works must cease and Council's Tree Assessment Officer (ph. 9710 0333) must be contacted to assess the tree/s and recommend action to be taken.

Table 6.3.1 Windows/Sliders, Doors, Walls & Roof Specifications

Building Component	*Rw Rating to be Achieved on Site*
Windows & Sliding Doors in all Habitable Areas of both Dwellings are to be 6.38 mm laminated type with full perimeter Mohair Fin acoustic seals (1)(2)(3).	32
Windows and Sliding Doors in all other Non-Habitable Areas (Toilets, laundries, ….) are to be in accordance with Australian Standard AS 2047 (Windows in Buildings) (1)(2)(3)	25
Entry Doors are to be solid core with acoustic seals fitted around the doors. A drop seal is also required at the base of the doors (2).	30-33
External Walls & Facia are to be standard 250/240 mm brick veneer construction with R2, 75mm thick insulation in the stud cavity and 13mm plasterboard lining (2)(3) OR 90mm conventional timber stud-framed walls cladded externally with min. 6.0 mm thick selected cladding and lined internally with 13mm plasterboard (plus cavity filled with 75mm 11kg/m³ insulation. (2)(3).	50 43
Roof to be Colorbond Steel Roof, 13mm thick plasterboard ceiling and ceiling cavity filled with 75mm thick, 11kg/m3 insulation (3).	40-43

NB: This report is to be read in conjunction with the BASIX/NatHERS certificate and any other related building specification.
(1) No See-through weep holes in windows/sliders. (2) All gaps between window & door frames and the masonry walls are to be sealed using acoustic foam Hilti CP620 or similar (Bostik/Parfix/Sika) Glass wool batts should be applied prior to the application of the foam to seal larger gaps. (3) All gaps are to be acoustically sealed.

ACOUSTIC REQUIREMENTS

ALL ACOUSTIC MITIGATION MEASURES, BUILDING ELEMENTS, CONSTRUCTION METHODS, GLAZING, DOORS, SEALS, WALL AND ROOF INSULATION, VENTILATION SYSTEMS AND ANY OTHER ACOUSTIC TREATMENTS REQUIRED FOR THE DEVELOPMENT SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE RECOMMENDATIONS AND REQUIREMENTS OF THE APPROVED ACOUSTIC REPORT.

THE BUILDER SHALL REVIEW THE ACOUSTIC REPORT IN ITS ENTIRETY PRIOR TO CONSTRUCTION AND ENSURE ALL RECOMMENDATIONS ARE INCORPORATED INTO THE WORKS. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL DRAWINGS AND ACOUSTIC REPORT SHALL BE REFERRED TO THE ARCHITECT AND ACOUSTIC CONSULTANT FOR CLARIFICATION PRIOR TO CONSTRUCTION.

ALL WORKS SHALL COMPLY WITH THE REQUIREMENTS OF THE ACOUSTIC REPORT, NCC AND RELEVANT AUSTRALIAN STANDARDS.

15. Noise Control - Residential Air Conditioning Unit / Heat Pump Water Heater / Any other Pump
To minimise the noise impact on the surrounding environment:
A. Design
The equipment must be located, designed and/or acoustically attenuated so that noise emitted does not exceed a sound pressure level of 5dB LAeq (15 minute) above the ambient background level when measured on or within any other residential property boundary.
B. Before Occupation
The equipment must be installed in accordance with the manufacturer's specification and all required noise attenuation measures implemented to ensure that the equipment complies with "A" above.
C. Ongoing
i) All equipment must be operated in accordance with 'A' above.
ii) For air conditioning units / heat pump water heaters: Between the hours of 10.00pm and 8.00am on weekends and public holidays and 10.00pm and 7.00am any other day, noise emitted must not be heard within any residence with its windows and/or doors open or closed.
iii) For any other pump:
Between the hours of 8.00pm and 8.00am on weekends and public holidays and 8.00pm and 7.00am any other day, noise emitted must not be heard within any residence with its windows and/or doors open or closed.
iv) Receipt of a noise complaint from the operation of this equipment will result in the requirement for certification from an acoustic engineer that the equipment is operating in accordance with the requirements of this condition. If the acoustic assessment reveals that the equipment is not operating in accordance with the consent it must make recommendations on what remediation measures are required to bring the equipment into compliance.
NB. Any other pump includes a swimming pool pump, a spa pump, a sump pump, a water cooler that uses a pump any other apparatus or machine for raising, driving, exhausting or compressing fluid by means of a piston, plunger or rotating vanes.

16. Road or Rail Noise Design Criteria
To minimise the impact of noise and vibration from the adjoining or nearby major road or rail corridor on the occupants of the development:
A. Design
The building must be designed to meet the internal noise level criteria provided in:
i) State Environmental Planning Policy (Transport and Infrastructure) 2021; and
ii) 'Development near Rail Corridors and Busy Roads - Interim Guideline' produced by the NSW Department of Planning.
B. Before Construction
Details of the acoustic attenuation treatment required by Development near Rail Corridors and Busy Roads - Interim Guideline' and to comply with 'A' above, must be provided to the Principal Certifier for Categories 1 to 4. Council has calculated that the site is in an area requiring Category 1 construction. These details must accompany the application for a Construction Certificate.
C. Before Occupation
Prior to the occupation of the building or the issue of any Occupation Certificate the appropriate certification, contingent on the Category above, must be provided to the Principal Certifier detailing that all work associated with the installation of the acoustic measures has been carried out in accordance with 'A' above.

18. Swimming Pools (including Spas)
To minimise the impact of the swimming pool on the amenity of adjoining properties and to ensure safety:
A. Design
The design of the swimming pool and associated equipment must comply with the following requirements:
i) The Swimming Pools Act & Regulations.
ii) Australian Standard 1926 Swimming Pool Safety as prescribed under the Building Code of Australia.
iii) The pump and associated equipment must be sound insulated and/or isolated so that the noise emitted does not exceed an LAeq (15min) of not more than 5 dB(A) above the background level in any octave band from 31.5Hz to 8KHz centre frequencies inclusive at the boundary of the site.
Note:
• The measurement of sound must be carried out in accordance with Australian Standard 1055.1.
Landscaping and ancillary structures must not intrude into the child-resistant barrier Non-Climbable Zone.
• Only structures associated with the pool may be located within the pool area. Clothes lines, barbeque, sheds, entertainment structure, outside toilets or any other non pool-related structures are not permitted within the pool area.
B. Before Construction
Details of all child-resistant barriers (existing and proposed) to be utilised to comply with the requirements of the Swimming Pools Act and Regulations applicable at the time must be shown on the Construction Certificate plans.
C. During Works
The swimming pool excavation and/or swimming pool must be provided with a suitable barrier to prevent a risk of falling into the excavation or pool at all times throughout the construction phase.
D. Before Occupation
Before the issue of any Occupation Certificate the child resistant barrier must be installed in accordance with A above.
E. Ongoing
i) The pump and associated equipment must be maintained and operated in accordance with the noise levels described above.
ii) The child resistant barrier must be maintained in accordance with the Australian Standard as described above.

21. Noise Control and Permitted Hours for Building and Demolition Work
A. General
To manage noise impacts upon the surrounding properties and occupants, demolition, excavation, or construction activities must be managed in accordance with the NSW Department of Environment and Climate Change (now Environment Protection Authority). Interim Construction Noise Guideline (ICNG) 2009 and Australian Standard 2436 - 2010 Guide to Noise Control on Construction, Maintenance and Demolition Sites.
B. Before Excavation
Prior to any excavation works involving rock breakers and similar earthmoving equipment, the builder must notify in writing all property owners/tenants within a minimum of 20m of all boundaries of the development site of the works being undertaken, a minimum of 7 days prior to the commencement of such works. The notification must provide details of the type of work being carried out, the time of day, its anticipated duration and a contact number to log any complaints or to make enquiries.
C. During Works
To minimise the noise impact on the surrounding environment, all building and demolition work must be carried out only between the hours of 7.00am and 6.00pm Monday to Friday inclusive, 8.00am and 3.00pm Saturdays. No work is permitted on Sundays and Public Holidays.

23. Containment of Fill
A. Design
Fill must not extend beyond the perimeter of the building. (The use of a dropped edge beam is a method of complying with this condition.)
B. Before Construction
Details of the finished levels around the perimeter of the building must accompany the application for a Construction Certificate.

24. Street Numbering and Provision of Letter Box Facilities
A. Before Occupation
i) Street numbers must be clearly displayed.
ii) Suitable letterbox facilities must be provided in accordance with Australia Post specifications.
iii) The dwellings must have the following street address format:
• The northern dwelling must be known as 18A Carramar Crescent, Miranda
• The southern dwelling must be known as 18B Carramar Crescent, Miranda

COVER-REGISTER

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	13.02.26	ISSUED-FOR-APPROVAL	AN
			drawn by:
			AN
			Project No:
			CARRA-26

DUAL-OCCUPANCY
18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC 01

CONSTRUCTION DETAILS

CATEGORY 1 CONSTRUCTION AS PER THE DPIE PUBLICATION "DEVELOPMENT NEAR RAIL CORRIDORS AND BUSY ROADS- INTERIM GUIDELINES."

Category No.	Building Element	Standard Constructions	sample
1	**Windows/Sliding Doors**	Operable with minimum 4mm monolithic glass and standard weather seals	
PROPOSED	**Frontage Facade**	**Timber Frame or Cladding:** 6mm fibre cement sheeting or weatherboards or plank cladding externally, 90mm deep timber stud or 92mm metal stud, 13mm standard plasterboard internally	
PROPOSED		**Brick Veneer:** 110mm brick, 90mm timber stud or 92mm metal stud, minimum 50mm clearance between masonry and stud frame, 10mm standard plasterboard internally	
PROPOSED		**Double Brick Cavity:** 2 leaves of 110mm brickwork separated by 50mm gap	
PROPOSED	**Roof**	Pitched concrete or terracotta tile or metal sheet roof with sarking, 10mm plasterboard ceiling fixed to ceiling joists, R1.5 insulation batts in roof cavity.	
PROPOSED	**Entry Door**	35mm solid core timber door fitted with full perimeter acoustic seals	
PROPOSED	**Floor**	1 layer of 19mm structural floor boards, timber joist on piers	
PROPOSED		Concrete slab floor on ground	

PLAN NOTES

1. THESE PLANS DETAILS MAIN WALL COMPONENTS ONLY AND THE MEASUREMENTS GIVEN DO NOT INCLUDE RENDER, PLASTER OR THE LIKE. THEY ARE PROVIDED FOR 'CONSTRUCTION' PURPOSES AND SUCH DO NOT REPRESENT THE FINAL WALL THICKNESS.
2. THE ITEMS PROVIDED ABOVE ARE A GENERAL LIST OF WALL TYPES. VERIFY ALL DISCREPANCIES WITH THE DESIGNER BEFORE COMMENCING CONSTRUCTION.
4. REFER TO BASIX CERTIFICATE FOR INSULATION REQUIREMENTS.

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022).
WITH A MINIMUM (FRL 60 / 60 / 60).

270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

VERTICAL JOINT IN MASONRY CONSTRUCTION

VERTICAL JOINTS INDICATED AS (V.J) ARE APPROXIMATES ONLY.
ALL VERTICAL JOINTS ARE TO BE IN STRICT ACCORDANCE WITH **AS-3700 MASONRY CODE.**
PROVIDE VERTICAL ARTICULATION JOINTS IN BRICK WALLS AS PER CLAUSE 5.6.8 OF THE NATIONAL CONSTRUCTION CODE AND AS PER STRUCTURAL ENGINEER'S DETAILS

(2) Articulation joints between masonry elements must have a width of not less than 10 mm and be provided (see Figures 5.6.8a and 5.6.8b)—
(a) in straight, continuous walls with openings less than 900 mm x 900 mm or walls without openings — at not more than 6 m centres and within 4.5 m, but not closer than 470 mm of all corners; and
(b) in straight, continuous walls with openings more than 900 mm x 900 mm — at not more than 5 m centres and located so that they are not more than 1.2 m away from openings

NOTE: PROVIDE CONTROL JOINT TO ANY UNBROKEN CEILING GREATER THAN 12m IN LENGTH

HOUSE
0007668900 27 Apr 2022
Assessor Noura Al Hazzouri
Accreditation No. DMN18/1891
Address
18 Carramar Crescent
Miranda , NSW , 2228
hstar.com.au

EXPANSION / CONTROL JOINTS

BUILDING BOARD MANUFACTURERS RECOMMEND THAT EXPANSION JOINTS ARE REQUIRED IN UNBROKEN WALLS AND CEILINGS AT NO GREATER THAN 12M CENTRES. EXPANSION JOINTS TO EFFICIENTLY ABSORB EXPANSION AND CONTRACTION IN WALLS AND CEILINGS TO MITIGATE THE RISK OF CRACKED PLASTERBOARD.

ALL EXTERNAL WALLS, ROOF AND FLOORS TO BE INSULATED TO COMPLY WITH BASIX REQUIREMENTS.

EXTERNAL PATHS AND GROUND SURFACES ADJOINING THE WALLS OF THE BUILDING SHALL BE GRADED AND DRAINED AWAY FROM THE DWELLINGS AS PER HYDRAULIC LAYOUTS AND DETAILS.

THE OUTSIDE FINISHED LEVEL SHALL BE CONSTRUCTED A MINIMUM 200mm BELOW THE HABITABLE FLOOR LEVEL FOR THE WHOLE BUILDING PERIMETER.

18. Swimming Pools (including Spas)
To minimise the impact of the swimming pool on the amenity of adjoining properties and to ensure safety:
A. Design
The design of the swimming pool and associated equipment must comply with the following requirements:
i) The Swimming Pools Act & Regulations.
ii) Australian Standard 1926 Swimming Pool Safety as prescribed under the Building Code of Australia.
iii) The pump and associated equipment must be sound insulated and/or isolated so that the noise emitted does not exceed an LAeq (15min) of not more than 5 dB(A) above the background level in any octave band from 31.5Hz to 8KHz centre frequencies inclusive at the boundary of the site.
Note:
• The measurement of sound must be carried out in accordance with Australian Standard 1055.1.
• Landscaping and ancillary structures must not intrude into the child-resistant barrier Non-Climbable Zone.
• Only structures associated with the pool may be located within the pool area. Clothes lines, barbeque, sheds, entertainment structure, outside toilets or any other non pool-related structures are not permitted within the pool area.
B. Before Construction
Details of all child-resistant barriers (existing and proposed) to be utilised to comply with the requirements of the Swimming Pools Act and Regulations applicable at the time must be shown on the Construction Certificate plans.
C. During Works
The swimming pool excavation and/or swimming pool must be provided with a suitable barrier to prevent a risk of falling into the excavation or pool at all times throughout the construction phase.

Refer to Service Protection Report. Contractor to confirm line, level and size of all the existing services (as per note in report) within the vicinity of any new works and report any conflict to site superintendent prior to any construction commencing.

The sewer crosses the left side fence at a distance to the back fence = 7.85m
Depth to invert = 2.2 m
Pipe Type = 150mm SGW Relend

The location of the assets specified on the report have been taken from existing fence lines and/or surveyors marking or pegs. fence lines may not be true boundary lines and will need to be confirmed by surveyor.

SMOKE ALARMS :9.5.1 NCC 2022 AND AS3786

SELF CONTAINED SMOKE ALARMS SHALL BE LOCATED AS SHOWN ON DRAWINGS AND FULLY COMPLY WITH THE BUILDING CODE OF AUSTRALIA, AS 3786 AND ANY OTHER CODE OR STANDARD REFERENCED THEREIN.

S/A SMOKE ALARMS FOR BUILDING IN ACCORDANCE TO PART 9.5 OF THE NCC 2022 Vol 2 AND AS3786.

SELF CONTAIN SMOKE DETECTOR 12/24V WITH INTERGRAL BUZZER AND BATTERY BACKUP
ALL SMOKE ALARMS TO BE HARD WIRED TO MAIN POWER.

INTERCONNECT SMOKE ALARMS SO THAT ONE ALARM WILL TRIGGER ALL ALARMS WITHIN THE RESIDENCE.

PLANS INDICATING SMOKE ALARM IN EACH DWELLING IN ACCORDANCE WITH PART 9.5.1 & 9.5.4 OF THE NCC 2022 VOLUME 2 AMENDMENT 1 AND AS 3786. (PLANS TO STATE "SMOKE ALARMS") SMOKE ALARMS ARE REQUIRED ON EVERY FLOOR OF THE DWELLING.

NOTE:
SAFETY POOL FENCING SHALL BE IN ACCORDANCE WITH AS 1926.1 WHEREIN A SUITABLE BARRIER SHALL BE PROVIDED AT A MINIMUM HEIGHT OF 1200mm MIN. AND VERTICLE BALLUSTRADES ARE SPACED AT NO GREATER THAN 100mm. THE GATE SHALL BE HUNG SO THAT IT SWINGS AWAY FROM THE POOL AREA AND ALSO BE A MINIMUM HEIGHT OF 1200mm MIN., SELF CLOSING AND SELF LATCHING OR SELF LOCKING DEVICE SHALL BE LOCATED AT LEAST 1200mm MIN. ABOVE THE FLOOR LEVEL. THE PERIMETER PAILING FENCING SHALL BE TREATED SO THAT THE RAILS ARE BEVELLED ON A 60° ANGLE TO PREVENT CHILDREN FROM CLIMBING OVE RTHE FENCE. FURTHERMORE, ENSURE ALL PERIMETER POOL FENCING HAS A 1200mm CLEAR SPAN FROM CLIMBABLE OBJECTS.

note:
bathroom and ensuite

Builder to ensure bathroom and ensuite floors are graded to a floor waste in accordance with 10.2.12 of the NCC 2022. Shower screens are to be designed and installed for human impact as per AS3740. Setdown concrete in wet areas to suit finished floor levels.

Mechanical ventilation to sanitary rooms & range-hoods are to be discharge directly to the outside air at a minimum rate of 25L/s minimum for bathrooms and 40L/s for kitchens and laundries. To be in accordance with NCC 2022 part 10.6.2 & 10.8.2. AS1668.2-2012-Mechanical ventilation for acceptable indoor-air quality.
mechanical ventilation to bathrooms, kitchen and laundry in accordance with part 10.5, 10.6, 10.8 of NCC 2022 Vol 2. & AS 1668.2

ALL MECHANICAL VENTILATION TO BE CONFIRMED WITH OWNER PRIOR TO SELECTION AND INSTALLATION

WATERPROOFING NOTES
ALL WATERPROOFING WORKS SHALL COMPLY WITH NCC 2022 – CLAUSES 10.2.7 TO 10.2.32 OF THE ABCB HOUSING PROVISIONS AND AS 3740:2021 – WATERPROOFING OF DOMESTIC WET AREAS.
WATERPROOFING SYSTEM TO BE A MEMBRANE TYPE (LIQUID-APPLIED OR SHEET) COMPLYING WITH AS 4858 – WET AREA MEMBRANES AND INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

SHOWER AREAS:
WATERPROOF ENTIRE FLOOR AND WALLS TO A MINIMUM OF 1800 MM ABOVE FINISHED FLOOR LEVEL.
WHERE NO HOB IS PROVIDED, EXTEND WATERPROOFING 1500 MM HORIZONTALLY FROM THE SHOWER ROSE.

BATHROOM FLOORS:
ENTIRE FLOOR TO BE WATERPROOFED WHERE LOCATED OVER HABITABLE ROOMS OR WHERE NO SHOWER HOB IS PROVIDED.

OTHERWISE, WATERPROOF TO A MINIMUM OF 1 M AROUND THE SHOWER AND 150 MM UP ADJACENT WALLS.

BATHS:
WATERPROOF JUNCTIONS BETWEEN BATH AND WALL TO 150 MM ABOVE BATH LIP AND 1 M HORIZONTALLY AROUND THE BATH PERIMETER.

LAUNDRIES:
FLOORS TO BE WATERPROOFED WITH MEMBRANE TURNED UP 100 MM AT WALLS (FULL FLOOR WATERPROOFING REQUIRED IF ABOVE ANOTHER DWELLING OR TIMBER SUBSTRATE).

TOILETS:
WATERPROOFING TO FLOORS WHERE LOCATED ABOVE HABITABLE ROOMS OR TIMBER FLOORS.

FALLS:
FLOORS IN WET AREAS TO FALL TO FLOOR WASTES BETWEEN 1:60 AND 1:80. MEMBRANE TO EXTEND INTO WASTE FLANGE.

PENETRATIONS & JUNCTIONS:
SEAL ALL WALL/FLOOR JUNCTIONS AND PENETRATIONS USING COMPATIBLE BOND BREAKERS OR PRE-FORMED COLLARS.

INSTALLATION:
WORKS TO BE CARRIED OUT BY A LICENSED WATERPROOFING CONTRACTOR AND A CERTIFICATE OF COMPLIANCE TO BE PROVIDED UPON COMPLETION.

NATURAL GROUND LEVEL SURROUNDING THE DEVELOPMENT AND AT PROPERTY BOUNDARIES TO BE RETAINED OR REINSTATED PRIOR TO THE COMPLETION OF WORKS.

RETAINING WALLS NOTE:
1. RETAINING WALL TO BE WHOLLY WITHIN PROPERTY
2. RETAINING WALL NOT TO REDIRECT THE FLOW OF ANY SURFACE WATER OR GROUND WATER, OR CAUSE SEDIMENT TO BE TRANSPORTED, ONTO AN ADJOINING PROPERTY
3. RETAINING WALL TO HAVE ADEQUATE DRAINAGE LINES CONNECTED TO THE STORMWATER DRAINAGE SYSTEM FOR THE SITE
4. RETAINING WALL NOT TO HAVE A TOTAL HEIGHT MEASURED VERTICALLY FROM THE BASE OF THE RETAINING WALL OR STRUCTURAL SUPPORT TO ITS UPPERMOST PORTION THAT IS MORE THAN THE HEIGHT OF THE ASSOCIATED EXCAVATION OR FILL
5. RETAINING WALL TO BE INSTALLED IN ACCORDANCE WITH ANY MANUFACTURER'S SPECIFICATIONS

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL, ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO. DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

ALL OFF-STREET CAR PARKING SPACES AND VEHICLE ACCESS MUST COMPLY WITH AS/NZS 2890.1:2004, PARKING FACILITIES, PART 1: OFF-STREET CAR PARKING.

THE DRIVEWAY CROSSOVER MUST BE CONSTRUCTED IN ACCORDANCE WITH THE SUTHERLAND SHIRE COUNCIL STANDARD DRAWING - DRIVEWAY CONSTRUCTION REQUIREMENTS FOR THE PROPERTY OWNER TO RECEIVE A DRIVEWAY CERTIFICATION FROM COUNCIL ONCE WORKS ARE COMPLETE A COPY OF THE STANDARD DRAWINGS TO BE KEPT ON SITE AT ALL TIMES.

BEFORE COMMENCING ANY WORKS, PLEASE ENSURE ALL CONDITIONS HAVE BEEN THOROUGHLY READ AND UNDERSTOOD TO GUARANTEE COMPLIANCE WITH COUNCIL REQUIREMENTS AS CONDITIONS ARE REGULARLY UPDATED TO REFLECT CURRENT STANDARDS. THE APPLICANT IS RESPONSIBLE FOR COMPLYING WITH ALL CONDITIONS OF CONSENT. IT IS THE APPLICANTS RESPONSIBILITY TO NOTE THE EXPIRY DATE AND ENSURE THE APPROVAL IS EXTENDED AND APPROPRIATE FEES PAID IF THE WORK MUST CONTINUE. EXTENSION OF APPROVAL MUST BE ARRANGED PRIOR TO EXPIRY OF CURRENT APPROVAL. FAILURE TO RENEW THE APPROVAL MAY RESULT IN ISSUE OF INFRINGEMENT NOTICE

POOL FENCING TO COMPLY WITH AS1926.1 – 2012

23. Containment of Fill
A. Design
Fill must not extend beyond the perimeter of the building. (The use of a dropped edge beam is a method of complying with this condition.)

WET AREA / WATERPROOFING NOTE

NO WINDOWS ARE TO BE CONSTRUCTED WITHIN A SHOWER RECESS, WITHIN 150 MM OF A BATH VESSEL, OR WITHIN 25 MM OF ANY WALL AND FLOOR JUNCTION.

PROVIDE LOCATIONS FOR ALL FLOOR AND SHOWER WASTES AND ENSURE REQUIRED FLOOR FALLS ARE IN ACCORDANCE WITH AS 3740:2021 AND NCC 2022 – CLAUSES H4D2 AND H4D3.

LOCATION OF WATER STOP IN ACCORDANCE WITH AS 3740:2021 AND NCC 2022 – CLAUSES 10.2.7 TO 10.2.32.

FOR ENCLOSED SHOWERS, LOCATE WATER STOP AT THE SHOWER THRESHOLD UNDER THE SCREEN OR DOOR AS PER DETAIL - SHEET 19-20.

FOR UNENCLOSED SHOWERS, LOCATE WATER STOP AT THE BATHROOM DOORWAY OR TRANSITION TO DRY AREA.
AS PER DETAIL - SHEET 19-20.


REFER TO STRUCTURAL DRAWINGS AND SYDNEY WATER STAMPED PLANS FOR ALL SEWER ENCASEMENT REQUIREMENTS AND ANY WORKS WITHIN THE SEWER ZONE OF INFLUENCE.


REFER TO STORMWATER ENGINEERS PLANS AND DETAILS. STORMWATER TO BE DRAINED TO LEGAL POINT OF DISCHARGE TO THE SATISFACTION OF RELEVANT AND GOVERNING AUTHORITY. BUILDER TO CONFIRM THE EXACT LOCATION OF THE LEGAL POINT OF DISCHARGE PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS.

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC 2022 (Housing Provisions) and AS 36601 (2014) Part 1 3.4 of the NCC 2022

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON-COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)
PART 10.2, H2D8 – WATERPROOFING MEMBRANES FOR BASEMENTS TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2

15. Noise Control - Residential Air Conditioning Unit / Heat Pump Water Heater / Any other Pump
To minimise the noise impact on the surrounding environment: The equipment must be located, designed and/or acoustically attenuated so that noise emitted does not exceed a sound pressure level of 5dB LAeq (15 minute) above the ambient background level when measured on or within any other residential property boundary.

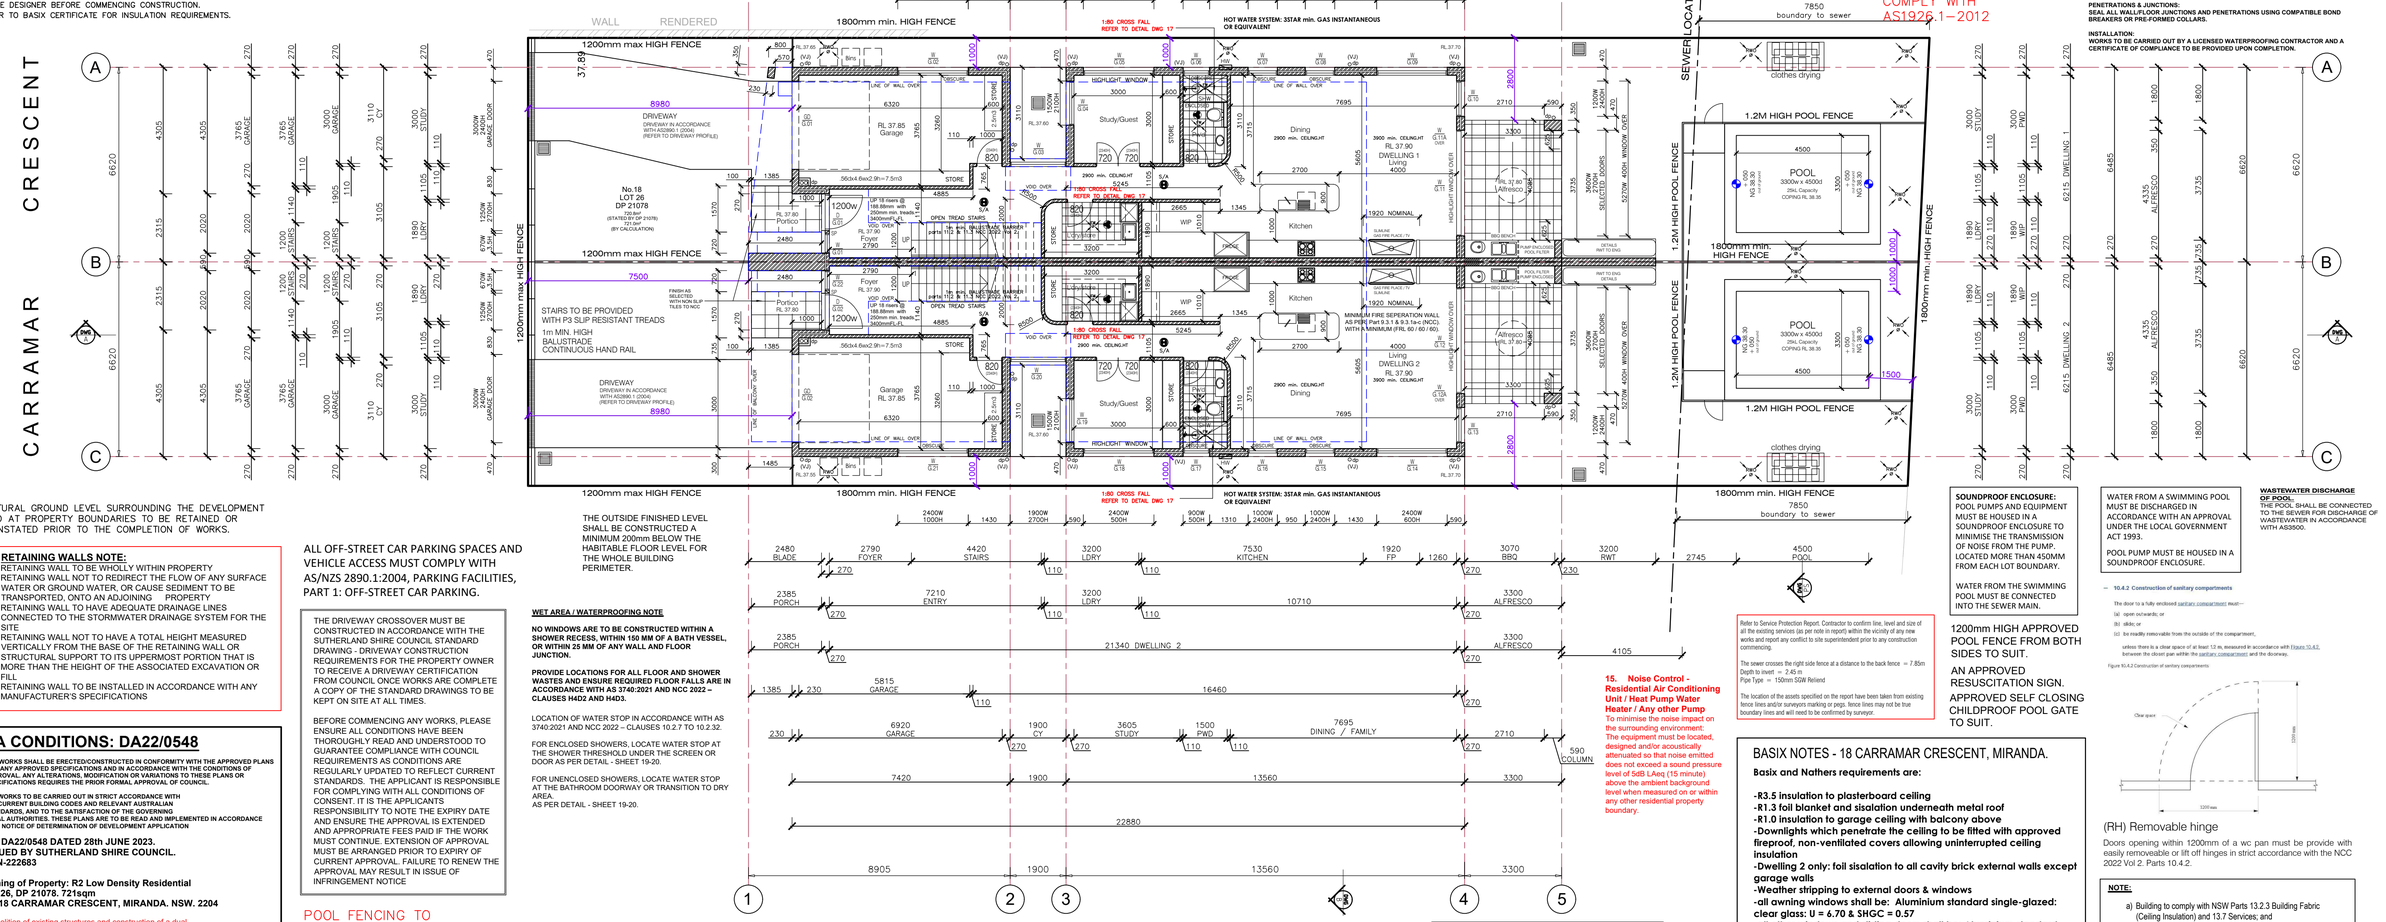

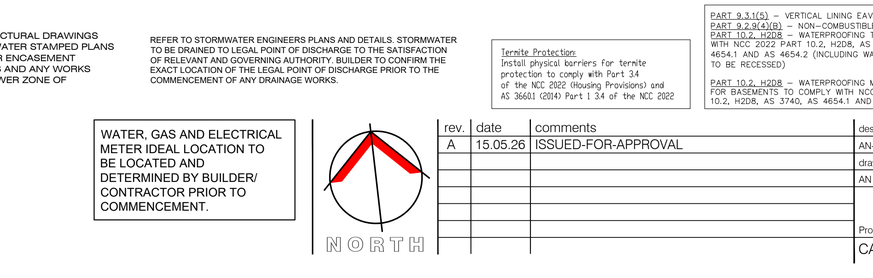



NATURAL GROUND LEVEL SURROUNDING THE DEVELOPMENT AND AT PROPERTY BOUNDARIES TO BE RETAINED OR REINSTATED PRIOR TO THE COMPLETION OF WORKS.

SOUNDPROOF ENCLOSURE:
POOL PUMPS AND EQUIPMENT MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE TO MINIMISE THE TRANSMISSION OF NOISE FROM THE PUMP. LOCATED MORE THAN 450MM FROM EACH LOT BOUNDARY.

WATER FROM THE SWIMMING POOL MUST BE CONNECTED INTO THE SEWER MAIN.

1200mm HIGH APPROVED POOL FENCE FROM BOTH SIDES TO SUIT.

AN APPROVED RESUSCITATION SIGN.

APPROVED SELF CLOSING CHILDPROOF POOL GATE TO SUIT.

Refer to Service Protection Report. Contractor to confirm line, level and size of all the existing services (as per note in report) within the vicinity of any new works and report any conflict to site superintendent prior to any construction commencing.

The sewer crosses the right side fence at a distance to the back fence = 7.85m
Depth to invert = 2.45 m
Pipe Type = 150mm SGW Relend

The location of the assets specified on the report have been taken from existing fence lines and/or surveyors marking or pegs. fence lines may not be true boundary lines and will need to be confirmed by surveyor.

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.

Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all awning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000L to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

WATER FROM A SWIMMING POOL MUST BE DISCHARGED IN ACCORDANCE WITH AN APPROVAL UNDER THE LOCAL GOVERNMENT ACT 1993.

POOL PUMP MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE.

WASTEWATER DISCHARGE OF POOL:
THE POOL SHALL BE CONNECTED TO THE SEWER FOR DISCHARGE OF WASTEWATER IN ACCORDANCE WITH AS3500.

10.4.2 Construction of sanitary compartments

The door to a fully-enclosed sanitary compartment must—

(a) open outwards; or

(b) slide; or

(c) be readily removable from the outside of the compartment,

unless there is a clear space of at least 1.2 m, measured in accordance with Figure 10.4.2, between the closet pan within the sanitary compartment and the doorway.

Figure 10.4.2 Construction of sanitary compartments

(RH) Removable hinge

Doors opening within 1200mm of a wc pan must be provide with easily removeable or lift off hinges in strict accordance with the NCC 2022 Vol 2. Parts 10.4.2.

NOTE:

a) Building to comply with NSW Parts 13.2.3 Building Fabric (Ceiling Insulation) and 13.7 Services; and

b) The water closet in swinging doorways must have a clear span of 1.2m from the edge of the doorway to the nearest part of the water closet or comply with Part 10.4.2 NCC 2022;

c) The laundries must have artificial lighting complying with AS 1680.1;

GROUND-FLOOR-PLAN

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

WATER, GAS AND ELECTRICAL METER IDEAL LOCATION TO BE LOCATED AND DETERMINED BY BUILDER/ CONTRACTOR PRIOR TO COMMENCEMENT.

NORTH

rev.	date	comments	designed by:
A	15.05.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by: AN
			Project No: CARRA-26

ndg

DUAL-OCCUPANCY

18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC
05

CONSTRUCTION DETAILS

CATEGORY 1 CONSTRUCTION AS PER THE DPIE PUBLICATION "DEVELOPMENT NEAR RAIL CORRIDORS AND BUSY ROADS- INTERIM GUIDELINES."

Category No.	Building Element	Standard Constructions	sample
1 PROPOSED	Windows/Sliding Doors	Operable with minimum 4mm monolithic glass and standard weather seals	
PROPOSED	Frontage Facade	**Timber Frame or Cladding:** 6mm fibre cement sheeting or weatherboards or plank cladding externally, 90mm deep timber stud or 92mm metal stud, 13mm standard plasterboard internally	
PROPOSED		**Brick Veneer:** 110mm brick, 90mm timber stud or 92mm metal stud, minimum 50mm clearance between masonry and stud frame, 10mm standard plasterboard internally	
PROPOSED		**Double Brick Cavity:** 2 leaves of 110mm brickwork separated by 50mm gap	
PROPOSED	Roof	Pitched concrete or terracotta tile or metal sheet roof with sarking, 10mm plasterboard ceiling fixed to ceiling joists, R1.5 insulation batts in roof cavity.	
PROPOSED	Entry Door	35mm solid core timber door fitted with full perimeter acoustic seals	
PROPOSED	Floor	1 layer of 19mm structural floor boards, timber joist on piers	
		Concrete slab floor on ground	

PLAN NOTES

1. THESE PLANS DETAILS MAIN WALL COMPONENTS ONLY AND THE MEASUREMENTS GIVEN DO NOT INCLUDE RENDER, PLASTER OR THE LIKE. THEY ARE PROVIDED FOR 'CONSTRUCTION' PURPOSES AND SUCH DO NOT REPRESENT THE FINAL WALL THICKNESS.
2. THE ITEMS PROVIDED ABOVE ARE A GENERAL LIST OF WALL TYPES. VERIFY ALL DISCREPANCIES WITH THE DESIGNER BEFORE COMMENCING CONSTRUCTION.
4. REFER TO BASIX CERTIFICATE FOR INSULATION REQUIREMENTS.

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022).
WITH A MINIMUM (FRL 60 / 60 / 60).

270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

VERTICAL JOINT IN MASONRY CONSTRUCTION

VERTICAL JOINTS INDICATED AS (VJ) ARE APPROXIMATES ONLY.
ALL VERTICAL JOINTS ARE TO BE IN STRICT ACCORDANCE WITH **AS-3700 MASONRY CODE.**
PROVIDE VERTICAL ARTICULATION JOINTS IN BRICK WALLS AS PER CLAUSE 5.6.8 OF THE NATIONAL CONSTRUCTION CODE AND AS PER STRUCTURAL ENGINEER'S DETAILS

(2) Articulation joints between masonry elements must have a width of not less than 10 mm and be provided (see Figures 5.6.8a and 5.6.8b)—
(a) in straight, continuous walls with openings less than 900 mm x 900 mm or walls without openings — at not more than 6 m centres and within 4.5 m, but not closer than 470 mm of all corners; and
(b) in straight, continuous walls with openings more than 900 mm x 900 mm — at not more than 5 m centres and located so that they are not more than 1.2 m away from openings

NOTE: PROVIDE CONTROL JOINT TO ANY UNBROKEN CEILING GREATER THAN 12m IN LENGTH

NOTE : THE FIRST FLOOR BEDROOM WINDOWS SHALL BE LIMITED TO OPENING NO GREATER THAN 125MM (I.E. LV29)

EXPANSION / CONTROL JOINTS
BUILDING BOARD MANUFACTURERS RECOMMEND THAT EXPANSION JOINTS ARE REQUIRED IN UNBROKEN WALLS AND CEILINGS AT NO GREATER THAN 12M CENTRES. EXPANSION JOINTS TO EFFICIENTLY ABSORB EXPANSION AND CONTRACTION IN WALLS AND CEILINGS TO MITIGATE THE RISK OF CRACKED PLASTERBOARD.

ALL EXTERNAL WALLS, ROOF AND FLOORS TO BE INSULATED TO COMPLY WITH BASIX REQUIREMENTS.

SMOKE ALARMS :9.5.1 NCC 2022 AND AS3786

SELF CONTAINED SMOKE ALARMS SHALL BE LOCATED AS SHOWN ON DRAWINGS AND FULLY COMPLY WITH THE BUILDING CODE OF AUSTRALIA, AS 3786 AND ANY OTHER CODE OR STANDARD REFERENCED THEREIN.

S/A SMOKE ALARMS FOR BUILDING IN ACCORDANCE TO PART 9.5 OF THE NCC 2022 Vol.2 AND AS3786.

SELF CONTAIN CHOKE DETECTOR TO OVER WITH INTEGRAL BUZZER AND BATTERY BACKUP
ALL SMOKE ALARMS TO BE HARD WIRED TO MAIN POWER

INTERCONNECT SMOKE ALARMS SO THAT ONE ALARM WILL TRIGGER ALL ALARMS WITHIN THE RESIDENCE

PLANS INDICATING SMOKE ALARM IN EACH DWELLING IN ACCORDANCE WITH PART 9.5.1 & 9.5.4 OF THE NCC 2022 VOLUME 2 AMENDMENT 1 AND AS 3786. (PLANS TO STATE "SMOKE ALARMS") SMOKE ALARMS ARE REQUIRED ON EVERY FLOOR OF THE DWELLING.

GUTTERS AND DOWNPIPES: AMENDED PLANS INDICATING GUTTERING AND DOWNPIPES IN ACCORDANCE WITH PART 3.5.3 OF THE NCC 2022 2019 VOLUME 2 AMENDMENT 1.

note :
bathroom and ensuite

Builder to ensure bathroom and ensuite floors are graded to a floor waste in accordance with 10.2.12 of the NCC 2022.
Shower screens are to be designed and installed for human impact as per AS3740. Setdown concrete in wet areas to suit finished floor levels.

Mechanical ventilation to sanitary rooms & range-hoods are to be discharge directly to the outside air at a minimum rate of 25L/s minimum for bathrooms and 40L/s for kitchens and laundries. To be in accordance with NCC 2022 part 10.6.2 & 10.8.2. AS1668.2-2012-Mechanical ventilation for acceptable indoor-air quality.
mechanical ventilation to bathrooms, kitchen and laundry in accordance with part 10.5, 10.6, 10.8 of NCC 2022 Vol 2. & AS 1668.2

ALL MECHANICAL VENTILATION TO BE CONFIRMED WITH OWNER PRIOR TO SELECTION AND INSTALLATION

ALL EXTERNAL WALLS, ROOF AND FLOORS TO BE INSULATED TO COMPLY WITH BASIX REQUIREMENTS.

WATERPROOFING NOTES
ALL WATERPROOFING WORKS SHALL COMPLY WITH NCC 2022 – CLAUSES 10.2.7 TO 10.2.32 OF THE ABCB HOUSING PROVISIONS AND AS 3740:2021 – WATERPROOFING OF DOMESTIC WET AREAS.
WATERPROOFING SYSTEM TO BE A MEMBRANE TYPE (LIQUID-APPLIED OR SHEET) COMPLYING WITH AS 4858 – WET AREA MEMBRANES AND INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

SHOWER AREAS:
WATERPROOF ENTIRE FLOOR AND WALLS TO A MINIMUM OF 1800 MM ABOVE FINISHED FLOOR LEVEL.
WHERE NO HOB IS PROVIDED, EXTEND WATERPROOFING 1500 MM HORIZONTALLY FROM THE SHOWER ROSE.

BATHROOM FLOORS:
ENTIRE FLOOR TO BE WATERPROOFED WHERE LOCATED OVER HABITABLE ROOMS OR WHERE NO SHOWER HOB IS PROVIDED.

OTHERWISE, WATERPROOF TO A MINIMUM OF 1 M AROUND THE SHOWER AND 150 MM UP ADJACENT WALLS.

BATHS:
WATERPROOF JUNCTIONS BETWEEN BATH AND WALL TO 150 MM ABOVE BATH LIP AND 1 M HORIZONTALLY AROUND THE BATH PERIMETER.


LAUNDRIES:
FLOORS TO BE WATERPROOFED WITH MEMBRANE TURNED UP 100 MM AT WALLS (FULL FLOOR WATERPROOFING REQUIRED IF ABOVE ANOTHER DWELLING OR TIMBER SUBSTRATE).

TOILETS:
WATERPROOFING TO FLOORS WHERE LOCATED ABOVE HABITABLE ROOMS OR TIMBER FLOORS.

FALLS:
FLOORS IN WET AREAS TO FALL TO FLOOR WASTES BETWEEN 1:60 AND 1:80. MEMBRANE TO EXTEND INTO WASTE FLANGE.

PENETRATIONS & JUNCTIONS:
SEAL ALL WALL/FLOOR JUNCTIONS AND PENETRATIONS USING COMPATIBLE BOND BREAKERS OR PRE-FORMED COLLARS.

INSTALLATION:
WORKS TO BE CARRIED OUT BY A LICENSED WATERPROOFING CONTRACTOR AND A CERTIFICATE OF COMPLIANCE TO BE PROVIDED UPON COMPLETION.

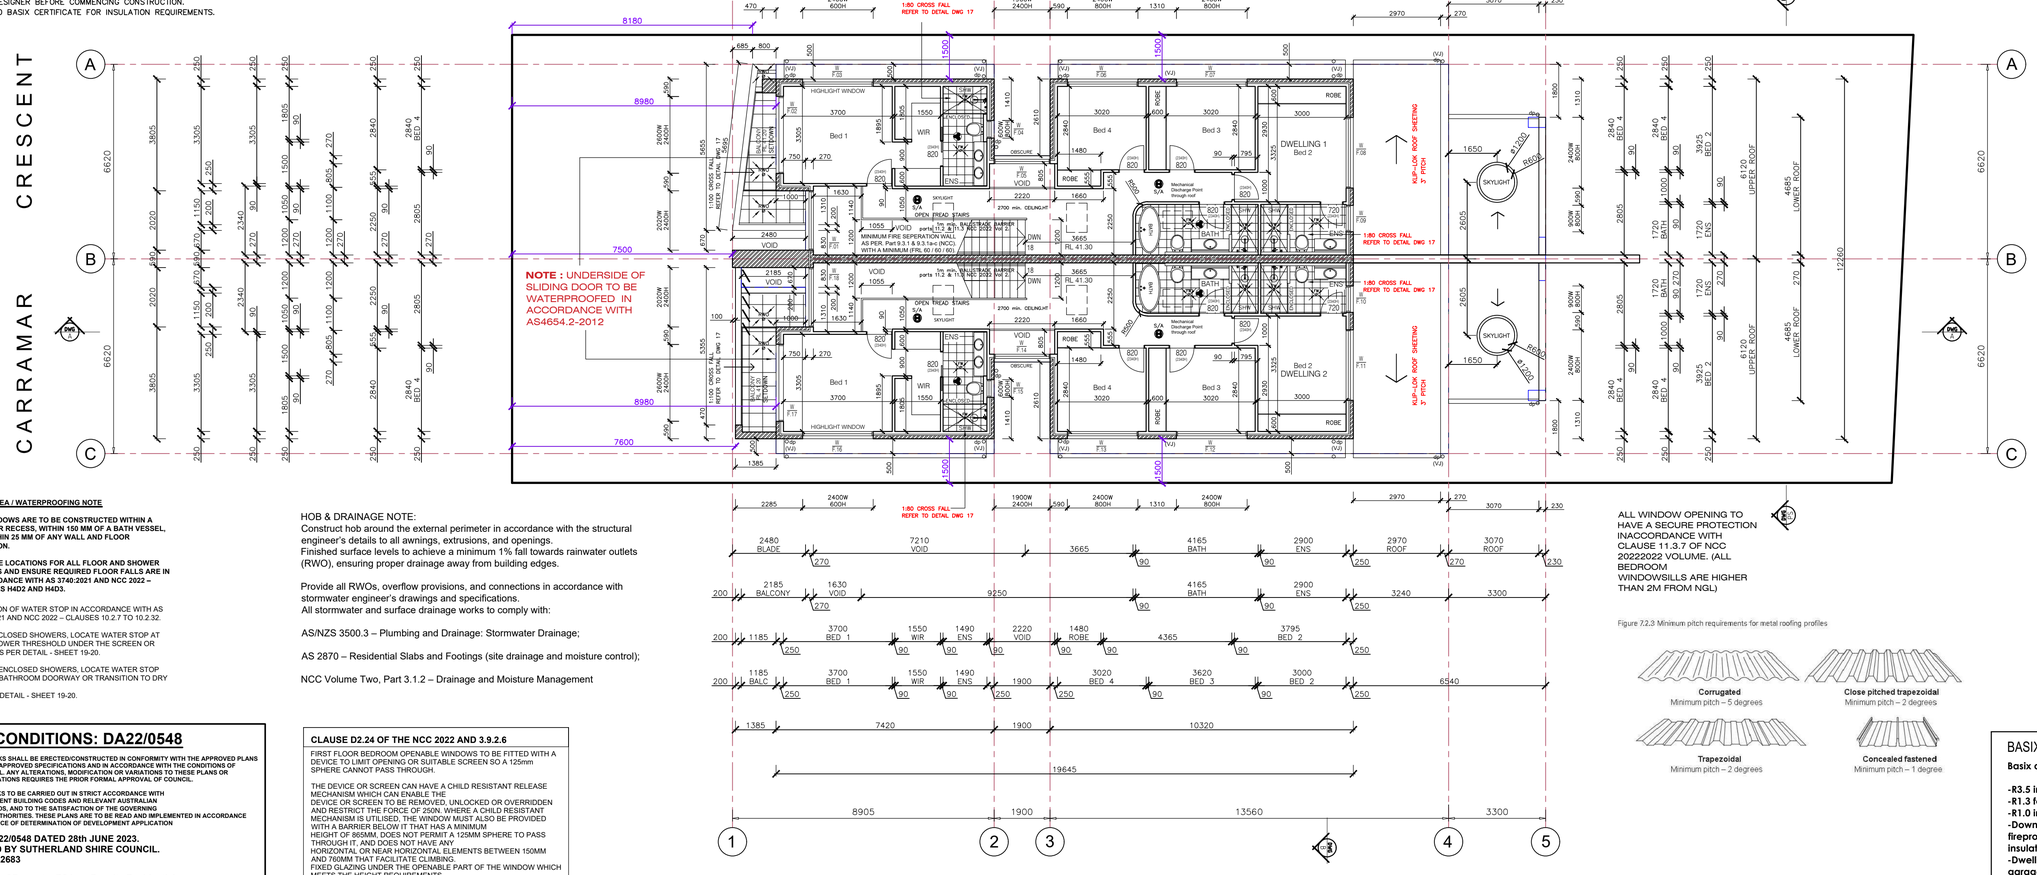

HOB & DRAINAGE NOTE:
Construct hob around the external perimeter in accordance with the structural engineer's details to all awnings, extrusions, and openings.
Finished surface levels to achieve a minimum 1% fall towards rainwater outlets (RWO), ensuring proper drainage away from building edges.

Provide all RWOs, overflow provisions, and connections in accordance with stormwater engineer's drawings and specifications.
All stormwater and surface drainage works to comply with:

AS/NZS 3500.3 – Plumbing and Drainage: Stormwater Drainage;

AS 2870 – Residential Slabs and Footings (site drainage and moisture control);

NCC Volume Two, Part 3.1.2 – Drainage and Moisture Management


ALL WINDOW OPENING TO HAVE A SECURE PROTECTION INACCORDANCE WITH CLAUSE 11.3.7 OF NCC 20222022 VOLUME. (ALL BEDROOM WINDOWSILLS ARE HIGHER THAN 2M FROM NGL)

Figure 7.2.3 Minimum pitch requirements for metal roofing profiles

— 10.4.2 Construction of sanitary compartments

The door to a fully enclosed sanitary compartment must—
(a) open outwards; or
(b) slide; or
(c) be readily removable from the outside of the compartment,
unless there is a clear space of at least 12 m, measured in accordance with Figure 10.4.2, between the closest pan within the sanitary compartment and the doorway.

Figure 10.4.2 Construction of sanitary compartments



(RH) Removable hinge

Doors opening within 1200mm of a wc pan must be provide with easily removeable or lift off hinges in strict accordance with the NCC 2022 Vol 2. Parts 10.4.2.

NOTE:

a) Building to comply with NSW Parts 13.2.3 Building Fabric (Ceiling Insulation) and 13.7 Services; and

b) The water closet in swinging doorways must have a clear span of 1.2m from the edge of the doorway to the nearest part of the water closet or comply with Part 10.4.2 NCC 2022;

c) The laundries must have artificial lighting complying with AS 1680.1;

WET AREA / WATERPROOFING NOTE

NO WINDOWS ARE TO BE CONSTRUCTED WITHIN A SHOWER RECESS, WITHIN 150 MM OF A BATH VESSEL, OR WITHIN 25 MM OF ANY WALL AND FLOOR JUNCTION.

PROVIDE LOCATIONS FOR ALL FLOOR AND SHOWER WASTES AND ENSURE REQUIRED FLOOR FALLS ARE IN ACCORDANCE WITH AS 3740:2021 AND NCC 2022 – CLAUSES H4D2 AND H4D3.

LOCATION OF WATER STOP IN ACCORDANCE WITH AS 3740:2021 AND NCC 2022 – CLAUSES 10.2.7 TO 10.2.32.

FOR ENCLOSED SHOWERS, LOCATE WATER STOP AT THE SHOWER THRESHOLD UNDER THE SCREEN OR DOOR AS PER DETAIL - SHEET 19-20.

FOR UNENCLOSED SHOWERS, LOCATE WATER STOP AT THE BATHROOM DOORWAY OR TRANSITION TO DRY AREA.
AS PER DETAIL - SHEET 19-20.

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL, ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO. DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

CLAUSE D2.24 OF THE NCC 2022 AND 3.9.2.6

FIRST FLOOR BEDROOM OPENABLE WINDOWS TO BE FITTED WITH A DEVICE TO LIMIT OPENING OR SUITABLE SCREEN SO A 125mm SPHERE CANNOT PASS THROUGH.

THE DEVICE OR SCREEN CAN HAVE A CHILD RESISTANT RELEASE MECHANISM WHICH CAN ENABLE THE DEVICE OR SCREEN TO BE REMOVED, UNLOCKED OR OVERRIDDEN AND RESTRICT THE FORCE OF 250N. WHERE A CHILD RESISTANT MECHANISM IS UTILISED, THE WINDOW MUST ALSO BE PROVIDED WITH A BARRIER BELOW IT THAT HAS A MINIMUM HEIGHT OF 865MM, DOES NOT PERMIT A 125MM SPHERE TO PASS THROUGH IT, AND DOES NOT HAVE ANY HORIZONTAL OR NEAR HORIZONTAL ELEMENTS BETWEEN 150MM AND 760MM THAT FACILITATE CLIMBING.
FIXED GLAZING UNDER THE OPENABLE PART OF THE WINDOW WHICH MEETS THE HEIGHT REQUIREMENTS (I.E. TRANSOM AT LEAST 865MM ABOVE THE FLOOR ETC.) WOULD SATISFY THE BARRIER REQUIREMENT.

WHERE A DEVICE OR SCREEN IS SECURELY FIXED IN POSITION (EG A SCREEN POP RIVETED TO THE WINDOW FRAME) SO IT CANNOT BE UNLOCKED, OVERRIDDEN, OR IS VERY DIFFICULT TO REMOVE WITHOUT FOR EXAMPLE A DRILL, THE 865MM BARRIER WOULD NOT BE REQUIRED AS THE SECURING METHOD IS CONSIDERED A FIXTURE AND NOT A CHILD RESISTANT RELEASE MECHANISM.

PROTECTION OF THE OPENING IS NOT REQUIRED FOR WINDOWS WHERE THE LOWEST PART OF THE OPENING IS 1.7M OR MORE ABOVE THE FLOOR

REFER TO STORMWATER ENGINEERS PLANS AND DETAILS. STORMWATER TO BE DRAINED TO LEGAL POINT OF DISCHARGE TO THE SATISFACTION OF RELEVANT AND GOVERNING AUTHORITY. BUILDER TO CONFIRM THE EXACT LOCATION OF THE LEGAL POINT OF DISCHARGE PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS.

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC 2022 (Housing Provisions) and AS 36601 (2014) Part 1 3.4 of the NCC 2022

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON-COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)

PART 10.2, H2D8 – WATERPROOFING MEMBRANES FOR BASEMENTS TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2

0007668900 27 Apr 2022
Assessor Noura Al Hazzouri
Accreditation No. DMN/18/1891
Address
18 Carramar Crescent
Miranda, NSW, 2228
hstar.com.au

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.

Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all awning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000L to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

FIRST-FLOOR-PLAN

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	13.02.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by: AN
			Project No: CARRA-26

ndg

DUAL-OCCUPANCY

18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC 06

CONSTRUCTION DETAILS

CATEGORY 1 CONSTRUCTION AS PER THE DPIE PUBLICATION "DEVELOPMENT NEAR RAIL CORRIDORS AND BUSY ROADS- INTERIM GUIDELINES."

Category No.	Building Element	Standard Constructions	sample
1 PROPOSED	Windows/Sliding Doors	Operable with minimum 4mm monolithic glass and standard weather seals	
PROPOSED	Frontage Facade	**Timber Frame or Cladding:** 6mm fibre cement sheeting or weatherboards or plank cladding externally, 90mm deep timber stud or 92mm metal stud, 13mm standard plasterboard internally	
PROPOSED		**Brick Veneer:** 110mm brick, 90mm timber stud or 92mm metal stud, minimum 50mm clearance between masonry and stud frame, 10mm standard plasterboard internally	
PROPOSED		**Double Brick Cavity:** 2 leaves of 110mm brickwork separated by 50mm gap	
PROPOSED	Roof	Pitched concrete or terracotta tile or metal sheet roof with sarking, 10mm plasterboard ceiling fixed to ceiling joists, R1.5 insulation batts in roof cavity.	
PROPOSED	Entry Door	35mm solid core timber door fitted with full perimeter acoustic seals	
PROPOSED	Floor	1 layer of 19mm structural floor boards, timber joist on piers	
PROPOSED		Concrete slab floor on ground	

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022). WITH A MINIMUM (FRL 60 / 60 / 60).

270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

VERTICAL JOINT IN MASONRY CONSTRUCTION

VERTICAL JOINTS INDICATED AS (V) ARE APPROXIMATES ONLY.
ALL VERTICAL JOINTS ARE TO BE IN STRICT ACCORDANCE WITH **AS-3700 MASONRY CODE.**
PROVIDE VERTICAL ARTICULATION JOINTS IN BRICK WALLS AS PER CLAUSE 5.6.8 OF THE NATIONAL CONSTRUCTION CODE AND AS PER STRUCTURAL ENGINEER'S DETAILS

(2) Articulation joints between masonry elements must have a width of not less than 10 mm and be provided (see Figures 5.6.8a and 5.6.8b)—
(a) in straight, continuous walls with openings less than 900 mm x 900 mm or walls without openings — at not more than 6 m centres and within 4.5 m, but not closer than 470 mm of all corners; and
(b) in straight, continuous walls with openings more than 900 mm x 900 mm — at not more than 5 m centres and located so that they are not more than 1.2 m away from openings

NOTE: PROVIDE CONTROL JOINT TO ANY UNBROKEN CEILING GREATER THAN 12m IN LENGTH

PLAN NOTES
1. THESE PLANS DETAILS MAIN WALL COMPONENTS ONLY AND THE MEASUREMENTS GIVEN DO NOT INCLUDE RENDER, PLASTER OR THE LIKE. THEY ARE PROVIDED FOR 'CONSTRUCTION' PURPOSES AND SUCH DO NOT REPRESENT THE FINAL WALL THICKNESS.
2. THE ITEMS PROVIDED ABOVE ARE A GENERAL LIST OF WALL TYPES. VERIFY ALL DISCREPANCIES WITH THE DESIGNER BEFORE COMMENCING CONSTRUCTION.
4. REFER TO BASIX CERTIFICATE FOR INSULATION REQUIREMENTS.

note:
bathroom and ensuite

Builder to ensure bathroom and ensuite floors are graded to a floor waste in accordance with 10.2.12 of the NCC 2022.
Shower screens are to be designed and installed for human impact as per AS3740. Setdown concrete in wet areas to suit finished floor levels.

Mechanical ventilation to sanitary rooms & range-hoods are to be discharge directly to the outside air at a minimum rate of 25L/s minimum for bathrooms and 40L/s for kitchens and laundries. To be in accordance with NCC 2022 part 10.6.2 & 10.8.2. AS1668.2-2012-Mechanical ventilation for acceptable indoor-air quality.
mechanical ventilation to bathrooms, kitchen and laundry in accordance with part 10.5, 10.6, 10.8 of NCC 2022 Vol 2. & AS 1668.2

REFER TO STORMWATER ENGINEERS PLANS AND DETAILS.
STORMWATER TO BE DRAINED TO LEGAL POINT OF DISCHARGE TO THE SATISFACTION OF RELEVANT AND GOVERNING AUTHORITY.
BUILDER TO CONFIRM THE EXACT LOCATION OF THE LEGAL POINT OF DISCHARGE PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS.

ALL EXTERNAL WALLS, ROOF AND FLOORS TO BE INSULATED TO COMPLY WITH BASIX REQUIREMENTS.

NOTE:
SAFETY POOL FENCING SHALL BE IN ACCORDANCE WITH AS 1926.1 WHEREIN A SUITABLE BARRIER SHALL BE PROVIDED AT A MINIMUM HEIGHT OF 1200mm MIN. AND VERTICLE BALLUSTRADES ARE SPACED AT NO GREATER THAN 100mm. THE GATE SHALL BE HUNG SO THAT IT SWINGS AWAY FROM THE POOL AREA AND ALSO BE A MINIMUM HEIGHT OF 1200mm MIN., SELF CLOSING AND SELF LATCHING OR SELF LOCKING DEVICE SHALL BE LOCATED AT LEAST 1200mm MIN. ABOVE THE FLOOR LEVEL. THE PERIMETER PAILING FENCING SHALL BE TREATED SO THAT THE RAILS ARE BEVELLED ON A 60° ANGLE TO PREVENT CHILDREN FROM CLIMBING OVE RTHE FENCE. FURTHERMORE, ENSURE ALL PERIMETER POOL FENCING HAS A 1200mm CLEAR SPAN FROM CLIMBABLE OBJECTS.

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON-COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)

PART 10.2, H2D8 – WATERPROOFING MEMBRANES FOR BASEMENTS TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC 2022 (Housing Provisions) and AS 3660.1 (2014) Part 1 3.4 of the NCC 2022

ACOUSTIC REQUIREMENTS

ALL ACOUSTIC MITIGATION MEASURES, BUILDING ELEMENTS, CONSTRUCTION METHODS, GLAZING, DOORS, SEALS, WALL AND ROOF INSULATION, VENTILATION SYSTEMS AND ANY OTHER ACOUSTIC TREATMENTS REQUIRED FOR THE DEVELOPMENT SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE RECOMMENDATIONS AND REQUIREMENTS OF THE APPROVED ACOUSTIC REPORT.

THE BUILDER SHALL REVIEW THE ACOUSTIC REPORT IN ITS ENTIRETY PRIOR TO CONSTRUCTION AND ENSURE ALL RECOMMENDATIONS ARE INCORPORATED INTO THE WORKS. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL DRAWINGS AND ACOUSTIC REPORT SHALL BE REFERRED TO THE ARCHITECT AND ACOUSTIC CONSULTANT FOR CLARIFICATION PRIOR TO CONSTRUCTION.

ALL WORKS SHALL COMPLY WITH THE REQUIREMENTS OF THE ACOUSTIC REPORT, NCC AND RELEVANT AUSTRALIAN STANDARDS.

Table 6.3.1 Windows/Sliders, Doors, Walls & Roof Specifications

Building Component	*Rw Rating to be Achieved on Site*
Windows & Sliding Doors in all Habitable Areas of both Dwellings are to be 6.38 mm laminated type with full perimeter Mohair Fin acoustic seals (1)(2)(3).	32
Windows and Sliding Doors in all other Non-Habitable Areas (Toilets, laundries, ….) are to be in accordance with Australian Standard AS 2047 (Windows in Buildings) (1)(2)(3).	25
Entry Doors are to be solid core with acoustic seals fitted around the doors. A drop seal is also required at the base of the doors (2).	30-33
External Walls & Facia are to be standard 250/240 mm brick veneer construction with R2, 75mm thick insulation in the stud cavity and 13mm plasterboard lining (2)(3) OR 90mm conventional timber stud-framed walls cladded externally with min. 6.0 mm thick selected cladding and lined internally with 13mm plasterboard (plus cavity filled with 75mm 11kg/m³ insulation (2)(3).	50 43
Roof to be Colorbond Steel Roof, 13mm thick plasterboard ceiling and ceiling cavity filled with 75mm thick, 11kg/m3 insulation (3).	40-43

NB: This report is to be read in conjunction with the BASIX/NatHERS certificate and any other related building specification.
(1) No See-through weep holes in windows/sliders. (2) All gaps between window & door frames and the masonry walls are to be sealed using acoustic foam Hilti CP620 or similar (Bostik/Parfix/Sika). Glass wool batts should be applied prior to the application of the foam to seal larger gaps. (3) All gaps are to be acoustically sealed.

Refer to Service Protection Report. Contractor to confirm line, level and size of all the existing services (as per note in report) within the vicinity of any new works and report any conflict to site superintendent prior to any construction commencing.

The sewer crosses the left side fence at a distance to the back fence = 7.85m
Depth to invert = 2.2 m
Pipe Type = 150mm SGW Relend

The location of the assets specified on the report have been taken from existing fence lines and/or surveyors marking or pegs. fence lines may not be true boundary lines and will need to be confirmed by surveyor.

REFER TO STRUCTURAL DRAWINGS AND SYDNEY WATER STAMPED PLANS FOR ALL SEWER ENCASEMENT REQUIREMENTS AND ANY WORKS WITHIN THE SEWER ZONE OF INFLUENCE.

WASTEWATER DISCHARGE OF POOL
THE POOL SHALL BE CONNECTED TO THE SEWER FOR DISCHARGE OF WASTEWATER IN ACCORDANCE WITH AS3500.

WATER FROM A SWIMMING POOL MUST BE DISCHARGED IN ACCORDANCE WITH AN APPROVAL UNDER THE LOCAL GOVERNMENT ACT 1993.

POOL PUMP MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE.

SOUNDPROOF ENCLOSURE:
POOL PUMPS AND EQUIPMENT MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE TO MINIMISE THE TRANSMISSION OF NOISE FROM THE PUMP. LOCATED MORE THAN 450MM FROM EACH LOT BOUNDARY.

WATER FROM THE SWIMMING POOL MUST BE CONNECTED INTO THE SEWER MAIN.

1200mm HIGH APPROVED POOL FENCE FROM BOTH SIDES TO SUIT.

AN APPROVED RESUSCITATION SIGN.


APPROVED SELF CLOSING CHILDPROOF POOL GATE TO SUIT.

10.4.2 Construction of sanitary compartments

The door to a fully enclosed sanitary compartment must—
(a) open outwards; or
(b) slide; or
(c) be readily removable from the outside of the compartment,

unless there is a clear space of at least 1.2 m, measured in accordance with Figure 10.4.2, between the closet pan within the sanitary compartment and the doorway.

Figure 10.4.2 Construction of sanitary compartments

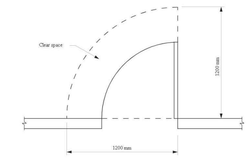

(RH) Removable hinge


Doors opening within 1200mm of a wc pan must be provide with easily removeable or lift off hinges in strict accordance with the NCC 2022 Vol 2. Parts 10.4.2.

NOTE:

a) Building to comply with NSW Parts 13.2.3 Building Fabric (Ceiling Insulation) and 13.7 Services; and

b) The water closet in swinging doorways must have a clear span of 1.2m from the edge of the doorway to the nearest part of the water closet or comply with Part 10.4.2 NCC 2022;

c) The laundries must have artificial lighting complying with AS 1680.1;

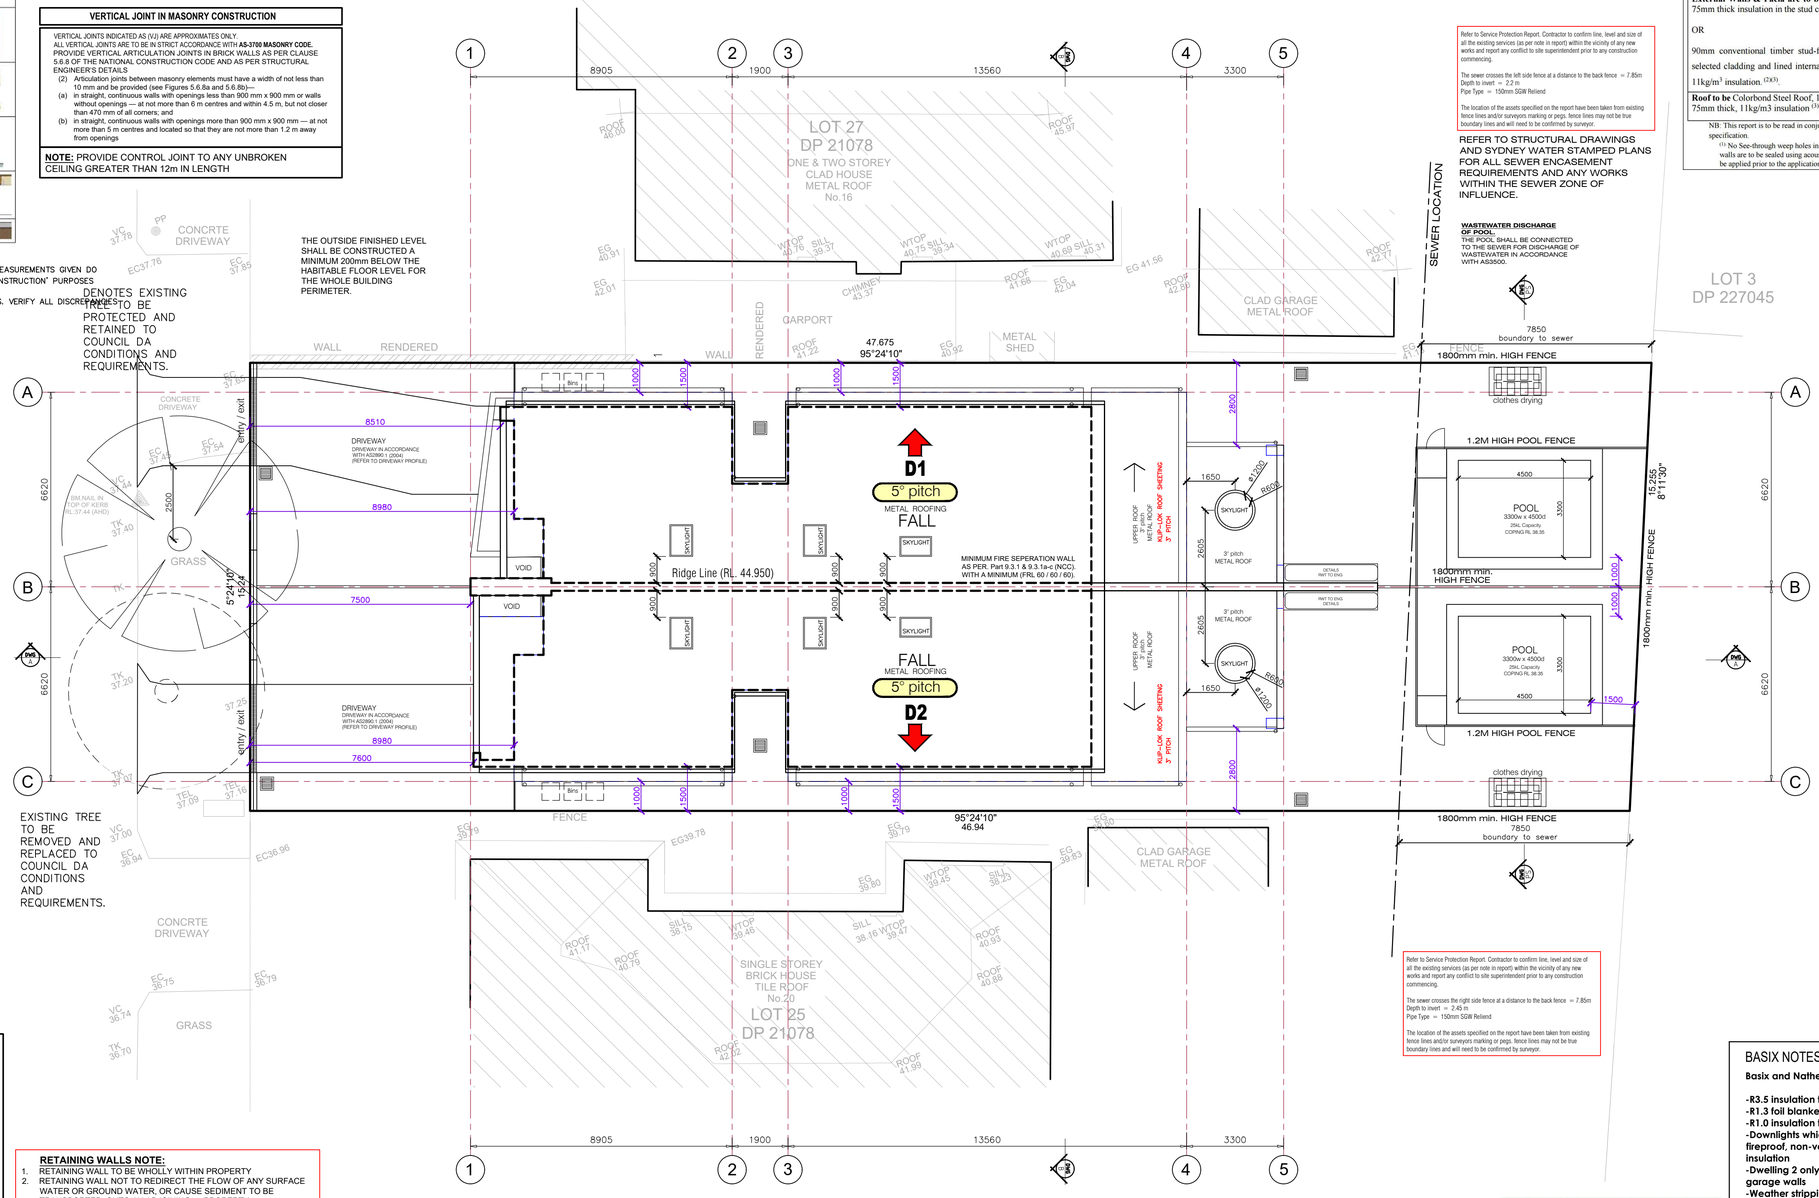

SMOKE ALARMS :9.5.1 NCC 2022 AND AS3786

SELF CONTAINED SMOKE ALARMS SHALL BE LOCATED AS SHOWN ON DRAWING AND FULLY COMPLY WITH THE BUILDING CODE OF AUSTRALIA, AS 3786 AND ANY OTHER CODE OR STANDARD REFERENCED THEREIN.

S/A SMOKE ALARM/S FOR BUILDING IN ACCORDANCE TO PART 9.5 OF THE NCC 2022 Vol 2 AND AS3786.

SELF CONTAIN SMOKE DETECTOR 12/240V WITH INTERGRAL BUZZER AND BATTERY BACKUP
ALL SMOKE ALARMS TO BE HARD WIRED TO MAIN POWER.

INTERCONNECT SMOKE ALARMS SO THAT ONE ALARM WILL TRIGGER ALL ALARMS WITHIN THE RESIDENCE

PLANS INDICATING SMOKE ALARM IN EACH DWELLING IN ACCORDANCE WITH PART 9.5.1 & 9.5.4 OF THE NCC 2022 VOLUME 2 AMENDMENT 1 AND AS 3786. (PLANS TO STATE "SMOKE ALARMS") SMOKE ALARMS ARE REQUIRED ON EVERY FLOOR OF THE DWELLING.

EXPANSION / CONTROL JOINTS
BUILDING BOARD MANUFACTURERS RECOMMEND THAT EXPANSION JOINTS ARE REQUIRED IN UNBROKEN WALLS AND CEILINGS AT NO GREATER THAN 12M CENTRES. EXPANSION JOINTS TO EFFICIENTLY ABSORB EXPANSION AND CONTRACTION IN WALLS AND CEILINGS TO MITIGATE THE RISK OF CRACKED PLASTERBOARD.

0007668900 27 Apr 2022
Assessor Noura Al Hazzouri
Accreditation No. DMN/18/1891
Address 18 Carramar Crescent Miranda , NSW , 2228
hstar.com.au

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL. ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO.DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

RETAINING WALLS NOTE:
1. RETAINING WALL TO BE WHOLLY WITHIN PROPERTY
2. RETAINING WALL NOT TO REDIRECT THE FLOW OF ANY SURFACE WATER OR GROUND WATER, OR CAUSE SEDIMENT TO BE TRANSPORTED, ONTO AN ADJOINING PROPERTY
3. RETAINING WALL TO HAVE ADEQUATE DRAINAGE LINES CONNECTED TO THE STORMWATER DRAINAGE SYSTEM FOR THE SITE
4. RETAINING WALL NOT TO HAVE A TOTAL HEIGHT MEASURED VERTICALLY FROM THE BASE OF THE RETAINING WALL OR STRUCTURAL SUPPORT TO ITS UPPERMOST PORTION THAT IS MORE THAN THE HEIGHT OF THE ASSOCIATED EXCAVATION OR FILL
5. RETAINING WALL TO BE INSTALLED IN ACCORDANCE WITH ANY MANUFACTURER'S SPECIFICATIONS

ALL OFF-STREET CAR PARKING SPACES AND VEHICLE ACCESS MUST COMPLY WITH AS/NZS 2890.1:2004, PARKING FACILITIES, PART 1: OFF-STREET CAR PARKING.

THE DRIVEWAY CROSSOVER MUST BE CONSTRUCTED IN ACCORDANCE WITH THE SUTHERLAND SHIRE COUNCIL STANDARD DRAWING - DRIVEWAY CONSTRUCTION REQUIREMENTS FOR THE PROPERTY OWNER TO RECEIVE A DRIVEWAY CERTIFICATION FROM COUNCIL ONCE WORKS ARE COMPLETE A COPY OF THE STANDARD DRAWINGS TO BE KEPT ON SITE AT ALL TIMES.

BEFORE COMMENCING ANY WORKS, PLEASE ENSURE ALL CONDITIONS HAVE BEEN THOROUGHLY READ AND UNDERSTOOD TO GUARANTEE COMPLIANCE WITH COUNCIL REQUIREMENTS AS CONDITIONS ARE REGULARLY UPDATED TO REFLECT CURRENT STANDARDS. THE APPLICANT IS RESPONSIBLE FOR COMPLYING WITH ALL CONDITIONS OF CONSENT. IT IS THE APPLICANTS RESPONSIBILITY TO NOTE THE EXPIRY DATE AND ENSURE THE APPROVAL IS EXTENDED AND APPROPRIATE FEES PAID IF THE WORK MUST CONTINUE. EXTENSION OF APPROVAL MUST BE ARRANGED PRIOR TO EXPIRY OF CURRENT APPROVAL. FAILURE TO RENEW THE APPROVAL MAY RESULT IN ISSUE OF INFRINGEMENT NOTICE

WATER, GAS AND ELECTRICAL METER IDEAL LOCATION TO BE LOCATED AND DETERMINED BY BUILDER/ CONTRACTOR PRIOR TO COMMENCEMENT.

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.

Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all awning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000Lt to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

SITE-ROOF-PLAN

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	15.05.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by: AN
			Project No: CARRA-26

ndg

DUAL-OCCUPANCY

18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com


CC 07

ALL EAVES TO HAVE 450MIN SETBACK FROM SIDE BOUNDARIES

EXISTING VEHICULAR CROSSING TO BE REMOVED AND THE KERB REPLACE IN ACCORDANCE WITH COUNCILS CONDITIONS AND REQUIREMENTS

NOTE : THE FIRST FLOOR BEDROOM WINDOWS SHALL BE LIMITED TO OPENING NO GREATER THAN 125MM (I.E. LV29)

SELECTED METAL ROOF AT 5° PITCH TBC. REFER TO MANUFACTURERS DETAILS AND SPECIFICATIONS FOR MINIMUM PITCH REQUIREMENTS AND SARKING TO SUIT SELECTED METAL SHEETING. SELECTED ROOF RAFTERS AS PER ENGINEERS DETAILS AND COMPUTATIONS. REFER TO BASIX REPORT FOR INSULATION REQUIREMENTS. BUILDER TO PROVIDE SARKING BELOW ALL NEW ROOF STRUCTURES.

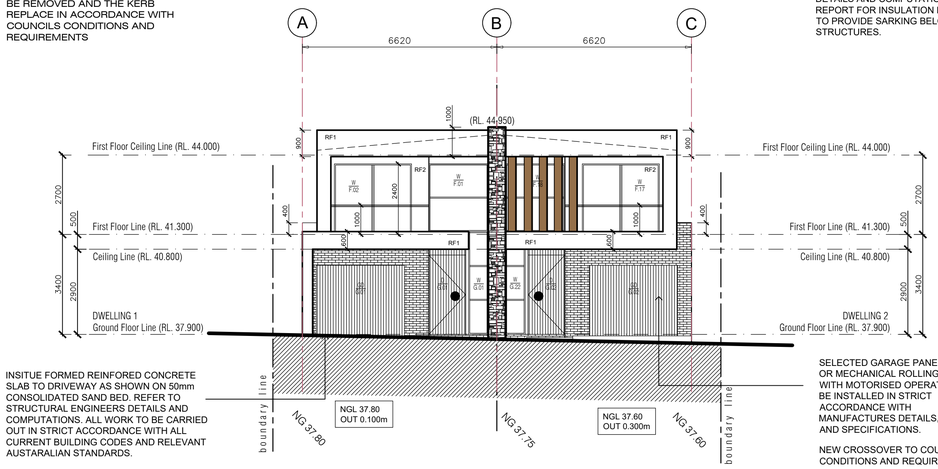

INSITUE FORMED REINFORED CONCRETE SLAB TO DRIVEWAY AS SHOWN ON 50mm CONSOLIDATED SAND BED. REFER TO STRUCTURAL ENGINEERS DETAILS AND COMPUTATIONS. ALL WORK TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTARALIAN STANDARDS.

SELECTED GARAGE PANEL LIFT OR MECHANICAL ROLLING DOOR WITH MOTORISED OPERATION TO BE INSTALLED IN STRICT ACCORDANCE WITH MANUFACTURES DETAILS, SIZES AND SPECIFICATIONS.

NEW CROSSOVER TO COUNCILS CONDITIONS AND REQUIREMENTS

REFER TO SYDNEY WATER CO-ORDINATOR AND STRUCTURAL ENGINEERS DETAILS FOR STRUCTURAL SEWER DESIGN AND RECOMMENDATIONS FOR ALL PROPOSED METHOD OF SUPPORT TO ANY EXCAVATION ADJACENT TO ADJOINING PROPERTIES, OR THE ROAD RESERVE - THE PROPOSED METHOD OF SUPPORT IS TO BE DESIGNED BY A CHARTERED CIVIL ENGINEER.

CLAUSE D2.24 OF THE NCC AND 3.9.2.6

FIRST FLOOR BEDROOM OPENABLE WINDOWS TO BE FITTED WITH A DEVICE TO LIMIT OPENING OR SUITABLE SCREEN SO A 125mm SPHERE CANNOT PASS THROUGH.

THE DEVICE OR SCREEN CAN HAVE A CHILD RESISTANT RELEASE MECHANISM WHICH CAN ENABLE THE DEVICE OR SCREEN TO BE REMOVED, UNLOCKED OR OVERRIDDEN AND RESTRICT THE FORCE OF 250N. WHERE A CHILD RESISTANT MECHANISM IS UTILISED, THE WINDOW MUST ALSO BE PROVIDED WITH A BARRIER BELOW IT THAT HAS A MINIMUM HEIGHT OF 865MM, DOES NOT PERMIT A 125MM SPHERE TO PASS THROUGH IT, AND DOES NOT HAVE ANY HORIZONTAL OR NEAR HORIZONTAL ELEMENTS BETWEEN 150MM AND 760MM THAT FACILITATE CLIMBING. FIXED GLAZING UNDER THE OPENABLE PART OF THE WINDOW WHICH MEETS THE HEIGHT REQUIREMENTS (I.E. TRANSOM AT LEAST 865MM ABOVE THE FLOOR ETC.) WOULD SATISFY THE BARRIER REQUIREMENT.

WHERE A DEVICE OR SCREEN IS SECURELY FIXED IN POSITION (EG A SCREEN POP RIVETED TO THE WINDOW FRAME) SO IT CANNOT BE UNLOCKED, OVERRIDDEN, OR IS VERY DIFFICULT TO REMOVE WITHOUT FOR EXAMPLE A DRILL, THE 865MM BARRIER WOULD NOT BE REQUIRED AS THE SECURING METHOD IS CONSIDERED A FIXTURE AND NOT A CHILD RESISTANT RELEASE MECHANISM.

PROTECTION OF THE OPENING IS NOT REQUIRED FOR WINDOWS WHERE THE LOWEST PART OF THE OPENING IS 1.7M OR MORE ABOVE THE FLOOR


PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)

PART 10.2, H2D8 – WATERPROOFING MEMBRANES FOR BASEMENTS TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2

PART 5.7 – MASONRY WALLS TO BE WEATHERPROOFED AND ENSURE DAMP–PROOF COURSES AND FLASHINGS MUST BE VISIBLE FROM THE OUTSIDE FACE OF THE WALL


PART 8.3 – GLAZING TO COMPLY WITH AS1288–2006, AS2047–2014, H1D8 OF THE NCC 2022 & MANUFACTURERS TECHNICAL SPECIFICATION.

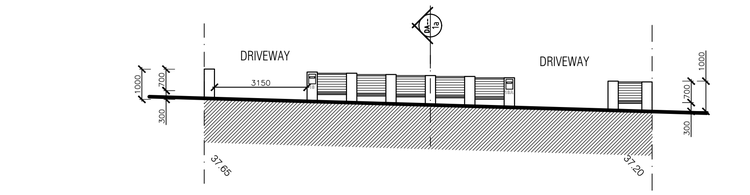

FRONT FENCE ELEVATION

scale 1:20

BUILDER TO CONFIRM EXTENT AND LOCATION OF FEATURE LETTERBOX WALL WITH PROPRIATOR BEFORE CONSTRUCTION. LETTERBOX TO AUSTRALIA POST REQUIREMENTS.

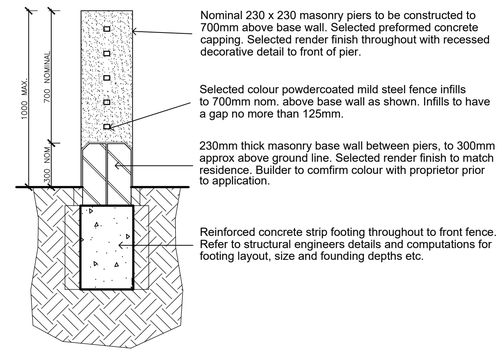

Nominal 230 x 230 masonry piers to be constructed to 700mm above base wall. Selected preformed concrete capping. Selected render finish throughout with recessed decorative detail to front of pier.

Selected colour powdercoated mild steel fence infills to 700mm nom. above base wall as shown. Infills to have a gap no more than 125mm.

230mm thick masonry base wall between piers, to 300mm approx above ground line. Selected render finish to match residence. Builder to comfirm colour with proprietor prior to application.

Reinforced concrete strip footing throughout to front fence. Refer to structural engineers details and computations for footing layout, size and founding depths etc.

WESTERN ELEVATION

Sample of materials - CARRAMAR CRESCENT, MIRANDA.

ACP CLADDING: Vertical aluminium composite panels with non-combustible/FR core. Install with cavity and sarking to manufacturer's details. Comply with NCC 2022 and AS 1530.1.

RF1 - RENDER - DULUX VIVID WHITE 1W or Similar COLOUR (Acrylic Render)

RF2 - RENDER - DULUX DOMINO GR10 or Similar COLOUR (Acrylic Render)

ST - STONE - CLAD SANDSTONE OR SIMILAR

TC - SELECTED COMPOSITE VERTICAL CLADDING - KNOTWOOD OR SIMILAR TBC

SELECTED COLORBOND ROOFING OR SIMILAR APPROVED ROOF SHEETING - TO MEET BASIX REQUIREMENTS. FACIA AND GUTTERS - MID GREY IN COLOUR

FB - SELECTED FACEBRICK - CHARCOAL GREY WITH BLACK MORTAR or Similar TBC

GUTTERS AND DOWNPIPES: AMENDED PLANS INDICATING GUTTERING AND DOWNPIPES IN ACCORDANCE WITH PART 3.5.3 OF THE NCC 2022 2019 VOLUME 2 AMENDMENT 1.

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022). WITH A MINIMUM (FRL 60 / 60 / 60).


270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

LOW REFLECTIVITY ROOF - ROOFING MATERIALS MUST BE LOW GLARE AND REFLECTIVITY.

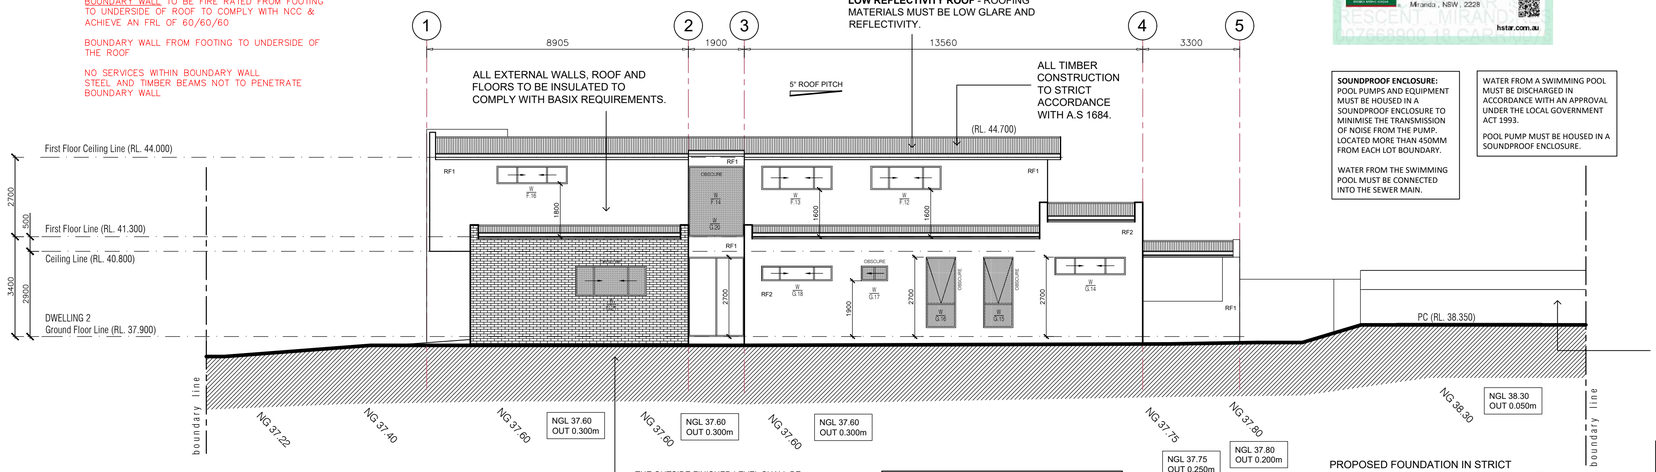

THE OUTSIDE FINISHED LEVEL SHALL BE CONSTRUCTED A MINIMUM 200mm BELOW THE HABITABLE FLOOR LEVEL FOR THE WHOLE BUILDING PERIMETER.

SOUNDPROOF ENCLOSURE: POOL PUMPS AND EQUIPMENT MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE TO MINIMISE THE TRANSMISSION OF NOISE FROM THE PUMP. LOCATED MORE THAN 450MM FROM EACH LOT BOUNDARY.

WATER FROM THE SWIMMING POOL MUST BE CONNECTED INTO THE SEWER MAIN.

WATER FROM A SWIMMING POOL MUST BE DISCHARGED IN ACCORDANCE WITH AN APPROVAL UNDER THE LOCAL GOVERNMENT ACT 1993.

POOL PUMP MUST BE HOUSED IN A SOUNDPROOF ENCLOSURE.

NOTE: POOL FENCE TO COMPLY WITH AS 1926.1

ALL WINDOW OPENING TO HAVE A SECURE PROTECTION INACCORDANCE WITH CLAUSE 11.3.7 OF NCC 20222022 VOLUME. (ALL BEDROOM WINDOWSILLS ARE HIGHER THAN 2M FROM NGL)

1200mm HIGH APPROVED POOL FENCE FROM BOTH SIDES TO SUIT.

AN APPROVED RESUSCITATION SIGN.

APPROVED SELF CLOSING CHILDPROOF POOL GATE TO SUIT.

FRONT FENCE SECTION - 1a

scale 1:20

UNRETAINED EMBANKMENT SLOPE RATIOS	
Soil Class	*Max Site Cut Angle (H:L)*
Stable rock (Class A)	8:1
Sand (Class A)	1:2
Firm Clay (Class M - E)	1:1
Soft Clay (Class M - E)	2:3

ANY ESSENTIAL SERVICE MUST BE DISCONNECTED FROM THE STRUCTURE BEING DEMOLISHED OR REMOVED IN ACCORDANCE WITH THE REQUIREMENTS OF THE RELEVANT AUTHORITY, AND THE STRUCTURE BEING DEMOLISHED OR REMOVED MUST NOT BE RELOCATED ON THE SAME LOT OR TO A DIFFERENT LOT, UNLESS IT MEETS THE RELEVANT DEVELOPMENT STANDARDS SPECIFIED.

PROPOSED FOUNDATION IN STRICT ACCORDANCE TO COUNCILS DETAILS AND COMPUTATIONS FOR CONSTRUCTION. BUILDER TO CONFIRM ALL FOOTING DEPTH ON SITE TO SUIT SITE LEVELS AND CONDITIONS.

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC 2022 (Housing Provisions) and AS 3660.1 (2014) Part 1 3.4 of the NCC 2022

NOTE - EXCAVATION

WHILE BUILDING WORK IS BEING CARRIED OUT, THE PRINCIPAL CERTIFIER MUST BE SATISFIED ALL SOIL REMOVED FROM OR IMPORTED TO THE SITE IS MANAGED IN ACCORDANCE WITH THE FOLLOWING REQUIREMENTS:

ALL EXCAVATED MATERIAL REMOVED FROM THE SITE MUST BE CLASSIFIED IN ACCORDANCE WITH THE EPA'S WASTE CLASSIFICATION GUIDELINES BEFORE IT IS DISPOSED OF AT AN APPROVED WASTE MANAGEMENT FACILITY AND THE CLASSIFICATION AND THE VOLUME OF MATERIAL REMOVED MUST BE REPORTED TO THE PRINCIPAL CERTIFIER.
b. ALL FILL MATERIAL IMPORTED TO THE SITE MUST BE VIRGIN EXCAVATED NATURAL MATERIAL AS DEFINED IN SCHEDULE 1 OF THE PROTECTION OF THE ENVIRONMENT OPERATIONS ACT 1997 OR A MATERIAL IDENTIFIED AS BEING SUBJECT TO A RESOURCE RECOVERY EXEMPTION BY THE NSW EPA.

IF THE DEVELOPMENT INVOLVES AN EXCAVATION THAT EXTENDS BELOW THE LEVEL OF THE BASE OF THE FOOTINGS OF A BUILDING, STRUCTURE OR WORK ON ADJOINING LAND (INCLUDING ANY STRUCTURE OR WORK WITHIN A ROAD OR RAIL CORRIDOR), THE PERSON HAVING THE BENEFIT OF THE DEVELOPMENT CONSENT MUST, AT THE PERSON'S OWN EXPENSE –

PROTECT AND SUPPORT THE BUILDING, STRUCTURE OR WORK FROM POSSIBLE DAMAGE FROM THE EXCAVATION, AND
b. WHERE NECESSARY, UNDERPIN THE BUILDING, STRUCTURE OR WORK TO PREVENT ANY SUCH DAMAGE.

VERTICAL JOINT IN MASONRY CONSTRUCTION

VERTICAL JOINTS INDICATED AS (VJ) ARE APPROXIMATES ONLY.
ALL VERTICAL JOINTS ARE TO BE IN STRICT ACCORDANCE WITH **AS-3700 MASONRY CODE**. PROVIDE VERTICAL ARTICULATION JOINTS IN BRICK WALLS AS PER CLAUSE 5.6.8 OF THE NATIONAL CONSTRUCTION CODE AND AS PER STRUCTURAL ENGINEER'S DETAILS
(2) Articulation joints between masonry elements must have a width of not less than 10 mm and be provided (see Figures 5.6.8a and 5.6.8b)—
(a) in straight, continuous walls with openings less than 900 mm x 900 mm or walls without openings — at not more than 6 m centres and within 4.5 m, but not closer than 470 mm of all corners; and
(b) in straight, continuous walls with openings more than 900 mm x 900 mm — at not more than 5 m centres and located so that they are not more than 1.2 m away from openings

NOTE: PROVIDE CONTROL JOINT TO ANY UNBROKEN CEILING GREATER THAN 12m IN LENGTH

0007668900 27 Apr 2022
Assessor Naura Al Hezzouri
Accreditation No. DMN18/1891
Address 18 Carramar Crescent Miranda , NSW, 2228
hstar.com.au

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL, ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO. DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

www.dialbeforeyoudig.com.au
DIAL1100 BEFORE YOU DIG

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.

Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all awning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000L to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

SOUTHERN ELEVATION

REFER TO SYDNEY WATER CO-ORDINATOR AND STRUCTURAL ENGINEERS DETAILS FOR STRUCTURAL SEWER DESIGN AND RECOMMENDATIONS FOR ALL PROPOSED METHOD OF SUPPORT TO ANY EXCAVATION ADJACENT TO ADJOINING PROPERTIES, OR THE ROAD RESERVE - THE PROPOSED METHOD OF SUPPORT IS TO BE DESIGNED BY A CHARTERED CIVIL ENGINEER.

TREES, SHRUBS OR ANY OTHER OBJECTS SUCH AS A BARBEQUE, POT PLANTS, TOYS, LADDERS AND CHAIRS MUST NOT BE WITHIN THE 900mm 'NON CLIMBABLE ZONE'. THIS IS SO THAT A CHILD CAN NOT USE THEM TO CLIMB OVER THE FENCE.
THE 'NON CLIMBABLE ZONE' IS A ZONE MEASURED IN AN ARC SHAPE FROM THE TOP OF THE OUTSIDE OF THE POOL FENCE ARCHING TOWARDS THE GROUND.
ANY PART OF THE BOUNDARY FENCE THAT IS PART OF THE POOL FENCE OR IS WITHIN THE 900mm 'NON CLIMBABLE ZONE' MUST NOT HAVE ANY HORIZONTAL BARS.

ELEVATIONS-A

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	13.02.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by:
			AN
			Project No:
			CARRA-26

ndg

DUAL-OCCUPANCY


18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC 08

Note:
Eaves, flues, chimneys, pipes and domestic fuel tanks, cooling or heating appliances or other services are required to be setback a min. 450mm from title boundary and 900mm from another building on the same allotment.

SELECTED METAL ROOF AT 5° PITCH TBC.
REFER TO MANUFACTURERS DETAILS AND SPECIFICATIONS FOR MINIMUM PITCH REQUIREMENTS AND SARKING TO SUIT SELECTED METAL SHEETING.
SELECTED ROOF RAFTERS AS PER ENGINEERS DETAILS AND COMPUTATIONS. REFER TO BASIX REPORT FOR INSULATION REQUIREMENTS. BUILDER TO PROVIDE SARKING BELOW ALL NEW ROOF STRUCTURES.

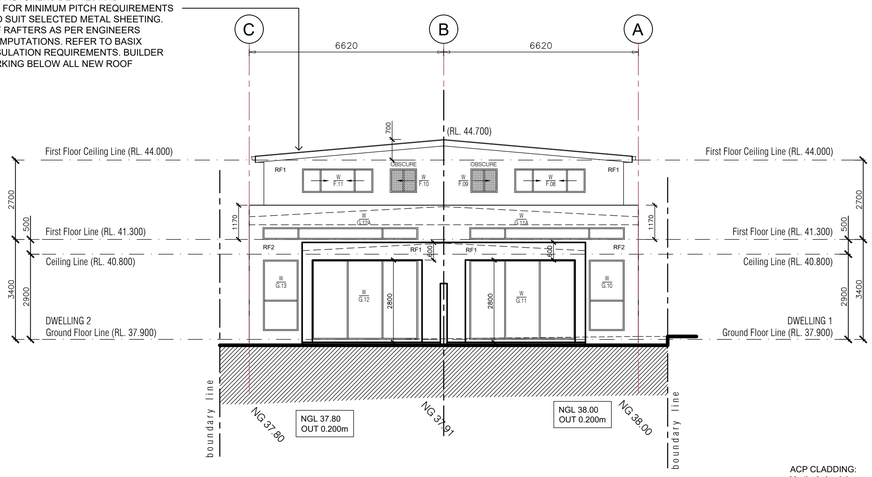

1 2 3 4 5 6 7 8 9 10 15 20 25

SCALE BAR - 1:200@A3 SCALE BAR - 1:100@A1

REFER TO SYDNEY WATER CO-ORDINATOR AND STRUCTURAL ENGINEERS DETAILS FOR STRUCTURAL SEWER DESIGN AND RECOMMENDATIONS FOR ALL PROPOSED METHOD OF SUPPORT TO ANY EXCAVATION ADJACENT TO ADJOINING PROPERTIES, OR THE ROAD RESERVE - THE PROPOSED METHOD OF SUPPORT IS TO BE DESIGNED BY A CHARTERED CIVIL ENGINEER.

CLAUSE D2.24 OF THE NCC AND 3.9.2.6

FIRST FLOOR BEDROOM OPENABLE WINDOWS TO BE FITTED WITH A DEVICE TO LIMIT OPENING OR SUITABLE SCREEN SO A 125mm SPHERE CANNOT PASS THROUGH.

THE DEVICE OR SCREEN CAN HAVE A CHILD RESISTANT RELEASE MECHANISM WHICH CAN ENABLE THE DEVICE OR SCREEN TO BE REMOVED, UNLOCKED OR OVERRIDDEN AND RESTRICT THE FORCE OF 250N. WHERE A CHILD RESISTANT MECHANISM IS UTILISED, THE WINDOW MUST ALSO BE PROVIDED WITH A BARRIER BELOW IT THAT HAS A MINIMUM HEIGHT OF 865MM, DOES NOT PERMIT A 125MM SPHERE TO PASS THROUGH IT, AND DOES NOT HAVE ANY HORIZONTAL OR NEAR HORIZONTAL ELEMENTS BETWEEN 150MM AND 760MM THAT FACILITATE CLIMBING. FIXED GLAZING UNDER THE OPENABLE PART OF THE WINDOW WHICH MEETS THE HEIGHT REQUIREMENTS (I.E. TRANSOM AT LEAST 865MM ABOVE THE FLOOR ETC.) WOULD SATISFY THE BARRIER REQUIREMENT.

WHERE A DEVICE OR SCREEN IS SECURELY FIXED IN POSITION (EG A SCREEN POP RIVETED TO THE WINDOW FRAME) SO IT CANNOT BE UNLOCKED, OVERRIDDEN, OR IS VERY DIFFICULT TO REMOVE WITHOUT FOR EXAMPLE A DRILL, THE 865MM BARRIER WOULD NOT BE REQUIRED AS THE SECURING METHOD IS CONSIDERED A FIXTURE AND NOT A CHILD RESISTANT RELEASE MECHANISM.

PROTECTION OF THE OPENING IS NOT REQUIRED FOR WINDOWS WHERE THE LOWEST PART OF THE OPENING IS 1.7M OR MORE ABOVE THE FLOOR

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)

PART 10.2, H2D8 – WATERPROOFING MEMBRANES FOR BASEMENTS TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2

PART 5.7 – MASONRY WALLS TO BE WEATHERPROOFED AND ENSURE DAMP–PROOF COURSES AND FLASHINGS MUST BE VISIBLE FROM THE OUTSIDE FACE OF THE WALL

PART 8.3 – GLAZING TO COMPLY WITH AS1288–2006, AS2047–2014, H1D8 OF THE NCC 2022 & MANUFACTURERS TECHNICAL SPECIFICATION.

EASTERN ELEVATION

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022). WITH A MINIMUM (FRL 60 / 60 / 60).

270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

Sample of materials - CARRAMAR CRESCENT, MIRANDA.

RF1 - RENDER - DULUX VIVID WHITE 1W or Similar COLOUR (Acrylic Render)

RF2 - RENDER - DULUX DOMINO GR10 or Similar COLOUR (Acrylic Render)

ST - STONE - CLAD SANDSTONE OR SIMILAR

ACP CLADDING:
Vertical aluminium composite panels with non-combustible/FR core. Install with cavity and sarking to manufacturer's details. Comply with NCC 2022 and AS 1530.1.

TC - SELECTED COMPOSITE VERTICAL CLADDING - KNOTWOOD OR SIMILAR TBC

SELECTED COLORBOND ROOFING OR SIMILAR APPROVED ROOF SHEETING - TO MEET BASIX REQUIREMENTS. FACIA AND GUTTERS - MID GREY IN COLOUR

FB - SELECTED FACEBRICK - CHARCOAL GREY WITH BLACK MORTAR or Similar TBC

GUTTERS AND DOWNPIPES:
AMENDED PLANS INDICATING GUTTERING AND DOWNPIPES IN ACCORDANCE WITH PART 3.5.3 OF THE NCC 2022 2019 VOLUME 2 AMENDMENT 1.

0007668900 27 Apr 2022
Assessor Noura Al Hazzouri
Accreditation No. DMN18/1891
Address 18 Carramar Crescent, Miranda, NSW, 2228
hstar.com.au


ROOF SHEET NOTE:
PROVIDE ROOF SHEETING AS SPECIFIED ON PLANS. PROFILE, FIXING METHOD, AND MINIMUM ROOF PITCH TO COMPLY WITH MANUFACTURER'S SPECIFICATIONS. PROVIDE SARKING/ROOF BLANKET BENEATH IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS AND NCC. ENSURE ALL FLASHINGS, LAPS, AND PENETRATIONS ARE INSTALLED TO ACHIEVE A WEATHERPROOF ROOF SYSTEM.

LOW REFLECTIVITY ROOF - ROOFING MATERIALS MUST BE LOW GLARE AND REFLECTIVITY.

NOTE : THE FIRST FLOOR BEDROOM WINDOWS SHALL BE LIMITED TO OPENING NO GREATER THAN 125MM (I.E. LV29)

ALL EXTERNAL WALLS, ROOF AND FLOORS TO BE INSULATED TO COMPLY WITH BASIX REQUIREMENTS.

ALL TIMBER CONSTRUCTION TO STRICT ACCORDANCE WITH A.S 1684.

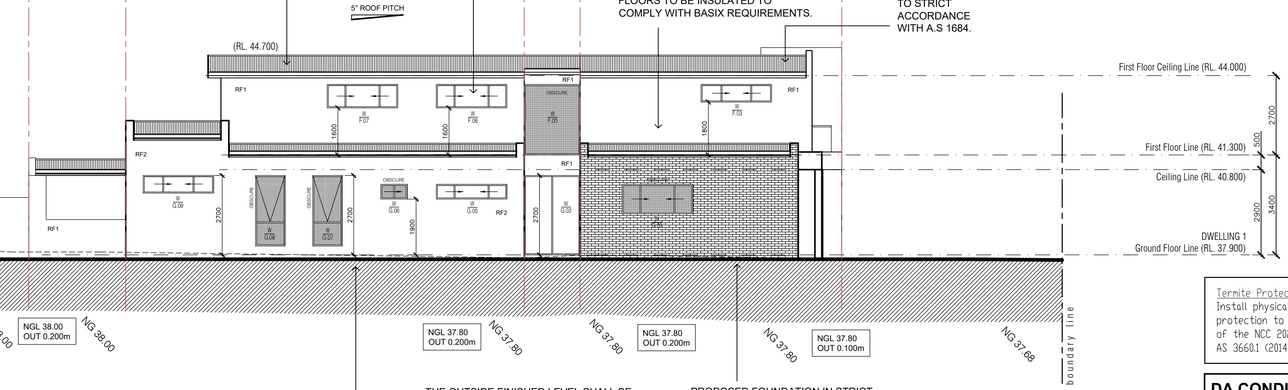

POOL PUMP & FILTRATION SYSTEMS TO BE ENCLOSED, IN ACCORDANCE WITH THE RELEVANT STANDARDS (AS1926)

WASTEWATER DISCHARGE OF POOL.
THE POOL SHALL BE CONNECTED TO THE SEWER FOR DISCHARGE OF WASTEWATER IN ACCORDANCE WITH AS3500.

WATER FROM A SWIMMING POOL MUST BE DISCHARGED IN ACCORDANCE WITH AN APPROVAL UNDER THE LOCAL GOVERNMENT ACT 1993.

1200mm HIGH APPROVED POOL FENCE TO SUIT.

AN APPROVED RESUSCITATION SIGN.

APPROVED SELF CLOSING CHILDPROOF POOL GATE TO SUIT.

NORTHERN ELEVATION

REFER TO SYDNEY WATER CO-ORDINATOR AND STRUCTURAL ENGINEERS DETAILS FOR STRUCTURAL SEWER DESIGN AND RECOMMENDATIONS FOR ALL PROPOSED METHOD OF SUPPORT TO ANY EXCAVATION ADJACENT TO ADJOINING PROPERTIES, OR THE ROAD RESERVE - THE PROPOSED METHOD OF SUPPORT IS TO BE DESIGNED BY A CHARTERED CIVIL ENGINEER.

NOTE:
SAFETY POOL FENCING SHALL BE IN ACCORDANCE WITH AS 1926.1 WHEREIN A SUITABLE BARRIER SHALL BE PROVIDED AT A MINIMUM HEIGHT OF 1200mm MIN. AND VERTICLE BALLUSTRADES ARE SPACED AT NO GREATER THAN 100mm. THE GATE SHALL BE HUNG SO THAT IT SWINGS AWAY FROM THE POOL AREA AND ALSO BE A MINIMUM HEIGHT OF 1200mm MIN., SELF CLOSING AND SELF LATCHING OR SELF LOCKING DEVICE SHALL BE LOCATED AT LEAST 1200mm MIN. ABOVE THE FLOOR LEVEL. THE PERIMETER PAILING FENCING SHALL BE TREATED SO THAT THE RAILS ARE BEVELLED ON A 60° ANGLE TO PREVENT CHILDREN FROM CLIMBING OVE RTHE FENCE. FURTHERMORE, ENSURE ALL PERIMETER POOL FENCING HAS A 1200mm CLEAR SPAN FROM CLIMBABLE OBJECTS.

THE OUTSIDE FINISHED LEVEL SHALL BE CONSTRUCTED A MINIMUM 200mm BELOW THE HABITABLE FLOOR LEVEL FOR THE WHOLE BUILDING PERIMETER.

PROPOSED FOUNDATION IN STRICT ACCORDANCE TO COUNCILS DETAILS AND COMPUTATIONS FOR CONSTRUCTION. BUILDER TO CONFIRM ALL FOOTING DEPTH ON SITE TO SUIT SITE LEVELS AND CONDITIONS.

NOTE - EXCAVATION

WHILE BUILDING WORK IS BEING CARRIED OUT, THE PRINCIPAL CERTIFIER MUST BE SATISFIED ALL SOIL REMOVED FROM OR IMPORTED TO THE SITE IS MANAGED IN ACCORDANCE WITH THE FOLLOWING REQUIREMENTS:

ALL EXCAVATED MATERIAL REMOVED FROM THE SITE MUST BE CLASSIFIED IN ACCORDANCE WITH THE EPA'S WASTE CLASSIFICATION GUIDELINES BEFORE IT IS DISPOSED OF AT AN APPROVED WASTE MANAGEMENT FACILITY AND THE CLASSIFICATION AND THE VOLUME OF MATERIAL REMOVED MUST BE REPORTED TO THE PRINCIPAL CERTIFIER.
b. ALL FILL MATERIAL IMPORTED TO THE SITE MUST BE VIRGIN EXCAVATED NATURAL MATERIAL AS DEFINED IN SCHEDULE 1 OF THE PROTECTION OF THE ENVIRONMENT OPERATIONS ACT 1997 OR A MATERIAL IDENTIFIED AS BEING SUBJECT TO A RESOURCE RECOVERY EXEMPTION BY THE NSW EPA.

IF THE DEVELOPMENT INVOLVES AN EXCAVATION THAT EXTENDS BELOW THE LEVEL OF THE BASE OF THE FOOTINGS OF A BUILDING, STRUCTURE OR WORK ON ADJOINING LAND (INCLUDING ANY STRUCTURE OR WORK WITHIN A ROAD OR RAIL CORRIDOR), THE PERSON HAVING THE BENEFIT OF THE DEVELOPMENT CONSENT MUST, AT THE PERSON'S OWN EXPENSE –

PROTECT AND SUPPORT THE BUILDING, STRUCTURE OR WORK FROM POSSIBLE DAMAGE FROM THE EXCAVATION, AND
b. WHERE NECESSARY, UNDERPIN THE BUILDING, STRUCTURE OR WORK TO PREVENT ANY SUCH DAMAGE,

VERTICAL JOINT IN MASONRY CONSTRUCTION

VERTICAL JOINTS INDICATED AS (VJ) ARE APPROXIMATES ONLY.
ALL VERTICAL JOINTS ARE TO BE IN STRICT ACCORDANCE WITH **AS-3700 MASONRY CODE.** PROVIDE VERTICAL ARTICULATION JOINTS IN BRICK WALLS AS PER CLAUSE 5.6.8 OF THE NATIONAL CONSTRUCTION CODE AND AS PER STRUCTURAL ENGINEER'S DETAILS
(2) Articulation joints between masonry elements must have a width of not less than 10 mm and be provided (see Figures 5.6.8a and 5.6.8b)—
(a) in straight, continuous walls with openings less than 900 mm x 900 mm or walls without openings — at not more than 6 m centres and within 4.5 m, but not closer than 470 mm of all corners; and
(b) in straight, continuous walls with openings more than 900 mm x 900 mm — at not more than 5 m centres and located so that they are not more than 1.2 m away from openings

NOTE: PROVIDE CONTROL JOINT TO ANY UNBROKEN CEILING GREATER THAN 12m IN LENGTH

Table 6.3.1 Windows/Sliders, Doors, Walls & Roof Specifications

Building Component	*Rw Rating to be Achieved on Site*
Windows & Sliding Doors in all Habitable Areas of both Dwellings are to be 6.38 mm laminated type with full perimeter Mohair Fin acoustic seals (1)(2)(3).	**32**
Windows and Sliding Doors in all other Non-Habitable Areas (Toilets, laundries, ….) are to be in accordance with Australian Standard AS 2047 (Windows in Buildings) (1)(2)(3).	**25**
Entry Doors are to be solid core with acoustic seals fitted around the doors. A drop seal is also required at the base of the doors (2).	**30-33**
External Walls & Facia are to be standard 250/240 mm brick veneer construction with R2, 75mm thick insulation in the stud cavity and 13mm plasterboard lining (2)(3) OR 90mm conventional timber stud-framed walls cladded externally with min. 6.0 mm thick selected cladding and lined internally with 13mm plasterboard (plus cavity filled with 75mm 11kg/m^3 insulation. (2)(3).	**50** **43**
Roof to be Colorbond Steel Roof, 13mm thick plasterboard ceiling and ceiling cavity filled with 75mm thick, 11kg/m3 insulation (3).	**40-43**

NB: This report is to be read in conjunction with the BASIX/NatHERS certificate and any other related building specification.
(1) No See-through weep holes in windows/sliders. (2) All gaps between window & door frames and the masonry walls are to be sealed using acoustic foam Hilti CP620 or similar (Bostik/Parfix/Sika). Glass wool batts should be applied prior to the application of the foam to seal larger gaps. (3) All gaps are to be acoustically sealed.

ACOUSTIC REQUIREMENTS

ALL ACOUSTIC MITIGATION MEASURES, BUILDING ELEMENTS, CONSTRUCTION METHODS, GLAZING, DOORS, SEALS, WALL AND ROOF INSULATION, VENTILATION SYSTEMS AND ANY OTHER ACOUSTIC TREATMENTS REQUIRED FOR THE DEVELOPMENT SHALL BE INSTALLED AND CONSTRUCTED IN ACCORDANCE WITH THE RECOMMENDATIONS AND REQUIREMENTS OF THE APPROVED ACOUSTIC REPORT.

THE BUILDER SHALL REVIEW THE ACOUSTIC REPORT IN ITS ENTIRETY PRIOR TO CONSTRUCTION AND ENSURE ALL RECOMMENDATIONS ARE INCORPORATED INTO THE WORKS. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL DRAWINGS AND ACOUSTIC REPORT SHALL BE REFERRED TO THE ARCHITECT AND ACOUSTIC CONSULTANT FOR CLARIFICATION PRIOR TO CONSTRUCTION.

ALL WORKS SHALL COMPLY WITH THE REQUIREMENTS OF THE ACOUSTIC REPORT, NCC AND RELEVANT AUSTRALIAN STANDARDS.

www.dialbeforeyoudig.com.au
DIAL1100 BEFORE YOU DIG

UNRETAINED EMBANKMENT SLOPE RATIOS

Soil Class	*Max Site Cut Angle (H:L)*
Stable rock (Class A)	8:1
Sand (Class A)	1:2
Firm Clay (Class M - E)	1:1
Soft Clay (Class M - E)	2:3

ANY ESSENTIAL SERVICE MUST BE DISCONNECTED FROM THE STRUCTURE BEING DEMOLISHED OR REMOVED IN ACCORDANCE WITH THE REQUIREMENTS OF THE RELEVANT AUTHORITY, AND THE STRUCTURE BEING DEMOLISHED OR REMOVED MUST NOT BE RELOCATED ON THE SAME LOT OR TO A DIFFERENT LOT, UNLESS IT MEETS THE RELEVANT DEVELOPMENT STANDARDS SPECIFIED.

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC 2022 (Housing Provisions) and AS 3660.1 (2014) Part 1 3.4 of the NCC 2022

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL. ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO. DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.

Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all owning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000L to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

ELEVATIONS-B

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	13.02.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by:
			AN
			Project No:
			CARRA-26

ndg


DUAL-OCCUPANCY

18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC
09

Note:
Eaves, flues, chimneys, pipes and domestic fuel tanks, cooling or heating appliances or other services are required to be setback a min. 450mm from title boundary and 900mm from another building on the same allotment.

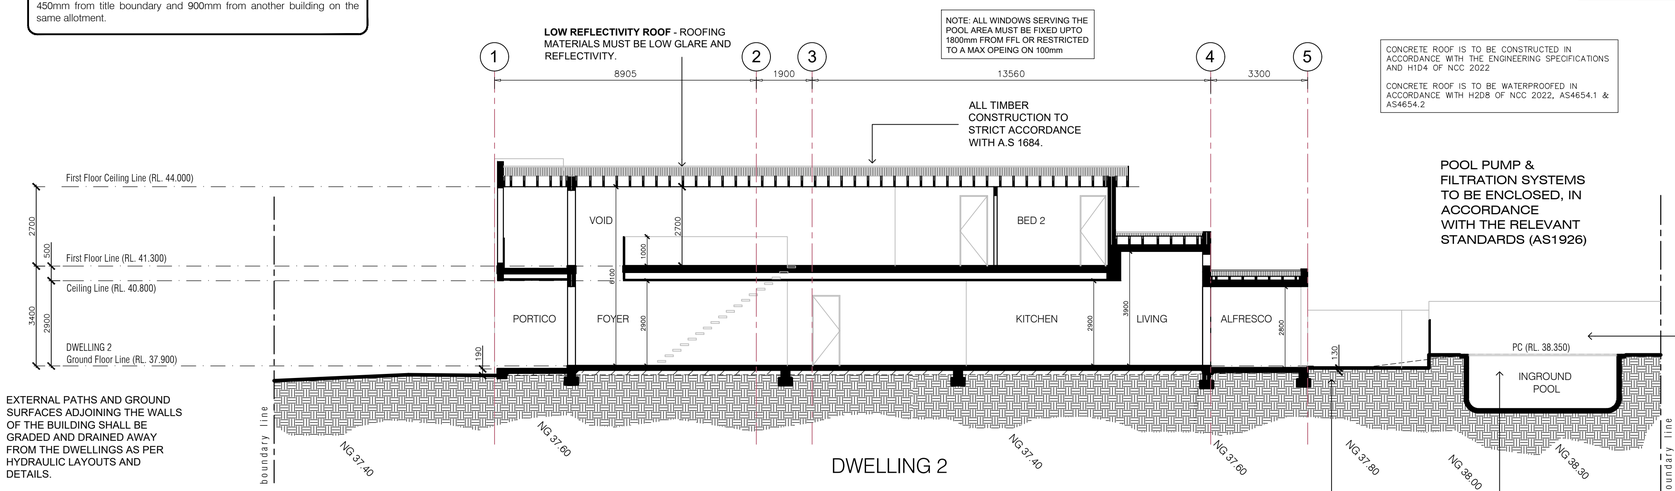

EXTERNAL PATHS AND GROUND SURFACES ADJOINING THE WALLS OF THE BUILDING SHALL BE GRADED AND DRAINED AWAY FROM THE DWELLINGS AS PER HYDRAULIC LAYOUTS AND DETAILS.

SECTION A - A

stair note
Stairs (internal/external) shall be constructed in accordance with the following:
i) Risers (R) - max. 190mm min. 115mm
ii) Going (G) - max. 355mm min. 240mm
iii) where 2R+G - max. 700mm and min. 550mm

contractor to ensure internal and external balustrades do not permit a 125mm sphere to pass through the barrier, refer to figure 3.9.1.4.

Slip rating for stairs	Surface Condition	
Application	Dry	Wet
Tread or Landing Surface	P3 or R10	P4 or R11
Nosing or Landing edge strip	P3	P4

A continuous, unobstructed handrail located along at least one side of all stairs that provide a change in floor level of at least 1m, at a height of at least 865mm above the stair nosings.

GUTTERS AND DOWNPIPES:
AMENDED PLANS INDICATING GUTTERING AND DOWNPIPES IN ACCORDANCE WITH PART 3.5.3 OF THE NCC 2019 VOLUME 2 AMENDMENT 1.

ALL EAVES TO HAVE 450MIN SETBACK FROM SIDE BOUNDARIES

ALL WINDOW OPENING TO HAVE A SECURE PROTECTION INACCORDANCE WITH CLAUSE 11.3.7 OF NCC2022 VOLUME. (ALL BEDROOM WINDOWSILLS ARE HIGHER THAN 2M FROM NGL)

REFER TO STORMWATER ENGINEERS PLANS AND DETAILS. STORMWATER TO BE DRAINED TO LEGAL POINT OF DISCHARGE TO THE SATISFACTION OF RELEVANT AND GOVERNING AUTHORITY. BUILDER TO CONFIRM THE EXACT LOCATION OF THE LEGAL POINT OF DISCHARGE PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS.

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING

PART 9.3.1(5) – VERTICAL LINING EAVE SEPARATION
PART 9.2.9(4)(B) – NON–COMBUSTIBLE EAVE LINING
PART 10.2, H2D8 – WATERPROOFING TO COMPLY WITH NCC 2022 PART 10.2, H2D8, AS 3740, AS 4654.1 AND AS 4654.2 (INCLUDING WASTE FLANGES TO BE RECESSED)

PART 5.7 – MASONRY WALLS TO BE WEATHERPROOFED AND ENSURE DAMP–PROOF COURSES AND FLASHINGS MUST BE VISIBLE FROM THE OUTSIDE FACE OF THE WALL

PART 8.3 – GLAZING TO COMPLY WITH AS1288–2006, AS2047–2014, H1D8 OF THE NCC 2022 & MANUFACTURERS TECHNICAL SPECIFICATION.

CONCRETE ROOF IS TO BE CONSTRUCTED IN ACCORDANCE WITH THE ENGINEERING SPECIFICATIONS AND H1D4 OF NCC 2022

CONCRETE ROOF IS TO BE WATERPROOFED IN ACCORDANCE WITH H2D8 OF NCC 2022, AS4654.1 & AS4654.2

POOL PUMP & FILTRATION SYSTEMS TO BE ENCLOSED, IN ACCORDANCE WITH THE RELEVANT STANDARDS (AS1926)

NOTE:
SAFETY POOL FENCING SHALL BE IN ACCORDANCE WITH AS 1926.1 WHEREIN A SUITABLE BARRIER SHALL BE PROVIDED AT A MINIMUM HEIGHT OF 1200mm MIN. AND VERTICLE BALLUSTRADES ARE SPACED AT NO GREATER THAN 100mm. THE GATE SHALL BE HUNG SO THAT IT SWINGS AWAY FROM THE POOL AREA AND ALSO BE A MINIMUM HEIGHT OF 1200mm MIN., SELF CLOSING AND SELF LATCHING OR SELF LOCKING DEVICE SHALL BE LOCATED AT LEAST 1200mm MIN. ABOVE THE FLOOR LEVEL. THE PERIMETER PAILING FENCING SHALL BE TREATED SO THAT THE RAILS ARE BEVELLED ON A 60° ANGLE TO PREVENT CHILDREN FROM CLIMBING OVE RTHE FENCE. FURTHERMORE, ENSURE ALL PERIMETER POOL FENCING HAS A 1200mm CLEAR SPAN FROM CLIMBABLE OBJECTS.

WASTEWATER DISCHARGE OF POOL.
THE POOL SHALL BE CONNECTED TO THE SEWER
FOR DISCHARGE OF WASTEWATER IN ACCORDANCE WITH AS3500.

REFER TO GEO-TECHNICAL ENGINEER AND STRUCTURAL ENGINEERS DETAILS AND RECOMMENDATIONS FOR ALL PROPOSED METHOD OF SUPPORT TO ANY EXCAVATION ADJACENT TO ADJOINING PROPERTIES, OR THE ROAD RESERVE - THE PROPOSED METHOD OF SUPPORT IS TO BE DESIGNED
BY A CHARTERED CIVIL ENGINEER.

UNRETAINED EMBANKMENT SLOPE RATIOS	
Soil Class	*Max Site Cut Angle (H:L)*
Stable rock (Class A)	8:1
Sand (Class A)	1:2
Firm Clay (Class M - E)	1:1
Soft Clay (Class M - E)	2:3

www.dialbeforeyoudig.com.au
DIAL1100 BEFORE YOU DIG

1 2 3 4 5 6 7 8 9 10 15 20 25
SCALE BAR - 1:200@A3 SCALE BAR - 1:100@A1

HOB & DRAINAGE NOTE:
Construct hob around the external perimeter in accordance with the structural engineer's details to all awnings, extrusions, and openings.
Finished surface levels to achieve a minimum 1% fall towards rainwater outlets (RWO), ensuring proper drainage away from building edges.

Provide all RWOs, overflow provisions, and connections in accordance with stormwater engineer's drawings and specifications.
All stormwater and surface drainage works to comply with:

AS/NZS 3500.3 – Plumbing and Drainage: Stormwater Drainage;

AS 2870 – Residential Slabs and Footings (site drainage and moisture control);

NCC Volume Two, Part 3.1.2 – Drainage and Moisture Management

WATER FROM A SWIMMING POOL MUST BE DISCHARGED IN ACCORDANCE WITH AN APPROVAL UNDER THE LOCAL GOVERNMENT ACT 1993.

1200mm HIGH APPROVED POOL FENCE TO SUIT.

AN APPROVED RESUSCITATION SIGN.

APPROVED SELF CLOSING CHILDPROOF POOL GATE TO SUIT.

CLAUSE D2.24 OF THE NCC 2022 AND 3.9.2.6
FIRST FLOOR BEDROOM OPENABLE WINDOWS TO BE FITTED WITH A DEVICE TO LIMIT OPENING OR SUITABLE SCREEN SO A 125mm SPHERE CANNOT PASS THROUGH.

THE DEVICE OR SCREEN CAN HAVE A CHILD RESISTANT RELEASE MECHANISM WHICH CAN ENABLE THE DEVICE OR SCREEN TO BE REMOVED, UNLOCKED OR OVERRIDDEN AND RESTRICT THE FORCE OF 250N. WHERE A CHILD RESISTANT MECHANISM
IS UTILISED, THE WINDOW MUST ALSO BE PROVIDED WITH A BARRIER BELOW IT THAT HAS A MINIMUM
HEIGHT OF 865MM, DOES NOT PERMIT A 125MM SPHERE TO PASS THROUGH IT, AND DOES NOT HAVE ANY HORIZONTAL OR NEAR HORIZONTAL ELEMENTS BETWEEN 150MM AND 760MM THAT FACILITATE CLIMBING.
FIXED GLAZING UNDER THE OPENABLE PART OF THE WINDOW WHICH MEETS THE HEIGHT REQUIREMENTS (I.E. TRANSOM AT LEAST 865MM ABOVE THE FLOOR ETC.) WOULD SATISFY THE BARRIER REQUIREMENT.

WHERE A DEVICE OR SCREEN IS SECURELY FIXED IN POSITION (EG A SCREEN POP RIVETED TO THE WINDOW FRAME) SO IT CANNOT BE UNLOCKED, OVERRIDDEN, OR IS VERY DIFFICULT TO REMOVE WITHOUT FOR EXAMPLE A DRILL, THE 865MM BARRIER WOULD NOT BE REQUIRED AS THE SECURING METHOD IS CONSIDERED A FIXTURE AND NOT A CHILD RESISTANT RELEASE MECHANISM.


PROTECTION OF THE OPENING IS NOT REQUIRED FOR WINDOWS WHERE THE LOWEST PART OF THE OPENING IS 1.7M OR MORE ABOVE THE FLOOR

note:
Builder to provide colorbond downpipes in a selected colour finish to Hydraulic Engineers specs. eaves gutter to have a fall not less than 1:500 unless fixed to a metal fascia. eaves gutters to be supported by by brackets securely fixed at stop ends and at not more than 1200mm centres and be capable of removing the overflow volume specified in table 3.5.3.3(a & b) roof plumber to provide 200mm min wide colorbond box gutters with overflows, refer to plan for box gutter widths. box gutters are to have a fall in the range of 1:40 to 1:200 and be supported with CD grade plywood and flexible high performance waterproofing membrane, UV resistant and in accordance with AS3500.3-2018. Nominated plumber to provide flashing to match roof colour. all sumps to be provided with overflows and to comply with current NCC standards and regulations. Upon completion plumber to provide compliance certificate for works carried out.

Builder to provide downpipes at 12m max centres


GUTTERS AND DOWNPIPES:
AMENDED PLANS INDICATING GUTTERING AND DOWNPIPES IN ACCORDANCE WITH PART 3.5.3 OF THE NCC 2019 VOLUME 2 AMENDMENT 1.

Figure 7.2.3 Minimum pitch requirements for metal roofing profiles

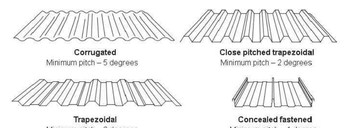

SELECTED METAL ROOF AT 5° PITCH TBC. REFER TO MANUFACTURERS DETAILS AND SPECIFICATIONS FOR MINIMUM PITCH REQUIREMENTS AND SARKING TO SUIT SELECTED METAL SHEETING.
SELECTED ROOF RAFTERS AS PER ENGINEERS DETAILS AND COMPUTATIONS. REFER TO BASIX REPORT FOR INSULATION REQUIREMENTS. BUILDER TO PROVIDE SARKING BELOW ALL NEW ROOF STRUCTURES.

MASONRY CONSTRUCTION WALLS ON CONCRETE FOOTING UNO WITH MOISTURE BARRIER THROUGHOUT. REFER TO STRUCTURAL ENGINEERS DETAILS AND DOCUMENTATION FOR WATERPROOFING METHODS, SLAB LAYOUT, SIZE AND FOUNDING DEPTHS etc.

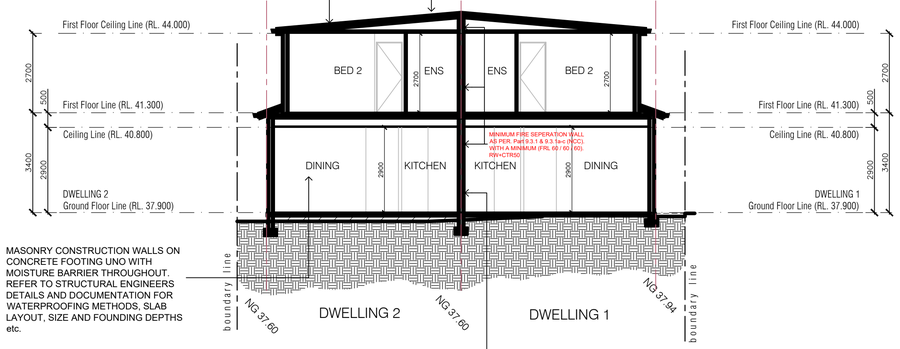

SECTION B - B

Termite Protection:
Install physical barriers for termite protection to comply with Part 3.4 of the NCC (Housing Provisions) and AS 3660.1 (2014) Part 1 3.4 of the NCC

270mm MINIMUM FIRE SEPERATION WALL AS PER part 9.3.1 & 9.3.1a-c of the (NCC 2022). WITH A MINIMUM (FRL 60 / 60 / 60).

270mm CONSTRUCTION / RENDER WITH A Rw + CTR not less than 50 ACOUSTIC RATING MINIMUM COMMON WALL MEETS THE MINIMUM SOUND ACOUSTIC INSULATION NCC 2022.

BOUNDARY WALL TO BE FIRE RATED FROM FOOTING TO UNDERSIDE OF ROOF TO COMPLY WITH NCC & ACHIEVE AN FRL OF 60/60/60

BOUNDARY WALL FROM FOOTING TO UNDERSIDE OF THE ROOF

NO SERVICES WITHIN BOUNDARY WALL
STEEL AND TIMBER BEAMS NOT TO PENETRATE BOUNDARY WALL

WET AREAS / FLOOR SETDOWNS


PROVIDE FLOOR SETDOWNS TO ALL WET AREAS INCLUDING BATHROOMS, ENSUITES, LAUNDRIES, POWDER ROOMS AND WC'S AS REQUIRED. WATERPROOFING AND CONSTRUCTION OF WET AREAS SHALL COMPLY WITH NCC REQUIREMENTS, AS 3740 (WATERPROOFING OF DOMESTIC WET AREAS) AND MANUFACTURER'S SPECIFICATIONS.

CONCRETE SLAB SHALL BE GRADED TOWARD FLOOR WASTES AND SHALL NOT RELY SOLELY ON SCREEDING TO ACHIEVE REQUIRED FALLS. WATERPROOFING AND DRAINAGE WORKS SHALL COMPLY WITH NCC, AS 3740 AND RELEVANT AUSTRALIAN STANDARDS. ALL SHOWER RECESSES ARE TO BE SUITABLY GRADED TO FLOOR WASTES AND INCORPORATE FLOOR SETDOWNS WHERE REQUIRED. WATERPROOF MEMBRANE TO EXTEND TO WALLS, FLOORS, JUNCTIONS, PENETRATIONS AND FIXTURES IN ACCORDANCE WITH AS 3740.

CONCRETE SLAB SETDOWNS, FALLS, SCREEDS AND THRESHOLDS ARE TO BE COORDINATED BY THE BUILDER AND STRUCTURAL ENGINEER TO ENSURE COMPLIANCE WITH WATERPROOFING, DRAINAGE AND FINISHED FLOOR LEVEL REQUIREMENTS.

ALL WET AREA FLOOR WASTES, PLUMBING PENETRATIONS AND DRAINAGE WORKS ARE TO BE INSTALLED IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS AND HYDRAULIC REQUIREMENTS.

COMMON STRUCTURES: BUILDER / PROPRIATOR TO CONSULT WITH NEIGHBOURS REGARDING THE MANAGEMENT, PROCESS AND HANDLING OF THE EXISTING FENCE / STRUCTURES ON THE COMMON BOUNDARY PRIOR TO ANY EXCAVATION OR WORKS AFFECTING THE COMMON STRUCTURES.

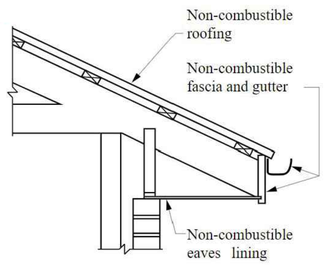

(d) Eaves construction

BASIX NOTES - 18 CARRAMAR CRESCENT, MIRANDA.
Basix and Nathers requirements are:

-R3.5 insulation to plasterboard ceiling
-R1.3 foil blanket and sisalation underneath metal roof
-R1.0 insulation to garage ceiling with balcony above
-Downlights which penetrate the ceiling to be fitted with approved fireproof, non-ventilated covers allowing uninterrupted ceiling insulation
-Dwelling 2 only: foil sisalation to all cavity brick external walls except garage walls
-Weather stripping to external doors & windows
-all awning windows shall be: Aluminium standard single-glazed: clear glass: U = 6.70 & SHGC = 0.57
-all other windows and sliding doors shall be: Aluminium standard single-glazed: clear glass: U = 6.70& SHGC = 0.70
-RWT: 2,000L to collect 80sqm of roof area and to be connected to toilets and landscape
-hot water system: 3star gas instantaneous or equivalent
-pool capcity: 28KL

DA CONDITIONS: DA22/0548

THE WORKS SHALL BE ERECTED/CONSTRUCTED IN CONFORMITY WITH THE APPROVED PLANS AND ANY APPROVED SPECIFICATIONS AND IN ACCORDANCE WITH THE CONDITIONS OF APPROVAL. ANY ALTERATIONS, MODIFICATION OR VARIATIONS TO THESE PLANS OR SPECIFICATIONS REQUIRES THE PRIOR FORMAL APPROVAL OF COUNCIL.

ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH ALL CURRENT BUILDING CODES AND RELEVANT AUSTRALIAN STANDARDS, AND TO THE SATISFACTION OF THE GOVERNING LOCAL AUTHORITIES. THESE PLANS ARE TO BE READ AND IMPLEMENTED IN ACCORDANCE WITH NOTICE OF DETERMINATION OF DEVELOPMENT APPLICATION

NO. DA22/0548 DATED 28th JUNE 2023.
ISSUED BY SUTHERLAND SHIRE COUNCIL.
PAN-222683

Zoning of Property: R2 Low Density Residential
Lot 26, DP 21078. 721sqm
No.18 CARRAMAR CRESCENT, MIRANDA. NSW. 2204

Demolition of existing structures and construction of a dual occupancy and 2 swimming pools with Torrens title subdivision

Determination Date: 28th JUNE 2023
THE DA CONDITIONS HAVE BEEN IMPOSED ON THE DEVELOPMENT TO ENSURE ALL RELEVANT PLANNING REQUIREMENTS ARE MET.

BEFORE COMMENCING THE DEVELOPMENT PLEASE READ THE DEVELOPMENT CONSENT CAREFULLY AND MAKE SURE YOU UNDERSTAND ALL THE CONDITIONS THAT HAVE BEEN IMPOSED. PLEASE CONTACT COUNCIL IF YOU HAVE ANY QUESTIONS.

SECTIONS

© THIS DRAWING & DESIGN MUST NOT BE COPIED IN PART OR WHOLE WITHOUT THE WRITTEN AUTHORIZATION FROM NASSIMA DESIGN GROUP.

NORTH

rev.	date	comments	designed by:
A	13.02.26	ISSUED-FOR-APPROVAL	AN-6880
			drawn by:
			AN
			Project No:
			CARRA-26

ndg

DUAL-OCCUPANCY
18-CARRAMAR-CRESCENT,MIRANDA-NSW-2228
LOT-26.DP.21078-AREA.721SQM

nassimadesign
group . melbourne . sydney
322 kingsgrove road, kingsgrove nsw 2208
phone: 0413 868 773
ndgsydney@gmail.com

CC 10