FOR CONSTRUCTION

LOT 325 - 34 ZEPHYR STREET AUSTRAL NSW 2179. IN DP1271188.

PROPOSED CONSTRUCTION OF A SINGLE STOREY DWELLING

PARAGON

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026



BASIX COMMITMENTS	Certificate number: 1865565S Date of issue: Tuesday, 15 September 2026
WATER	
LANDSCAPE	110.67m2
TOILETS	4 STARS
KITCHEN TAPS	5 STARS
SHOWER HEADS	4 STARS (>4.5 but <=6 Umin)
BASIN TAPS	4 STARS
ALTERNATIVE WATER	1500L RAINWATER TANK
ROOF WATER TO TANK	299m2
ALT.WATER USES- TANK	LAUNDRY
ALT. WATER USES - RETIC	ALL TOILETS + ONE OUTDOOR TAP
SWIMMING POOL	N/A
ENERGY	
HOT WATER	GAS INSTANTANEOUS - 5 STAR
AIR-CON (HEATING)	3 PHASE DUCTED - EER 3.0-3.5
AIR-CON (COOLING)	3 PHASE DUCTED - EER 3.0-3.5
VENTILATION - BATHROOM	NONE/ NATURAL VENTILATION
VENTILATION - KITCHEN	DUCTED - MANUAL SWITCH
VENTILATION - LAUNDRY	NONE/ NATURAL VENTILATION
PV SYSTEM	N/A
COOKTOP	GAS
OVEN	ELECTRIC
CLOTHES DRYING	OUTDOOR CLOTHESLINE
LIGHTING	DEDICATED LED

GENERAL LEGEND

AC	AIR CONDITIONING UNIT
AL	POWDERCOATED ALUMINIUM DOOR/ WINDOW
BAL	BALUSTRADE TYPE
BG	BOX GUTTER
BR1, BR2, etc.	BRICK FACE TYPE
CAP	METAL CAPPING
CD1, CD2, etc.	WALL CLADDING
CONC.	CONCRETE FLOOR
CPT	CARPET
CRT	CONCRETE ROOF TILES
CR1, CR2, etc.	CEMENT RENDER TYPE/ COLOUR
DP/S	DOWN PIPE
DW	DISH WASHER
ED	ENTRY DOOR
F	FRIDGE
FAS	FASCIA
FET	FEATURE TILE
FT, FT1, FT2, etc	FLOOR TILES
FW	FLOOR WASTE
GD	GARAGE DOOR
GUT	GUTTER
HWU	HOT WATER UNIT
HYB	HYBRID FLOOR
L	LINEN
MR	METAL ROOF
MW	MICROWAVE OVEN
NGL	NATURAL GROUND LEVEL
OBS	OBSCURED GLASS
P	PANTRY
R	ROBE
RL	REDUCED LEVEL
RWH	RAIN WATER HEAD
RWT	RAIN WATER TANK
S	STORAGE
TOW	TOP OF WALL
TL	TIMBER LAMINATE
WC	WATER CLOSET
WM	WASHING MACHINE
SD	SMOKE DETECTOR

Sheet List

Sheet No.	Sheet Name	Drawn By	Current Revision Date	Revision
CDC.01	COVER SHEET	AS	7-09-2026	CDC ISSUE
CDC.02A	GENERAL NOTES	AS	7-09-2026	CDC ISSUE
CDC.02B	GENERAL NOTES	AS	7-09-2026	CDC ISSUE
CDC.03	LOCATION PLAN AND SITE PLAN	AS	7-09-2026	CDC ISSUE
CDC.04	SITE ANALYSIS AND SEDIMENT CONTROL	AS	7-09-2026	CDC ISSUE
CDC.05	GROUND FLOOR PLAN	AS	7-09-2026	CDC ISSUE
CDC.07	ROOF PLAN	AS	7-09-2026	CDC ISSUE

Sheet List

Sheet No.	Sheet Name	Drawn By	Current Revision Date	Revision
CDC.08	ELEVATION 01	AS	7-09-2026	CDC ISSUE
CDC.09	ELEVATION 02	AS	7-09-2026	CDC ISSUE
CDC.10	SECTIONS	AS	7-09-2026	CDC ISSUE
CDC.11	FLOOR AREA PLAN	AS	7-09-2026	CDC ISSUE
CDC.12	RENTABLE AREA PLAN	AS	7-09-2026	CDC ISSUE
CDC.14	COLOR SCHEDULE	AS	7-09-2026	CDC ISSUE
CDC.15	LANDSCAPE PLAN	AS	7-09-2026	CDC ISSUE
CDC.18	WATERPROOFING DETAILS	SL	7-09-2026	CDC ISSUE

NOTE : ALL IMAGES ARE FOR ILLUSTRATION ONLY AND ARE SUBJECT TO VARIATION AS PER SITE CONDITION, STRUCTURAL ELEMENT AND TO AVAILABILITY OF MATERIALS.

CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
12	10-08-2026	Kitchen counter and island extended to 3200mm, Sliding door and window swapped, Tall unit with MW Space added - Ekta	
5	02-02-2026	CDC ISSUE	

RUBY HOMES

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
COVER SHEET

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	As indicated	CDC.01	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

BUILDING SPECIFICATIONS

National Construction Code – Volume 2, Amendment 1 – Building Code of Australia 2022 & Housing Provisions Standard 2022

PARAGON
Paragon Building Certifiers Pty Ltd
BBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

SITE PREPARATION

- PART 3.1 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

EARTHWORKS

- TO BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE ENVIRONMENTAL PLANNING & ASSESSMENT ACT 1979 AND DEVELOPMENT CONSENT CONDITIONS
- PART 3.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4678:2002 - EARTH-RETAININGSTRUCTURES

DRAINAGE

- PART 3.3 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS 3500.1:2021 - PLUMBING & DRAINAGE - WATER SERVICES
- AS/NZS 3500.2:2021 - PLUMBING & DRAINAGE - SANITARY PLUMBING & DRAINAGE
- AS/NZS 3500.3:2021 - PLUMBING & DRAINAGE STORMWATER DRAINAGE
- AS/NZS 3500.4:2021 - PLUMBING & DRAINAGE - HEATED WATER SERVICES

STRUCTURAL WORK

- Part 2.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4100-2020– STEEL STRUCTURES CODES
- AS/NZS 1170.0-2002 – GENERAL PRINCIPLES
- ASNZS 1170.1-2002 – PARTS 1 PERMANENT, IMPOSED AND OTHER ACTIONS
- AS/NZS 1170.2-2021 – PART 2 WIND ACTIONS
- AS 3700-2018– SAA MASONRY CODE
- AS 1684.3-2021- RESIDENTIAL TIMBER FRAMED CONSTRUCTION

FOOTINGS & SLABS

- PART 4 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 2159:2009 - PILING - DESIGN & INSTALLATION
- AS 2870:2011 - RESIDENTIAL SLABS & FOOTINGS
- AS 3600:2018 - CONCRETE STRUCTURES

MASONRY

- PART 5 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3700:2018 - MASONRY STRUCTURES

FRAMING

- PART 6 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1684.2:2021 - RESIDENTIAL TIMBER-FRAMED CONSTRUCTION - NON- CYCLONIC AREAS
- AS 1720.1:2010 - TIMBER STRUCTURES - DESIGN METHODS
- AS 4100:2020 - STEEL STRUCTURES
- AS 3660.1-2014 – TERMITE MANAGEMENT SYSTEM

ROOF & WALL CLADDING

- PART 7 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1273:1991 - UNPLASTICIZED PVC (UPVC) DOWNPIPES & FITTINGS FORRAINWATER
- AS 1562.1:2018 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - METAL
- AS/NZS 1562.3:2006 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - PLASTIC
- AS 2049:2002 - ROOF TILES
- AS 2050:2018 - INSTALLATION OF ROOF TILES
- AS 4285:2019 – ROOFLIGHTS

GLAZING

- PART 8 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1288:2021 - GLASS IN BUILDINGS -SELECTION & INSTALLATION
- AS 2047:2014 - WINDOWS & EXTERNAL GLAZED DOORS IN BUILDINGS
- AS/NZS 2208:1996 - SAFETY GLAZING MATERIALS IN BUILDINGS

FIRE SAFETY

- PART 9 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3786:2014 - SMOKE ALARMS USING SCATTERED LIGHT, TRANSMITTED LIGHTOR IONIZATION

HEALTH & AMENITY

- PART 10 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS ISO 717.1:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS -AIRBORNE SOUND INSULATION
- AS ISO 717.2:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - IMPACT SOUND INSULATION
- AS 1668.2:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - MECHANICAL VENTILATIONIN BUILDINGS
- AS 1668.4:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - NATURAL VENTILATION OFBUILDINGS
- AS/NZS 1680.0:2009 - INTERIOR LIGHTING - SAFE MOVEMENT
- AS 3740:2021 - WATERPROOFING OF DOMESTIC WET AREAS
- AS 3000-2018 – ELECTRICAL INSTALLATION
- BCA Part 10.8.1, AS4200.1 & AS4200.2 – PLIABLE BUILDING MEMBRANE INSTALLED.

WATERPROOFING

- PART 10.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022
- AS 3740-2021– WATERPROOFING TO WET AREA
- AS 4654-2012 – EXTERNAL WET AREAS

SAFE MOVEMENT & ACCESS

- PART 11 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1428.1:2009 - DESIGN FOR ACCESS &MOBILITY – GENERAL REQUIREMENTS FOR ACCESS - NEW BUILDING WORK
- AS 1657:2018 - FIXED PLATFORMS, WALKWAYS, STAIRWAYS & LADDERS - DESIGN, CONSTRUCTION & INSTALLATION

HANDRAILS & BALUSTRADE

- PART 11.3.3 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.4 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.5 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1170.1-2002 – BALUSTRADEINSTALLATION

PROTECTION OF OPENABLE WINDOW

PART 11.3.7 AND 11.3.8 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

ENERGY EFFICIENCY


- PART 13 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022 & BASIX CERTIFICATE.

HEATING APPLIANCES, FIREPLACES, CHIMNEYS AND FLUES

- PART 12.4 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

MECHANICAL VENTILATION

- EXHAUST FROM A BATHROOM, SANITARY COMPARTMENT TO DISCHARGE DIRECTLY TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 25L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM^2. THIS EXHAUST SYSTEM MUST BE INTERLOCKED WITH LIGHT SWITCH AND INCLUDE RUN-ON TIMER SO THAT THE EXHAUST SYSTEM CONTINUES TO OPERATE FOR 10 MINUTES AFTER THE LIGHT SWITCH IS OFF.
- ANY INSTALLED - KITCHEN RANGEHOOD EXHAUST TO DISCHARGE DIRECTLY OR VIA DUCT TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 40L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM^2.
- LAUNDRY EXHAUST TO DISCHARGE DIRECTLY OR VIA DUCT TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 40L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM^2.

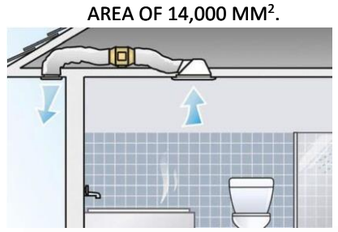



CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT: **LOT 325**

34 Zephyr Street Auatral NSW 2179

DRAWING TITLE: **GENERAL NOTES**

NORTH:


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 2	CDC.02A	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

WATERPROOFING


FALL TO FLOOR WASTE TO BE **MINIMUM 1:80 TO MAXIMUM 1:50**

Figure 10.2.29: Typical membrane termination at drainage outlet

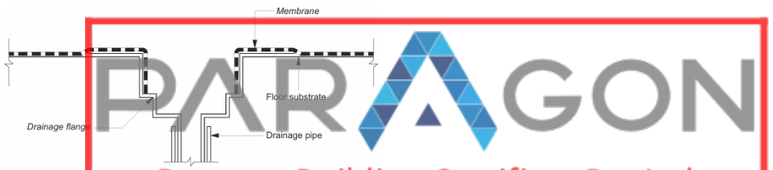


PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

Figure 10.2.24: Typical bathroom door details for whole bathroom waterproofing

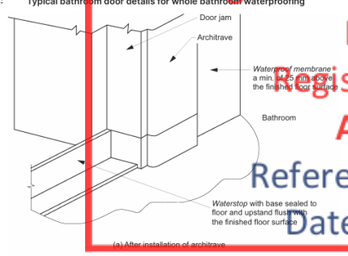


(a) After installation of architrave

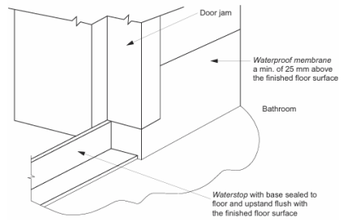


(b) Prior to installation of architrave

BASIN & BATHTUB:

Figure 10.2.5: Bath and vessel abutting wall — areas to be protected

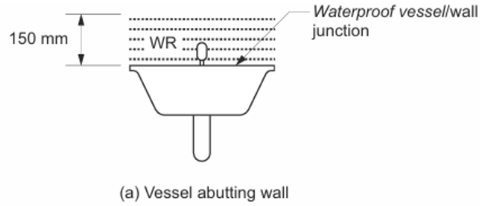


(a) Vessel abutting wall

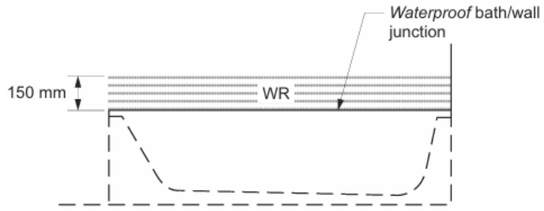

(b) Wall/bath junction

TERMITE SHEET

- TERMITE SHEET EXTENDS THROUGH THE ENTIRE MASONRY LEAF AND **IS VISIBLE AT THE FINISHED FACE OF THE WALL.**

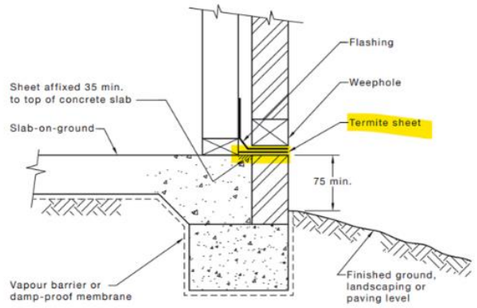


(a) Masonry veneer with separate strip footings

DIMENSIONS IN MILLIMETRES

FIGURE 5.5 (in part) TYPICAL SHEET INSTALLATION TO EXTERNAL WALL WITH CONCRETE FLOOR SLAB


DPC FOR BRICKS

DAMP-PROOF COURSE (DPC) TO EXTENDS THROUGH THE ENTIRE MASONRY LEAF AND **NEED TO BE VISIBLE AT THE FINISHED FACE OF THE WALL FROM OUTSIDE**

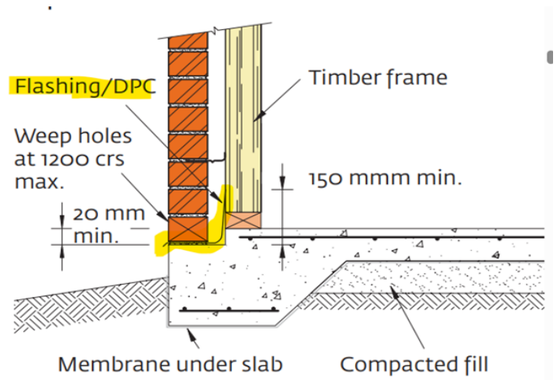


ENCLOSED SHOWER AREA

Figure 10.2.17: Typical hobless construction

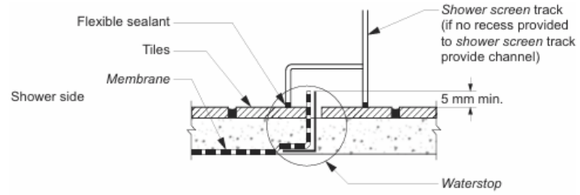

Extent of treatment for shower areas — concrete compressed fibre-cement and fibre-cement sheet floors

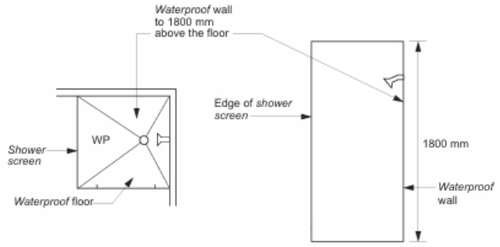

(i) Plan view (ii) Side view

(a) Enclosed shower

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT: **LOT 325**

34 Zephyr Street Auatral NSW 2179

DRAWING TITLE: **GENERAL NOTES**

NORTH:

CDC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 2	CDC.02B	14

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL


CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami

A3

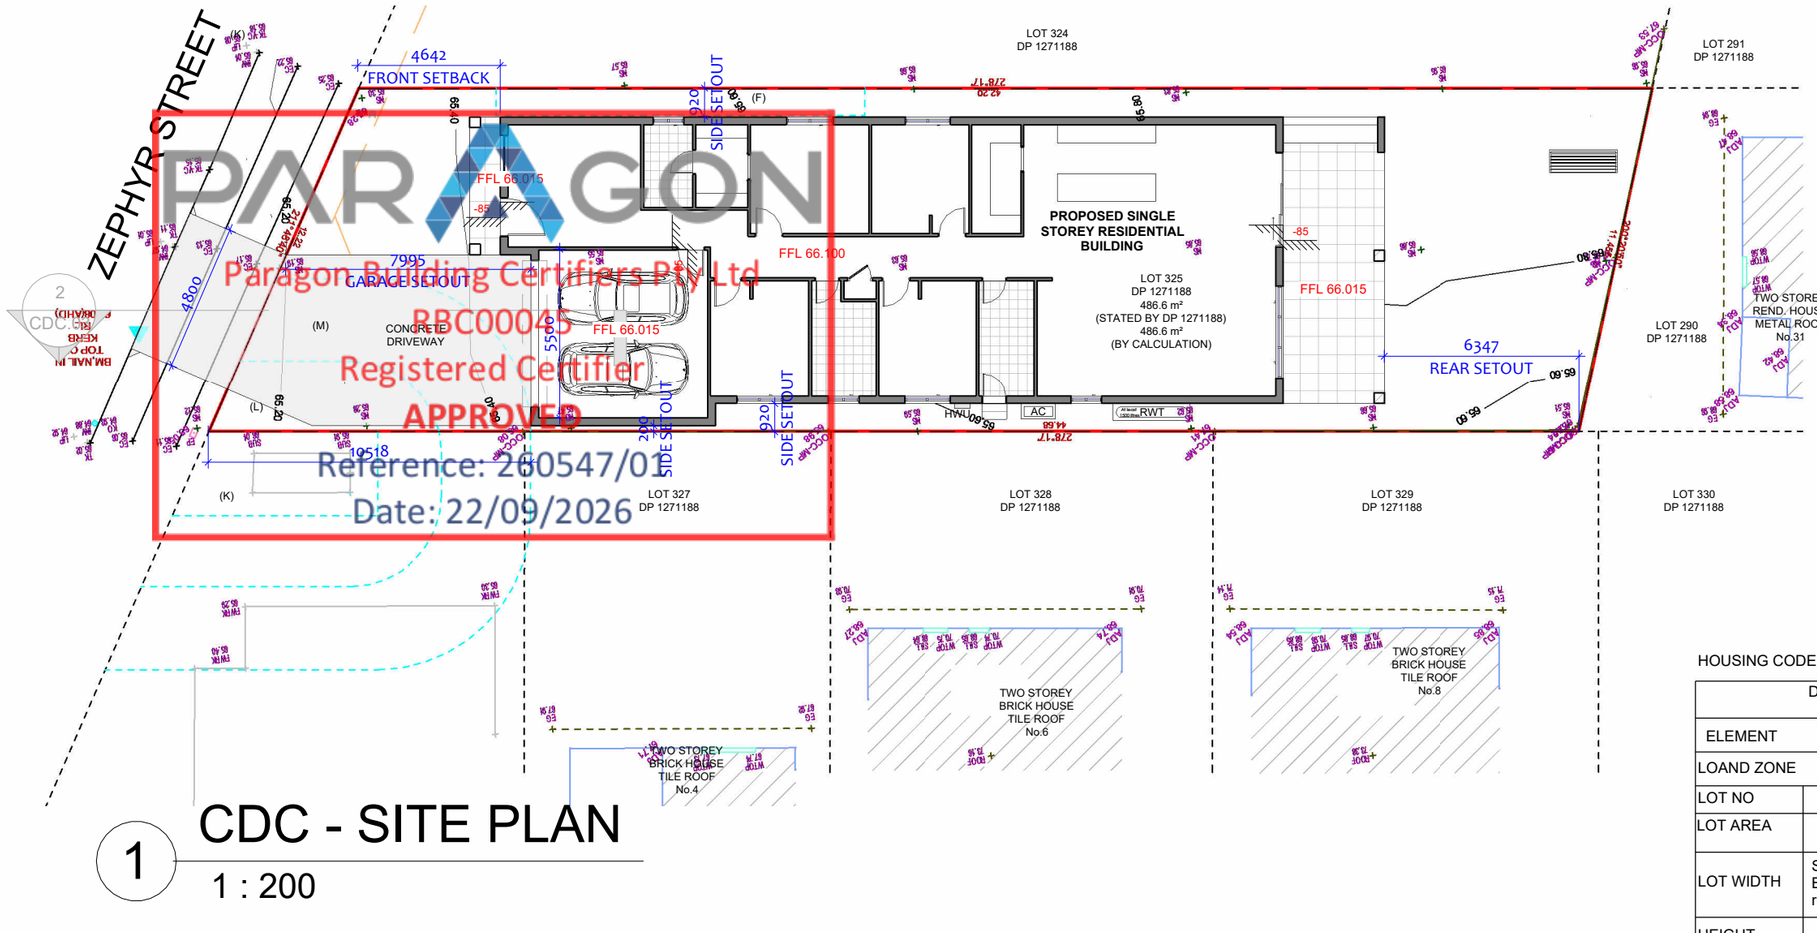

1 CDC - SITE PLAN

1 : 200

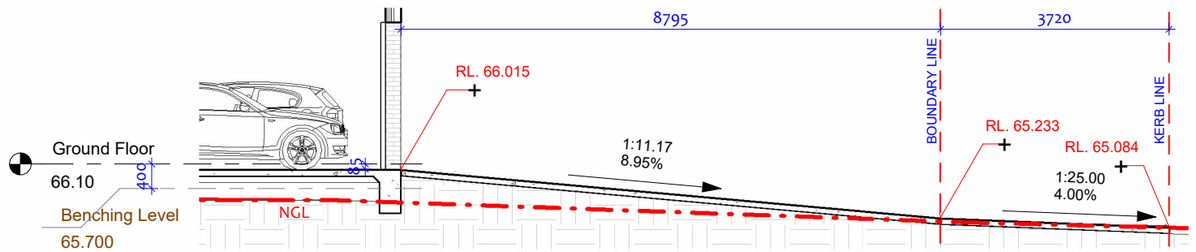

2 DRIVEWAY SECTION

1 : 100

AREA SCHEDULE (RENTABLE)	
NAME	AREA (m2)
LOT AREA	486.6
GROUND FLOOR	190
FIRST FLOOR	
GARAGE	31
STAIRSCASE VOID	
PRIVATE OPEN SPACE	24
DRIVEWAY	49.5
FRONT LANDSCAPE	26.56
REAR LANDSCAPE	84.5

HOUSING CODE COMPLIANCE TABLE

DESCRIPTION		COMPLIANCE		COMMENT
ELEMENT	CODE CONTROL	REQUIREMNT	PROPOSED	
LOAND ZONE	1 GENERAL RESIDENTIAL			
LOT NO	LOT 325			
LOT AREA	486.60 m2			
LOT WIDTH	Standard Lot Min. 6m at Building Line facing primary road	6.0m	12.22 m	YES
HEIGHT	MAX. Height	8.5m	4.9m (MAX.)	YES
FRONT SETBACK	FRONT SET BACK (Min. Setback from Primary Road) (For 450m2<600m2)	4.5 m	4.64m	YES
REAR SET BACK (MIN.)	GROUND FLOOR	3m	6.35m	YES
SIDE SET BACK (MIN.)	GROUND FLOOR	0/0.9m	0.2/0.92m	YES
GROSS FLOOR AREA (GFA)	290 sqm. (For 450m2<600m2)	330m2	203 m2	YES
GROSS FLOOR AREA PLAN	GROUND FLOOR		190 m2	
TOTAL FLOOR AREA			221 m2	
GARAGE			31m2	
ROOF AREA			299 m2	
PRIVATE OPEN SPACE	>10m Lot width	24m2	24 m2	YES
LANDSCAPE AREA	20 % of TOTAL LAND AREA	97.32 m2	110.7 m2	YES

(F) - EASEMENT FOR ACCESS & MAINTENANCE 0.9 WIDE (VIDE DP 1271188)
(K) - EASEMENT FOR PADMOUNT SUBSTATION 2.75 WIDE (VIDE DP 1271188)
(L) - RESTRICTION ON USE OF LAND (No.5) (VIDE DP 1271188)
(M) - RESTRICTION ON USE OF LAND (No.6) (VIDE DP 1271188)

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
LOCATION PLAN AND SITE PLAN

NORTH:

CDC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	As indicated	CDC.03	14

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL

CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami

A3

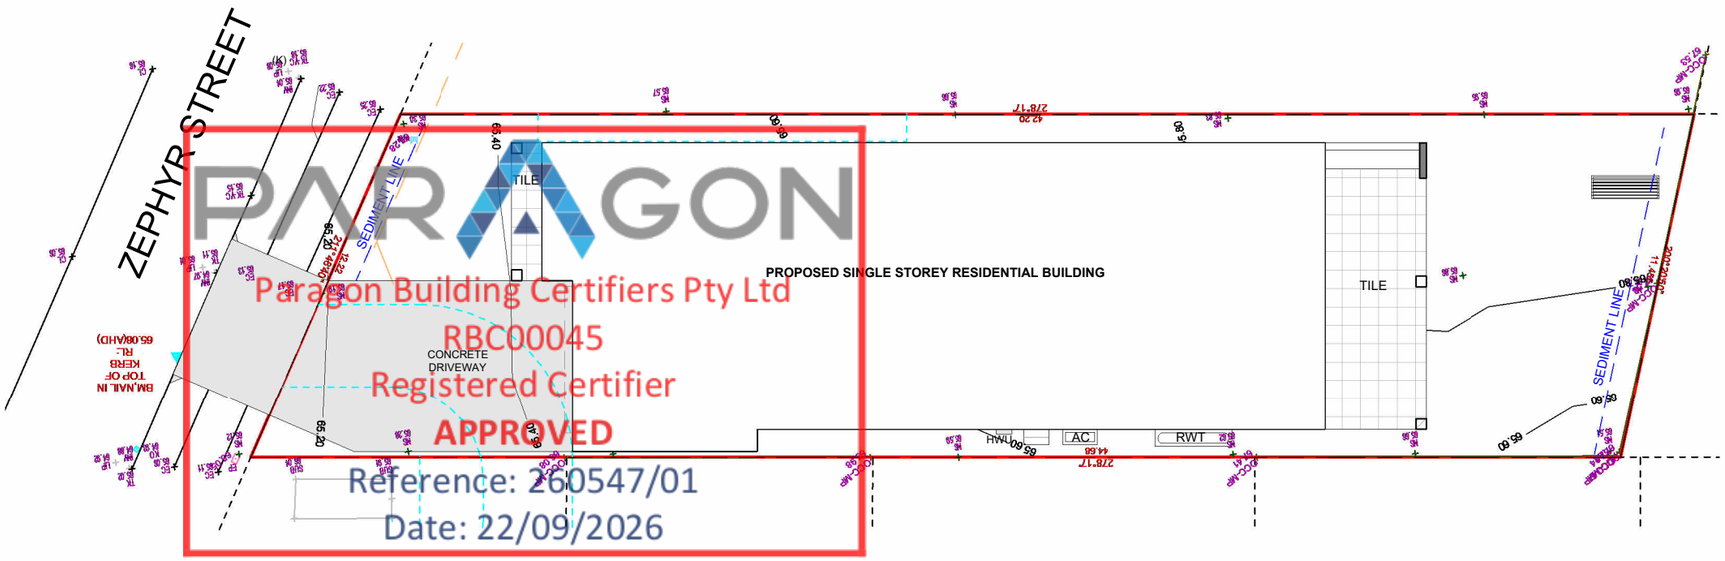

1 SITE ANALYSIS & SEDIMENT CONTROL PLAN

1 : 200

SD 6-9 GEOTEXTILE INLET FILTER

1) FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXILE. REFER SD6-7 FOR DETAILS.
2) SUPPORT GEOTEXILE WITH MESH TIED TO POSTS AT 1 m Ctrs.
3) DO NOT COVER INLET WITH GEOTEXILE.

SD 5-7 STABILISED SITE ACCESS

1) STRIP TOPSOIL AND LEVEL SITE.
2) COMPACT SUBGRADE.
3) COVER AREA WITH GEOTEXILE.
4) CONSTRUCT 200 mm THICK PAD OVER GEOTEXILE USING ROADBASE OR 30 mm AGGREGATE. Min 15 m LONG OR TO BUILDING ALIGNMENT. Min 3 m WIDE.
5) CONSTRUCT HUMP IMMEDIATELY WITHIN BOUNDARY TO DIVERT WATER TO A SEDIMENT FENCE OR OTHER SEDIMENT TRAP.

SITE WORKS NOTES

1.ORIGIN OF LEVELS PROVIDED BY SURVEYIDR

2.THE BUILDER SHALL VERIFY ALL DIMENSIONS AND EXISTING LEVELS ON SITE PERIOR TO THE COMMENCEMENT OF WORK AND ANY DISCREPANNCIES SHALL BE REPORTED TO THE SURVEYOR / ENGINEER .

3. TOPSOIL SHALL BE STRIPPED FROM THE CONSTRUCTUTION AREA AND SOCKPILED ON SITE , TO BE LATER SPREAD OR DISPOSED OFF SITE ,AS DIRECTED BY SUPERVISOR /ENGINEER .

4. ALL TH TRENCH BACKFILL MATERIAL SHAL BE COMPACTED TO THE SAME DENSITY AS THE ADJACENT MATERIAL.

5. ALL SERVICE TRENCHES UNDER VEHICULAR PAVEMENTS SHALL BE BACKFILLED WITH SAND OR APPROVED GRANULAR MATERIALS. TO THE UNDERSIDE OF THE PAVEMENT, AND COMPACTED TO 98%STANDARD MAXIMUM DRY DENSITY ,IN ACCORDANCE WITH AS 1289E1.1.

TEMPORARY 1.8M HIGH WIRE ML FENCE WITH DUSTPROOF MESH APPLIED TO FULL HEIGHTTO BOUNDARIES AS REQUIRED

LOCATION OF WASTE BINS

SEDIMENT FENCE AS REQUIRED

GRAVEL ACCESS

SITE ACCESS AREA TO BE USED FOR WASHDOWN AREA


FOOTPATH CLEAN AND CLEAR AT ALL TIMES

LOCATION OF STOCKPILE MATERIAL

MATERIAL STORAGE AREA


TEMPORARY TOILETS

INSTALL TEMPORARY SEDIMENT BARRIERS TO ALL INLET PITS LIKELY TO COLLECT SILT LADDEN WATER, TO COUNCILS'S REQUIREMENTS.

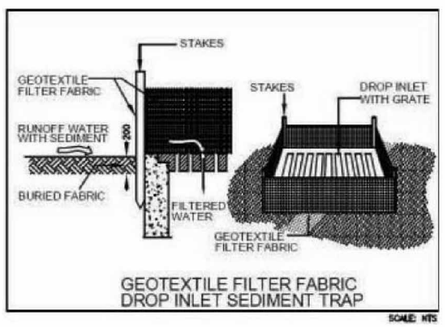


GEOTEXTILE FILTER FABRIC DROP INLET SEDIMENT TRAP

SCALE: NTS

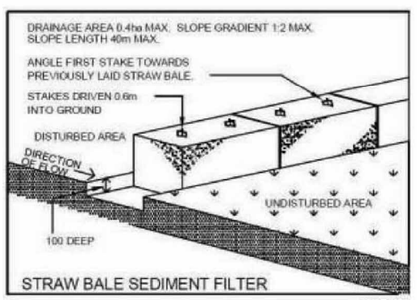


STRAW BALE SEDIMENT FILTER

SCALE: NTS

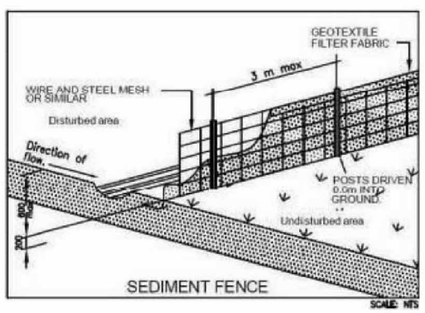

SEDIMENT FENCE

SCALE: NTS

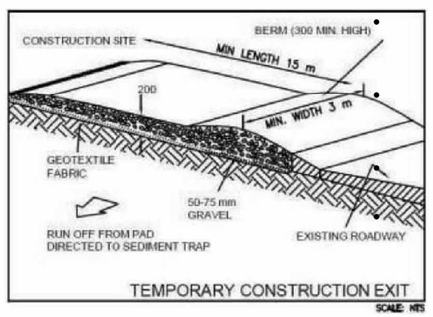

TEMPORARY CONSTRUCTION EXIT

SCALE: NTS

SEDIMENT AND EROSION NOTES:

- THIS PLAN TO BE READ IN CONJUNCTION WITH SEDIMENT AND EROSION CONTROL DETAILS AS ATTACHED.
- THE CONTRACTOR SHALL IMPLEMENT ALL SOIL EROSION AND SEDIMENT CONTROL MEASURES AS NECESSARY AND TO THE SATISFACTION OF COUNCIL PRIOR TO THE COMMENCEMENT AND DURING CONSTRUCTION.NO DISTURBANCE TO THE SITE SHALL BE PERMITTED OTHER THAN IN THE IMMEDIATE AREA OF THE WORK AND NO MATERIAL SHALL BE REMOVED FROM THE SITE WITHOUT COUNCIL'S APPROVAL.ALL SEDIMENTAND EROSION CONTROL DEVICES TO BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH STANDARDS OUTLINED IN NSW DEPARTMENT OF HOUSING "MANAGING URBAN STORMWATER-SOILS AND CONSTRUCTIONS".
- TOPSOIL SHALL BE STRIPPED AND STOCKPILED OUTSIDE HAZARD AREAS SUCH AS DRAINAGE LINES.THIS TOP SOIL IS TO BE RESPIRED LATER ON AREAS TO BE REVEGETATED AND STABLISED ONLY. (I.E ALL FOOTPATHS,BATTERS,SITE REGARDING AREAS,BASINS AND CATCH DRAINS),TOPSOIL SHALL NOT BE RESPIRED ON ANY OTHER AREAS UNLESS SPECIALLY INSTRUCTED BY THE SUPERIDENT.IF THEY ARE TO REMAIN FOR LONGER THAN ONE MONTH STOCKPILES SHALL BE PROTECTED FROM EROSION BY COVERING THEM WITH A MULCH AND HYDROSEEDING AND,IF NECESSARY,BY LOCATING BANKS OR DRAINS DOWNSTREAM OF A STOCKPILE TO RETARD SILT LADEN RUNOFF.
- THE CONTRACTOR SHALL REGULARLY MAINTAIN ALL SEDIMENT AND EROSION CONTROL DEVICES AND REMOVE ACCUMULATED SILT FROM SUCH DEVICES SUCH THAT MORE THAN 60% OF THEIR CAPACITY LOST.ALL THE SILTS TO BE PLACED OUTSIDE THE LIMIT OF WORKS.THE PERIOD FOR MAINTAINING THESE DEVICES SHALL BE AT LEAST UNTIL ALL DISTURBED AREAS ARE REVEGETATED AND FURTHER AS MAY BE DIRECTED BY THE SUPERINTENDENT OR COUNCIL.
- LAY TURF STRIP (MIN 300 mm WIDE) ON 100 mm TOPSOIL WITH 1.0 m LONG RETURNS EVERY 6.0m BEHIND ALL KERB AT THE TOP OF ALL BATTERS AND AROUND STRUCTURES IMMEDIATELY AFTER BACKFILLING OR FORMATION.
- THE CONTRACTOR SHALL GRASS SEED ALL DISTURBED AREAS WITH AN APPROVED MIX AS SSON AS PRACTICABLE AFTER COMPLETION OF EARTHWORKS AND REGRADING.
- VEHICULAR TRAFFIC SHALL BE CONTROLLED DURING CONSTRUCION CONFINNG ACCESS WHERE POSSIBLE TO NOMINATED STABLISED ACCESS POINTS.
- WHEN ANY DEVICES ARE TO BE HANDED OVER TO COUNCIL,THEY SHALL BE IN CLEAN AND STABLE CONDITION.
- THE CONTRACTOR SHALL IMPLEMENT DUST CONTROL BY REGULAR WETTING DOWN(BUT NOT SATURATING) DISTURBED AREA.
- PROVIDE AND MAINTAIN SILT TRAPS AROUND ALL SURFACE INLET PITS UNTL CATCHMENT IS REVEGETATED OR PAVED.
- REVEGETATE ALL TRENCHES IMMEDIATELY UPON COMPLETION OF BACKFILLING.
- ALL DRAINAGE PIPE INLETS TO BE CAPPED UNTIL:
  A) DOWNPIPES CONNECTED
  B) PITS CONSTRUCTED & PROTECTED WITH SILT BARRIER

CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

RUBY HOMES

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
SITE ANALYSIS AND SEDIMENT CONTROL

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	As indicated	CDC.04	14

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	


DRAFTED BY: SL

CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami

A3

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION.ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT,VARIATION TO PLANS,SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER.IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS.
WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

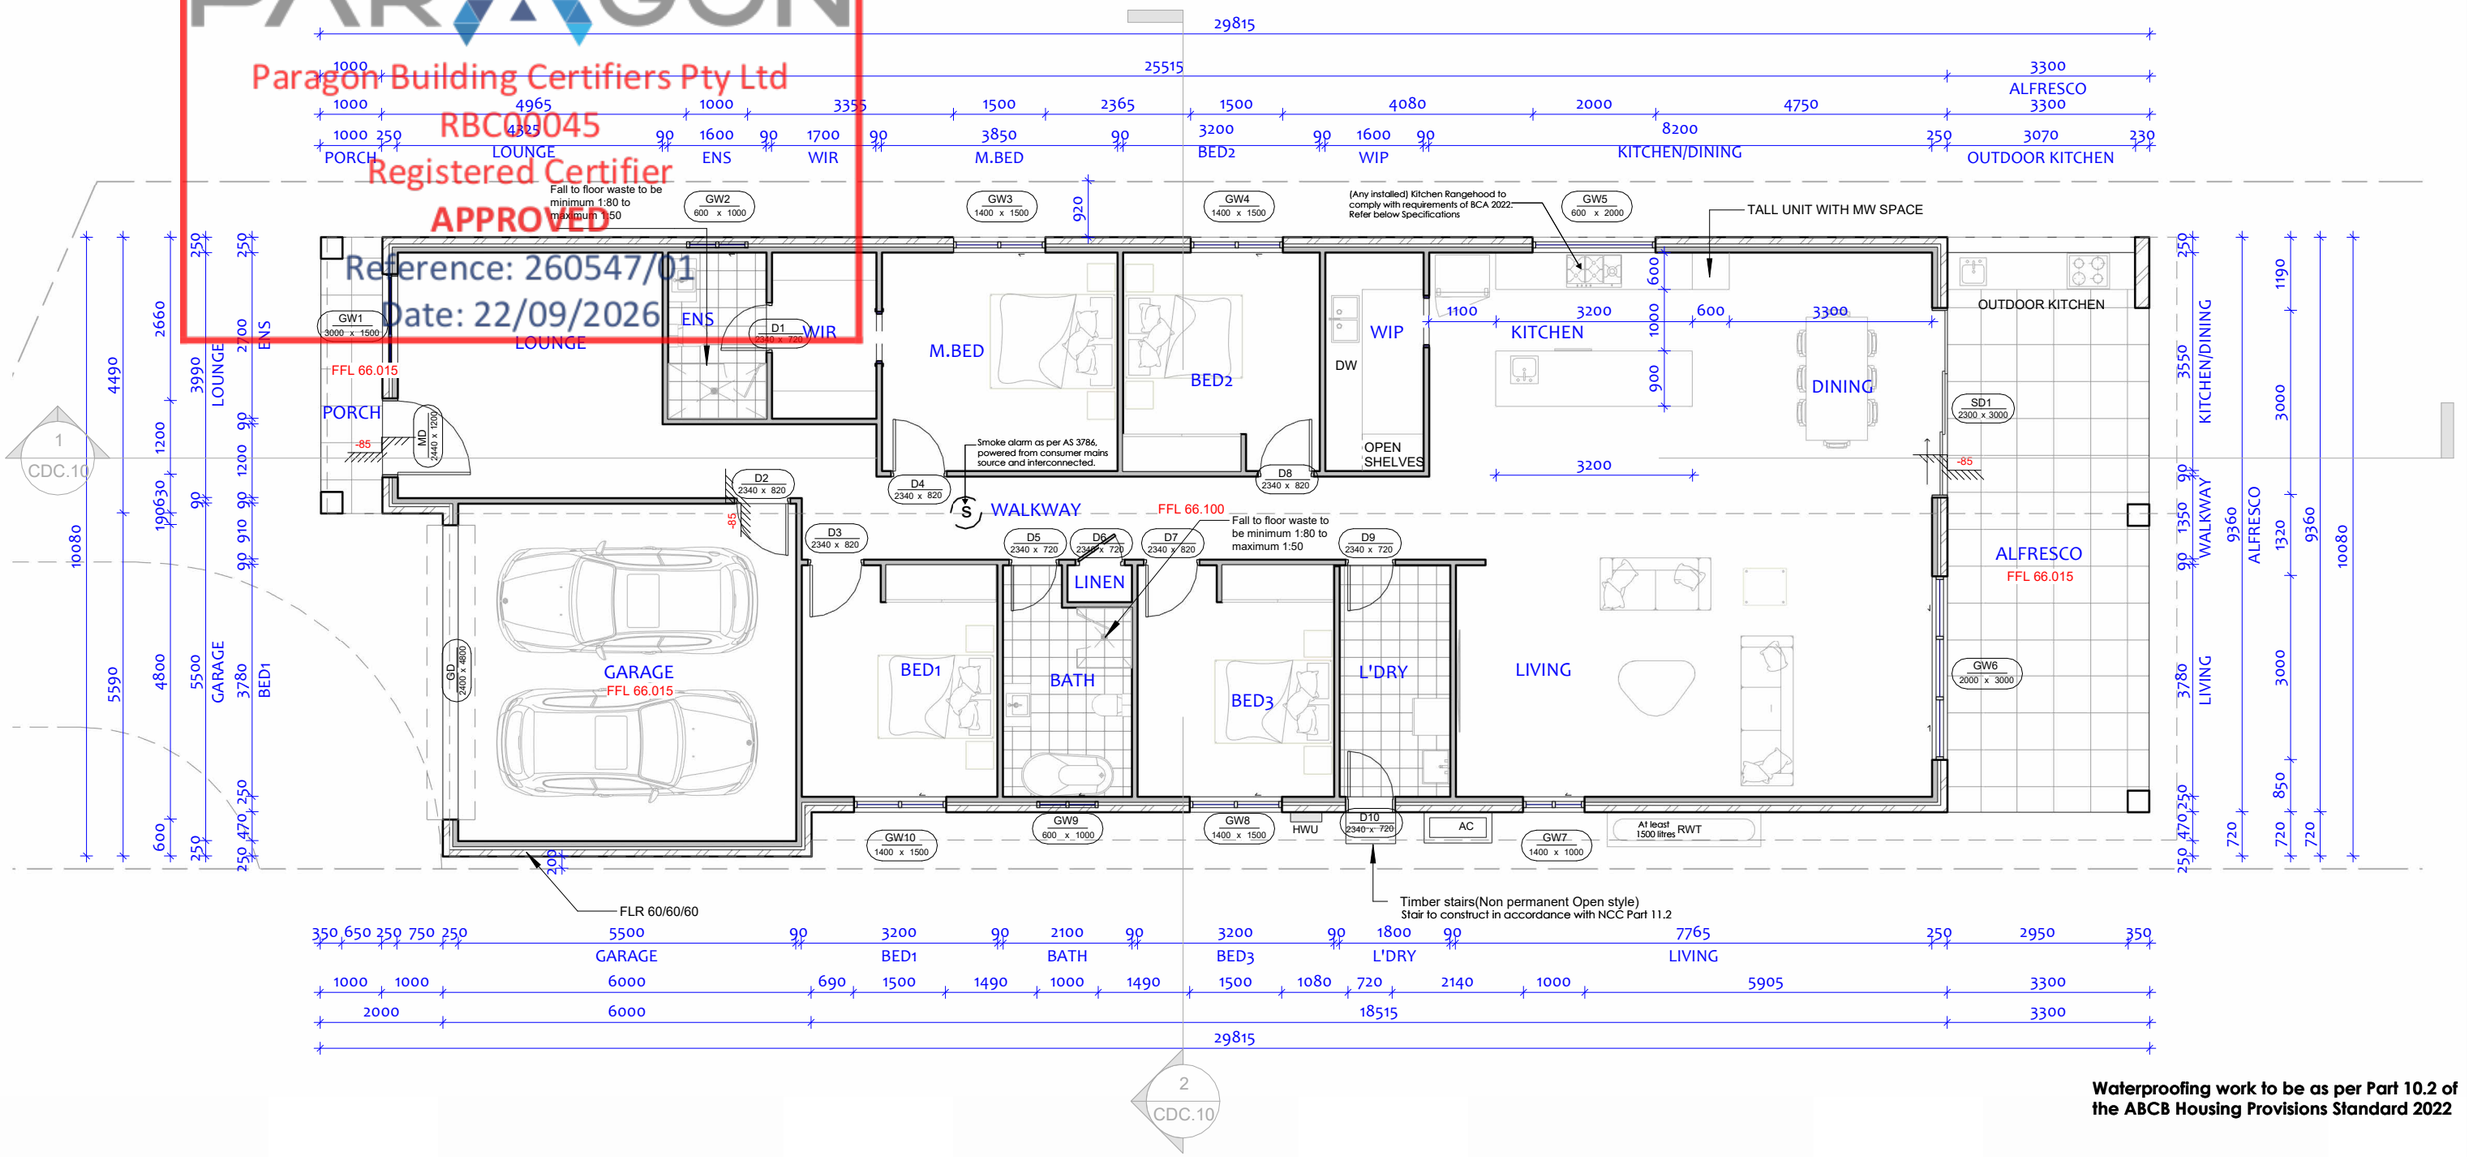

Waterproofing work to be as per Part 10.2 of the ABCB Housing Provisions Standard 2022

1 Ground Floor

1 : 100

NOTE: PLEASE REFER TO TENDER FOR ALL INCLUSIONS.

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
12	10-08-2026	Kitchen counter and island extended to 3200mm, Sliding door and window swapped, Tall unit with MW Space added - Ekta	
11	05-08-2026	Laundry Shifted to other side, Bigger Sliding window and doors to alfresco - Ekta	
10	19-06-2026	Living extended to alfreco, alfreso shifted back and extended, Outdoor kitchen - Ekta	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179


DRAWING TITLE:
GROUND FLOOR PLAN

NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.05	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

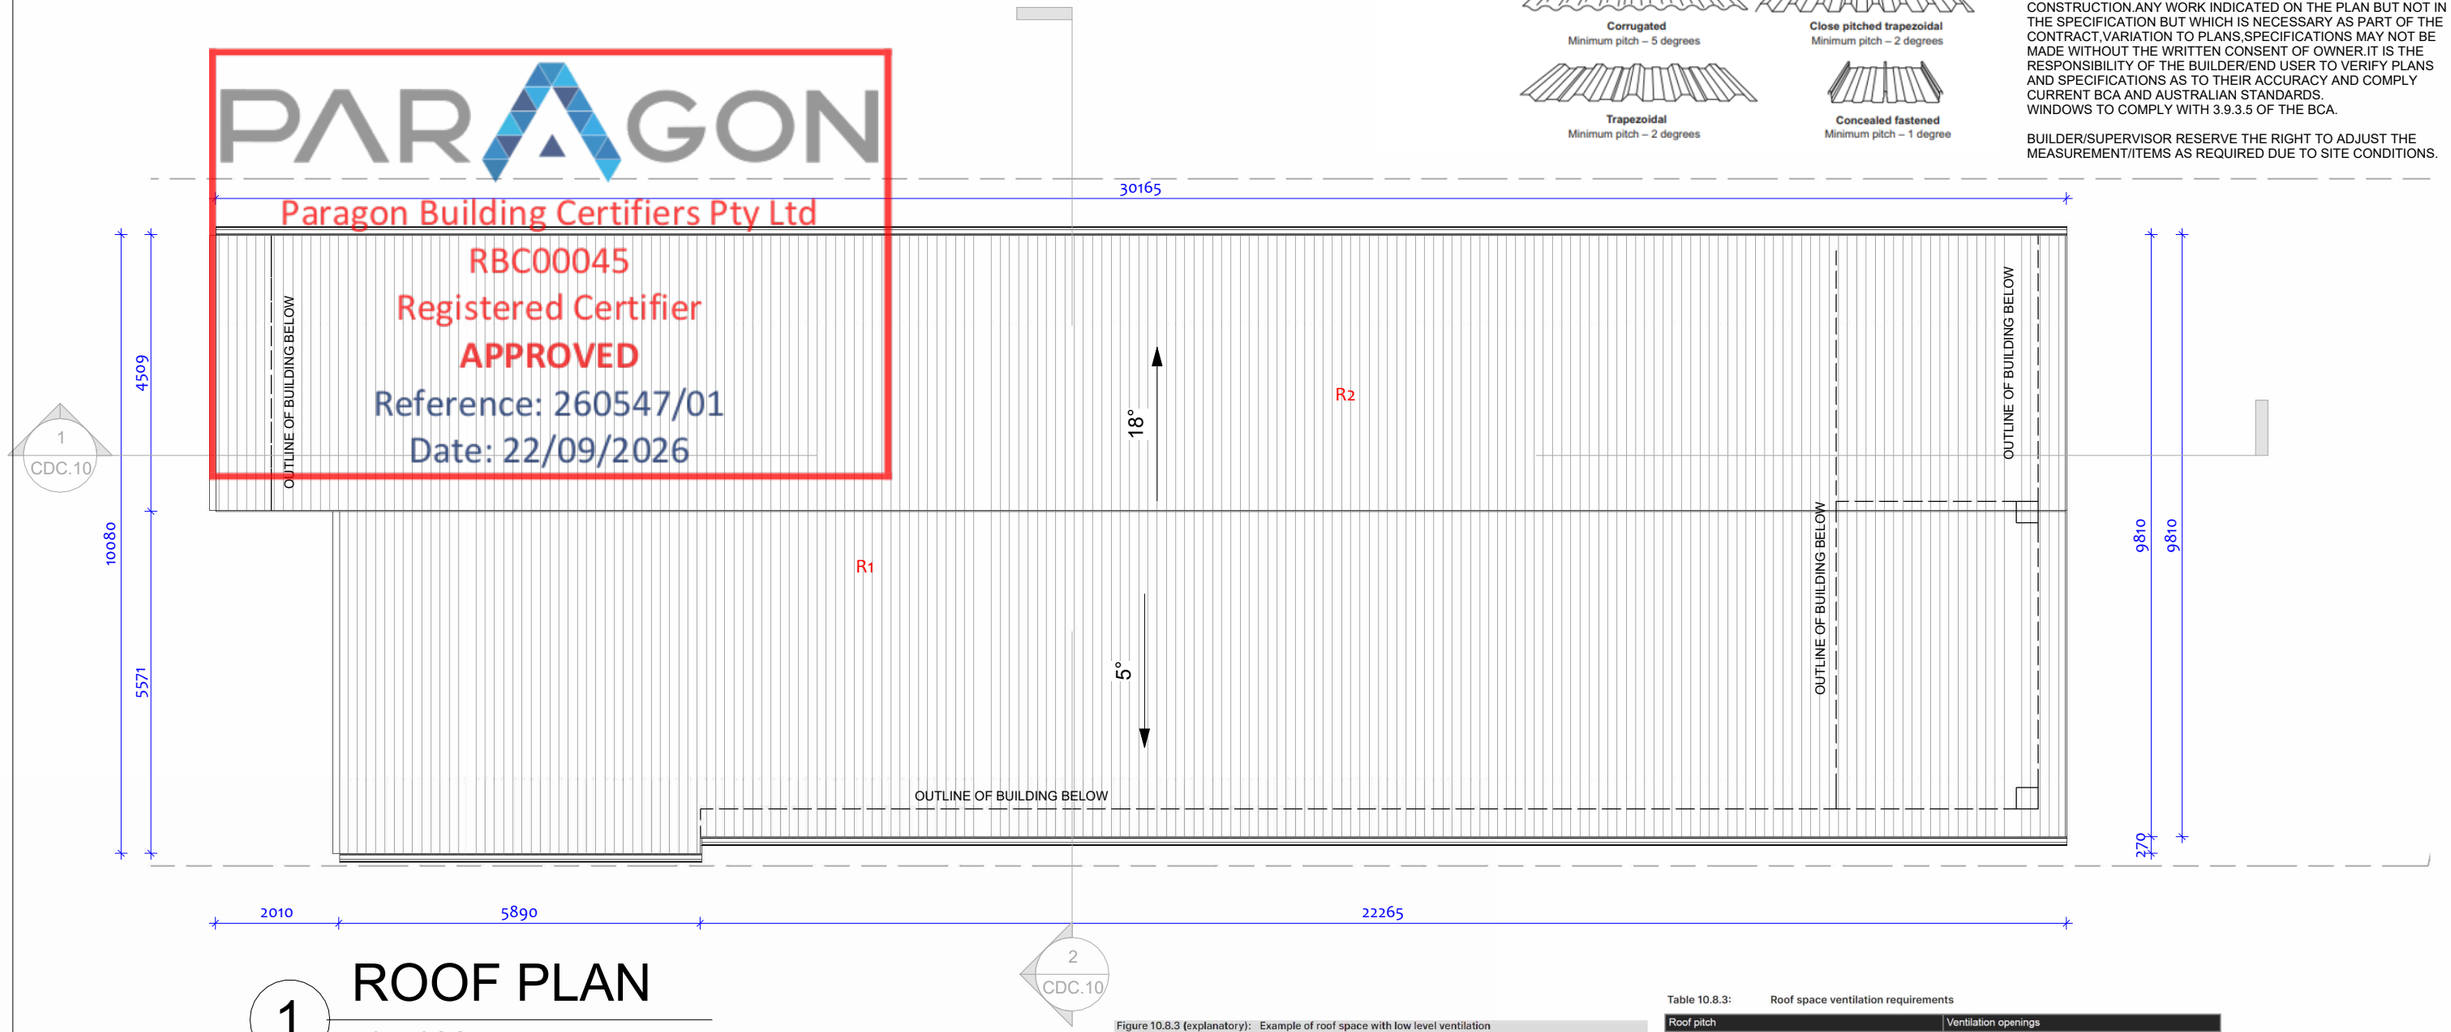


PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

1 ROOF PLAN

1 : 100

Figure 7.2.3: Minimum pitch requirements for metal roofing profiles

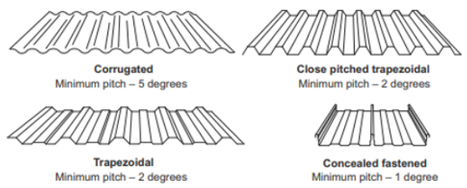


IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION.ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT,VARIATION TO PLANS,SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER.IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS.
WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

BUILDER/SUPERVISOR RESERVE THE RIGHT TO ADJUST THE MEASUREMENT/ITEMS AS REQUIRED DUE TO SITE CONDITIONS.

ABCB HOUSING PROVISIONS STANDARD 2022

10.8.3 VENTILATION OF ROOF SPACES

1. IN CLIMATE ZONES 6,7 AND 8, A ROOF MUST HAVE A ROOF SPACE THAT
(A) IS LOCATIED
(I) IMMEDIATELY ABOVE THE *PRIMARY INSULATION LAYER*, OR
(II) IMMEDIATELY ABOVE SARKING WITH A *VAPOUR PERMEANCE* OF NOT LESS THAN 1.14 µG/N.S, WHICH IS IMMEDIATELY ABOVE THE *PRIMARY INSULATION LAYER* OR
(III) IMMEDIATELY ABOVE CEILING INSULATION THAT MEETS THE REQUIREMENTS OF 13.2.3(3) AND 13.2.3(4); AND
(B) HAS A HEIGHT OF NOT LESS THAN 20MM; AND
(C) IS EITHER -
(I) VENTILATED TO OUTDOOR AIR THROUGH EVENLY DISTRIBUTED OPENINGS IN ACCORDANCE WITH TABLE 10.8.3; OR
(II) LOCATED IMMEDIATELY UNDERNEATH THE ROOF TILES OF A UNSARKED TILED ROOF.

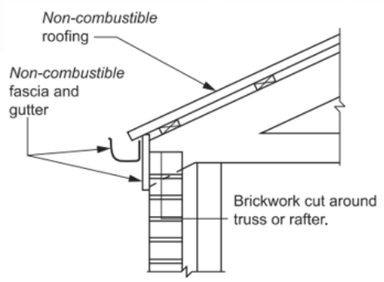

(b) Gutter on face of wall

Figure 10.8.3 (explanatory): Example of roof space with low level ventilation

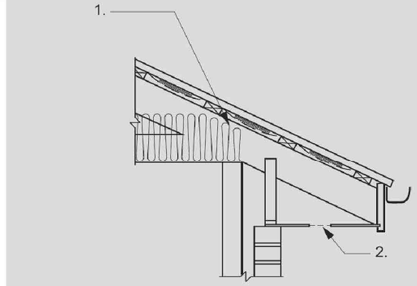


Figure Notes
(1) Minimum 20 mm gap maintained between insulation and sarking.
(2) Eave ventilation opening in accordance with Table 10.8.3.

Table 10.8.3: Roof space ventilation requirements

Roof pitch	Ventilation openings
< 10°	25,000 mm²/m provided at each of two opposing ends
≥ 10° and < 15°	25,000 mm²/m provided at the eaves and 5,000 mm²/m at high level
≥ 15° and < 75°	7,000 mm²/m provided at the eaves and 5,000 mm²/m at high level, plus an additional 18,000 mm²/m at the eaves if the roof has a cathedral ceiling

Roof Schedule

Mark	Base Level	Area	Comments
R2	Ground Ceiling	142 m²	COLORBOND
R1	Ground Ceiling	156 m²	COLORBOND
Grand total: 2		299 m²	

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
ROOF PLAN

NORTH:

CDC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.07	14

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL

CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami


A3

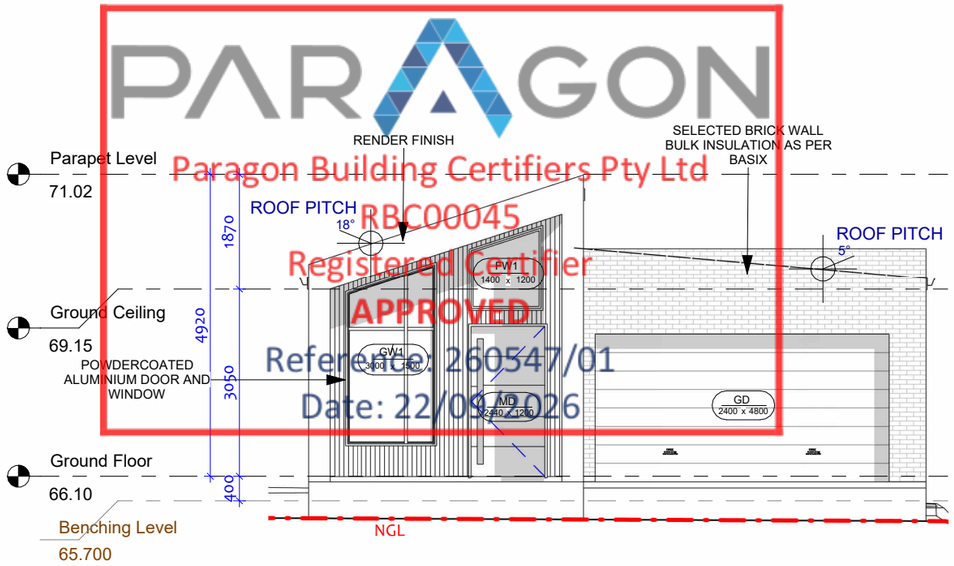

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

1 East Elevation

1 : 100

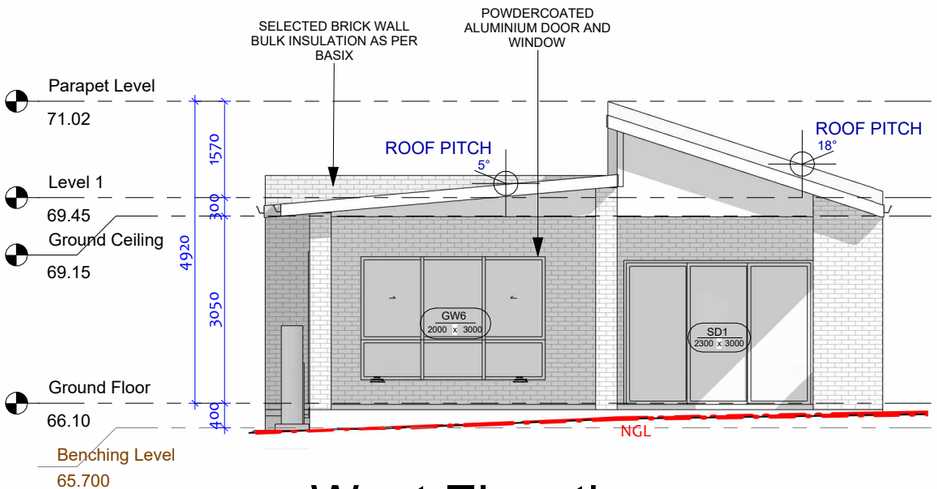

2 West Elevation

1 : 100

Window Schedule 1					
Mark	Height	Width	Sill Height	Head Height	Description
Ground Floor					
FW1	1400	1200	2700	4100	FIXED
GW1	3000	1500	500	3500	FIXED
GW2	600	1000	1800	2400	SLIDING
GW3	1400	1500	1000	2400	SLIDING
GW4	1400	1500	1000	2400	SLIDING
GW5	600	2000	1050	1650	FIXED
GW6	2000	3000	400	2400	SLIDING & FIXED
GW7	1400	1000	1000	2400	SLIDING
GW8	1400	1500	1000	2400	SLIDING
GW9	600	1000	1800	2400	SLIDING
GW10	1400	1500	1000	2400	SLIDING
Ground Floor: 11					

Door Schedule 1				
Mark	Height	Width	Count	Description
Ground Floor				
D1	2340	720	1	FLUSH DOOR
D2	2340	820	1	FLUSH DOOR
D3	2340	820	1	FLUSH DOOR
D4	2340	820	1	FLUSH DOOR
D5	2340	720	1	FLUSH DOOR
D6	2340	720	1	FLUSH DOOR
D7	2340	820	1	FLUSH DOOR
D8	2340	820	1	FLUSH DOOR
D9	2340	720	1	FLUSH DOOR
D10	2340	720	1	FLUSH DOOR
GD	2400	4800	1	GARAGE DOOR
MD	2440	1200	1	SOLID CORE DOOR
SD1	2300	3000	1	SLIDING DOOR
Ground Floor: 13				

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325

34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
ELEVATION 01


NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.08	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			


A3

PARAGON
Paragon Building Certifiers Pty Ltd
BBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

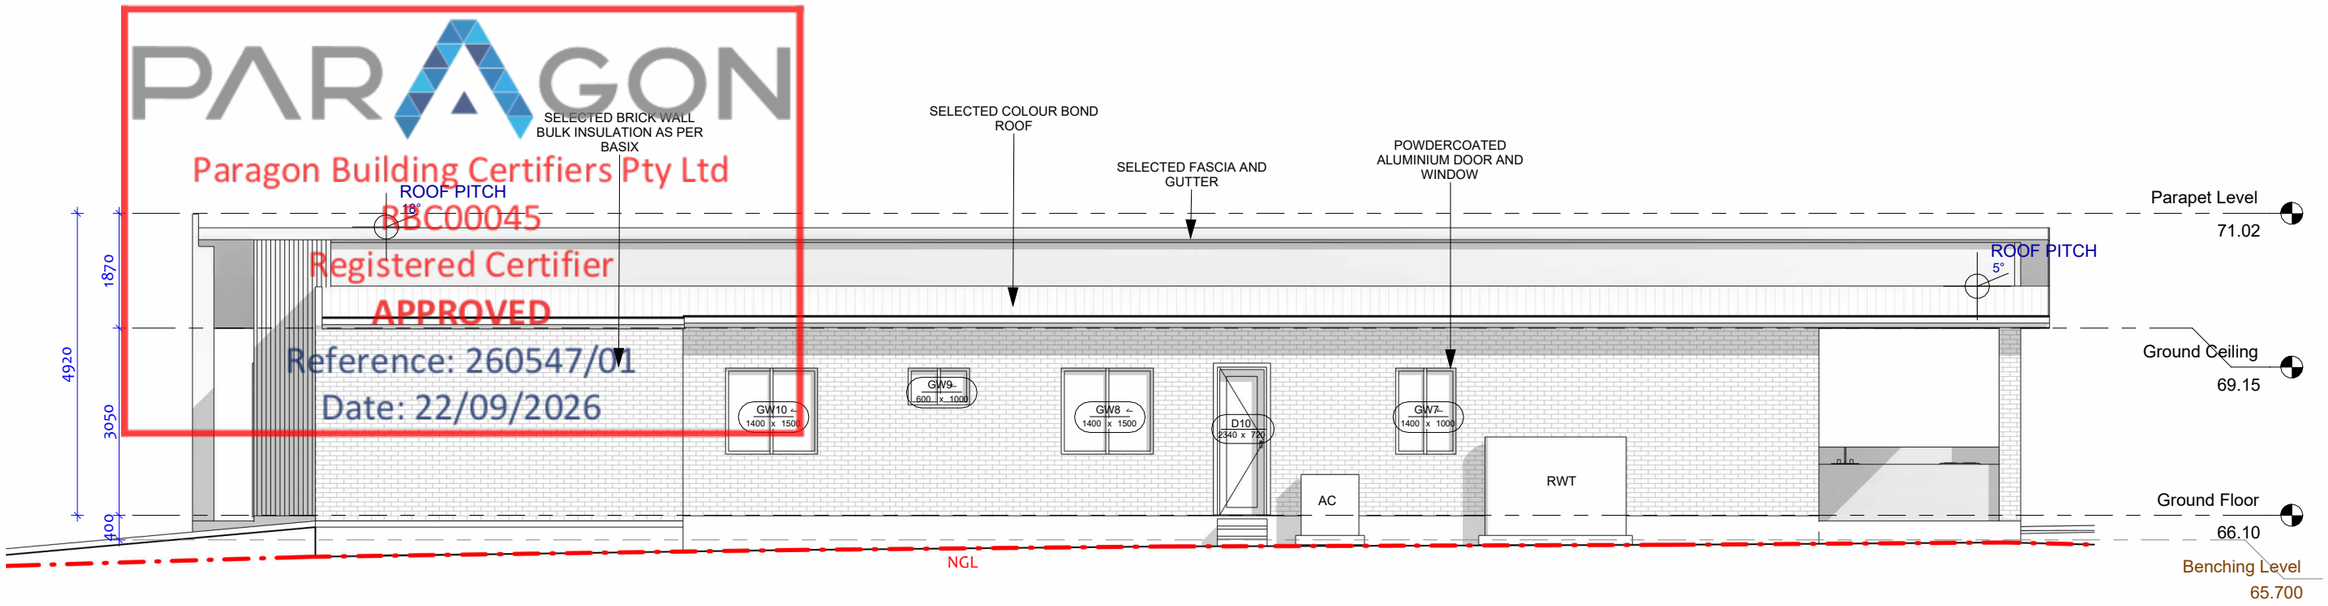

1 North Elevation

1 : 100

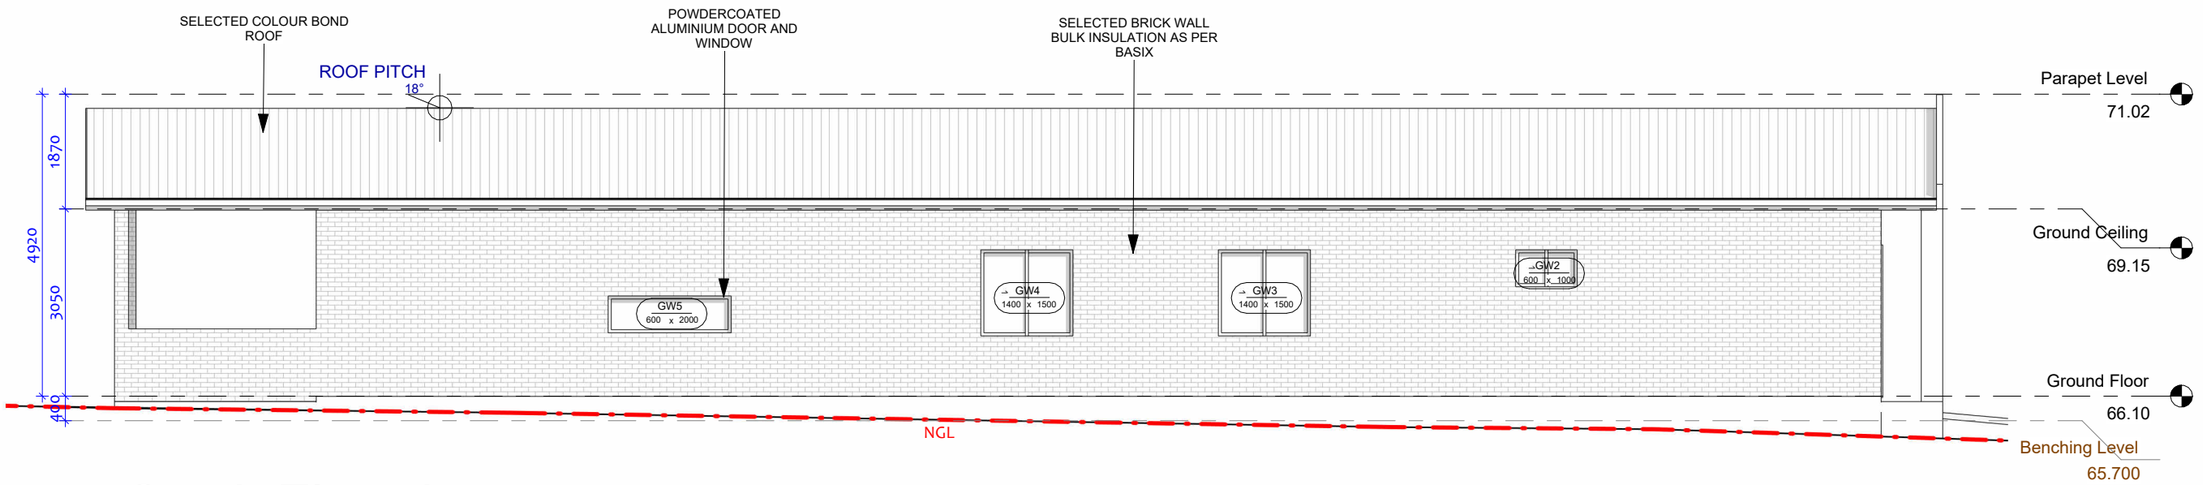

2 South Elevation

1 : 100

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL, COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325

34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
ELEVATION 02

NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.09	14


DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL

CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami


A3

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

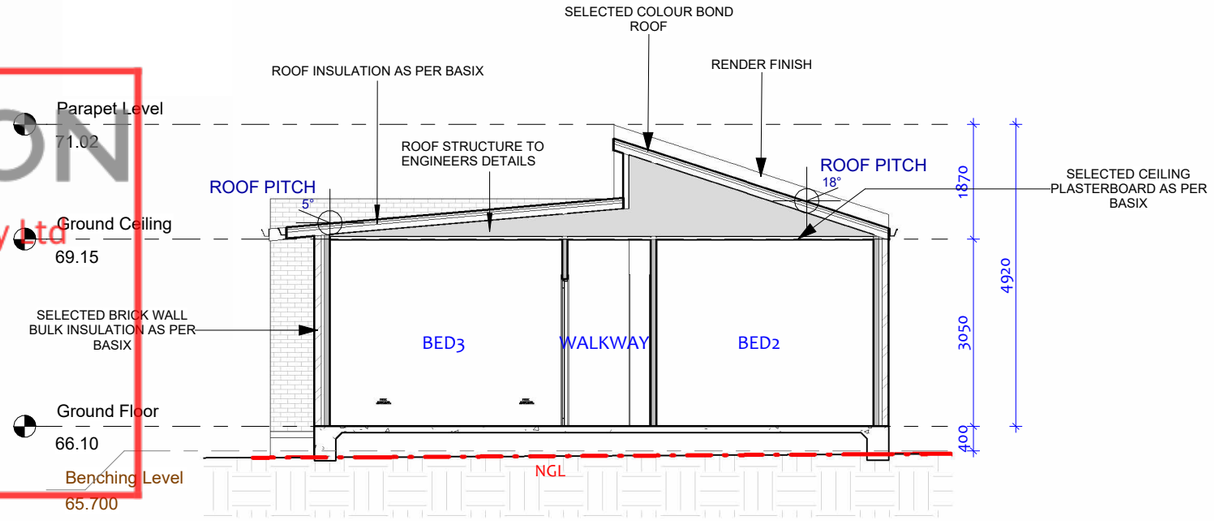

2 CROSS SECTION

1 : 100

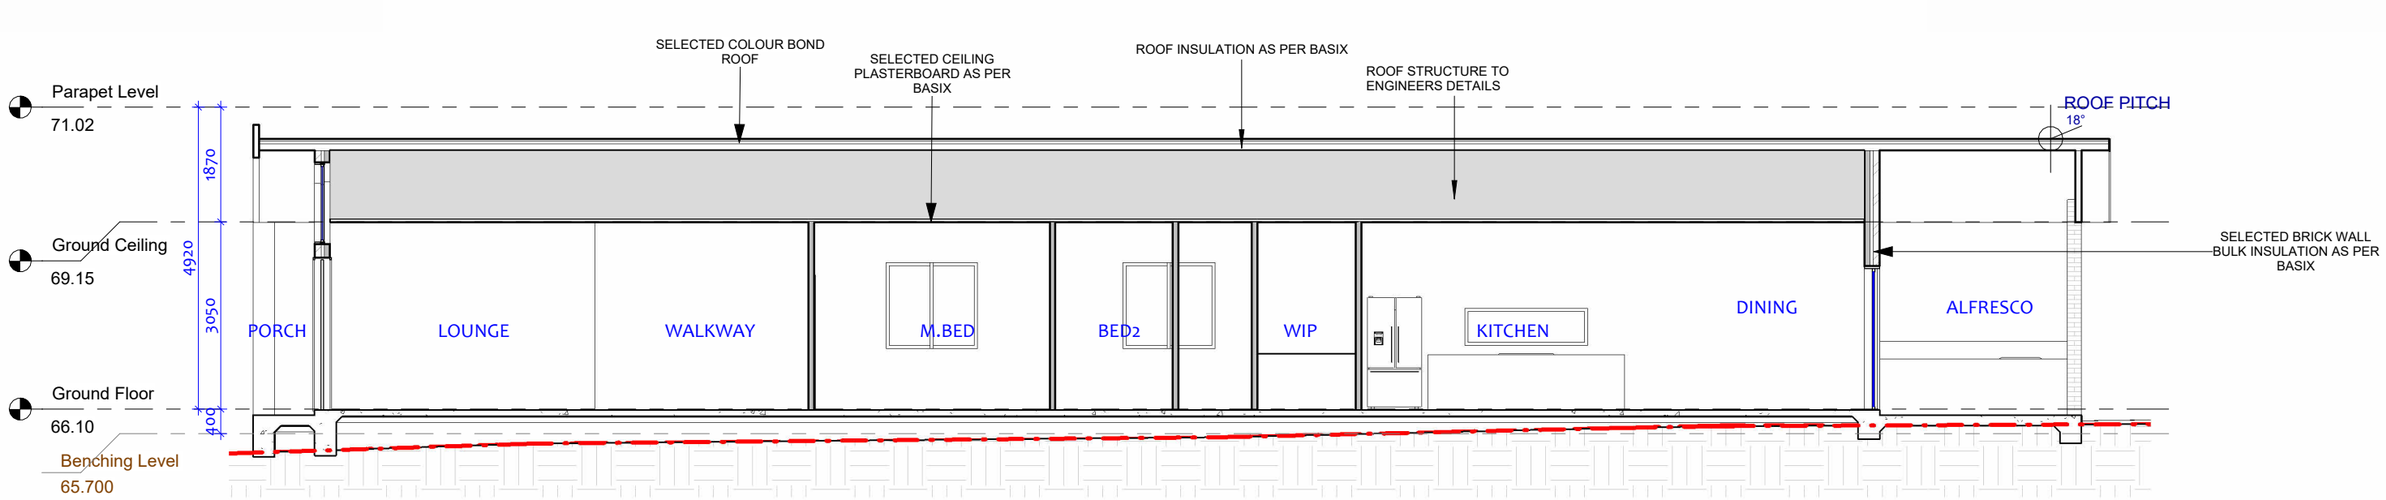

1 LONGITUDINAL SECTION

1 : 100

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL, COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
SECTIONS

NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.10	14


DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL

CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami

A3

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

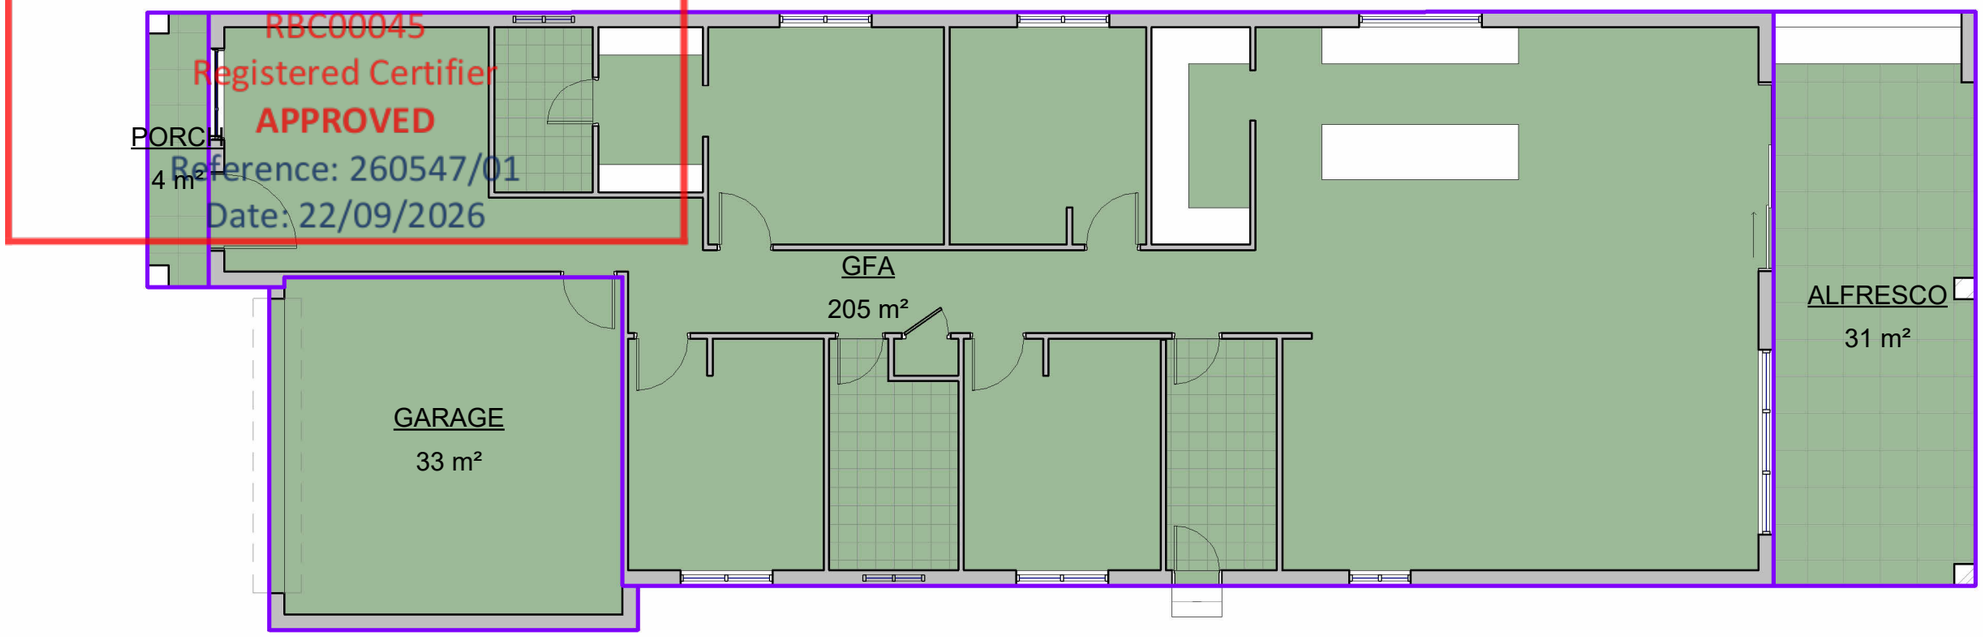

1 Ground Floor Plan

1 : 100

Area Schedule (Gross Building)	
Name	Area
Ground Floor	
GFA	205 m²
GARAGE	33 m²
PORCH	4 m²
ALFRESCO	31 m²
Ground Floor: 4	274 m²
Grand total: 4	274 m²

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
11	05-08-2026	Laundry Shifted to other side, Bigger Sliding window and doors to alfresco - Ekta	
10	19-06-2026	Living extended to alfreco, alfreso shifted back and extended, Outdoor kitchen - Ekta	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325

34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
FLOOR AREA PLAN


NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.11	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

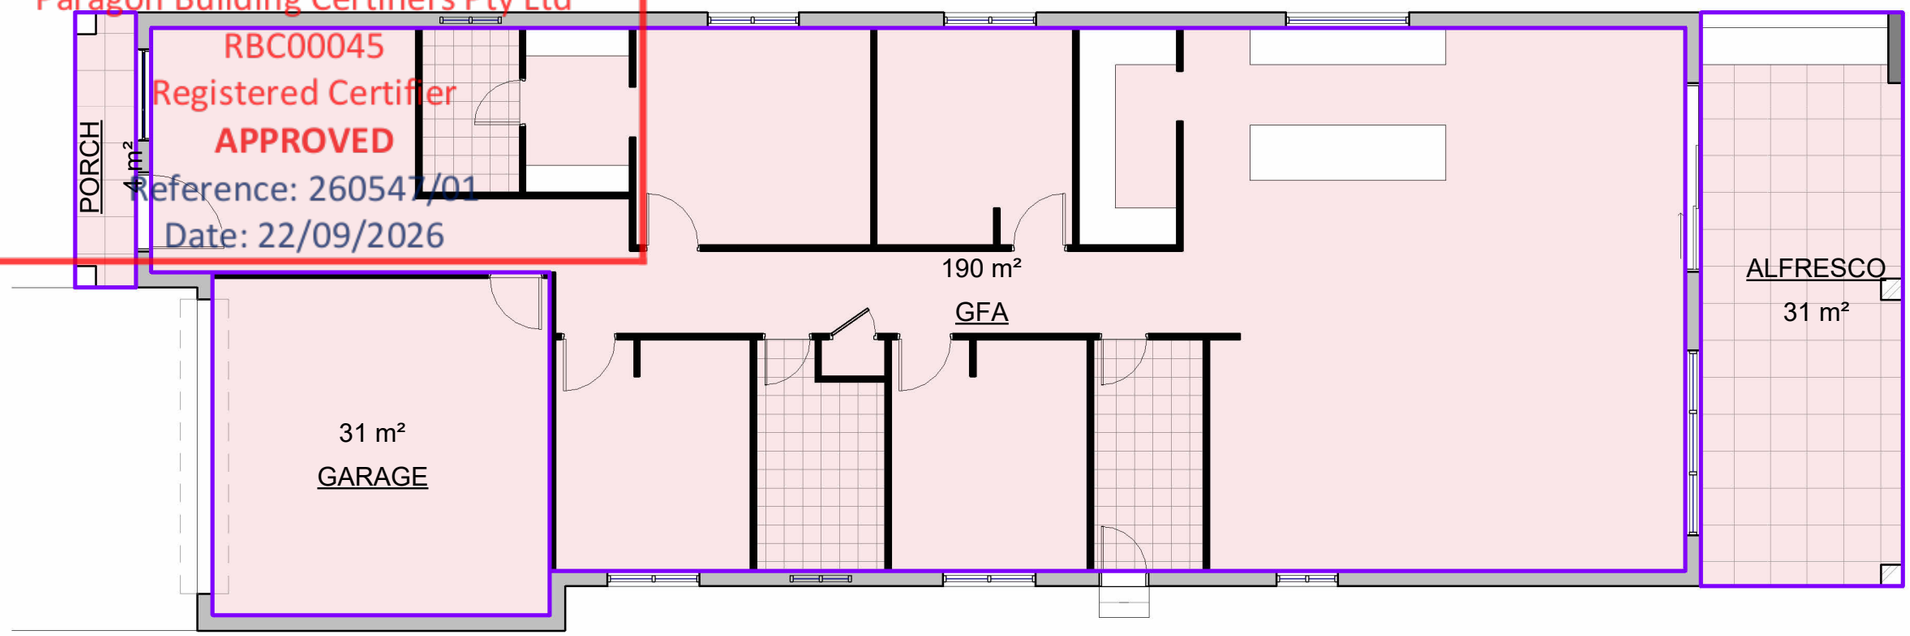

1 Ground Floor

1 : 100

Area Schedule (Rentable)	
Name	Area
Ground Floor	
GFA	190 m²
GARAGE	31 m²
PORCH	4 m²
ALFRESCO	31 m²
Ground Floor: 4	256 m²
Grand total: 4	256 m²

CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179


DRAWING TITLE:
RENTABLE AREA PLAN



NORTH:

LOT NO: 325	DATE: 17-09-2026	SCALE: 1 : 100	DRAWING No: CDC.12	REV: 14	
DRAWN BY: AS	CHECKED BY: RH				ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami				

A3

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

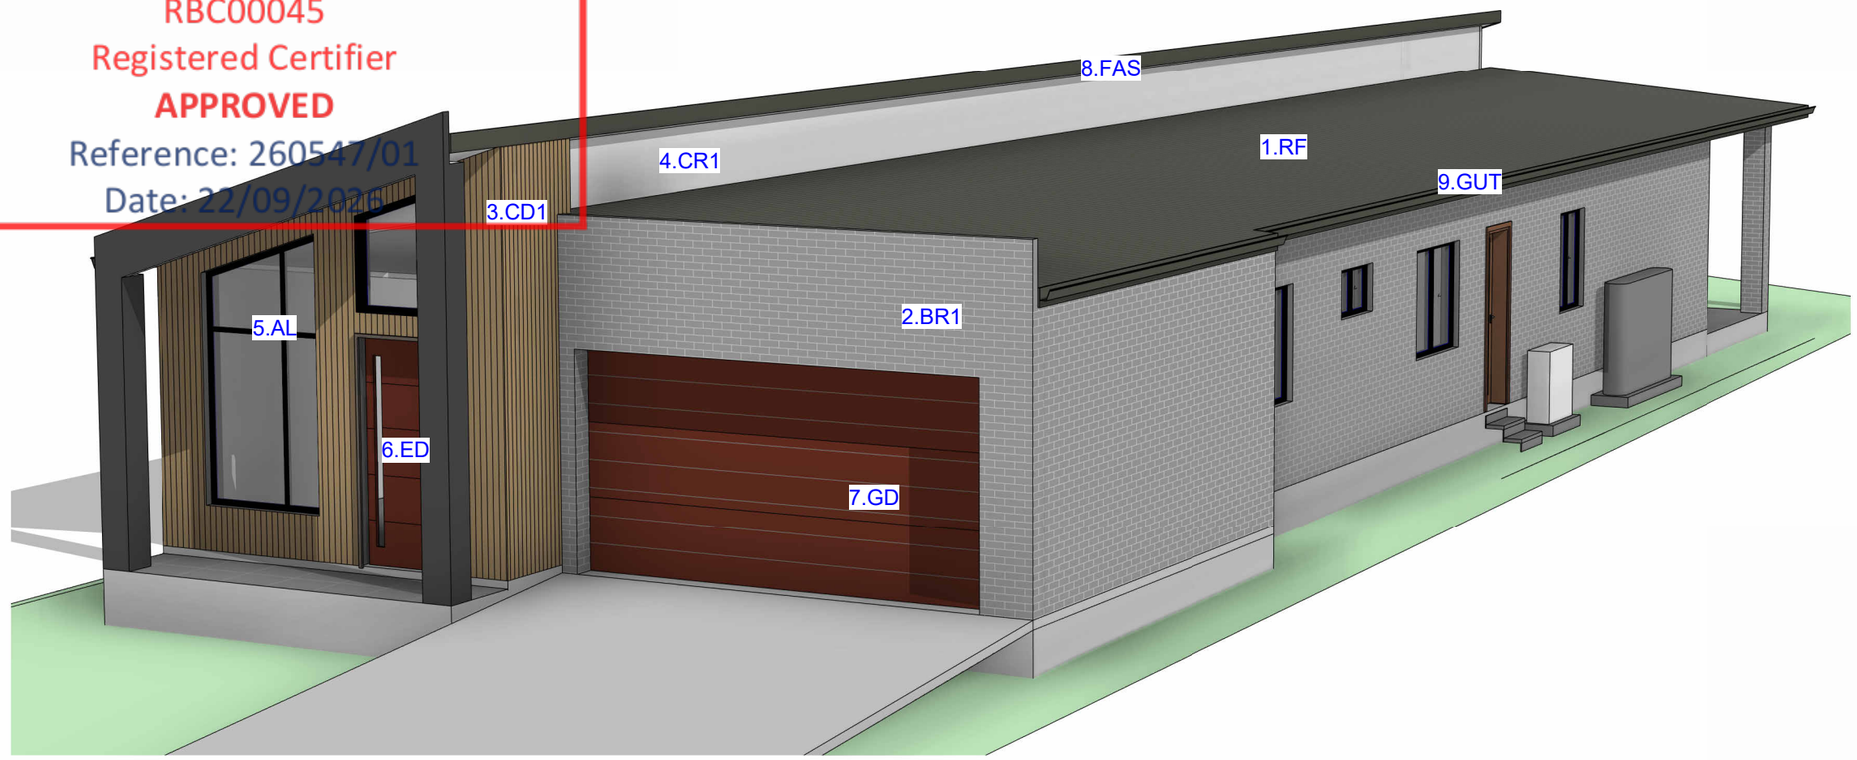

	1. RF	2. BR1	3. CD1	4. CR1	5. AL	6. ED	7. GD	8. FAS	9. GUT
	ROOF	MAIN WALLS	CLADDING	ACCENT 1/RENDER	WINDOWS/ BALUSTRADE	MAIN DOOR	GARAGE DOOR	FASCIA	GUTTER
MATERIAL	COLORBOND DARK MONUMENT	BRICK	BLUEBOARD		ALUMINIUM	TIMBER	COLORBOND	COLORBOND	COLORBOND
COLOUR									

NOTE : ALL COLOURS SPECIFIED ARE INDICATATIVE ONLY AND ARE SUBJECT TO VARIATION AND TO AVAILABILITY
ANY DISCREPANCY PLEASE FOLLOW AS PER RENDERED IMAGE

CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

RUBY HOMES

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.


PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
COLOR SCHEDULE

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 100	CDC.14	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

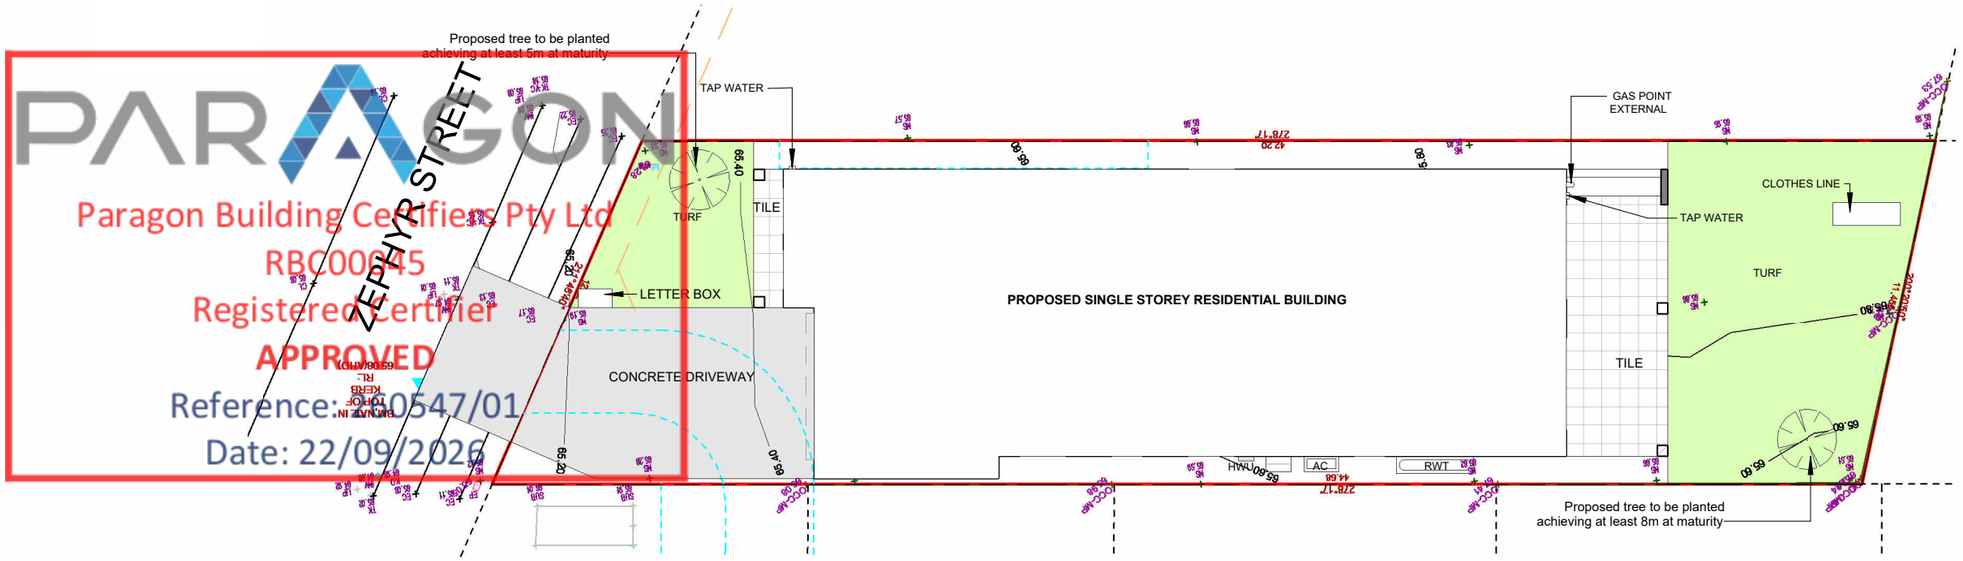

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00645
Registered Certifier
APPROVED
Reference: 0547/01
Date: 22/09/2026

1 LANDSCAPE PLAN

1 : 200

GENERAL NOTES:


- LANDSCAPE CONTRACTOR TO CHECK DA CONDITIONS AND STAMPED LANDSCAPE PLAN
- BEFORE COMMENCING WORKS TO ENSURE NO ADDITIONS/AMENDMENTS TO PLAN.
- GARDEN BEDS IN OSD BASIN TO CONSIST OF NON FLOATABLE DECORATIVE GRAVEL.
- REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD DETAILS/FINAL LEVELS.
- MULCHED PLANTING BEDS TO BE A MINIMUM DEPTH OF 75mm AS SELECTED.
- CONTRACTOR'S RESPONSIBILITY TO CHECK AND ADJUST SOIL pH AS REQUIRED.
- PROVIDE TIMBER EDGE AS A MINIMUM BENEATH FENCING/GATES TO DEFINE TURF AND GARDEN BEDS/PATHWAYS,EDGING TO BE PROVIDED TO ALL AREAS WHERE DIFFERING MATERIALS MEET i.e TURF/GARDEN,TURF/GRAVEL PATH ETC.
- WEED MAT BENEATH GRAVEL GRAVEL PATHWAYS REQUIRED TO LIMIT MUD TRACKING.
- PREMIUM ORGANIC GARDEN MIX TO BE USED.
- ALL PLANTS TO BE HEALTHY AND VIGOROUS.
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION.
- DO NOT SCALE ARCHITECTURAL SETOUT FROM LANDSCAPE DRAWING.
- EXISTING TREE SPREAD APPROXIMATE ONLY.REFER TO TREE REPORT WHEN APPLICABLE.
- SITE SURVEY PROVIDED BY OTHERS.
- BUFFALO TURF PREFERRED OVER KIKUYU.

LANDSCAPE BASIX NOTE:
THE APPLICANT MUST PLANT INDIGENEOUS OR LOW WATER USE SPECIES OF VEGETATION THROUGHOUT 15 SQM OF THE SITE.

NOTE :BUILDER RESERVES THE RIGHT NOT TO UNDERTAKE NOR SUPPLY CERTIFICATE FOR OCCUPATION CERTIFICATE.
NOTE : TO AID COMPLIANCE WITH BASIX LEGISLATION,PLANTS (WHERE APPLICABLE) HAVE BEEN SELECTED FROM THE LOCAL CITY COUNCIL/SHIRE PLANT LISTS.
NOTE: LOCATION OF SEWER MAINS/LINES,WATER PIPES,UNDERGROUND ELECTRICITY AND OTHER SERVICES MUST BE OBTAINED PRIOR TO COMMENCEMENT OF ANY WORK ON SITE.


CONTRACTORS NOTE : CALCULATED ARES DETERMINED BY CAD AND HAVE BEEN ROUNDED UP FOR USE AS A GUIDE ONLY ALLOW STANDARD PERCENTAGE FOR CUTTING AND WASTAGE .CONFIRM DIMENSIONS AND NUMBERS PRIOR TO QUOTING/ORDERING.

LANDSCAPE AREA	
FRONT AREA	26.2m^2
BACKYARD AREA	84.5 m^2
TOTAL AREA	110.7 m^2

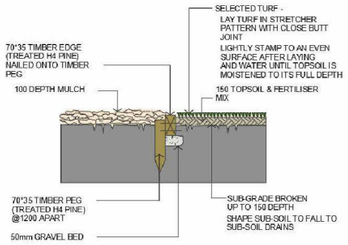

1. TURF & GARDEN EDGE DETAIL

NOTE:
ALIGNMENT OF BRICK EDGE SHALL BE EVEN & FREE FROM DIPS AND HUMPS.

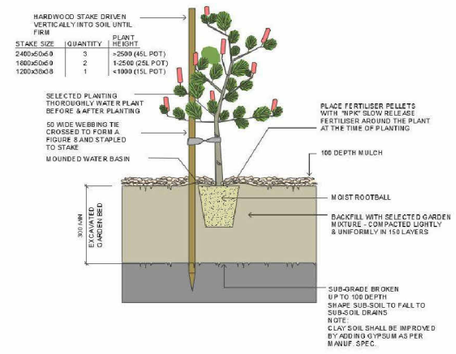

2. TREE & SHRUB PLANTING IN GARDEN BED

NOTE :
DO NOT PLANT IN UNSUITABLE WEATHER CONDITIONS SUCH AS EXTREME HEAT, COLD, WIND OR RAIN
CLAY SOIL IS TO BE TREATED WITH CLAY BREAKER AND ORGANIC COMPOST

CDC ISSUE

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
LANDSCAPE PLAN

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 200	CDC.15	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3

ABCB HOUSING PROVISIONS : PART 10.2 WET AREA WATERPROOFING

10.2.1 Wet Areas

1. Building elements in wet areas within a building must be protected with a waterproofing system.
2. The waterproofing system in (1) must be either waterproof or water resistant in accordance with 10.2.2 to 10.2.6.

10.2.2 Shower Area (enclosed and unenclosed)

1. For a shower area with a hob, step-down or level threshold, the following applies:
   a. The floor of the *shower area* must be *waterproof*, including any hob or step-down (see Figure 10.2.2); and
   b. The walls of the *shower area* must be *waterproof* not less than 1800 mm above the floor substrate (see Figure 10.2.2).
   c. Wall junctions and joints within the *shower area* must be *waterproof* not less than 40 mm either side of the junction (see Figure 10.2.2).
   d. Wall/floor junctions within the shower area must be *waterproof* (see Figure 10.2.2).
   e. Penetrations within the *shower area* must be *waterproof*.
2. A shower with a *preformed shower base* must also comply with the requirements of (1), except for (a) which is not applicable.

Figure 10.2.2: Extent of treatment for shower areas - concrete compressed fibre-cement and fibre-cement sheet floors.

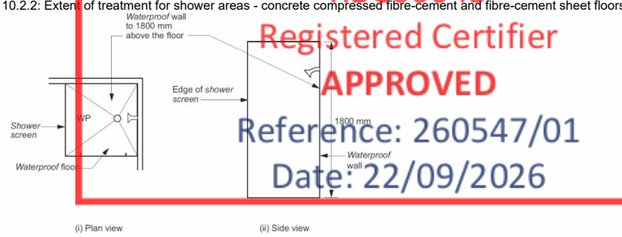


Figure Notes
Wall/floor junction heights are to be as per 10.2.2 to 10.2.6 (as applicable).

Notes
Where a shower is above a bath or spa, use requirements for shower.

10.2.3 Area outside shower area

1. For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.
2. For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.
3. Wall/floor junctions must be -
   a. waterproof, and
   b. where a flashing is used, the horizontal leg must be not less than 40 mm.

10.2.4 Areas adjacent to baths and spas without showers

1. For areas adjacent to all baths and spas, the following applies:
   a. For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.
   b. For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.
   c. Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.
2. For areas adjacent to non-freestanding baths and spas, the following applies:
   a. Walls must be water resistant (see Figure 10.2.4a and Figure 10.2.4b)-
      • to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is within 75mm of a wall; and
      • for all exposed surfaces below vessel lip.
   b. Wall junctions and joints must be water resistant within 150mm above a vessel for the extent of the vessel.
   c. Wall/floor junctions must be waterproof for the extent of the vessel (see Figure 10.2.4a and Figure 10.2.4b).
3. For inserted baths and spas, the following applies.
   a. For floors and horizontal surfaces:
      • Any shelf area adjoining the bath or spa must be waterproof and include a waterstop under the vessel lip.
      • There are no requirements for the floor under a bath or spa.
   b. For walls:
      • Waterproof to not less than 150mm above the lip of a bath or spa.
      • There are no requirements for the floor under a bath or spa.
   c. For wall junctions and joints, the following applies:
      • Waterproof junctions within 150mm of a bath or spa.
      • There are no requirements for junctions and joints in walls beneath the lip of a bath or spa.
   d. Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.

Figure 10.2.4a: Areas adjacent to baths and spas without showers for concrete, compressed fibre-cement and fibre-cement sheet flooring


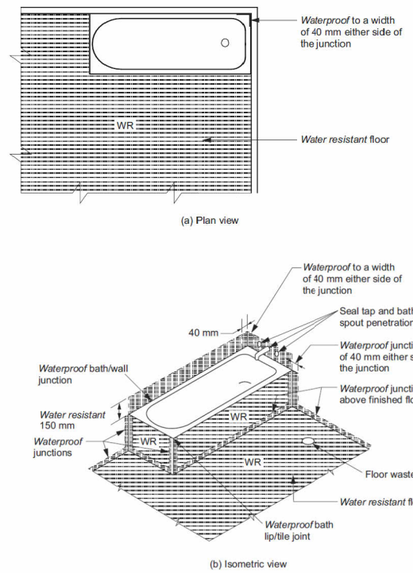



Figure 10.2.4b: Areas adjacent to baths and spas without showers for timber floors including particle-board, plywood and other floor materials

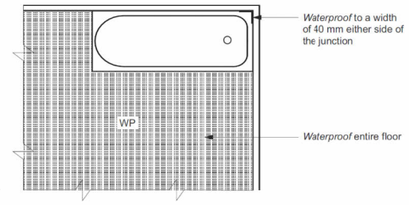

10.2.5 Other areas

1. For walls adjoining other types of vessels (e.g. sink, basin or laundry tub), the following applies:
   a. Walls must be water resistant to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is withing 75 mm of a wall (see Figure 10.2.5.)
   b. Waterproof wall junctions where a vessel is fixed to a wall.
   c. Waterproof tap and spout penetrations where they occur in surfaces required to be waterproof or water resistant.
2. For laundries and WCs, the following applies:
   a. The floor of the room must be water resistant.
   b. Wall/floor junctions must be water resistant, and where a flashing is used, the horizontal leg must not be less than 40 mm.
3. For WCs with handheld bidet spray installations, the following applies:
   a. The floor of the room must be waterproof.
   b. Walls must be -
      • waterproof in WC area within a 900 mm radius from the wall connection of the handheld bidet spray device to a height of not less than 150mm above the floor substrate; and
      • water resistant in WC area within a 900 mm radius from the wall connection of the handheld bidet device to not less than 1200 mm above the finished floor level of the WC.
   c. Wall junctions within the WC area within 900 mm radius from the wall connection of the handheld bidet spray device must be waterproof.
   d. Wall/floor junctions within the WC area within 1000 mm radius from the wall connection of the handheld bidet spray device must be waterproof.
   e. Penetrations in the WC area must be waterproof.

Figure 10.2.5: Bath and vessel abutting wall - areas to be protected

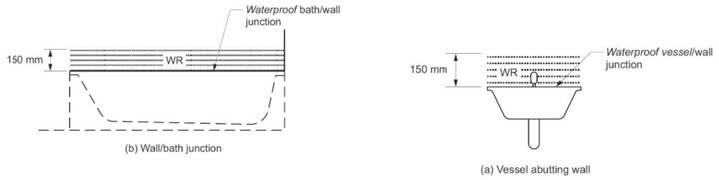

10.2.6 Waterproofing systems

1. For the purposes of this Part, a waterproofing system is deemed -
   a. waterproof, if it complies with (2); or
   b. water resistant, if it complies with (3).
2. For a waterproofing system required to be waterproof in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.8 must be used.
3. For a waterproofing system required to be water resistant in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.9 must be used in conjunction with the materials in 10.2.10.

10.2.12 Construction of wet area floors - falls

Where a floor waste is installed -
   a. the minimum continuous fall of a floor plane to the waste must be 1:80; and
   b. the maximum continuous fall of a floor plane to the waste must be 1:50.

PARAGON Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260547/01
Date: 22/09/2026

REV	DATE	DESCRIPTION	BY
14	7-09-2026	CDC ISSUE	
5	02-02-2026	CDC ISSUE	
4	15-08-2025	Idry and ptry change	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 325
34 Zephyr Street Auatral NSW 2179

DRAWING TITLE:
WATERPROOFING DETAILS

NORTH:

CDC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
325	17-09-2026	1 : 50	CDC.18	14
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Mohamad Souheil El Esber & Dania Ahmand El Chami			

A3