Proposed Dwelling House at, Lot:2070 DP:1279737, 331 Tallawong Road, Rouse hill



SITE AREA: 296.06 m^2	
Ground Floor	96.61
Porch	1.50
Garage	33.68
First Floor	86.84
Balcony	4.33
TOTAL	222.96
	24.00 sq

CDC (max ALLOWABLE coverage 222 m^2) Calculated to internal face of external wall
Main House: 87.13 + 30.25 - 18 (single garage excluded)
First Floor (excluding voids) : 72.14
CDC AREA = 171.52 m² MAX ALLOWABLE = 222 M^2.

Design Facts:
Site Area : 296.06 m²
Site Coverage Allowed : 222 m²
Site Coverage Proposed : 171.52 m²

Landscape Area Required 10% : 29.6 m²
Landscape Area Proposed: 29.59% : 85.83 m²

Landscape Area Behind Building line : 63.81 m²

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

DRAWING TRANSMITTAL

A01	COVER PAGE
A02	PROPOSED SITE PLAN
A03	SITE SURROUNDING PLAN
A04	PROPOSED GROUND FLOOR
A05	PROPOSED FIRST FLOOR
A06	PROPOSED ROOF PLAN & WINDOW SCHEDULE
A07	AREA CALCULATIONS PLAN
A08	NORTH & WEST ELEVATION
A09	SOUTH & EAST ELEVATION
A10	SECTION
A11	CONCEPTUAL LANDSCAPE PLAN
A12	CONCEPTUAL STORMWATER PLAN
A13	SEDIMENTATION CONTROL & WASTE MANAGEMENT PLAN
A14	SITE ANALYSIS
A15	SITE SAFETY NOTE

BUILDING SPECIFICATIONS
National Construction Code - Volume 2-
Building Code of Australia 2022 & Housing Provisions Standard 2022

SITE PREPARATION
- PART 3.1 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

EARTHWORKS
-TO BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE ENVIRONMENTAL PLANNING & ASSESSMENT ACT 1979 AND DEVELOPMENT CONSENT CONDITIONS
-PART 3.2 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4678:2002 - EARTH-RETAINING STRUCTURES

DRAINAGE
- PART 3.3 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS 3500.1:2021 - PLUMBING & DRAINAGE - WATER SERVICES
- AS/NZS 3500.2:2021 - PLUMBING & DRAINAGE - SANITARY PLUMBING & DRAINAGE
- AS/NZS 3500.3:2021 - PLUMBING & DRAINAGE STORMWATER DRAINAGE
- AS/NZS 3500.4:2021 - PLUMBING & DRAINAGE - HEATED WATER SERVICES

STRUCTURAL WORK
- Part 2.2 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 4100-2020-STEEL STRUCTURES CODES
-AS/NZS 1170.0-2002 - GENERAL PRINCIPLES
-ASNZS 1170.1-2002 - PARTS 1 PERMANENT, IMPOSED AND OTHER ACTIONS
- AS/NZS 1170.2-2021 - PART 2 WIND ACTIONS
- AS 3700-2018-SAA MASONRY CODE
-AS 1684.3-2021-RESIDENTIAL TIMBER FRAMED CONSTRUCTION

FOOTINGS & SLABS
- PART 4 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 2159:2009 - PILING-DESIGN & INSTALLATION
-AS 2870:2011 - RESIDENTIAL SLABS & FOOTINGS -AS 3600:2018 - CONCRETE STRUCTURES MASONRY
-PART 5 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 3700:2018 - MASONRY STRUCTURES

FRAMING
-PART 6 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1684.2:2021 - RESIDENTIAL TIMBER- FRAMED CONSTRUCTION - NON-CYCLONIC AREAS
-AS 1720.1:2010 - TIMBER STRUCTURES - DESIGN METHODS
- AS 4100:2020-STEEL STRUCTURES
- AS 3660.1-2014- TERMITE MANAGEMENT SYSTEM

ROOF & WALL CLADDING
- PART 7 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1273:1991 - UNPLASTICIZED PVC (UPVC) DOWNPIPES & FITTINGS FOR RAINWATER
- AS 1562.1:2018 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - METAL
- AS/NZS 1562.2:1999 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING-CORRUGATED FIBRE-REINFORCED CEMENT
-AS/NZS 1562.3:2006 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - PLASTIC
- AS 2049:2002 - ROOF TILES
-AS 2050:2018 - INSTALLATION OF ROOF TILES
- AS 4285:2019 - ROOFLIGHTS

GLAZING
-PART 8 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 1288:2021 - GLASS IN BUILDINGS-SELECTION & INSTALLATION
-AS 2047:2014- WINDOWS & EXTERNAL GLAZED DOORS IN BUILDINGS
- AS/NZS 2208:1996 - SAFETY GLAZING MATERIALS IN BUILDINGS

FIRE SAFETY
-PART 9 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3786:2014 - SMOKE ALARMS USING SCATTERED LIGHT, TRANSMITTED LIGHT OR IONIZATION

HEALTH & AMENITY
- PART 10 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS ISO 717.1:2004-ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - AIRBORNE SOUND INSULATION
-AS ISO 717.2:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - IMPACT SOUND INSULATION
-AS 1668.2:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - MECHANICAL VENTILATION IN BUILDINGS
-AS 1668.4:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - NATURAL VENTILATION OF BUILDINGS
- AS/NZS 1680.0:2009 - INTERIOR LIGHTING
-SAFE MOVEMENT
- AS 3740:2021 - WATERPROOFING OF DOMESTIC WET AREAS
-AS 3000-2018 - ELECTRICAL INSTALLATION

WATERPROOFING
- AS 3740-2021-WATERPROOFING TO WET AREA
-AS 4654-2012 - EXTERNAL WET AREAS

SAFE MOVEMENT & ACCESS
- PART 11 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1428.1:2009 - DESIGN FOR ACCESS & MOBILITY-GENERAL REQUIREMENTS FOR ACCESS - NEW BUILDING WORK
- AS 1657:2018 - FIXED PLATFORMS, WALKWAYS, STAIRWAYS & LADDERS - DESIGN, CONSTRUCTION & INSTALLATION

HANDRAILS & BALUSTRADE
- PART 11.3.3 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.4 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.5 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
-AS 1170.1-2002 - BALUSTRADE INSTALLATION

PROTECTION OF OPENABLE WINDOW
PART 11.3.7 AND 11.3.8 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

DEMOLITION
-AS 2601-2001-DEMOLITION WORK

SWIMMING POOL
- PART 12.1.1 (H7D2) OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022
- AS 1926 PART 1-2012 - SWIMMING POOL SAFETY-SAFETY BARRIERS FOR SWIMMING POOLS
- AS 1926 PART 2-2007-SWIMMING POOL SAFETY-LOCATION OF SAFETY BARRIERS FOR SWIMMING POOLS (INCORPORATING AMENDMENTS 1 AND 2)
-AS 1926 PART 3-2010 - SWIMMING POOL SAFETY-WATER RECIRCULATION SYSTEMS (INCORPORATING AMENDMENT 1)

ENERGY EFFICIENCY
- PART 13 OF THE NCC VOLUME 2 BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022 & BASIX Certificate.

A01

Job # 00033

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North


Drawing Title
Cover Page

Lodged at: Blacktown
Scale 06 July 2026
Drawn By VS **Checked** VS
Date 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

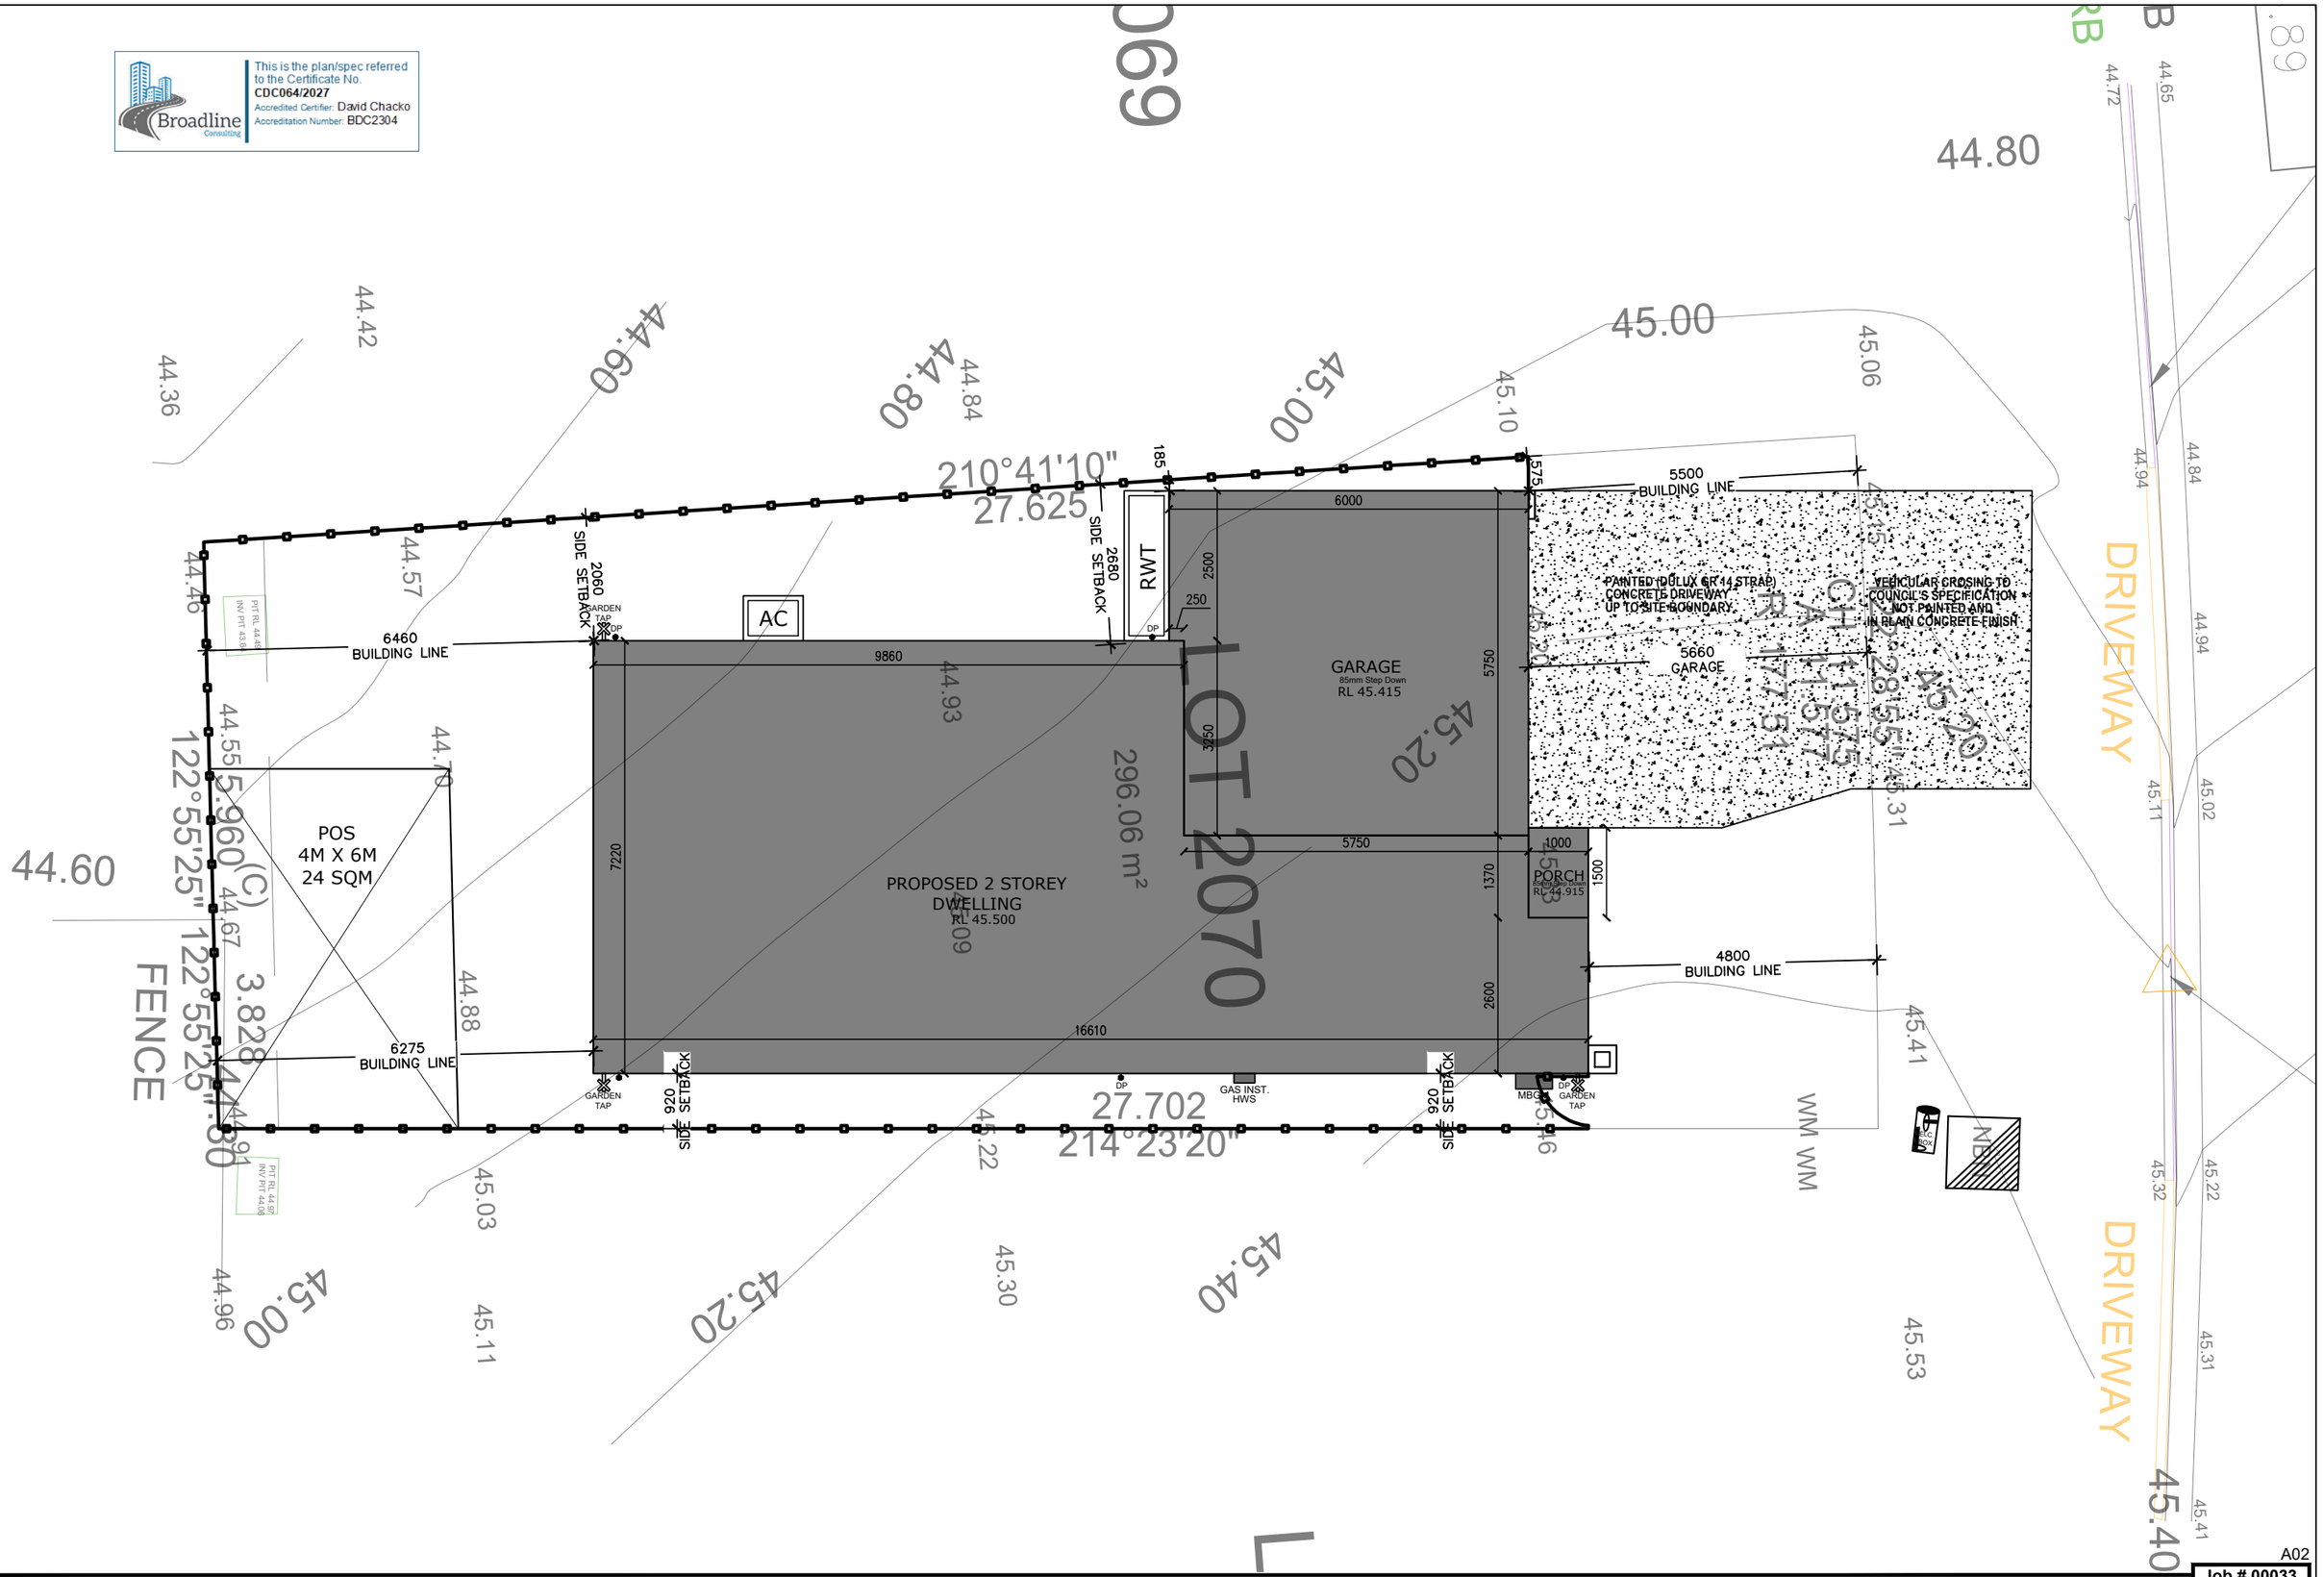

A02

Job # 00033

MOHAR .STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer.

Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North

Drawing Title
Site Plan


Lodged at: Blacktown
Drawn By VS **Checked** VS
Scale 1:100 (A3)
Date 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting

This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

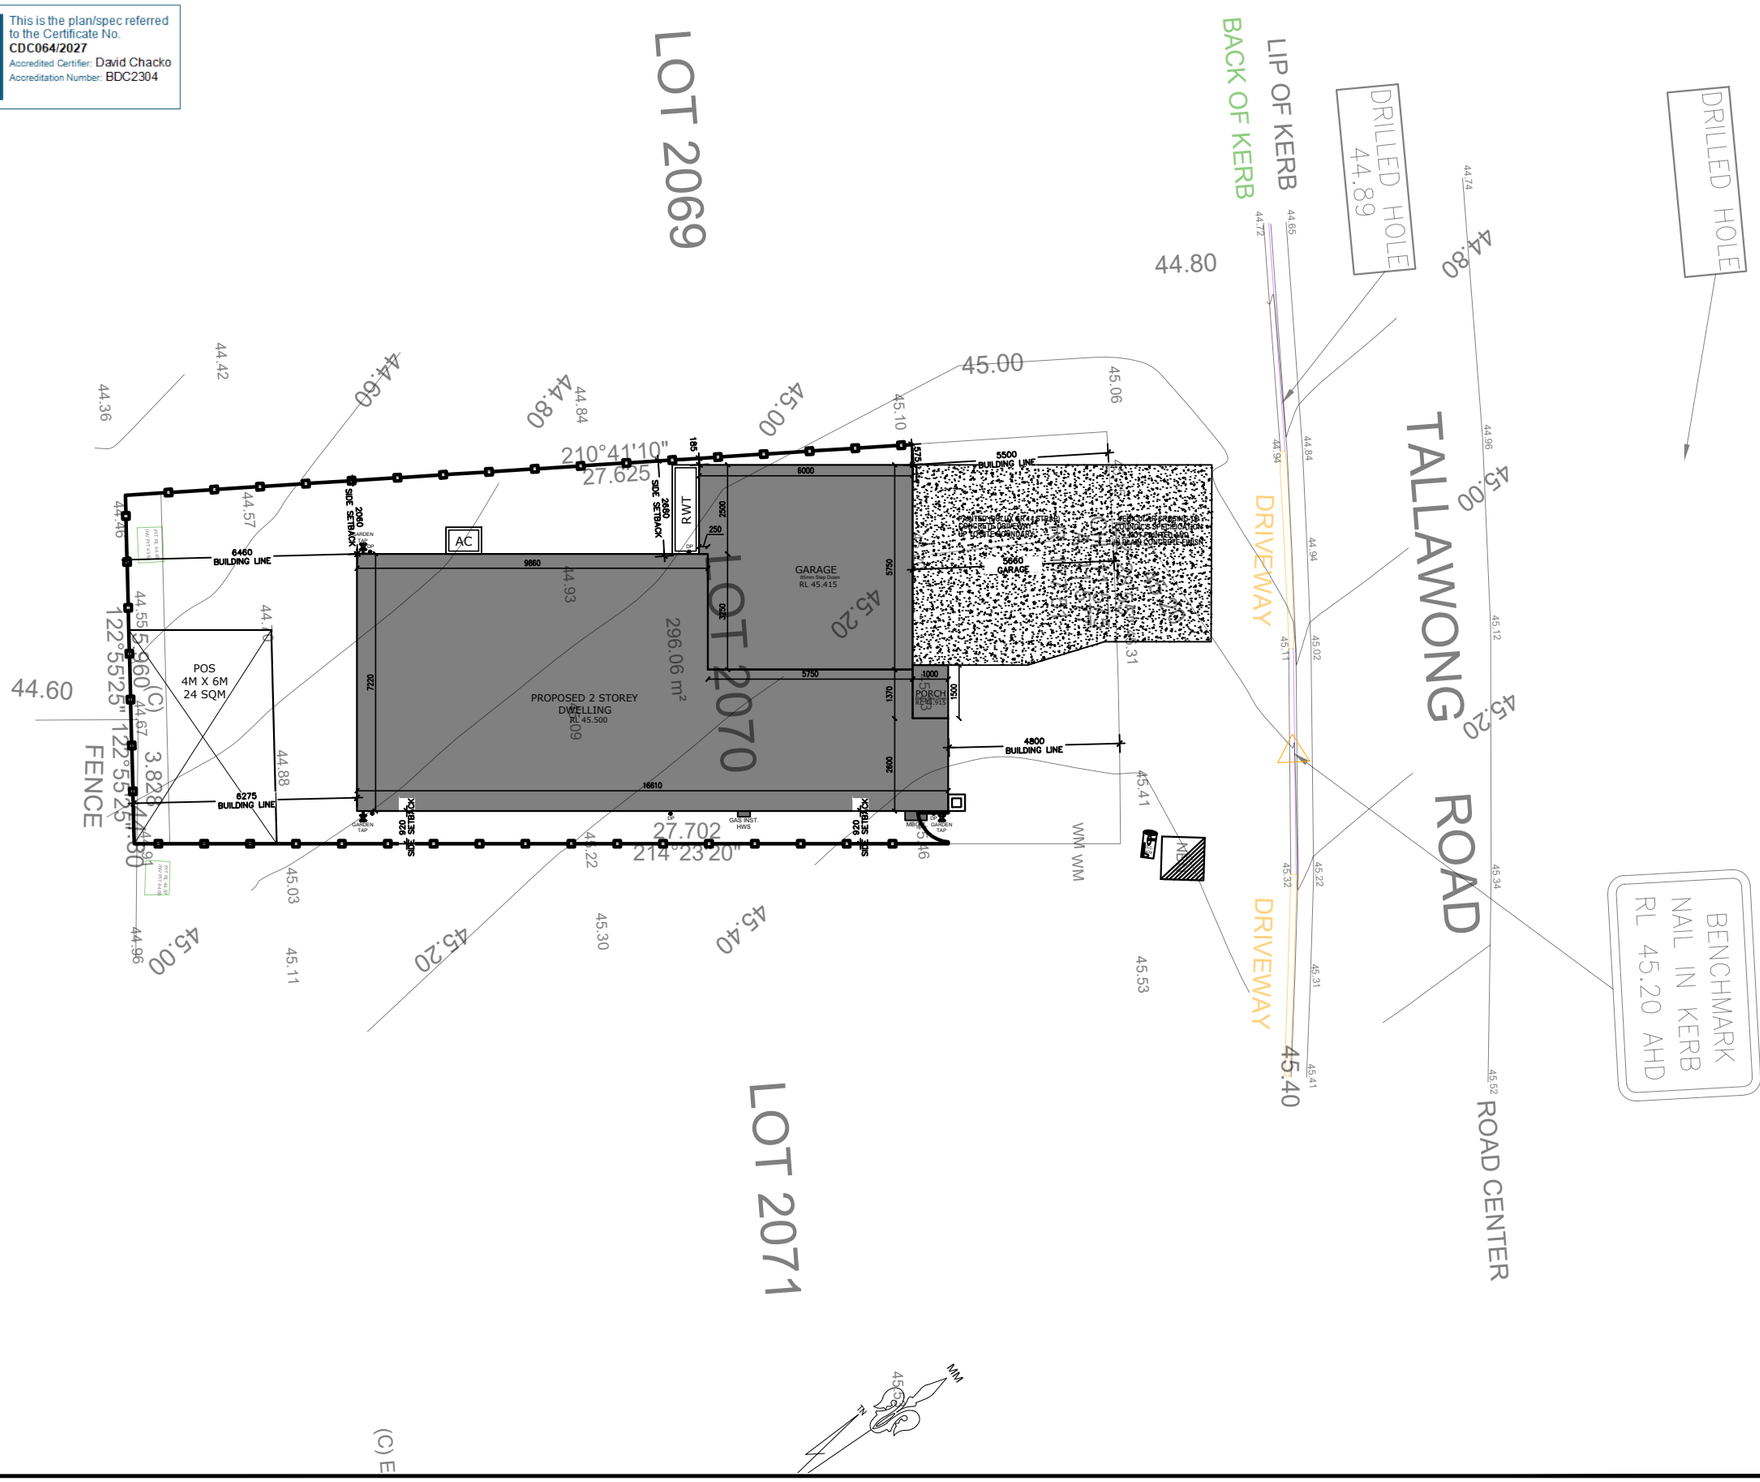

A03

Job # 00033

MOHAR .STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:

Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North


Drawing Title
Site Surroundings

Lodged at: Blacktown
Scale 1:150 (A3)
Drawn By VS **Checked** VS
Date 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

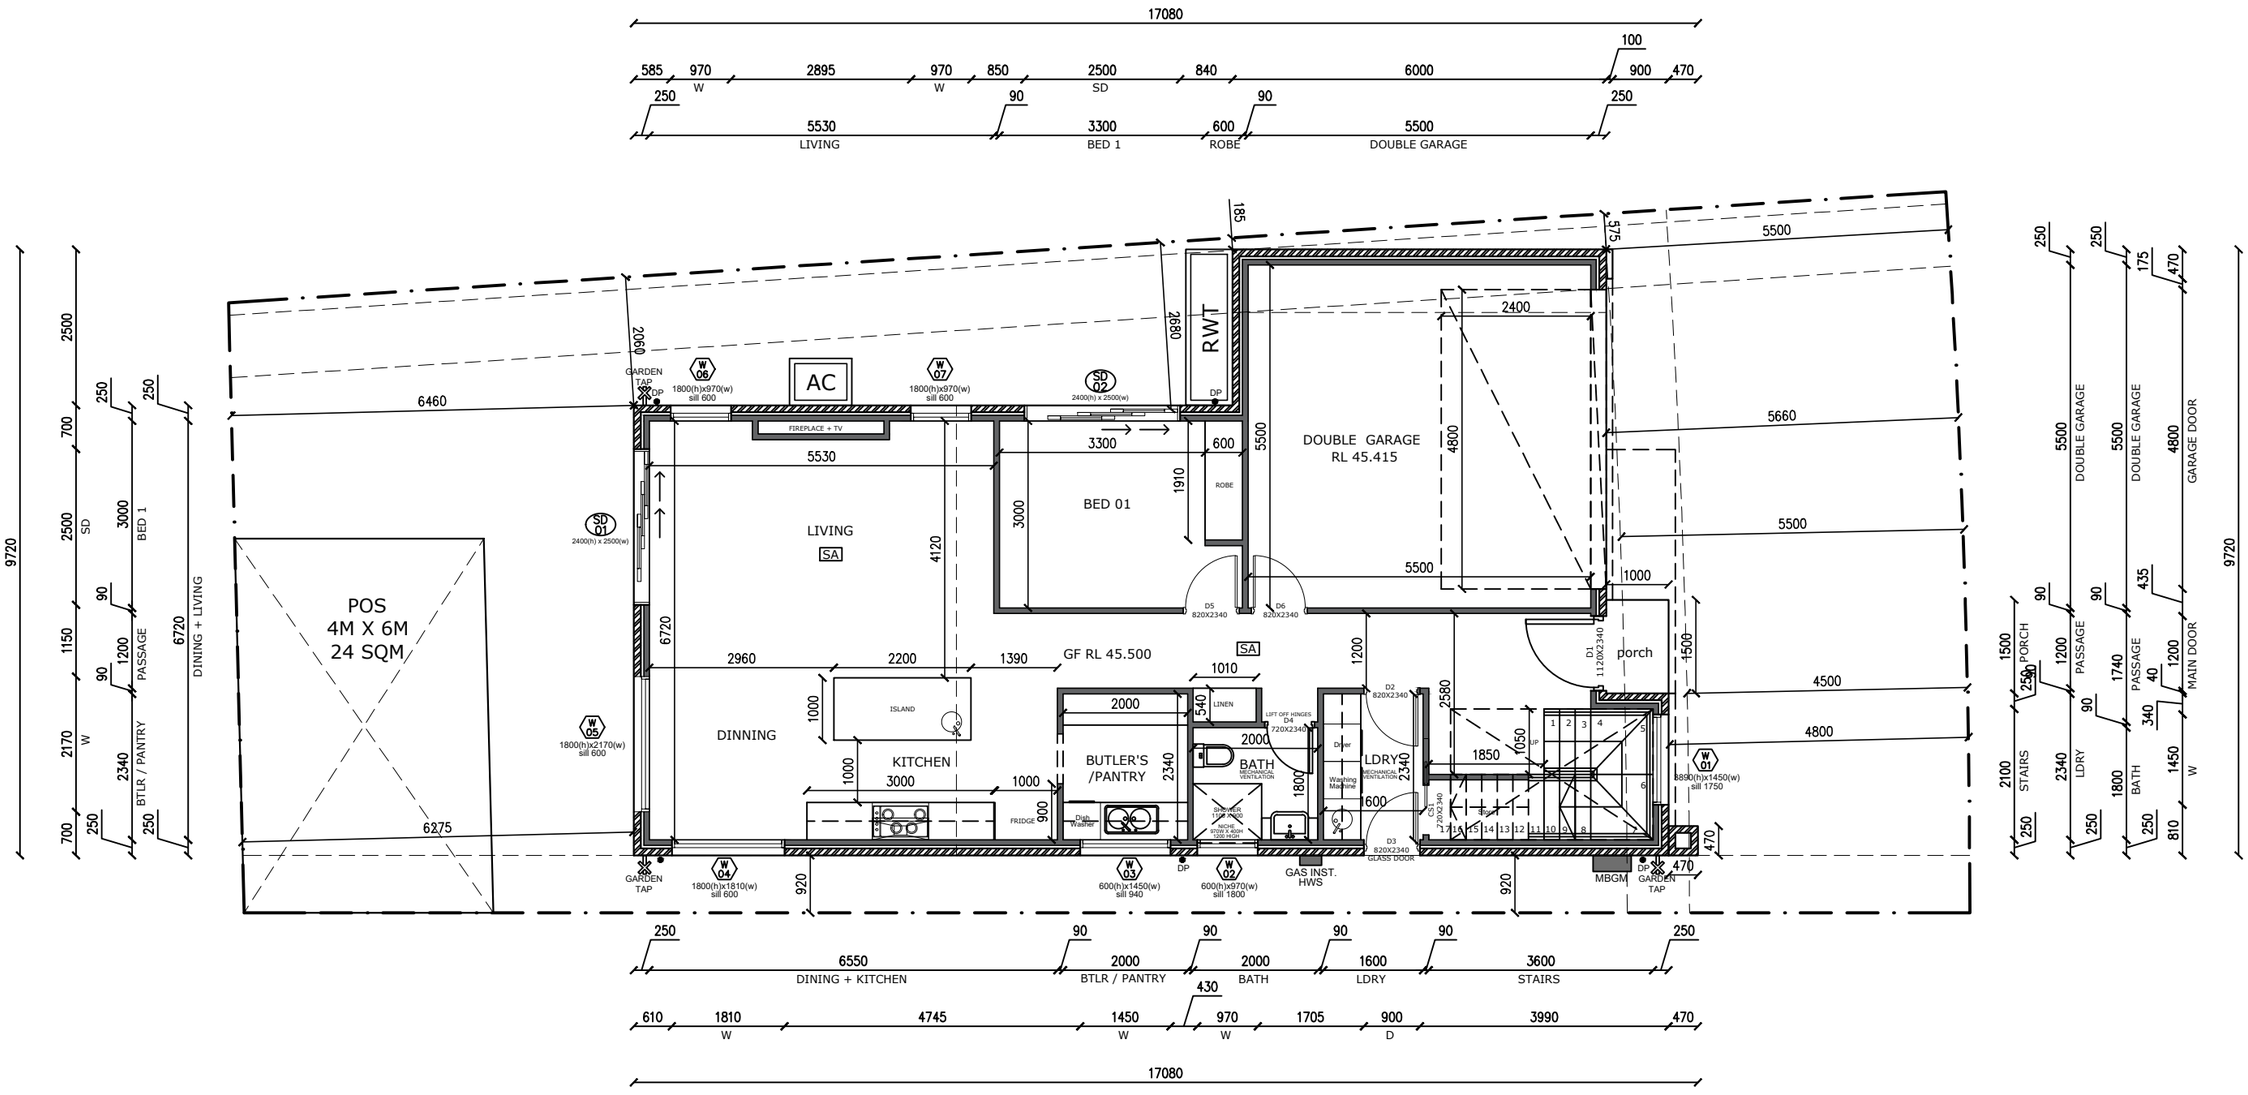

SA SMOKE ALARM
DP DOWN PIPE
MBGM ELECTRIC METER
GAS INST. HWS GAS INSTANTANEOUS HOT WATER SYSTEM

A04

Job # 00033

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North


Drawing Title
Ground Floor Plan

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS **Date** 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

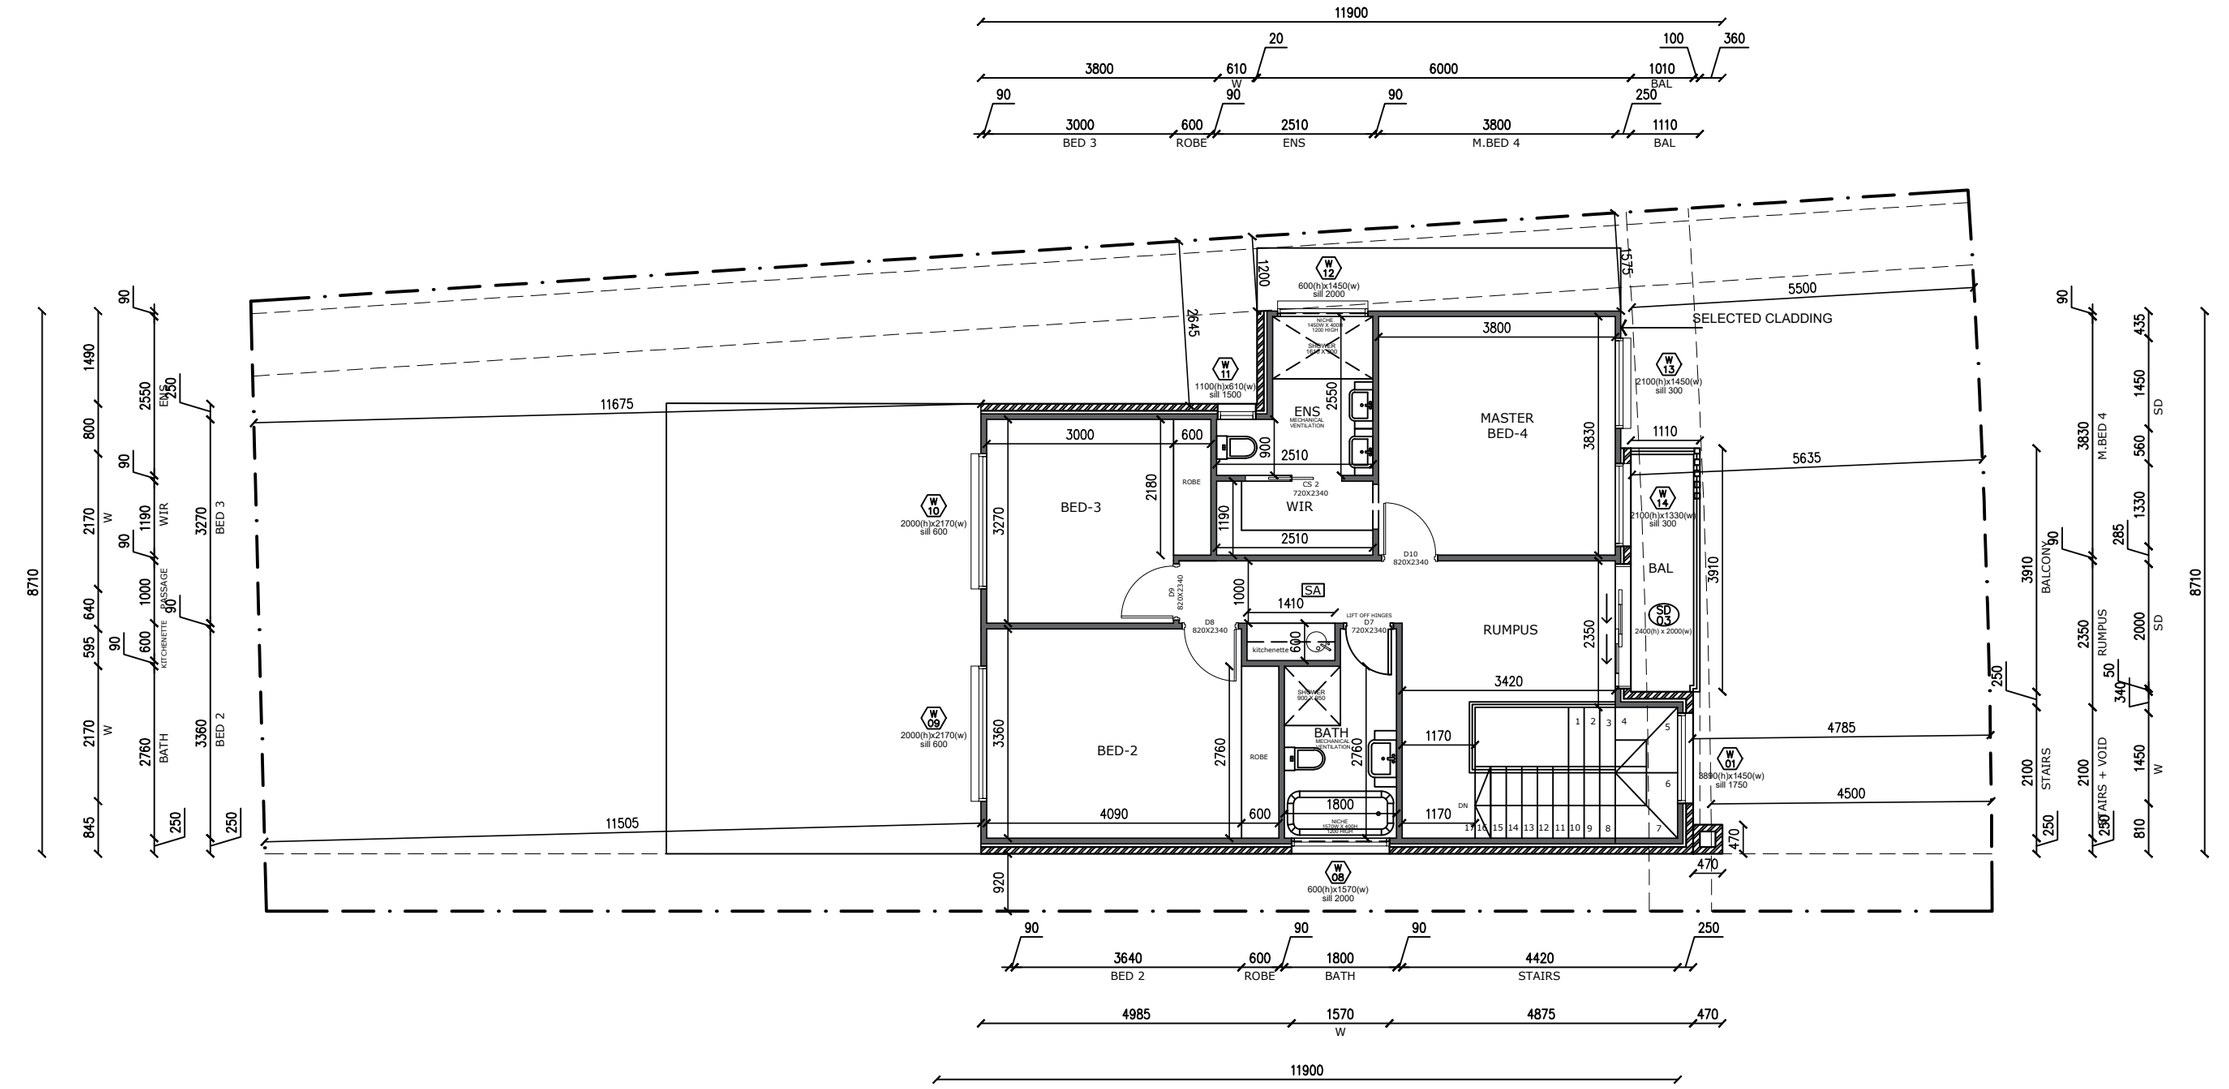

A05

Job # 00033

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North


Drawing Title
First Floor Plan

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS **Date** 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

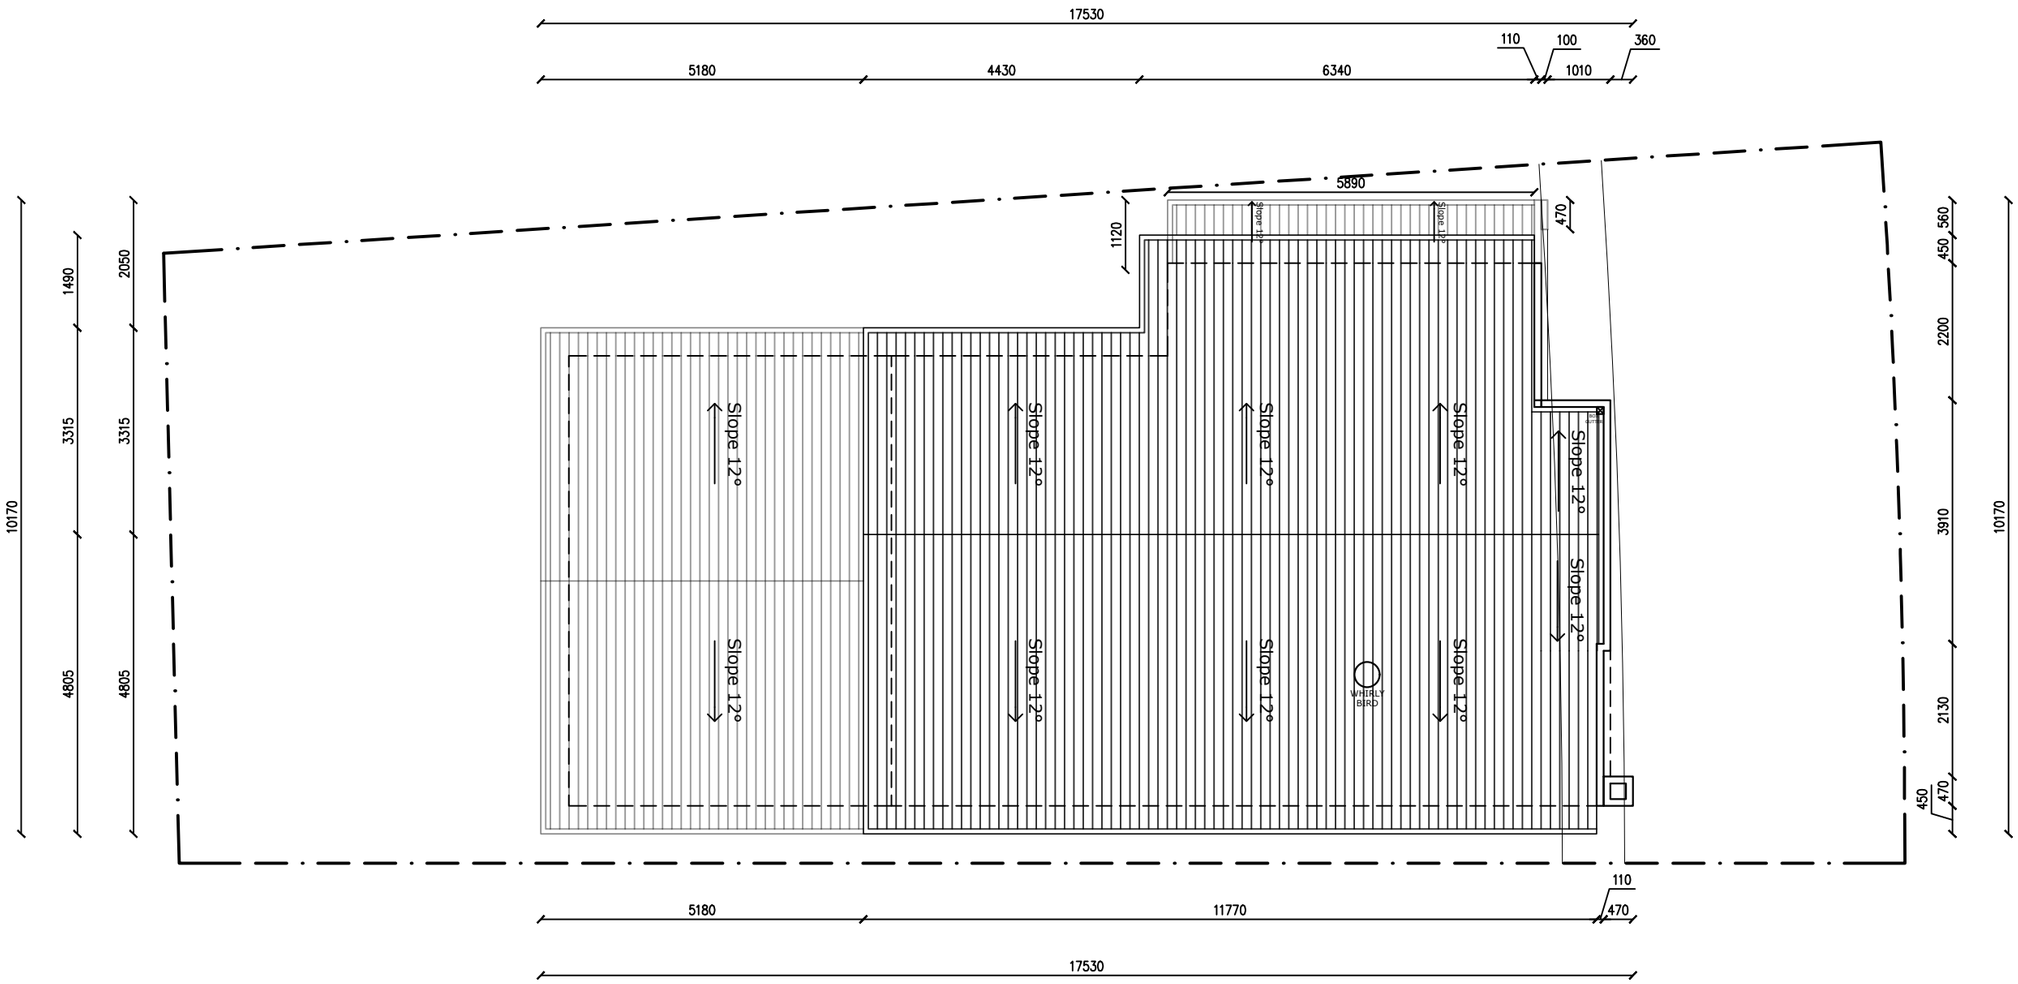

Window #	Dimensions WxH	Sill	Window Type
W 01	3890(h) x 1450(w)	1750	FIXED
W 02 - OP	600(h) x 970(w)	1800	F-S
W 03	600(h) x 1450(w)	940	F-S
W 04	1800(h) x 1810(w)	600	S-F-S_F
W 05	1800(h) x 2170(w)	600	S-F-S_F
W 06	1800(h) x 970(w)	600	A_F
W 07	1800(h) x 970(w)	600	A_F
W 08 - OP	6900(h) x 1570(w)	2000	S-F
W 09	2000(h) x 2170(w)	600	S-F-S_F
W 10	2000(h) x 2170(w)	600	S-F-S_F
W 11 - OP	1100(h) x 610(w)	1500	A_F
W 12- OP	600(h) x 1450(w)	2000	S-F
W 13	2100(h) x 1450(w)	300	A-F_F
W 14	2100(h) x 1330(w)	300	A-F_F

Sliding #	Dimensions WxH	
SD 01	2400(h) x 2500(w)	S-S-F - SLIDER
SD 02	2400(h) x 2500(w)	S-S-F - SLIDER
SD 03	2400(h) x 2000(w)	S-F - SLIDER

S = Sliding
F = Fix
A = Awning
OP = Opaque

Door#	Dimensions WxH	
D 01	1120 x 2340	
D 02	820 x 2340	
D 03	820 x 2340	GLASS DOOR
D 04	720 x 2340	
D 05	820 x 2340	
D 06	820 x 2340	
D 07	720 x 2340	
D 08	820 x 2340	
D 09	820 x 2340	
D 10	820 x 2340	
CS 1	720 x 2340	
CS 2	720 x 2340	

A06

Job # 00033

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

North


Drawing Title
Roof Plan

Lodged at: Blacktown
Drawn By VS **Checked** VS
Scale 1:100 (A3)
Date 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill


Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Total Area Calculation

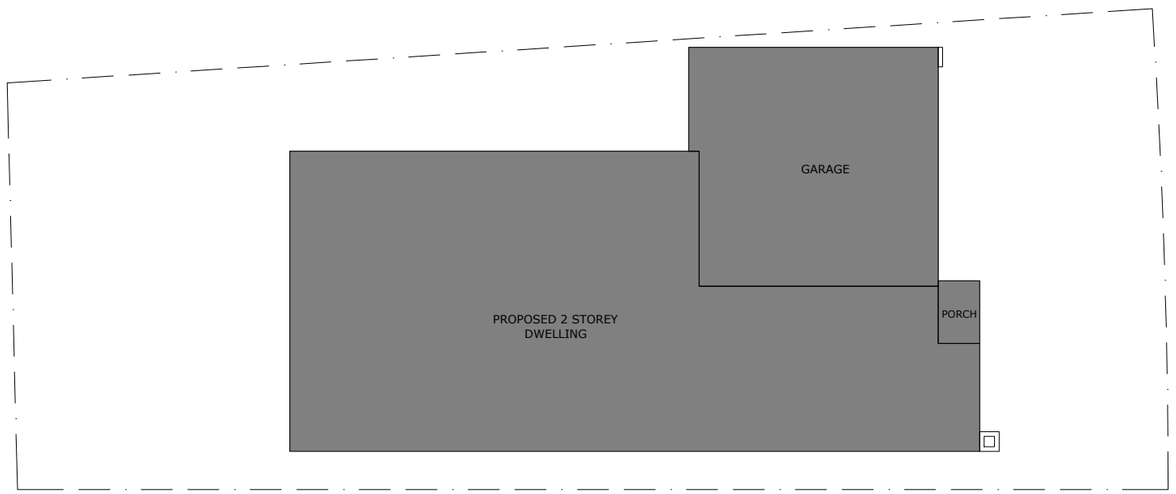


Broadline Consulting


This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

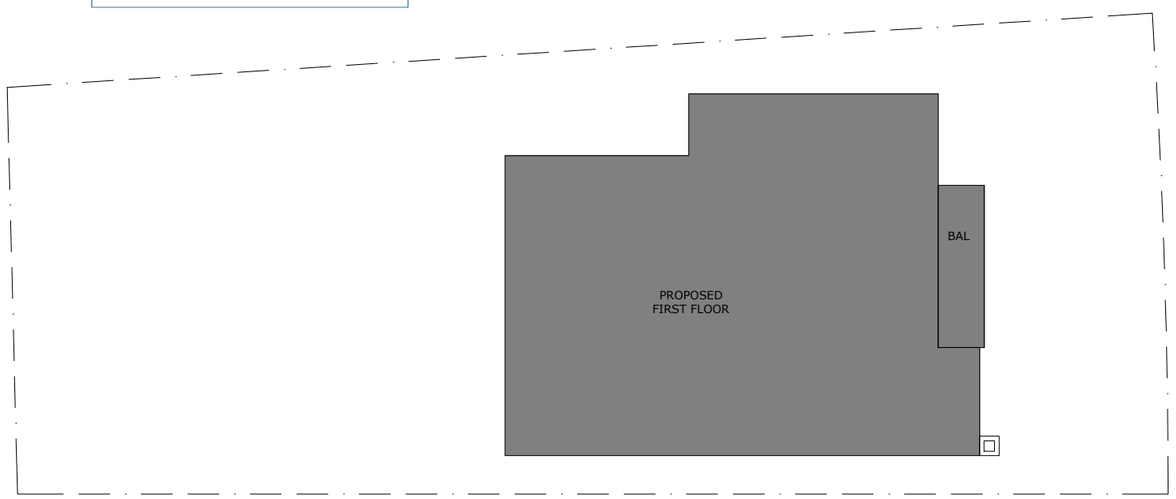

SITE AREA: 296.06 m^2	
Ground Floor	96.61
Porch	1.50
Garage	33.68
First Floor	86.84
Balcony	4.33
TOTAL	222.96
	24.00 sq

CDC Area Calculation

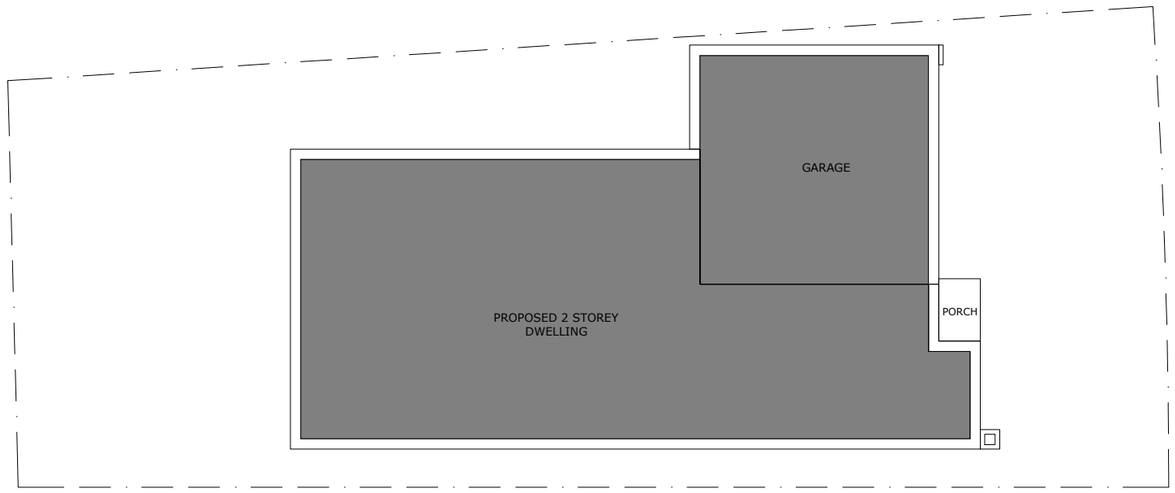

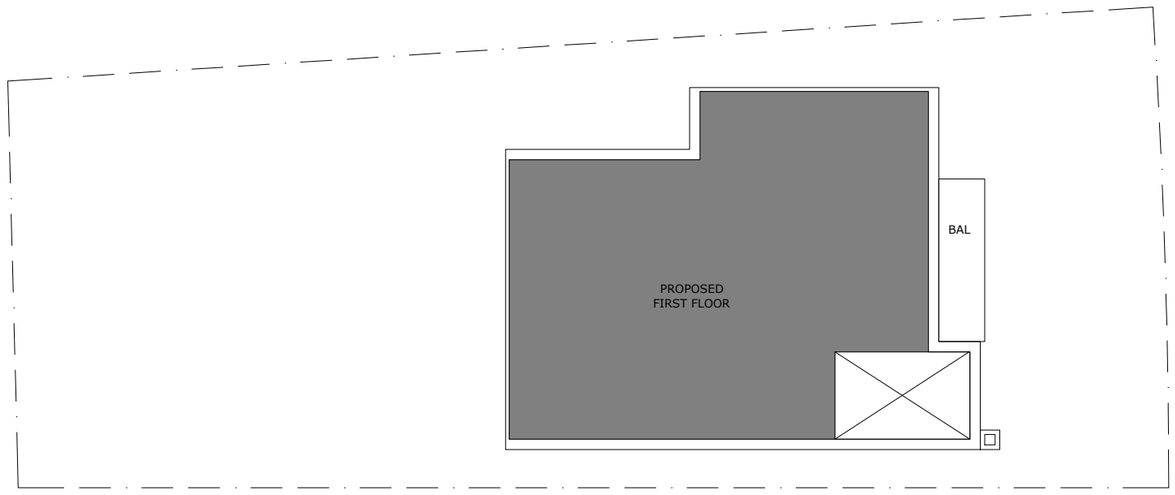

CDC (max ALLOWABLE coverage 222 m^2) Calculated to internal face of external wall
Main House: 87.13 + 30.25 - 18 (single garage excluded)
First Floor (excluding voids) : 72.14
CDC AREA = 171.52 m^2 MAX ALLOWABLE = 222 M^2.

A07

Job # 00033

MOHAR .STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:

Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.


Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

Drawing Title
Area Calculation


Lodged at: Blacktown
Scale 1:150 (A3)
Drawn By VS **Checked** VS
Date 07 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

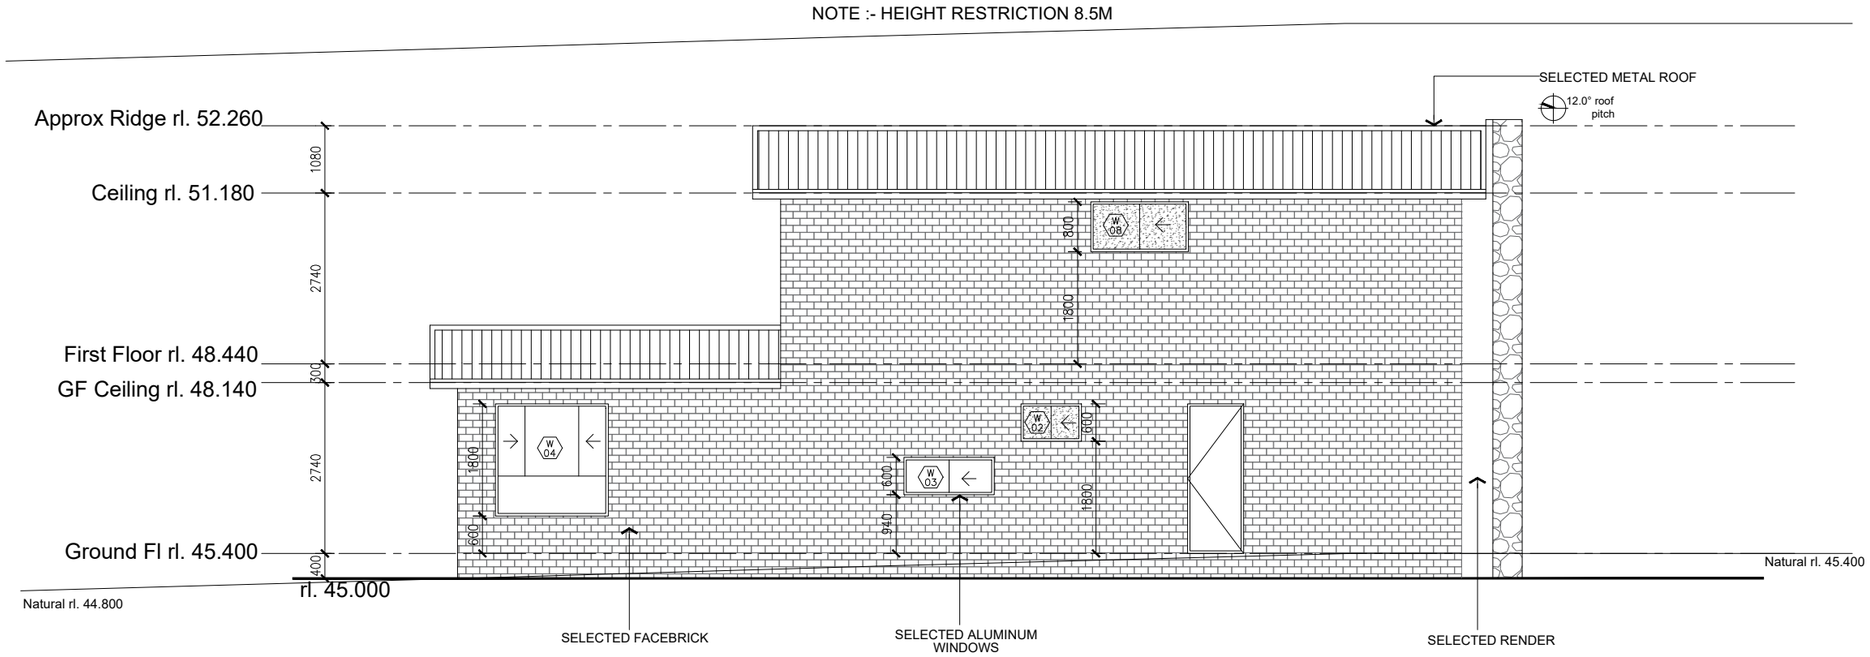

East Elevation

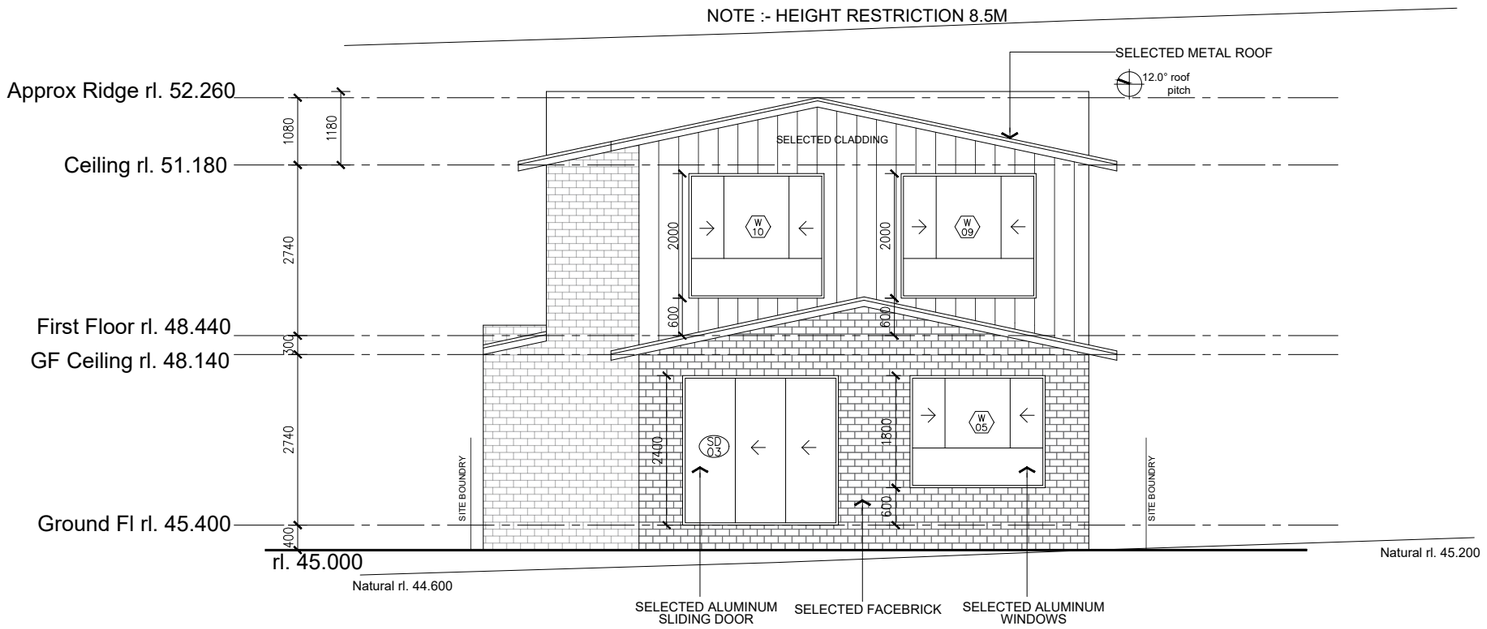

South Elevation

This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.


Drawing Title
Elevation 01

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS
Date 07 Sept 2026


Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

A08
Job # 00033

Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

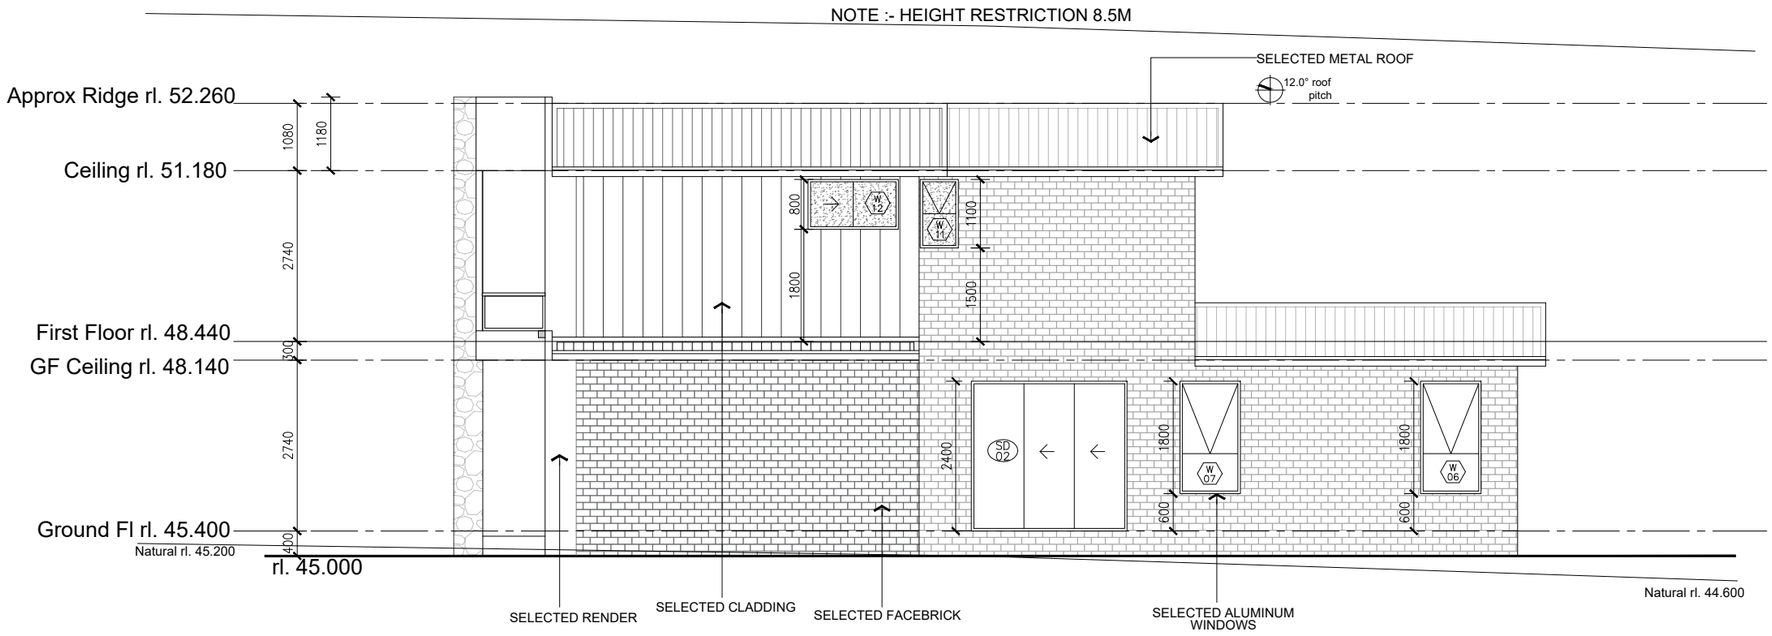

West Elevation

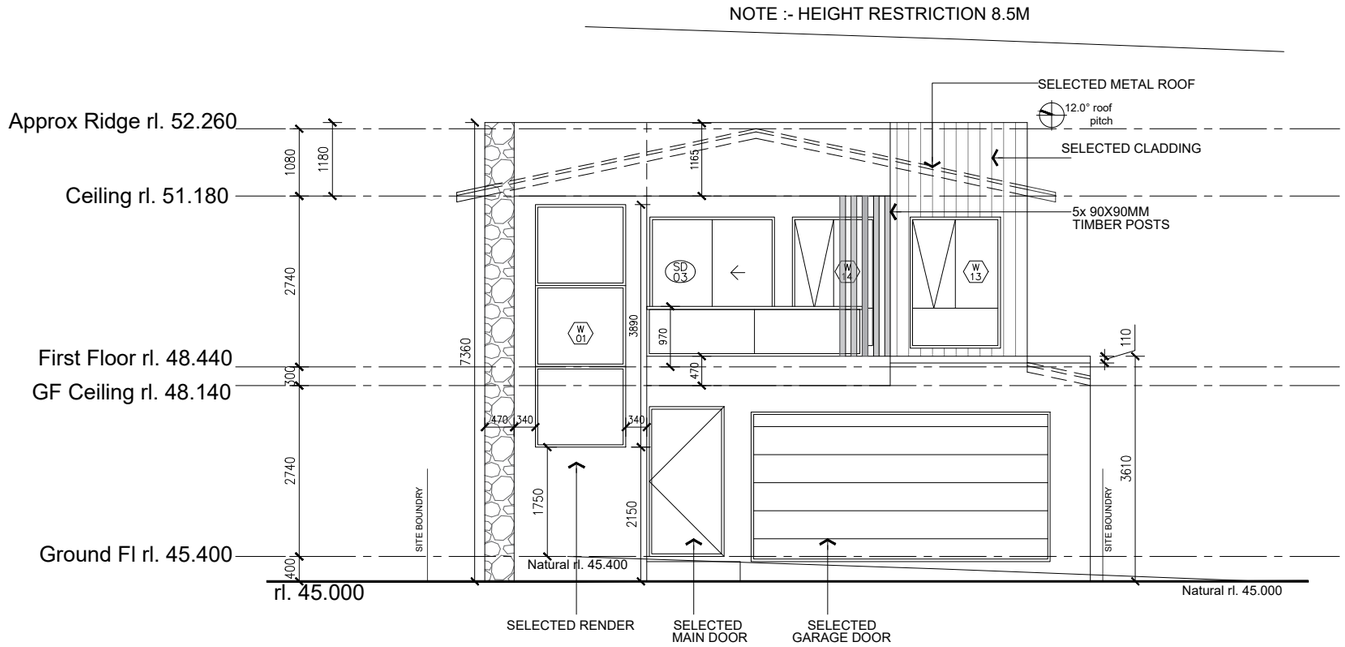

North Elevation

This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

Drawing Title
Elevation 02

Lodged at: Blacktown
Drawn By VS **Checked** VS
Scale 1:100 (A3)
Date 07 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill


A09
Job # 00033


Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26


Broadline Consulting

This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

NOTE :- HEIGHT RESTRICTION 8.5M

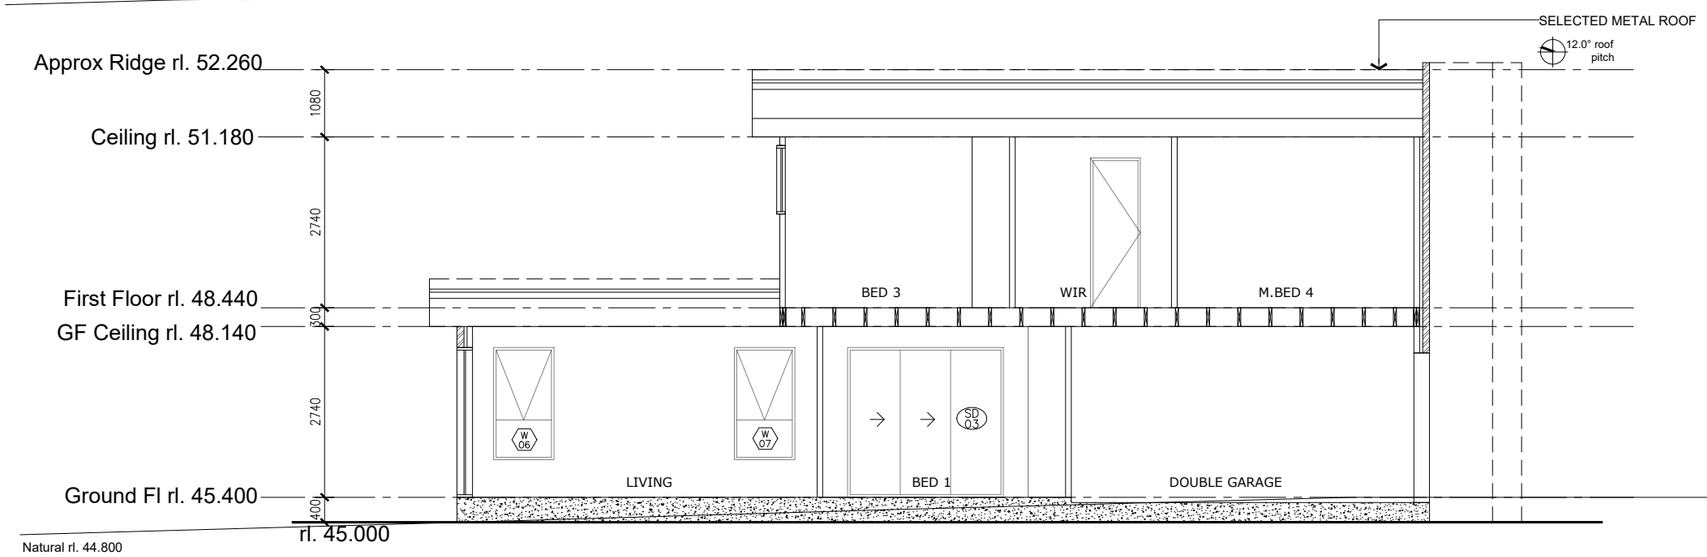

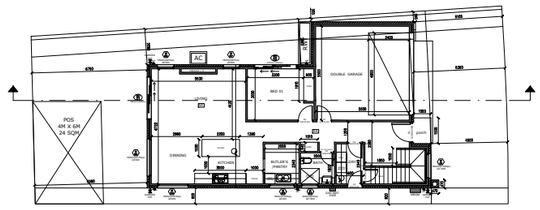

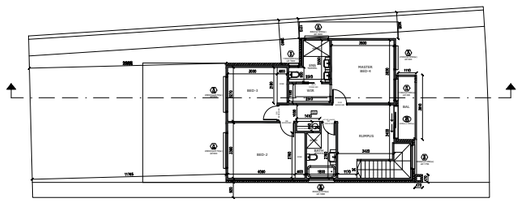

Section

A10

Job # 00033

MOHAR .STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:

Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.


Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

Drawing Title
Section

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS **Date** 07 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

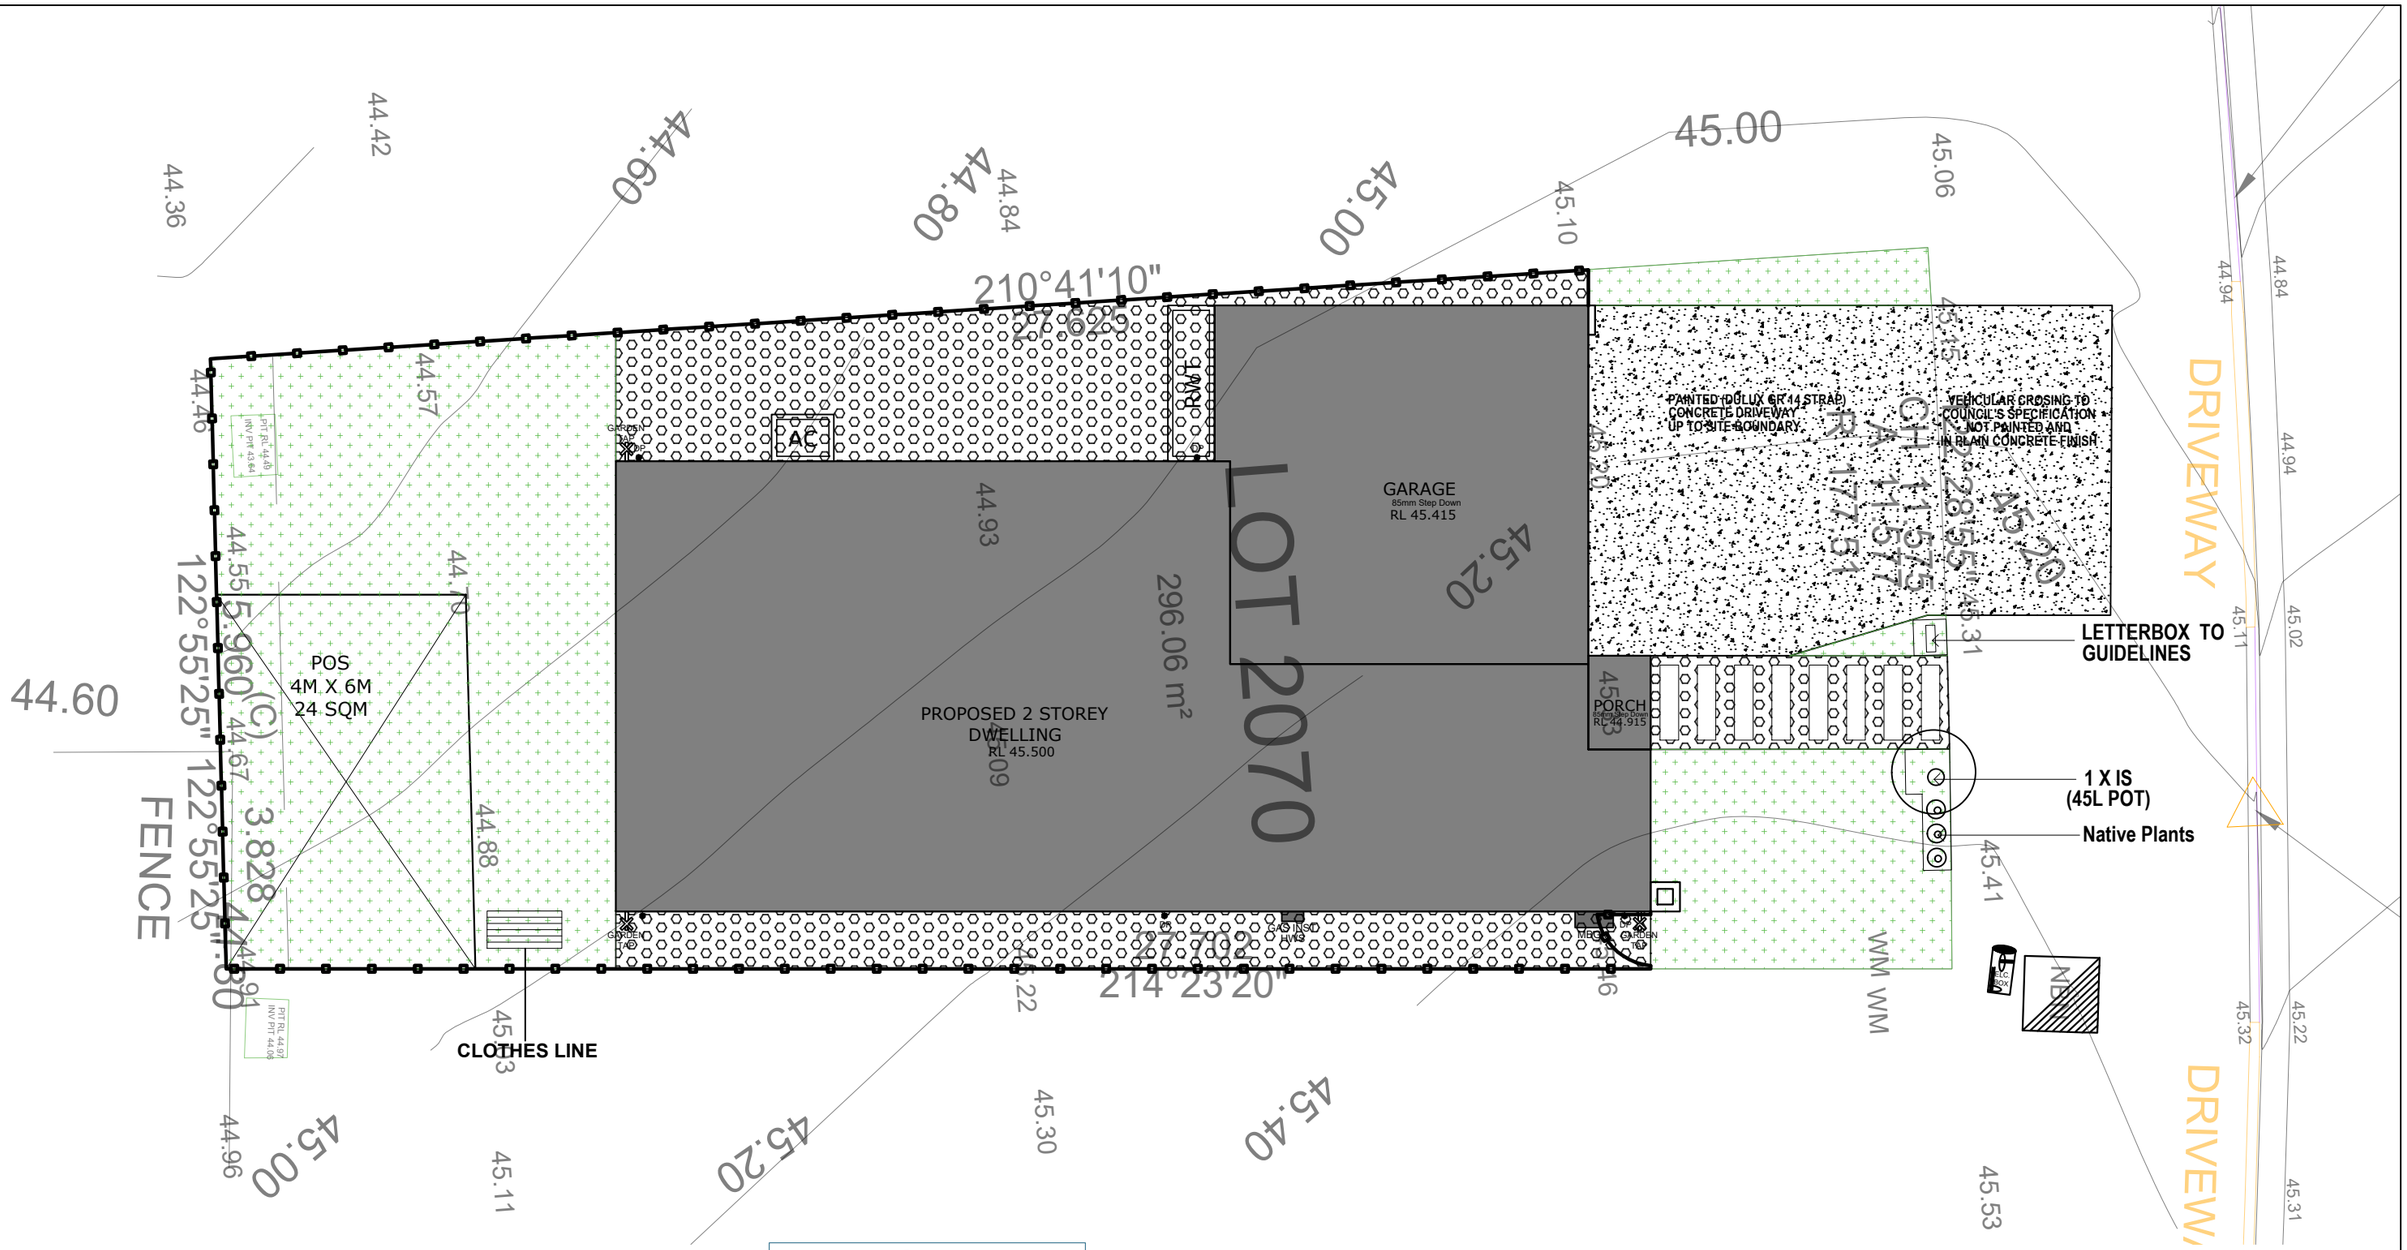

Broadline Consulting

This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

LEGEND


- Turf
- Selected brick garden edging — Lay a single coarse of brick paver in a mortar haunch.
- Selected Pebbles — 50mm selected pebbles on firm compacted base

TB - **TRISTANIOPSIS BURGUNDY BLUSH PBR**


IS - **INDIAN SUMER WHITE WEEPING CREPE MYRTLE**

Landscape Design Facts

Propsoed Landscape Area - 85.83 (29.59%)

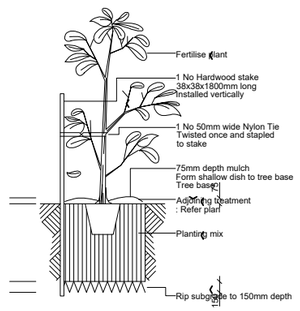

45 litre Tree planting Detail. Not.To.Scale.

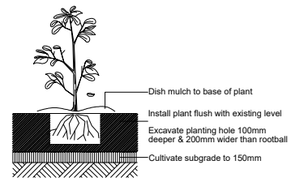

Planting in garden beds Detail. Not.To.Scale.

A11

Job # 00033

MOHAR .STUDIO

32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:

Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.

Design & documentation there of are copyright and remain the property of Mistry Desings and must not be used in anyway, wholly or in part without the written consent of the designer.

North

Drawing Title
Conceptual Landscape Plan

Lodged at: Blacktown | **Scale** 1:100 (A3)
Drawn By VS | **Checked** VS | **Date** 23 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
F	Issued for CDC (ARCHITECTRUAL CHANGES)	VS	23.09.26
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

Broadline Consulting
This is the plan/spec referred to the Certificate No.
CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

SEDIMENTATION FENCE TO DETAIL A

SEDIMENTATION FENCE TO DETAIL A

210°41'10"
27.625

SITE SLOPE

SITE SLOPE

SITE SLOPE

SITE SLOPE

SITE SLOPE

LOT 2070

296.06 m²

TEMPORARY CONSTRUCTION DRIVE WAY WITH SITE ACCESS GATE

122°28'55"
45.20

waste bin

recycle bin

building stock pile

WM

NBN

DRIVEWAY

DRIVEWAY

122°55'25"
5.960

FENCE

3.828

214°23'20"
27.702

44.80

45.00


44.60

45.00


45.20

45.40

44.42 44.36 44.60 44.80 44.84 45.00 45.10 45.06 44.72 44.65 44.94 44.84 44.94 45.02 45.11 45.15 45.20 45.31 44.57 44.70 44.93 45.09 45.33 44.55 44.88 45.41 45.46 44.22 45.03 44.96 45.11 45.30 45.53 45.32 45.22 45.31 45.41

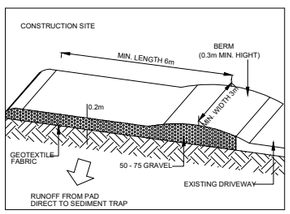

TEMPORARY CONSTRUCTION DRIVEWAY (NOT TO SCALE)

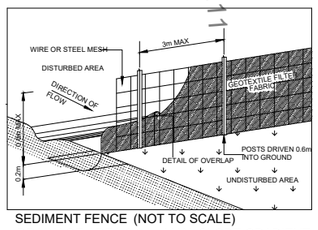

SEDIMENT FENCE (NOT TO SCALE)
DRAINAGE AREA 0.6 ha MAX. SLOPE GRADIENT 12 MAX. SLOPE LENGTH 60M MAX

A13

Job # 00033

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Desings and must not be used in anyway, wholly or in part without the written consent of the designer.

North

Drawing Title
Sedimentation Control & Waste Management

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS
Date 07 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26

1. FALLS, SLIPS, TRIPS

a) WORKING AT HEIGHTS

DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of worker's falling more than two metres. However, construction of this building will require workers to be working at heights where a fall in excess of two metres is possible and injury is likely to result from such a fall. The builder should provide a suitable barrier wherever a person is required to work in a situation where falling more than two metres is a possibility.

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings where scaffolding is appropriate:
Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation.
For buildings where scaffold, ladders, trestles are not appropriate:
Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, fall barriers with Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislation.

ROOF ANCHORAGE POINTS

Anchorage points for portable scaffold or fall arrest devices have been included in the design for use by maintenance workers. Any persons engaged to work on the building after completion of construction work should be informed about the anchorage points.

b) SLIPPERY OR UNEVEN SURFACES

FLOOR FINISHES SPECIFIED

If finishes have been specified by designer, these have been selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to the specified finish should be made in consultation with the designer or, if this is not practical, surfaces with an equivalent or better slip resistance should be chosen.

FLOOR FINISHES BY OWNER

If designer has not been involved in the selection of surface finishes, the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with AS HB 197:1999 and AS/NZ 4586:2004

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for this building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace.
Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways.
Contractors should be required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be stored in designated areas away from access ways and work areas.

2. FALLING OBJECTS

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the work is being carried out onto persons below.

Prevent or restrict access to areas below where the work is being carried out.
Provide toeboards to scaffolding or work platforms.
Provide protective structure below the work area.
Ensure that all persons below the work have Personal Protective Equipment (PPE).

Broadline Consulting
This is the plan/spec referred to the Certificate No. CDC064/2027
Accredited Certifier: David Chacko
Accreditation Number: BDC2304

BUILDING COMPONENTS

During construction, renovation or demolition of this building, parts of the structure including prefabricated steel work, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times when collapse which may injure persons in the area is a possibility.

Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

3. TRAFFIC MANAGEMENT

For building on a major road, narrow road or steeply sloping road:
Parking of vehicles or loading/unloading of vehicles on this roadway may cause a traffic hazard. During construction, maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the supervision of these areas.
For building where on-site loading/unloading is restricted:
Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading areas.
For all buildings:
Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

4. SERVICES

GENERAL

Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are identified on the plans but the exact location and extent of services may vary from that indicated. Services should be located using an appropriate service (such as Dial Before You Dig), appropriate excavation practice should be used and, where necessary, specialist contractors should be used.
Locations with underground power:
Underground power lines MAY be located in or around this site. All underground power lines must be disconnected or care located and adequate warning signs used prior to any construction, maintenance or demolition commencing.
Locations with overhead power lines:
Overhead power lines MAY be near or on this site. These pose a risk of electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5. MANUAL TASKS

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass.
All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methods in all areas where lifting may occur.
Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturer's specifications and not used where faulty or (in the case of electrical equipment) not carrying a current electrical safety tag.
All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in accordance with manufacturer's specification.

6. HAZARDOUS SUBSTANCES ASBESTOS

For alterations to a building constructed prior to 1990:
If this existing building was constructed prior to:
1990 - it therefore may contain asbestos
1986 - it therefore is likely to contain asbestos
either in cladding material or in fire retardant insulation material, either case, the builder should check and, if necessary, take appropriate action before demolishing, cutting, sanding, drilling or otherwise disturbing the existing structure.

POWDERED MATERIALS

Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

TREATED TIMBER

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this may be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation of harmful material when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS

Many types of glues, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Fibreglass, rockwool, ceramic and other material used for thermal sound insulation may contain synthetic mineral fibre which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts of the body. Personal Protective Equipment including protection against inhalation of harmful material should be used when installing, removing or working near bulk insulation material.

TIMBER FLOORS

This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

7. CONFINED SPACES

EXCAVATION

Construction of this building and some maintenance on the building will require excavation and installation of items within excavations. Where practical, installation should be carried out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated area should be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations should be provided.

ENCLOSED SPACES

For buildings with enclosed spaces where maintenance or other access may be required:
Enclosed spaces within this building may present a risk to persons entering for construction, maintenance or any other purpose. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal Protective Equipment should be provided.

SMALL SPACES

For buildings with small spaces where maintenance or other access may be required:
Some small spaces within this building will require access by construction or maintenance workers. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces.

8. PUBLIC ACCESS

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secured when not fully supervised.

9. OPERATIONAL USE OF BUILDING

RESIDENTIAL BUILDINGS

This building has been designed as a residential building. If it, at a later date, is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new use.

10. OTHER HIGH RISK ACTIVITY

All electrical work should be carried out in accordance with Code of Practice: Managing Electrical Risks at the Workplace, AS/NZ 3012 and all licensing requirements.
All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace.
All work should be carried out in accordance with Code of Practice: Managing Noise and Preventing Hearing Loss at Work.
Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement. All the above applies.

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN THE PROJECT.
THIS INCLUDES (but is not excluded to): OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTENORS, DEMOLISHERS.

A15

MOHAR .STUDIO
32 Fuchsia Crescent,
Macquarie Fields, NSW 2564
m : 04 0508 3220
e : Hello@mohar.homes

DIAL BEFORE YOU DIG www.1100.com.au

Disclaimer:
Do not scale drawings. Work off figured dimensions. Verify all dimensions on site. Report any discrepancy to the designer.
Design & documentation there of are copyright and remain the property of Mistry Designs and must not be used in anyway, wholly or in part without the written consent of the designer.

Drawing Title
Site Safety Note

Lodged at: Blacktown
Scale 1:100 (A3)
Drawn By VS **Checked** VS **Date** 07 Sept 2026

Project
Dwelling House
Lot : 2070 DP: 1279737
Address:
331 Tallawong Road, Rouse hill

Job # 00033

Issue	Description	By	Date
E	Issued for CDC	VS	07.09.26
D	Issued for CDC	VS	28.08.26