FOR CONSTRUCTION

Proposed Construction of a Two-Storey Detached Dwelling with an Attached Double Garage, Associated Earthworks, Retaining Structures, Stormwater Drainage, Landscaping, and Ancillary Site Works

Lot 3 DP 1300639

LOCATED AT NO.

75 BEROWRA WATERS ROAD, BEROWRA NSW 2081

PARAGON
Paragon Building Certifiers Pty Ltd
PROPOSE
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026



BASIX COMMITMENTS	Certificate number: 1849142S Date of issue: Monday, 01 June 2026
WATER	
LANDSCAPE	20m2
TOILETS	4 STARS
KITCHEN TAPS	4 STARS
SHOWER HEADS	5 STAR (>4.5 but <=6 Umin)
BASIN TAPS	4 STARS
ALTERNATIVE WATER	2000L RAINWATER TANK
ROOF WATER TO TANK	222m2
ALT.WATER USES- TANK	LAUNDRY
ALT. WATER USES - RETIC	ALL TOILETS + ONE OUTDOOR TAP
ENERGY	
HOT WATER	GAS INSTANTANEOUS - 6 STAR
AIR-CON (HEATING)	3 PHASE DUCTED - EER 3.5-4.0
AIR-CON (COOLING)	3 PHASE DUCTED - EER 3.5-4.0
VENTILATION - BATHROOM	NONE/ NATURAL VENTILATION
VENTILATION - KITCHEN	DUCTED - MANUAL SWITCH
VENTILATION - LAUNDRY	INTERLOCKED WITH LIGHT
COOKTOP	GAS
OVEN	ELECTRIC
CLOTHES DRYING	OUTDOOR CLOTHESLINE
LIGHTING	DEDICATED LED

GENERAL LEGEND

AC	AIR CONDITIONING UNIT
AL	POWDERCOATED ALUMINIUM DOOR/ WINDOW
BAL	BALUSTRADE TYPE
BG	BOX GUTTER
BR1, BR2, etc.	BRICK FACE TYPE
CAP	METAL CAPPING
CD1, CD2, etc.	WALL CLADDING
CONC.	CONCRETE FLOOR
CPT	CARPET
CRT	CONCRETE ROOF TILES
CR1, CR2, etc.	CEMENT RENDER TYPE/ COLOUR
DP/S	DOWN PIPE
DW	DISH WASHER
ED	ENTRY DOOR
F	FRIDGE
FAS	FASCIA
FET	FEATURE TILE
FT, FT1, FT2, etc.	FLOOR TILES
FW	FLOOR WASTE
GD	GARAGE DOOR
GUT	GUTTER
HWU	HOT WATER UNIT
HYB	HYBRID FLOOR
L	LINEN
MR	METAL ROOF
MW	MICROWAVE OVEN
NGL	NATURAL GROUND LEVEL
OBS	OBSCURED GLASS
P	PANTRY
R	ROBE
RL	REDUCED LEVEL
RWH	RAIN WATER HEAD
RWT	RAIN WATER TANK
S	STORAGE
TOW	TOP OF WALL
TL	TIMBER LAMINATE
WC	WATER CLOSET
WM	WASHING MACHINE
SD	SMOKE DETECTOR

Sheet List

Sheet No.	Sheet Name	Drawn By	Current Revision Date	Revision
CC.01	COVER SHEET	AS	1-10-2026	CC ISSUE
CC.02A	GENERAL NOTES A	AS	1-10-2026	CC ISSUE
CC.02B	GENERAL NOTES B	AS	1-10-2026	CC ISSUE
CC.03	LOCATION PLAN AND SITE PLAN	AS	1-10-2026	CC ISSUE
CC.04	SITE CUT & FILL	AS	1-10-2026	CC ISSUE
CC.04A	SITE ANALYSIS AND SEDIMENT CONTROL	AS	1-10-2026	CC ISSUE
CC.05	GROUND FLOOR PLAN	AS	1-10-2026	CC ISSUE
CC.06	FIRST FLOOR LEVEL	AS	1-10-2026	CC ISSUE
CC.07	ROOF PLAN	AS	1-10-2026	CC ISSUE
CC.08	ELEVATION 01	AS	1-10-2026	CC ISSUE

Sheet List

Sheet No.	Sheet Name	Drawn By	Current Revision Date	Revision
CC.09	ELEVATION 02	AS	1-10-2026	CC ISSUE
CC.10	SECTIONS	AS	1-10-2026	CC ISSUE
CC.11	FLOOR AREA PLAN	AS	1-10-2026	CC ISSUE
CC.12	RENTABLE AREA PLAN	AS	1-10-2026	CC ISSUE
CC.14	COLOR SCHEDULE	AS	1-10-2026	CC ISSUE
CC.15	LANDSCAPE PLAN	AS	1-10-2026	CC ISSUE
CC.16	BASIX	AS	1-10-2026	CC ISSUE
CC.16a	BASIX 02	AS	1-10-2026	CC ISSUE
CC.18	WATERPROOFING DETAILS	AS	1-10-2026	CC ISSUE
CC.20	BUILDING ENVELOPE	AS	1-10-2026	CC ISSUE

NOTE : ALL IMAGES ARE FOR ILLUSTRATION ONLY AND ARE SUBJECT TO VARIATION AND TO AVAILABILITY OF MATERIALS.

CC ISSUE

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
COVER SHEET

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	As indicated	CC.01	3
DRAWN BY:	CHECKED BY:			ISSUED BY:
AS	RH			
DRAFTED BY:	CLIENT NAME:			
SL	Vikas Kumar Rangi & Poonam Chaudhary			

A3

BUILDING SPECIFICATIONS

National Construction Code – Volume 2, Amendment 1 – Building Code of Australia 2022 & Housing Provisions Standard 2022

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

SITE PREPARATION

- PART 3.1 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.

EARTHWORKS

- TO BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE ENVIRONMENTAL PLANNING & ASSESSMENT ACT 1979 AND DEVELOPMENT CONSENT CONDITIONS
- PART 3.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4678:2002 - EARTH-RETAININGSTRUCTURES

DRAINAGE

- PART 3.3 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS 3500.1:2021 - PLUMBING & DRAINAGE - WATER SERVICES
- AS/NZS 3500.2:2021 - PLUMBING & DRAINAGE - SANITARY PLUMBING & DRAINAGE
- AS/NZS 3500.3:2021 - PLUMBING & DRAINAGE STORMWATER DRAINAGE
- AS/NZS 3500.4:2021 - PLUMBING & DRAINAGE - HEATED WATER SERVICES

STRUCTURAL WORK

- Part 2.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 4100-2020– STEEL STRUCTURES CODES
- AS/NZS 1170.0-2002 – GENERAL PRINCIPLES
- ASNZS 1170.1-2002 – PARTS 1 PERMANENT, IMPOSED AND OTHER ACTIONS
- AS/NZS 1170.2-2021 – PART 2 WIND ACTIONS
- AS 3700-2018– SAA MASONRY CODE
- AS 1684.3-2021- RESIDENTIAL TIMBER FRAMED CONSTRUCTION

FOOTINGS & SLABS

- PART 4 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 2159:2009 - PILING - DESIGN & INSTALLATION
- AS 2870:2011 - RESIDENTIAL SLABS & FOOTINGS
- AS 3600:2018 - CONCRETE STRUCTURES

MASONRY

- PART 5 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3700:2018 - MASONRY STRUCTURES

FRAMING

- PART 6 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1684.2:2021 - RESIDENTIAL TIMBER-FRAMED CONSTRUCTION - NON- CYCLONIC AREAS
- AS 1720.1:2010 - TIMBER STRUCTURES - DESIGN METHODS
- AS 4100:2020 - STEEL STRUCTURES
- AS 3660.1-2014 – TERMITE MANAGEMENT SYSTEM

ROOF & WALL CLADDING

- PART 7 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1273:1991 - UNPLASTICIZED PVC (UPVC) DOWNPIPES & FITTINGS FORRAINWATER
- AS 1562.1:2018 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - METAL
- AS/NZS 1562.3:2006 - DESIGN & INSTALLATION OF SHEET ROOF & WALL CLADDING - PLASTIC
- AS 2049:2002 - ROOF TILES
- AS 2050:2018 - INSTALLATION OF ROOF TILES
- AS 4285:2019 – ROOFLIGHTS

GLAZING

- PART 8 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1288:2021 - GLASS IN BUILDINGS -SELECTION & INSTALLATION
- AS 2047:2014 - WINDOWS & EXTERNAL GLAZED DOORS IN BUILDINGS
- AS/NZS 2208:1996 - SAFETY GLAZING MATERIALS IN BUILDINGS

FIRE SAFETY

- PART 9 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 3786:2014 - SMOKE ALARMS USING SCATTERED LIGHT, TRANSMITTED LIGHTOR IONIZATION

HEALTH & AMENITY

- PART 10 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS/NZS ISO 717.1:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS -AIRBORNE SOUND INSULATION
- AS ISO 717.2:2004 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS & OF BUILDING ELEMENTS - IMPACT SOUND INSULATION
- AS 1668.2:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - MECHANICAL VENTILATIONIN BUILDINGS
- AS 1668.4:2012 - THE USE OF VENTILATION & AIR CONDITIONING IN BUILDINGS - NATURAL VENTILATION OFBUILDINGS
- AS/NZS 1680.0:2009 - INTERIOR LIGHTING - SAFE MOVEMENT
- AS 3740:2021 - WATERPROOFING OF DOMESTIC WET AREAS
- AS 3000-2018 – ELECTRICAL INSTALLATION
- BCA Part 10.8.1, AS4200.1 & AS4200.2 – PLIABLE BUILDING MEMBRANE INSTALLED.

WATERPROOFING

- PART 10.2 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022
- AS 3740-2021– WATERPROOFING TO WET AREA
- AS 4654-2012 – EXTERNAL WET AREAS

SAFE MOVEMENT & ACCESS

- PART 11 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1428.1:2009 - DESIGN FOR ACCESS &MOBILITY – GENERAL REQUIREMENTS FOR ACCESS - NEW BUILDING WORK
- AS 1657:2018 - FIXED PLATFORMS, WALKWAYS, STAIRWAYS & LADDERS - DESIGN, CONSTRUCTION & INSTALLATION

HANDRAILS & BALUSTRADE

- PART 11.3.3 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.4 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- PART 11.3.5 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.
- AS 1170.1-2002 – BALUSTRADEINSTALLATION

PROTECTION OF OPENABLE WINDOW

PART 11.3.7 AND 11.3.8 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022.


ENERGY EFFICIENCY

- PART 13 OF THE NCC VOLUME 2, AMENDMENT 1 - BUILDING CODE OF AUSTRALIA 2022 & HOUSING PROVISIONS STANDARD 2022 & BASIX CERTIFICATE.

MECHANICAL VENTILATION

- EXHAUST FROM A BATHROOM, SANITARY COMPARTMENT TO DISCHARGE DIRECTLY TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 25L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM². THIS EXHAUST SYSTEM MUST BE INTERLOCKED WITH LIGHT SWITCH AND INCLUDE RUN-ON TIMER SO THAT THE EXHAUST SYSTEM CONTINUES TO OPERATE FOR 10 MINUTES AFTER THE LIGHT SWITCH IS OFF.
- ANY INSTALLED - KITCHEN RANGEHOOD EXHAUST TO DISCHARGE DIRECTLY OR VIA DUCT TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 40L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM².
- LAUNDRY EXHAUST TO DISCHARGE DIRECTLY OR VIA DUCT TO OUTDOOR AIR WITH MINIMUM FLOW RATE OF 40L/S & MAKE-UP AIR VIA OPENINGS TO AN ADJACENT ROOM WITH A FREE AREA OF 14,000 MM².





-

CC ISSUE

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
GENERAL NOTES A

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 2	CC.02A	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

TERMITE SHEET

- TERMITE SHEET EXTENDS THROUGH THE ENTIRE MASONRY LEAF AND **IS VISIBLE AT THE FINISHED FACE OF THE WALL.**


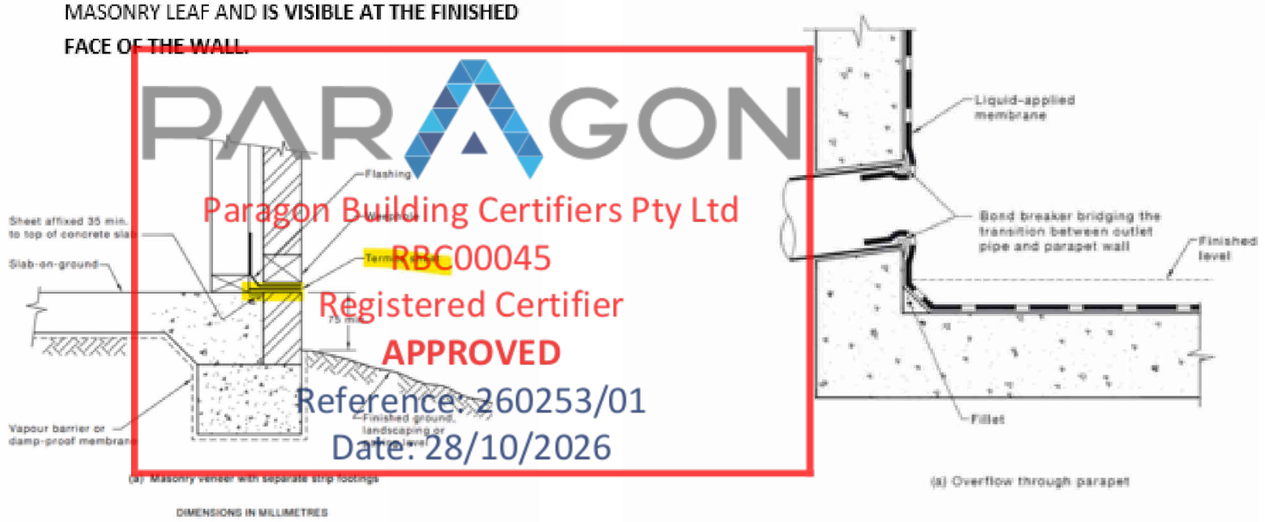


FIGURE 5.5 (in part) TYPICAL SHEET INSTALLATION TO EXTERNAL WALL WITH CONCRETE FLOOR SLAB

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

DPC FOR BRICKS

DAMP-PROOF COURSE (DPC) TO EXTENDS THROUGH THE ENTIRE MASONRY LEAF AND **NEED TO BE VISIBLE AT THE FINISHED FACE OF THE WALL FROM OUTSIDE**

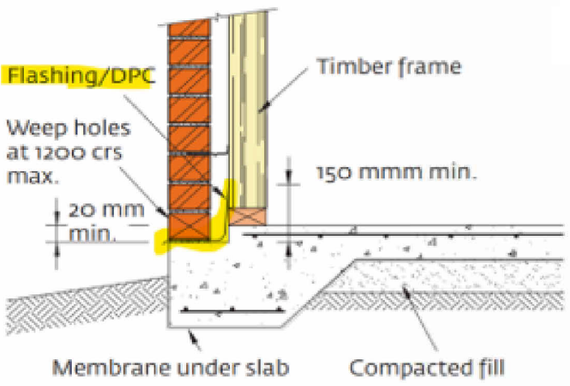

OVERFLOW TO BALCONY:

- SURFACE DRAIN & OVERFLOW TO BALCONY

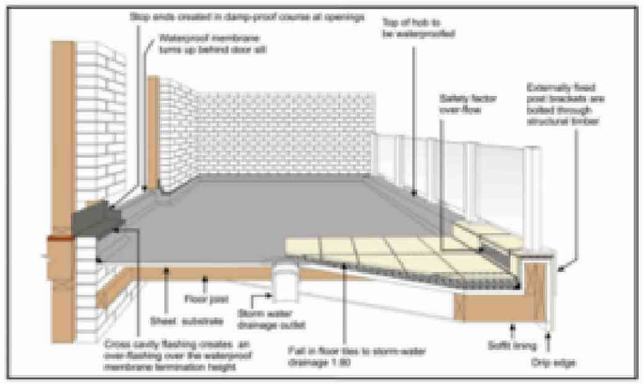


Figure 10.2.29: **Typical membrane termination at drainage outlet**



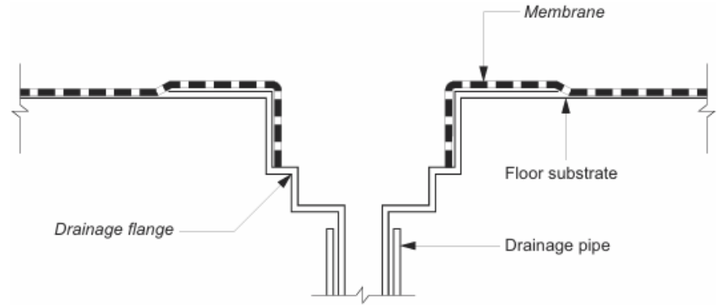


Figure 10.2.24: **Typical bathroom door details for whole bathroom waterproofing**

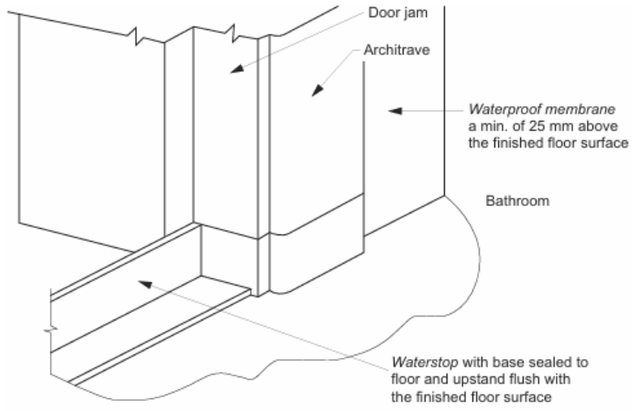

(a) After installation of architrave

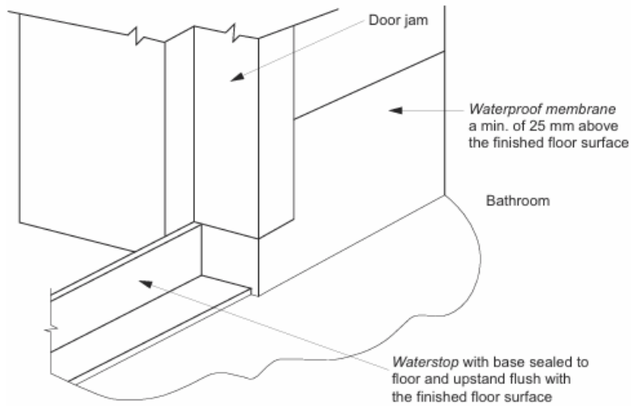

(b) Prior to installation of architrave

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA


DRAWING TITLE:
GENERAL NOTES B

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 2	CC.02B	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			


CC ISSUE

A3

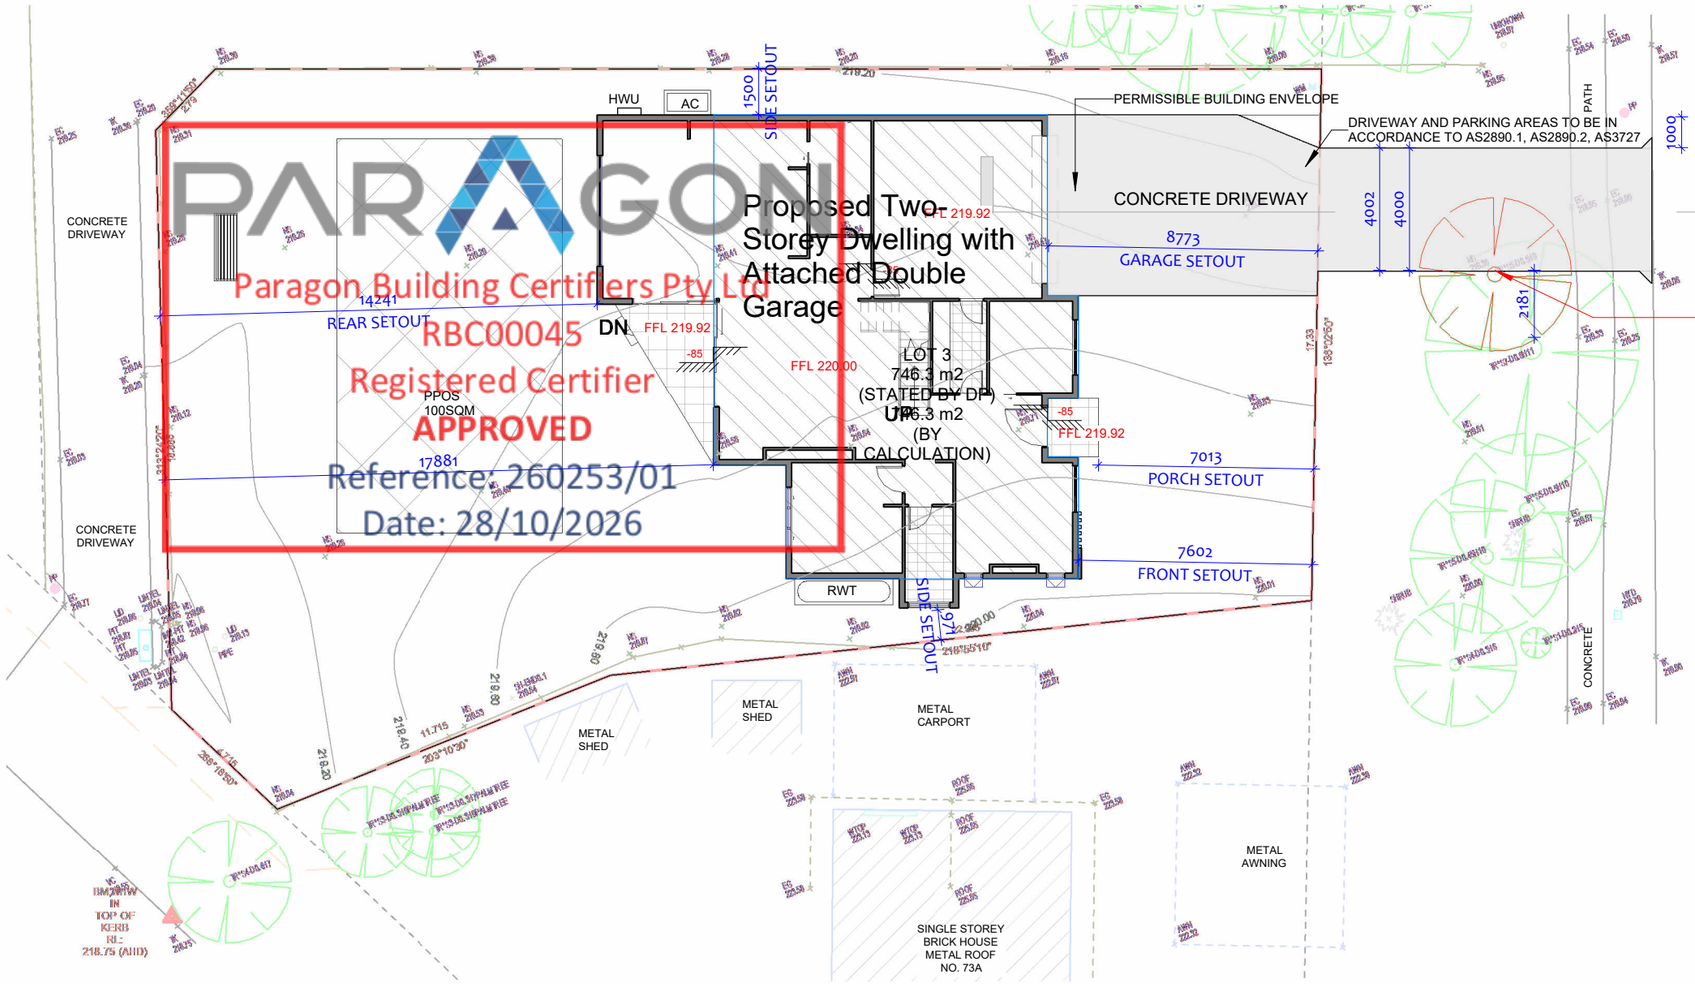

1 CC - SITE PLAN

1 : 200

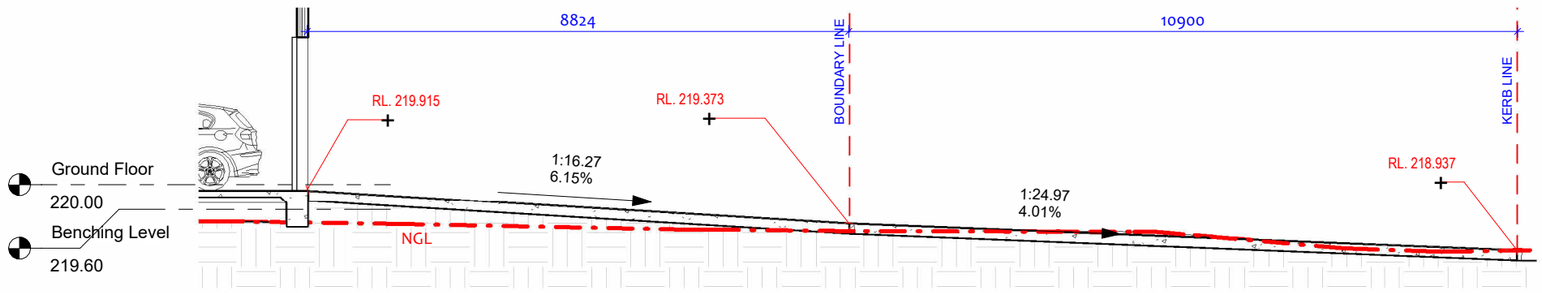

2 DRIVEWAY SECTION

1 : 100

CODE COMPLIANCE TABLE
Hornsby Development Control Plan 2024

DESCRIPTION		COMPLIANCE		COMMENT
ELEMENT	CODE CONTROL	REQUIREMNT	PROPOSED	
LAND ZONE	R2 LOW DENSITY RESIDENTIAL			
LOT NO	LOT 03			
LOT AREA	746.3 m²			
LOT WIDTH	17.33 m			
HEIGHT	MAX. Height	8.5m	7.9m (MAX.)	YES
FRONT SETBACK	FRONT SET BACK (Min. Setback from Primary Road)	6m	7.6m	YES
REAR SET BACK (MIN.)	GROUND FLOOR	3m	14.2m	YES
	FIRST FLOOR	8m	14.2 m	
SIDE SET BACK (MIN.)	GROUND FLOOR	0.9/0.9m	0.9/1.5m	YES
	FIRST FLOOR	1.5/1.5m	1.5/1.5m	
GROSS FLOOR AREA PLAN	GROUND FLOOR	380m²	145 m²	YES
	FIRST FLOOR		140.0 m²	
TOTAL FLOOR AREA			**285.0** m²	
COVERAGE AREA	450m² to 899m²	(373.15m²)50%	201.0m² (27%)	YES
PRIVATE OPEN SPACE		24m²	100m²	YES
LANDSCAPE AREA	30 % of TOTAL LOT AREA	223.89 m²	370.0 m²	YES

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
LOCATION PLAN AND SITE PLAN

NORTH:

CC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	As indicated	CC.03	3

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	ROHIT	

DRAFTED BY: SL

CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary

A3

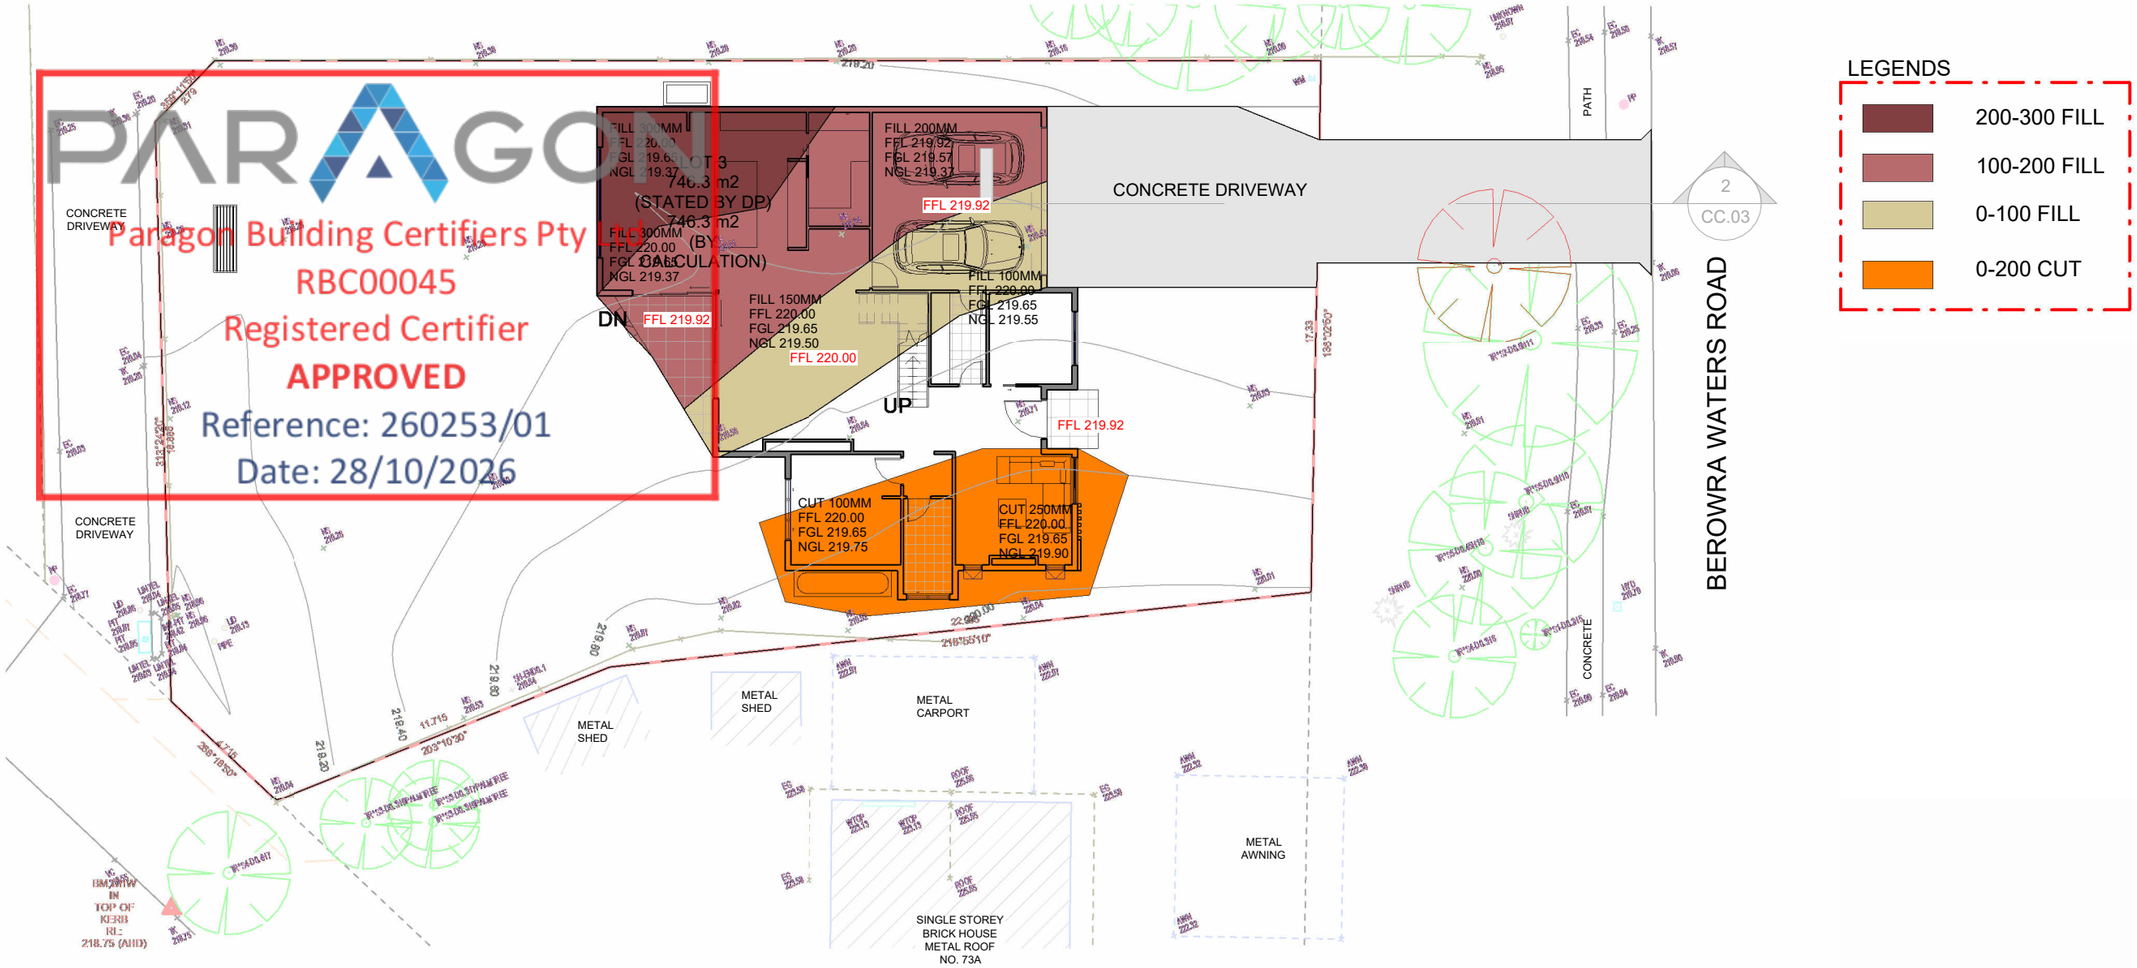

1 CC - SITE CUT & FILL

1 : 200

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:

LOT 3 75 BEROWRA WATERS ROAD

75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:

SITE CUT & FILL


NORTH:

CC ISSUE

LOT NO: 3	DATE: 15-10-2026	SCALE: 1 : 200	DRAWING No: CC.04	REV: 3	
DRAWN BY: AS	CHECKED BY: ROHIT			ISSUED BY:	
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary				

A3

COMPLIANCE NOTE: All Erosion and Sediment Control Measures have been designed and shall be implemented and maintained in accordance with the publication Managing Urban Stormwater: Soils and Construction 2004 (4th edition) - 'The Blue Book' and the Protection of the Environment Operations Act 1997.

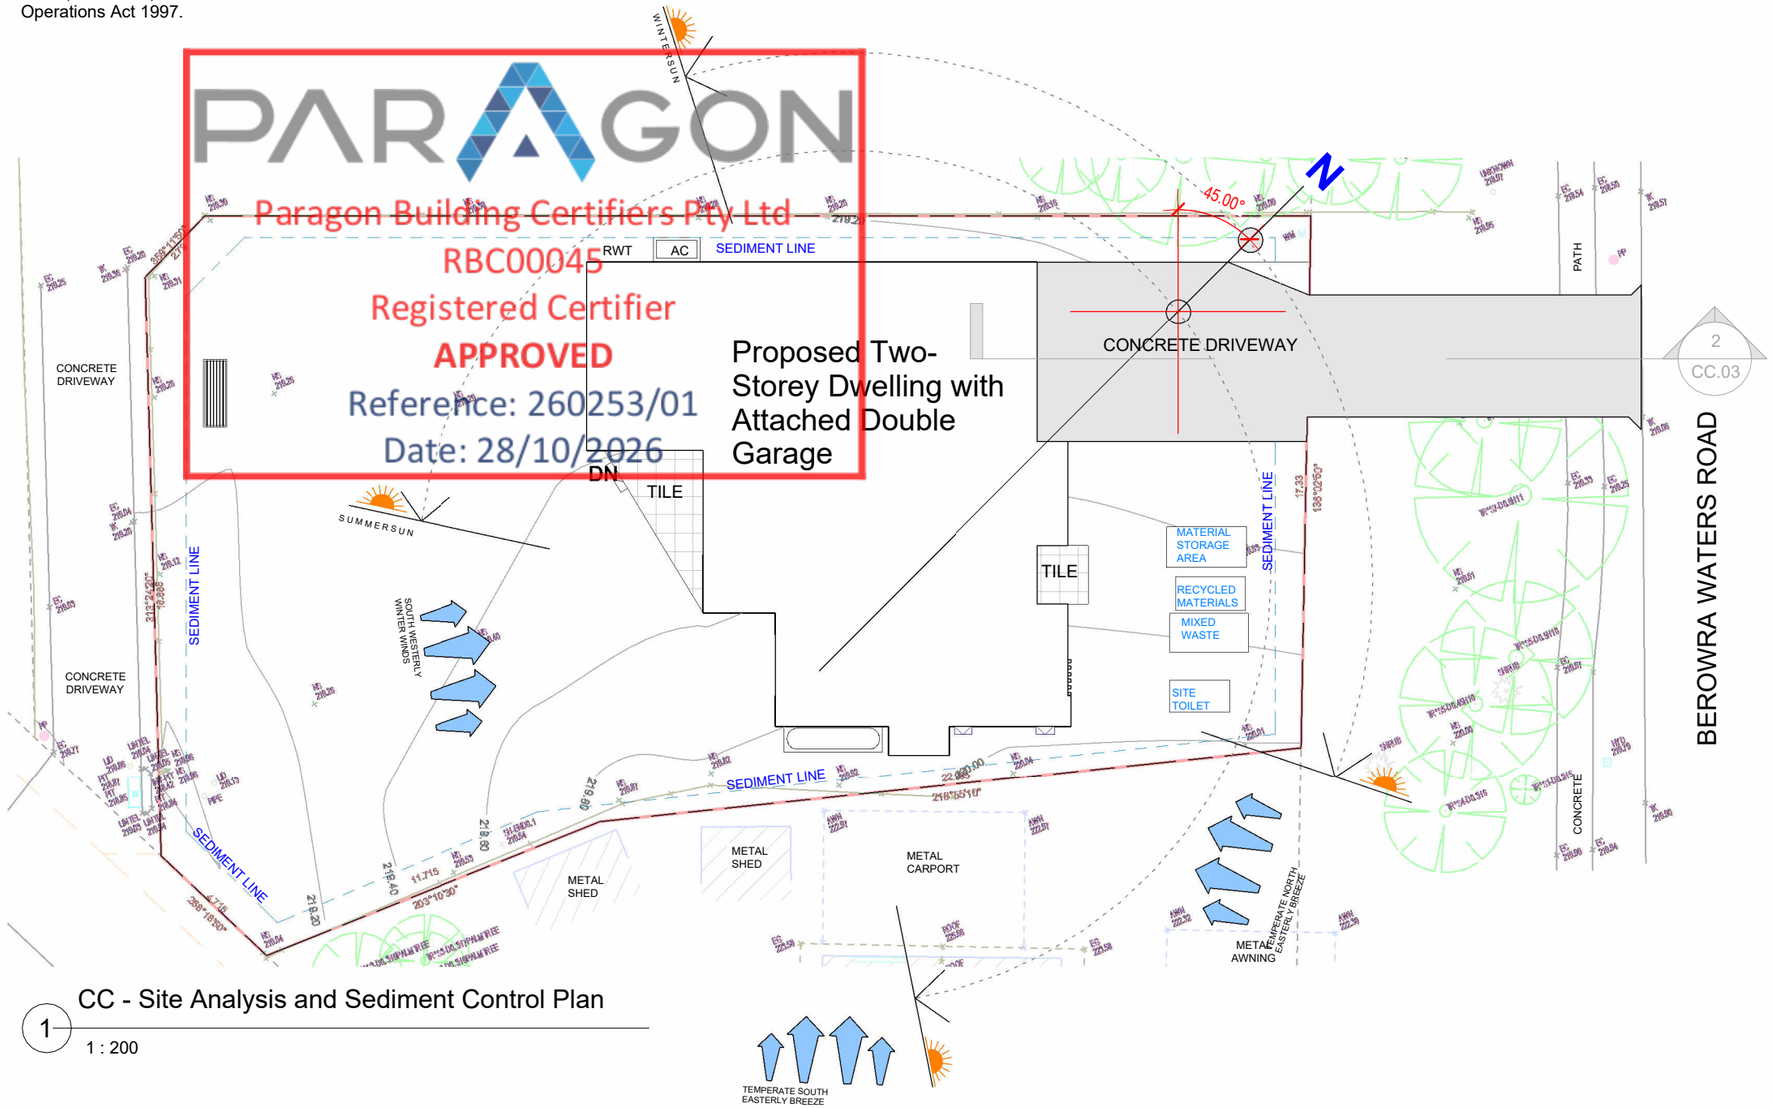

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

CC - Site Analysis and Sediment Control Plan

1 : 200

SEDIMENT AND EROSION NOTES:

- THIS PLAN TO BE READ IN CONJUNCTION WITH SEDIMENT AND EROSION CONTROL DETAILS AS ATTACHED.
- THE CONTRACTOR SHALL IMPLEMENT ALL SOIL EROSION AND SEDIMENT CONTROL MEASURES AS NECESSARY AND TO THE SATISFACTION OF COUNCIL PRIOR TO THE COMMENCEMENT AND DURING CONSTRUCTION.NO DISTURBANCE TO THE SITE SHALL BE PERMITTED OTHER THAN IN THE IMMEDIATE AREA OF THE WORK AND NO MATERIAL SHALL BE REMOVED FROM THE SITE WITHOUT COUNCIL'S APPROVAL.ALL SEDIMENTAND EROSION CONTROL DEVICES TO BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH STANDARDS OUTLINED IN NSW DEPARTMENT OF HOUSING "MANAGING URBAN STORMWATER-SOILS AND CONSTRUCTIONS".
- TOPSOIL SHALL BE STRIPPED AND STOCKPILED OUTSIDE HAZARD AREAS SUCH AS DRAINAGE LINES.THIS TOP SOIL IS TO BE RESPIRED LATER ON AREAS TO BE REVEGETATED AND STABLISED ONLY. (I.E ALL FOOTPATHS,BATTERS,SITE REGARDING AREAS,BASINS AND CATCH DRAINS),TOPSOIL SHALL NOT BE RESPIRED ON ANY OTHER AREAS UNLESS SPECIALLY INSTRUCTED BY THE SUPERIDENT.IF THEY ARE TO REMAIN FOR LONGER THAN ONE MONTH STOCKPILES SHALL BE PROTECTED FROM EROSION BY COVERING THEM WITH A MULCH AND HYDROSEEDING AND,IF NECESSARY,BY LOCATING BANKS OR DRAINS DOWNSTREAM OF A STOCKPILE TO RETARD SILT LADEN RUNOFF.
- THE CONTRACTOR SHALL REGULARLY MAINTAIN ALL SEDIMENT AND EROSION CONTROL DEVICES AND REMOVE ACCUMULATED SILT FROM SUCH DEVICES SUCH THAT MORE THAN 60% OF THEIR CAPACITY LOST.ALL THE SILTS TO BE PLACED OUTSIDE THE LIMIT OF WORKS.THE PERIOD FOR MAINTAINING THESE DEVICES SHALL BE AT LEAST UNTIL ALL DISTURBED AREAS ARE REVEGETATED AND FURTHER AS MAY BE DIRECTED BY THE SUPERINTENDENT OR COUNCIL.
- LAY TURF STRIP (MIN 300 mm WIDE) ON 100 mm TOPSOIL WITH 1.0 m LONG RETURNS EVERY 6.0m BEHIND ALL KERB AT THE TOP OF ALL BATTERS AND AROUND STRUCTURES IMMEDIATELY AFTER BACKFILLING OR FORMATION.
- THE CONTRACTOR SHALL GRASS SEED ALL DISTURBED AREAS WITH AN APPROVED MIX AS SSON AS PRACTICABLE AFTER COMPLETION OF EARTHWORKS AND REGRADING.
- VEHICULAR TRAFFIC SHALL BE CONTROLLED DURING CONSTRUCION CONFINNG ACCESS WHERE POSSIBLE TO NOMINATED STABLISED ACCESS POINTS.
- WHEN ANY DEVICES ARE TO BE HANDED OVER TO COUNCIL,THEY SHALL BE IN CLEAN AND STABLE CONDITION.
- THE CONTRACTOR SHALL IMPLEMENT DUST CONTROL BY REGULAR WETTING DOWN(BUT NOT SATURATING) DISTURBED AREA.
- PROVIDE AND MAINTAIN SILT TRAPS AROUND ALL SURFACE INLET PITS UNTL CATCHMENT IS REVEGETATED OR PAVED.
- REVEGETATE ALL TRENCHES IMMEDIATELY UPON COMPLETION OF BACKFILLING.
- ALL DRAINAGE PIPE INLETS TO BE CAPPED UNTIL:
  A) DOWNPIPES CONNECTED
  B) PITS CONSTRUCTED & PROTECTED WITH SILT BARRIER

SITE WORKS NOTES

1.ORIGIN OF LEVELS PROVIDED BY SURVEYIOR

2.THE BUILDER SHALL VERIFY ALL DIMENSIONS AND EXISTING LEVELS ON SITE PERIOR TO THE COMMENCEMENT OF WORK AND ANY DISCREPANNCIES SHALL BE REPORTED TO THE SURVEYOR / ENGINEER .

3. TOPSOIL SHALL BE STRIPPED FROM THE CONSTRUCTUTION AREA AND SOCKPILED ON SITE , TO BE LATER SPREAD OR DISPOSED OFF SITE ,AS DIRECTED BY SUPERVISOR /ENGINEER .

4. ALL TH TRENCH BACKFILL MATERIAL SHAL BE COMPACTED TO THE SAME DENSITY AS THE ADJACENT MATERIAL.

5. ALL SERVICE TRENCHES UNDER VEHICULAR PAVEMENTS SHALL BE BACKFILLED WITH SAND OR APPROVED GRANULAR MATERIALS. TO THE UNDERSIDE OF THE PAVEMENT, AND COMPACTED TO 98%STANDARD MAXIMUM DRY DENSITY ,IN ACCORDANCE WITH AS 1289E1.1.

TEMPORARY 1.8M HIGH WIRE ML FENCE WITH DUSTPROOF MESH APPLIED TO FULL HEIGHTTO BOUNDARIES AS REQUIRED

LOCATION OF WASTE BINS

SEDIMENT FENCE AS REQUIRED

GRAVEL ACCESS

SITE ACCESS AREA TO BE USED FOR WASHDOWN AREA

FOOTPATH CLEAN AND CLEAR AT ALL TIMES

LOCATION OF STOCKPILE MATERIAL

MATERIAL STORAGE AREA

TEMPORARY TOILETS


INSTALL TEMPORARY SEDIMENT BARRIERS TO ALL INLET PITS LIKELY TO COLLECT SILT LADDEN WATER, TO COUNCILS'S REQUIREMENTS.

SD 5-7 STABILISED SITE ACCESS

1) STRIP TOPSOIL AND LEVEL SITE.
2) COMPACT SUBGRADE.
3) COVER AREA WITH GEOTEXILE.
4) CONSTRUCT 200 mm THICK PAD OVER GEOTEXILE USING ROADBASE OR 30 mm AGGREGATE. Min 15 m LONG OR TO BUILDING ALIGNMENT, Min 3 m WIDE.
5) CONSTRUCT HUMP IMMEDIATELY WITHIN BOUNDARY TO DIVERT WATER TO A SEDIMENT FENCE OR OTHER SEDIMENT TRAP.


SD 6-9 GEOTEXTILE INLET FILTER

1) FABRICATE A SEDIMENT BARRIER MADE FROM GEOTEXILE. REFER SD6-7 FOR DETAILS.
2) SUPPORT GEOTEXILE WITH MESH TIED TO POSTS AT 1 m Ctrs.
3) DO NOT COVER INLET WITH GEOTEXILE.

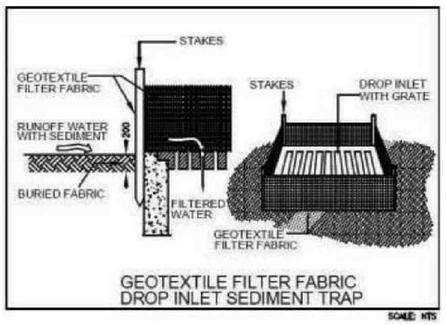


GEOTEXTILE FILTER FABRIC DROP INLET SEDIMENT TRAP

SCALE: NTS

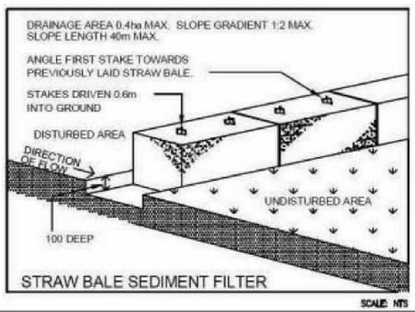


STRAW BALE SEDIMENT FILTER

SCALE: NTS

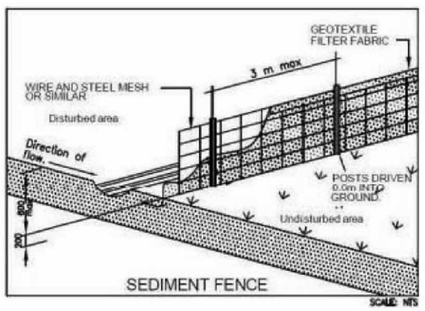

SEDIMENT FENCE

SCALE: NTS

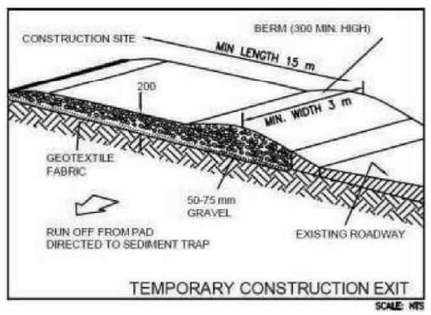

TEMPORARY CONSTRUCTION EXIT

SCALE: NTS

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:

LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:

SITE ANALYSIS AND SEDIMENT CONTROL

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	As indicated	CC.04A	3
DRAWN BY: AS	CHECKED BY: ROHIT			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

	BAL – 19	BAL – 29
SUBFLOOR SUPPORTS	No special construction requirements	Enclosure by external wall or by steel, bronze or aluminium mesh, non-combustible supports where the subfloor is unenclosed, naturally fire resistant timber stumps or posts on 75mm metal stirrups
FLOORS	No special construction requirements	Concrete slab on ground, enclosure by external wall, metal mesh as above or flooring less than 400mm above ground level to be non-combustible, naturally fire resistant timber or protected on the underside with sarking or mineral wool insulation
EXTERNAL WALLS	External walls – Parts less than 400m above ground or decks etc to be of non-combustible material, 6mm fibre cement clad or bushfire resistant/naturally fire resistant timber	Non-combustible material (masonry, concrete, brick, aerated concrete, concrete), timber framed or steel framed walls sarked on the outside and clad with 6mm fibre cement sheeting or steel weatherboard, naturally fire resistant timber
EXTERNAL WINDOWS	Protected by bushfire shutter, completely screened with steel, bronze or aluminium mesh or 5mm toughened glass or glass blocks within 400mm of ground, deck etc. Openable portion metal screened with frame of metal or metal reinforced PVC-U or bushfire resisting timber	Protected by bushfire shutter, completely screened with steel, bronze or aluminium mesh or 5mm toughened glass or glass with openable portion metal screened and frame of metal or metal reinforced PVC-U or bushfire resisting timber and portion within 400mm of ground level screened.


	BAL – 19	BAL – 29
EXTERNAL DOORS	Protected by bushfire shutter, or screened with steel bronze or aluminium mesh or glazed with 5mm toughened glass, non-combustible or 35mm solid timber for 400mm above threshold, metal or bushfire resisting timber framed for 400mm above ground, decking, etc tight fitting with weather strips at base.	Protected by bushfire shutter, or screened with steel bronze or aluminium mesh or non-combustible or 35mm solid timber for 400mm above threshold. Metal or bushfire resisting timber framed tight fitting with weather strips at base.
ROOFS	Non-combustible covering. Roof/wall junction sealed. Openings fitted with non-combustible ember guards. Roof to be fully sarked.	Non-combustible covering. Roof/wall junction sealed. Openings fitted with non-combustible ember guards. Roof to be fully sarked.
VERANDAHS DECKS ETC	Enclosed sub-floor space – no special required for materials except within 400mm of gound. No special requirements for supports or framing. Decking to be non combustible or bushfire resistant within 300mm horizontally and 400mm vertically from a glazed element.	Enclosed sub –floor space or non-combustible or bushfire resistant timber supports. Decking to be non-combustible

PARAGON
Paragon Building Certifiers Pty Ltd
ABC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

(ANY INSTALLED) KITCHEN RANGEHOOD TO COMPLY WITH REQUIREMENTS OF BCA 2022. REFER BELOW SPECIFICATIONS

STAIR, SLIP RESISTANCE, BALUSTRADE, HANDRAIL TO CONSTRUCT IN ACCORDANCE WITH NCC PART 11.2, 11.3, AS1170.1:2002 & AS1657:2018.

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION.ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT,VARIATION TO PLANS,SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER.IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS.
WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

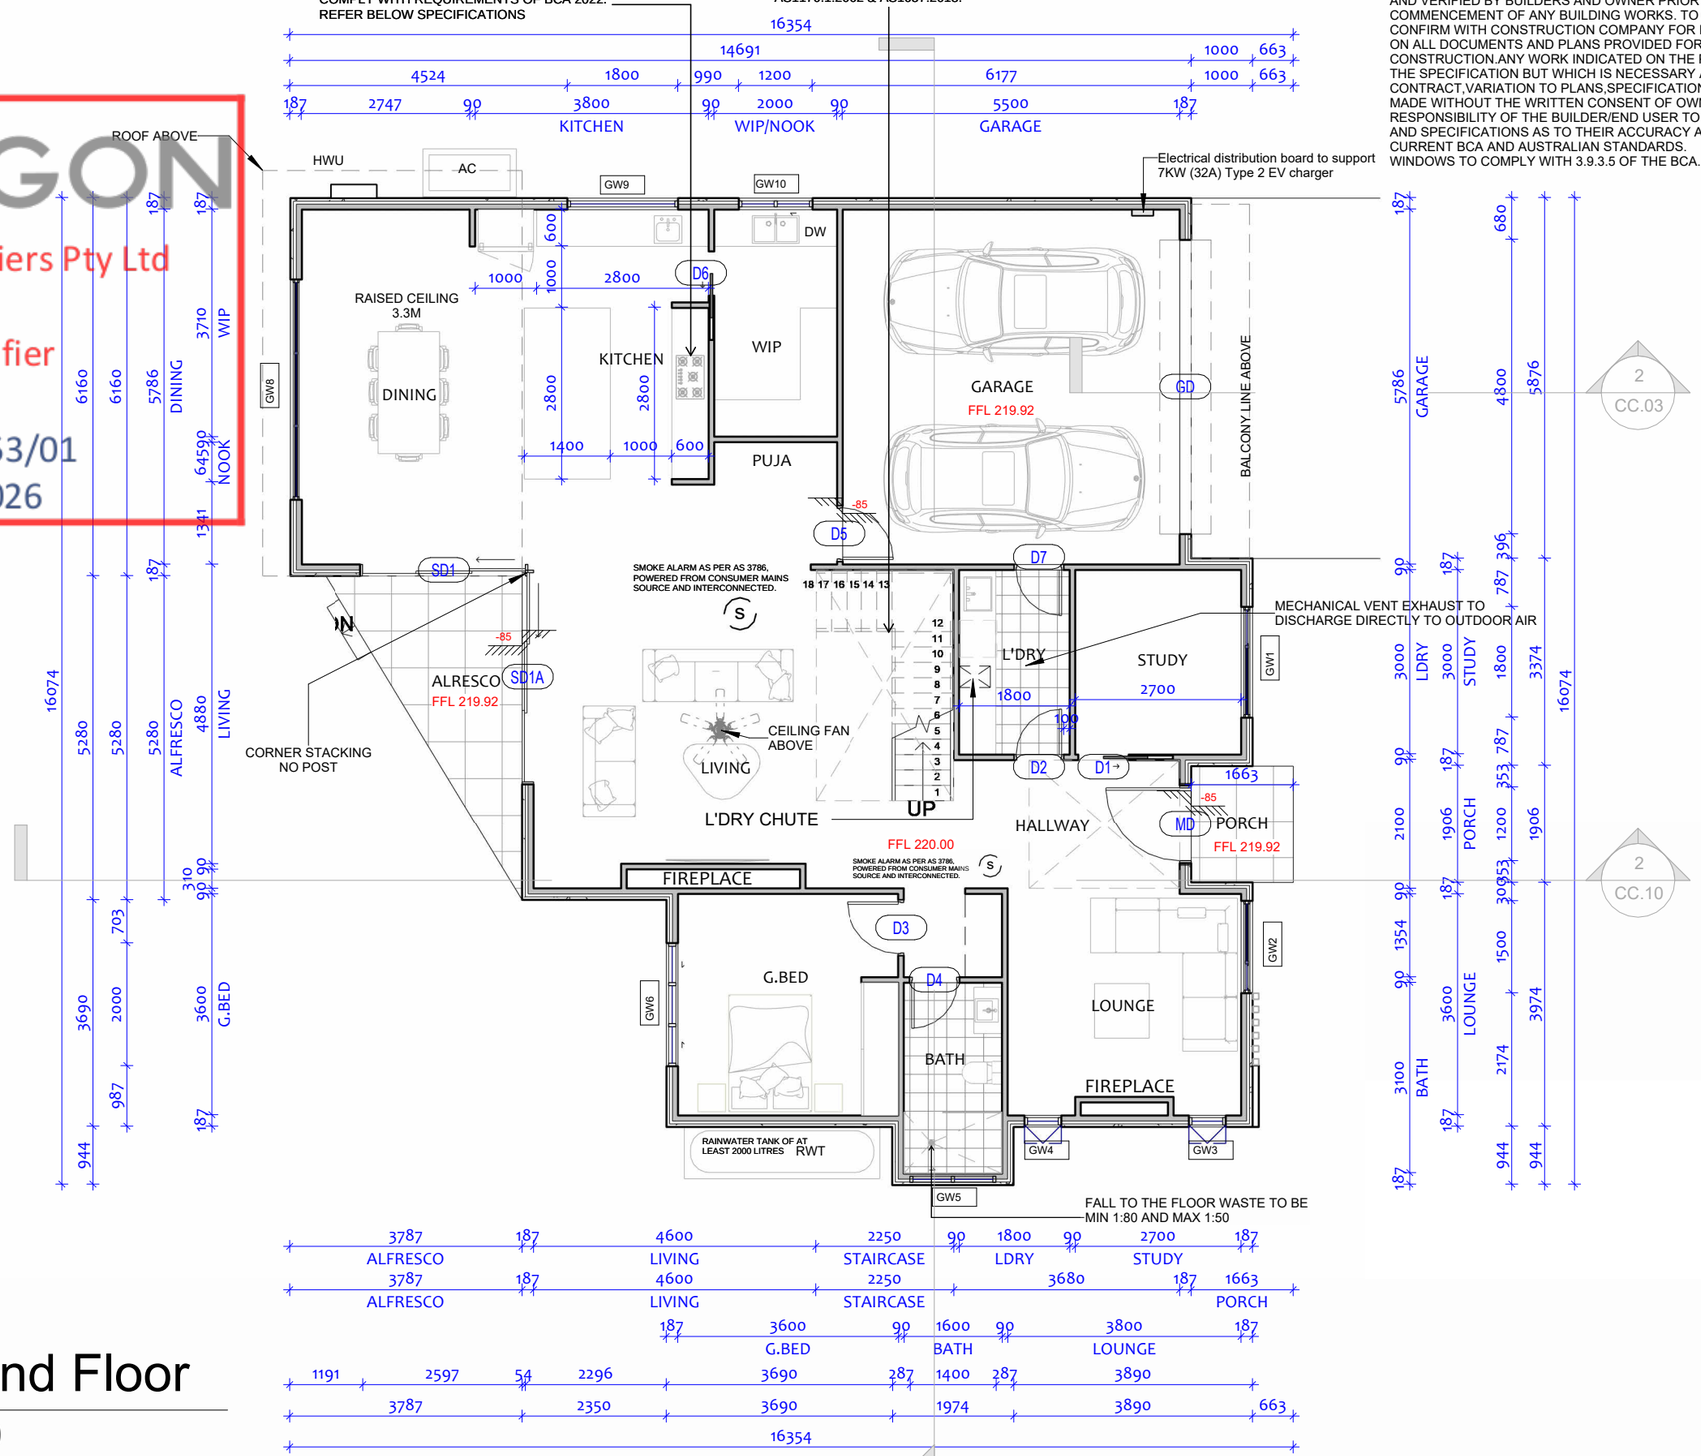

1 Ground Floor

1 : 100

NOTE: PLEASE REFER TO TENDER FOR ALL INCLUSIONS.

WATERPROOFING WORK TO BE AS PER PART 10.2 OF THE ABCB HOUSING PROVISIONS STANDARD 2022

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
GROUND FLOOR PLAN

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.05	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3


	BAL – 19	BAL – 29
SUBFLOOR SUPPORTS	No special construction requirements	Enclosure by external wall or by steel, bronze or aluminium mesh, non-combustible supports where the subfloor is unenclosed, naturally fire resistant timber stumps or posts on 75mm metal stirrups
FLOORS	No special construction requirements	Concrete slab on ground, enclosure by external wall, metal mesh as above or flooring less than 400mm above ground level to be non-combustible, naturally fire resistant timber or protected on the underside with sarking or mineral wool insulation
EXTERNAL WALLS	External walls – Parts less than 400m above ground or decks etc to be of non-combustible material, 6mm fibre cement clad or bushfire resistant/naturally fire resistant timber	Non-combustible material (masonry, fibre cement, brick, aerated concrete, concrete), timber framed, steel framed walls sarked on the outside and clad with 6mm fibre cement sheeting or steel sheeting over sarking, naturally fire resistant timber
EXTERNAL WINDOWS	Protected by bushfire shutter, completely screened with steel, bronze or aluminium mesh or 5mm toughened glass or glass blocks within 400mm of ground, deck etc. Openable portion metal screened with frame of metal or metal reinforced PVC-U or bushfire resisting timber	Protected by bushfire shutter, completely screened with steel, bronze or aluminium mesh or 5mm toughened glass or glass with openable portion metal screened and frame of metal or metal reinforced PVC-U or bushfire resisting timber and portion within 400mm of ground level screened.

	BAL – 19	BAL – 29
EXTERNAL DOORS	Protected by bushfire shutter, or screened with steel bronze or aluminium mesh or glazed with 5mm toughened glass, non-combustible or 35mm solid timber for 400mm above threshold, metal or bushfire resisting timber framed for 400mm above ground, decking, etc tight fitting with weather strips at base.	Protected by bushfire shutter, or screened with steel bronze or aluminium mesh or non-combustible or 35mm solid timber for 400mm above threshold. Metal or bushfire resisting timber framed tight fitting with weather strips at base.
ROOFS	Non-combustible covering. Roof/wall junction sealed. Openings fitted with non-combustible ember guards. Roof to be fully sarked.	Non-combustible covering. Roof/wall junction sealed. Openings fitted with non-combustible ember guards. Roof to be fully sarked.
VERANDAHS DECKS ETC	Enclosed sub-floor space – no special required for materials except within 400mm of gound. No special requirements for supports or framing. Decking to be non combustible or bushfire resistant within 300mm horizontally and 400mm vertically from a glazed element.	Enclosed sub –floor space or non-combustible or bushfire resistant timber supports. Decking to be non-combustible

PARAGON
Paragon Building Certifiers Pty Ltd
BDC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

WATERPROOFING WORK TO BE AS PER PART 10.2 OF THE ABCB HOUSING PROVISIONS STANDARD 2022

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION.ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT,VARIATION TO PLANS,SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER.IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS.
WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

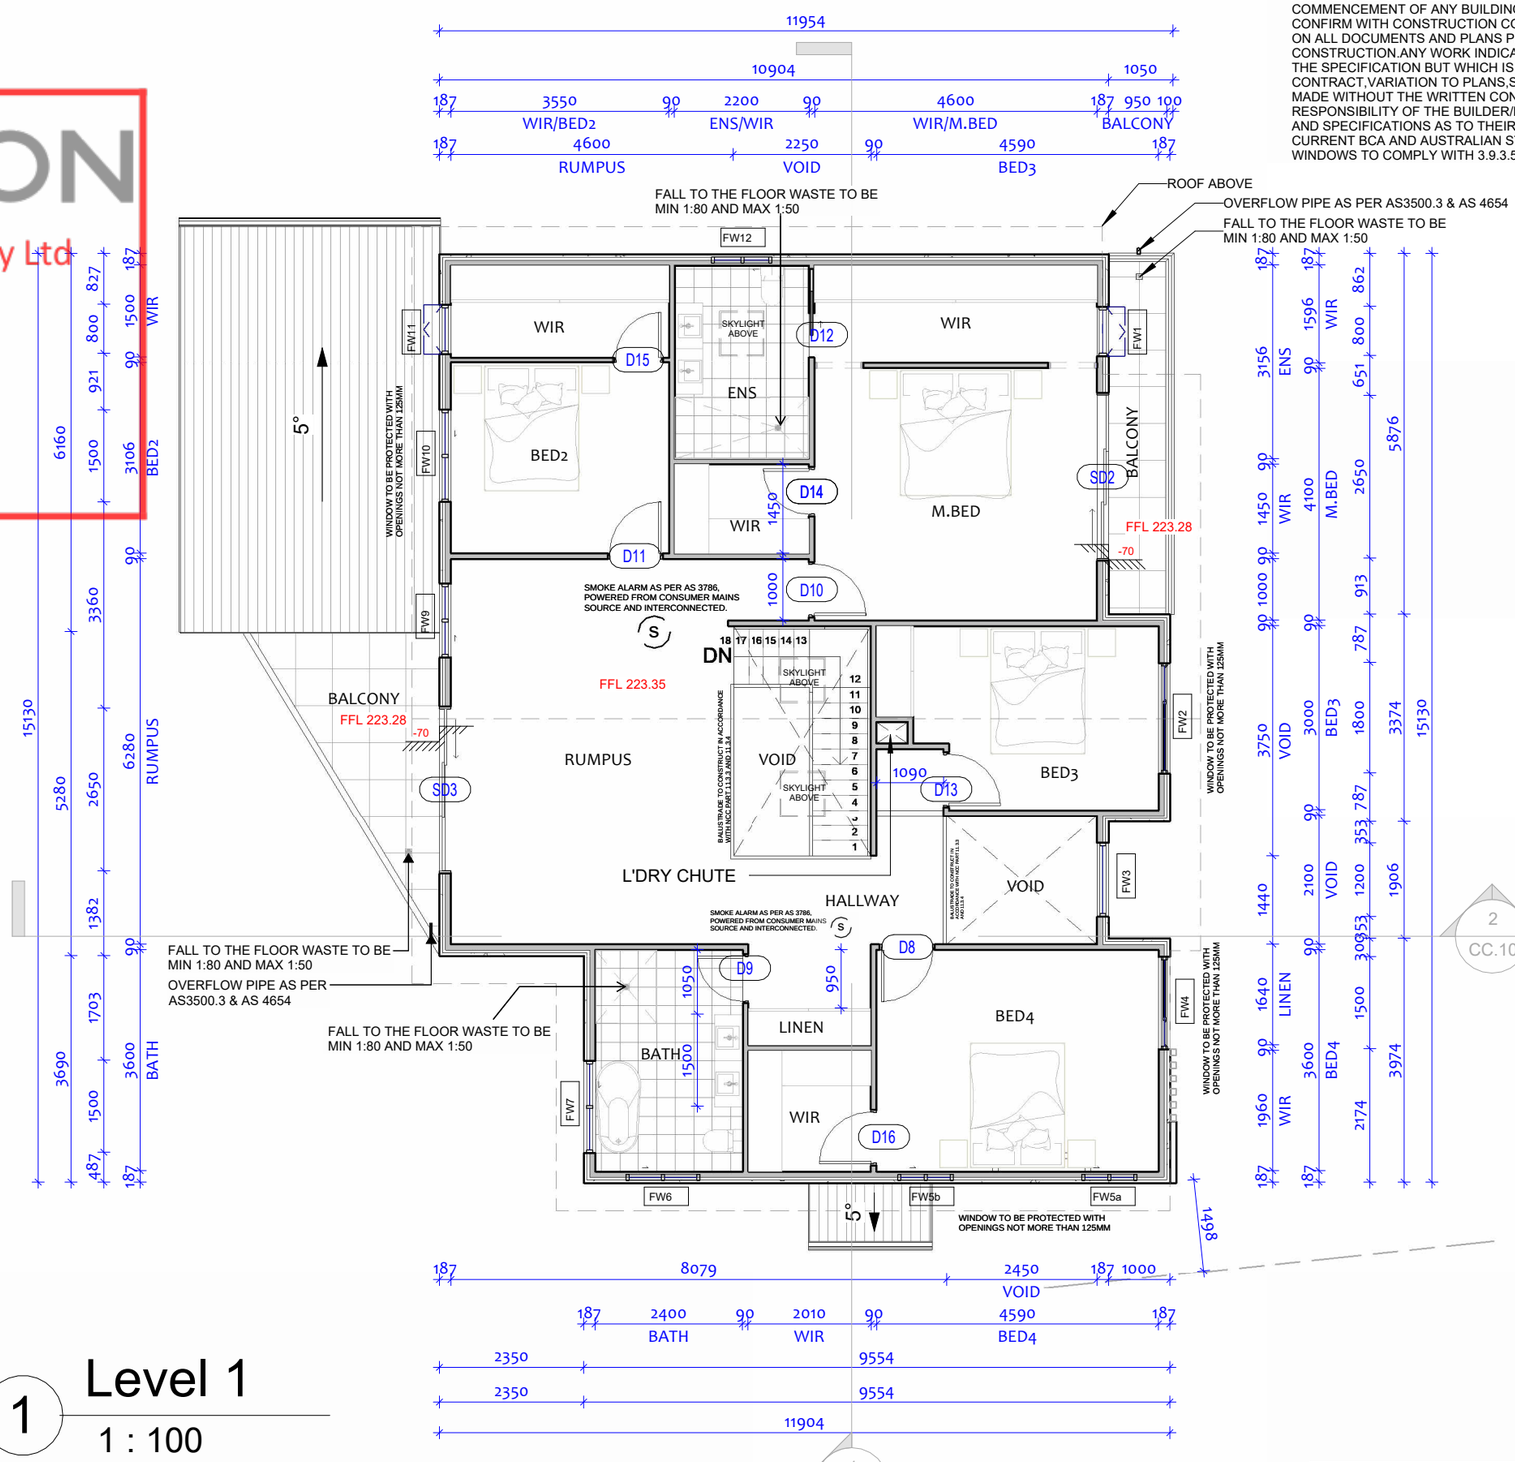

1 Level 1
1 : 100

NOTE: PLEASE REFER TO TENDER FOR ALL INCLUSIONS.

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA


DRAWING TITLE:
FIRST FLOOR LEVEL

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.06	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

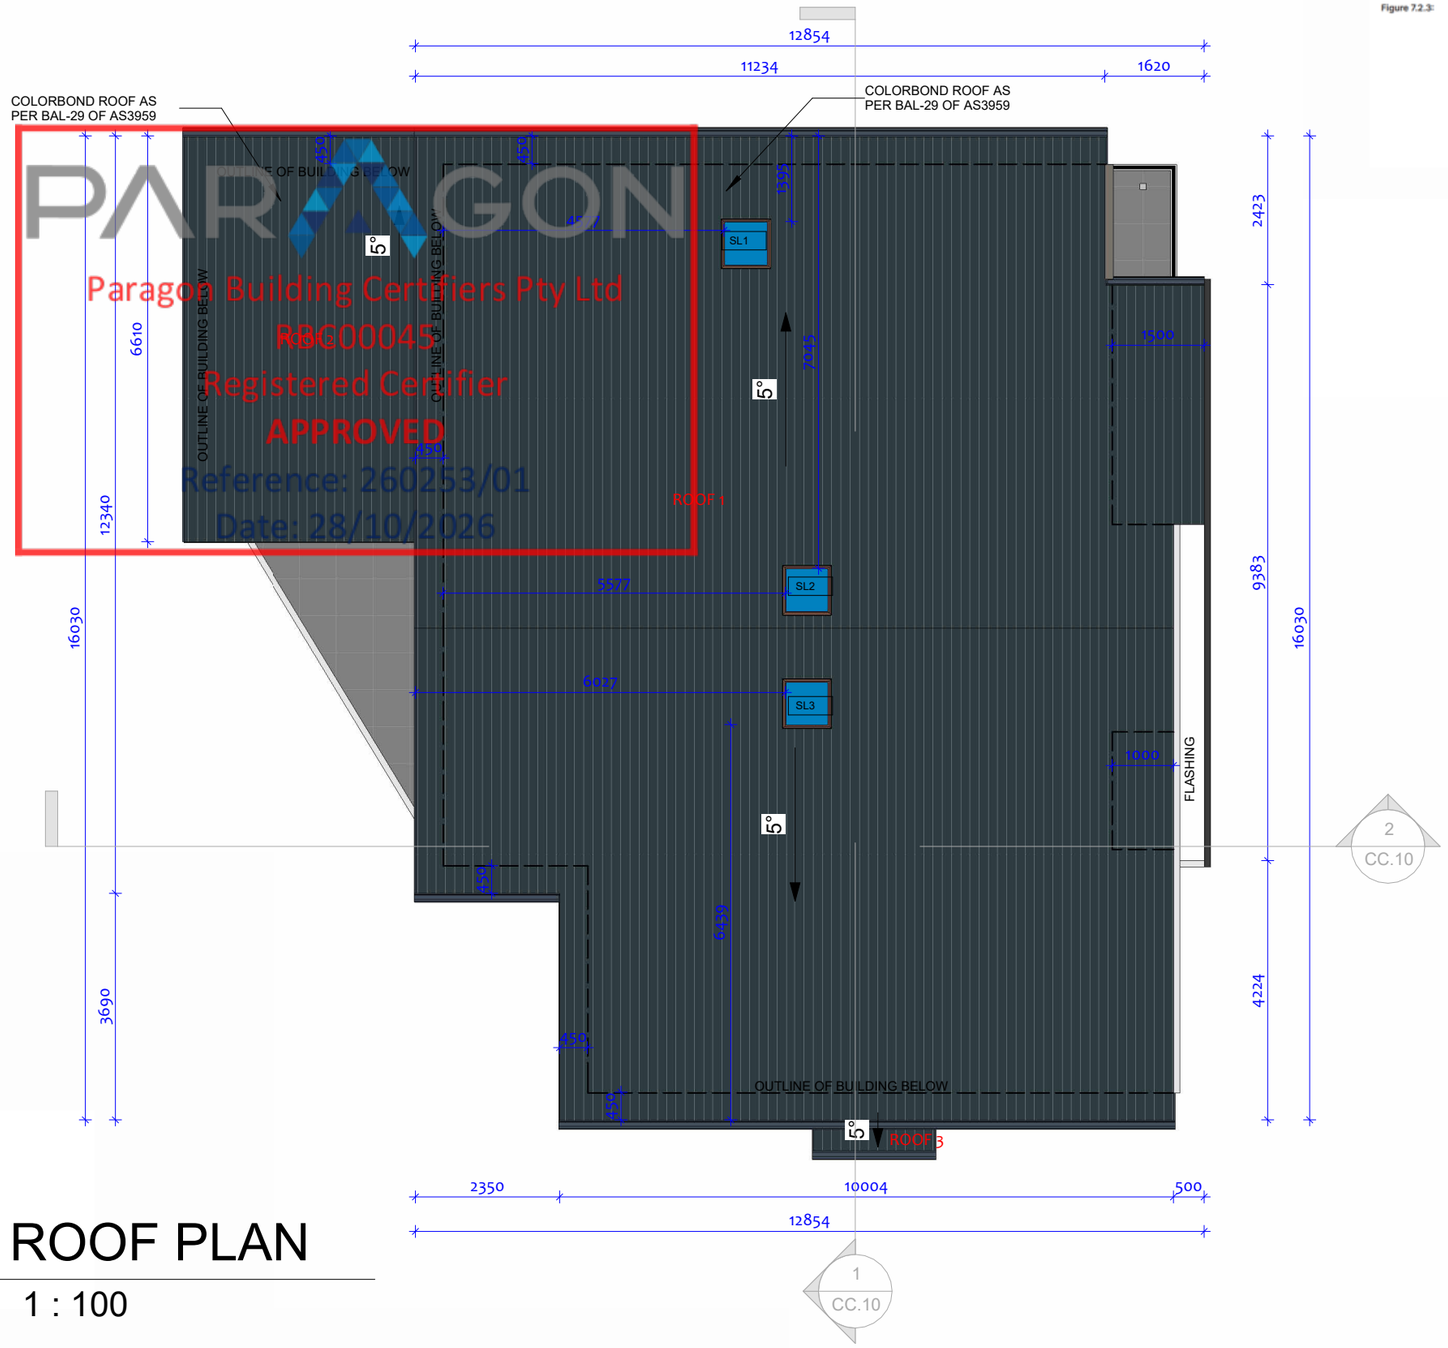


PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

1 ROOF PLAN

1 : 100

Figure 7.2.3: Minimum pitch requirements for metal roofing profiles

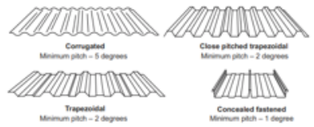

IMPORTANT NOTES:
ALL DIMENSIONS AND NOTES ON ALL PLANS MUST BE CHECKED AND VERIFIED BY BUILDERS AND OWNER PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS. TO CLARIFY AND CONFIRM WITH CONSTRUCTION COMPANY FOR DISCREPANCIES ON ALL DOCUMENTS AND PLANS PROVIDED FOR CONSTRUCTION.ANY WORK INDICATED ON THE PLAN BUT NOT IN THE SPECIFICATION BUT WHICH IS NECESSARY AS PART OF THE CONTRACT,VARIATION TO PLANS,SPECIFICATIONS MAY NOT BE MADE WITHOUT THE WRITTEN CONSENT OF OWNER.IT IS THE RESPONSIBILITY OF THE BUILDER/END USER TO VERIFY PLANS AND SPECIFICATIONS AS TO THEIR ACCURACY AND COMPLY CURRENT BCA AND AUSTRALIAN STANDARDS.
WINDOWS TO COMPLY WITH 3.9.3.5 OF THE BCA.

ABCB HOUSING PROVISIONS STANDARD 2022

10.8.3 VENTILATION OF ROOF SPACES

1. IN CLIMATE ZONES 6,7 AND 8, A ROOF MUST HAVE A ROOF SPACE THAT
(A) IS LOCATIED
(I) IMMEDIATELY ABOVE THE *PRIMARY INSULATION LAYER*, OR
(II) IMMEDIATELY ABOVE SARKING WITH A *VAPOUR PERMEANCE* OF NOT LESS THAN 1.14 µG/N.S, WHICH IS IMMEDIATELY ABOVE THE *PRIMARY INSULATION LAYER* OR
(III) IMMEDIATELY ABOVE CEILING INSULATION THAT MEETS THE REQUIREMENTS OF 13.2.3(3) AND 13.2.3(4); AND
(B) HAS A HEIGHT OF NOT LESS THAN 20MM; AND
(C) IS EITHER -
(I) VENTILATED TO OUTDOOR AIR THROUGH EVENLY DISTRIBUTED OPENINGS IN ACCORDANCE WITH TABLE 10.8.3; OR
(II) LOCATED IMMEDIATELY UNDERNEATH THE ROOF TILES OF A UNSARKED TILED ROOF.

Figure 10.8.3 (explanatory): Example of roof space with low level ventilation

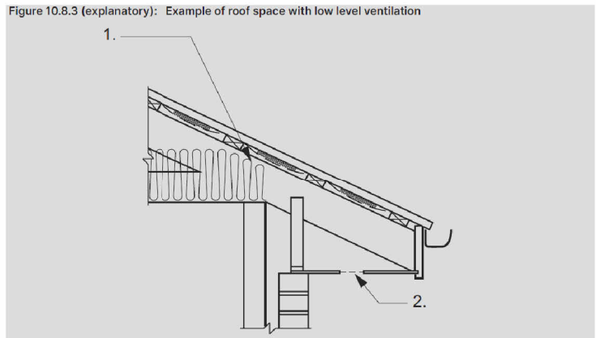


Figure Notes
(1) Minimum 20 mm gap maintained between insulation and sarking.
(2) Eave ventilation opening in accordance with Table 10.8.3.

Table 10.8.3: Roof space ventilation requirements

Roof pitch	Ventilation openings
< 10°	25,000 mm²/m provided at each of two opposing ends
≥ 10° and < 15°	25,000 mm²/m provided at the eaves and 5,000 mm²/m at high level
≥ 15° and < 75°	7,000 mm²/m provided at the eaves and 5,000 mm²/m at high level, plus an additional 18,000 mm²/m at the eaves if the roof has a cathedral ceiling

Roof Schedule

Mark	Base Level	Area	Comments
ROOF 2	Level 1	28 m²	COLORBOND
ROOF 3	Level 1	2 m²	COLORBOND
ROOF 1	CEILING LEVEL	191 m²	COLORBOND
Grand total: 3		221 m²	

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
ROOF PLAN

NORTH:

CC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.07	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3



NORTH EAST ELEVATION

1 : 100

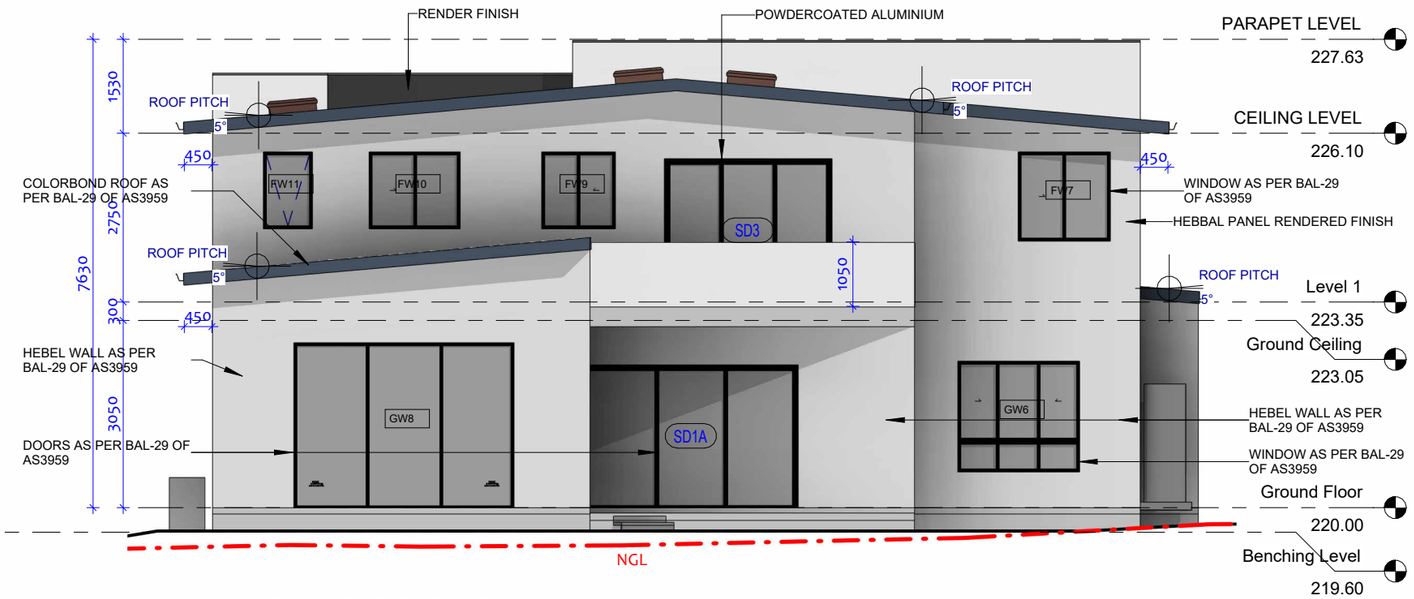

SOUTH WEST ELEVATION

1 : 100

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

Window Schedule 1					
Mark	Height	Width	Sill Height	Head Height	Description
Ground Floor					
GW1	2350	1800	350	2700	FIXED AND AWNING
GW2	2350	1500	350	2700	FIXED AND AWNING
GW3	1850	600	550	2400	FIXED with AWNING
GW4	1850	600	550	2400	FIXED with AWNING
GW5	600	1400	1800	2400	SLIDING
GW6	1800	2000	600	2400	SLIDING & FIXED
GW8	2700	3600	0	2700	FIXED
GW9	600	1800	920	1520	FIXED
GW10	900	1200	920	1820	SLIDING
Ground Floor: 9					
Level 1					
FW1	1800	800	500	2300	FIXED with AWNING
FW2	2350	1800	100	2450	FIXED AND AWNING
FW3	2350	1200	100	2450	FIXED
FW4	2350	1500	100	2450	FIXED AND AWNING
FW5a	800	900	1500	2300	SLIDING
FW5b	800	900	1500	2300	SLIDING
FW6	800	1200	1650	2450	SLIDING
FW7	1450	1500	1000	2450	SLIDING
FW9	1250	1200	1200	2450	SLIDING
FW10	1250	1500	1200	2450	SLIDING
FW11	1250	800	1200	2450	AWNING
FW12	800	1000	1650	2450	SLIDING
Level 1: 12					
CEILING LEVEL					
SL1	775	775			SKY LIGHT
SL2	775	775			SKY LIGHT
SL3	775	775			SKY LIGHT
CEILING LEVEL: 3					

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:

LOT 3 75 BEROWRA WATERS ROAD

75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:


ELEVATION 01

NORTH:

CC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.08	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

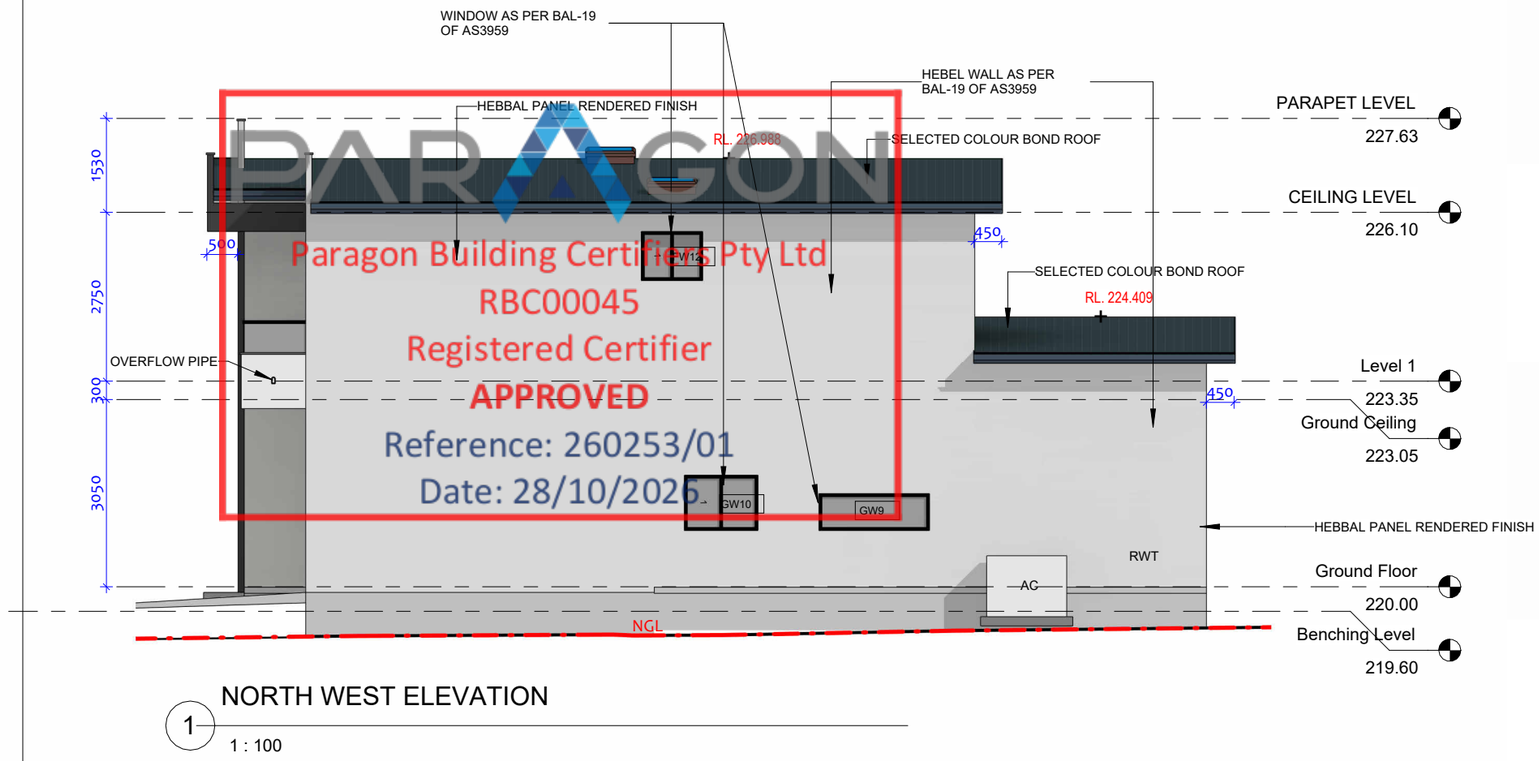

1 NORTH WEST ELEVATION

1 : 100

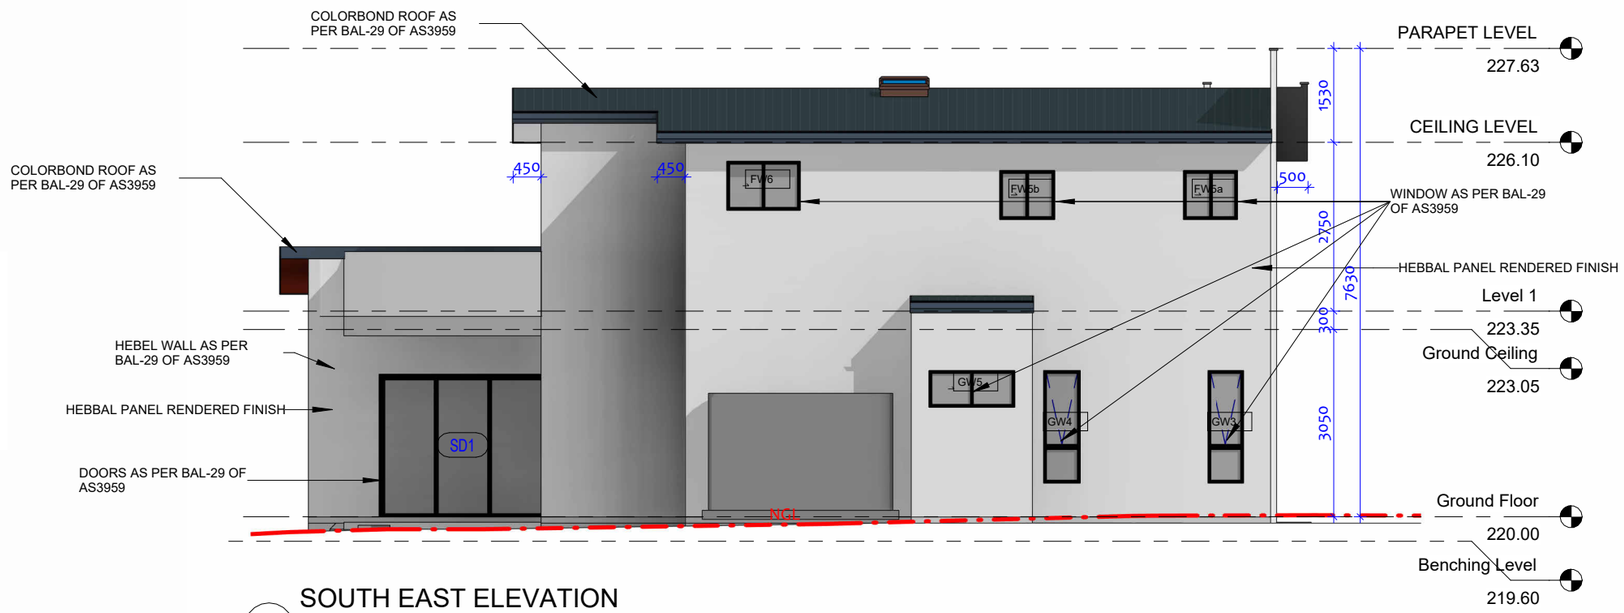

2 SOUTH EAST ELEVATION

1 : 100

Door Schedule 1				
Mark	Height	Width	Count	Description
Ground Floor				
D1	2340	820	1	POCKET DOOR
D2	2340	720	1	FLUSH DOOR
D3	2340	820	1	FLUSH DOOR
D4	2340	720	1	FLUSH DOOR
D5	2340	820	1	FLUSH DOOR
D6	2340	720	1	POCKET DOOR
D7	2340	720	1	FLUSH DOOR
GD	2500	4800	1	GARAGE DOOR
MD	2400	1200	1	SOLID CORE DOOR
SD1	2300	2650	1	STACKER DOOR(Corner)
SD1A	2300	3400	1	STACKER DOOR(Corner)
Ground Floor: 11				
Level 1				
D8	2340	820	1	FLUSH DOOR
D9	2340	720	1	FLUSH DOOR
D10	2340	820	1	FLUSH DOOR
D11	2340	820	1	FLUSH DOOR
D12	2340	720	1	POCKET DOOR
D13	2340	820	1	FLUSH DOOR
D14	2340	720	1	FLUSH DOOR
D15	2340	720	1	FLUSH DOOR
D16	2340	820	1	FLUSH DOOR
SD2	2300	2650	1	STACKER DOOR
SD3	2300	2650	1	STACKER DOOR
Level 1: 11				

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:

LOT 3 75 BEROWRA WATERS ROAD

75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:


ELEVATION 02

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.09	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			


A3

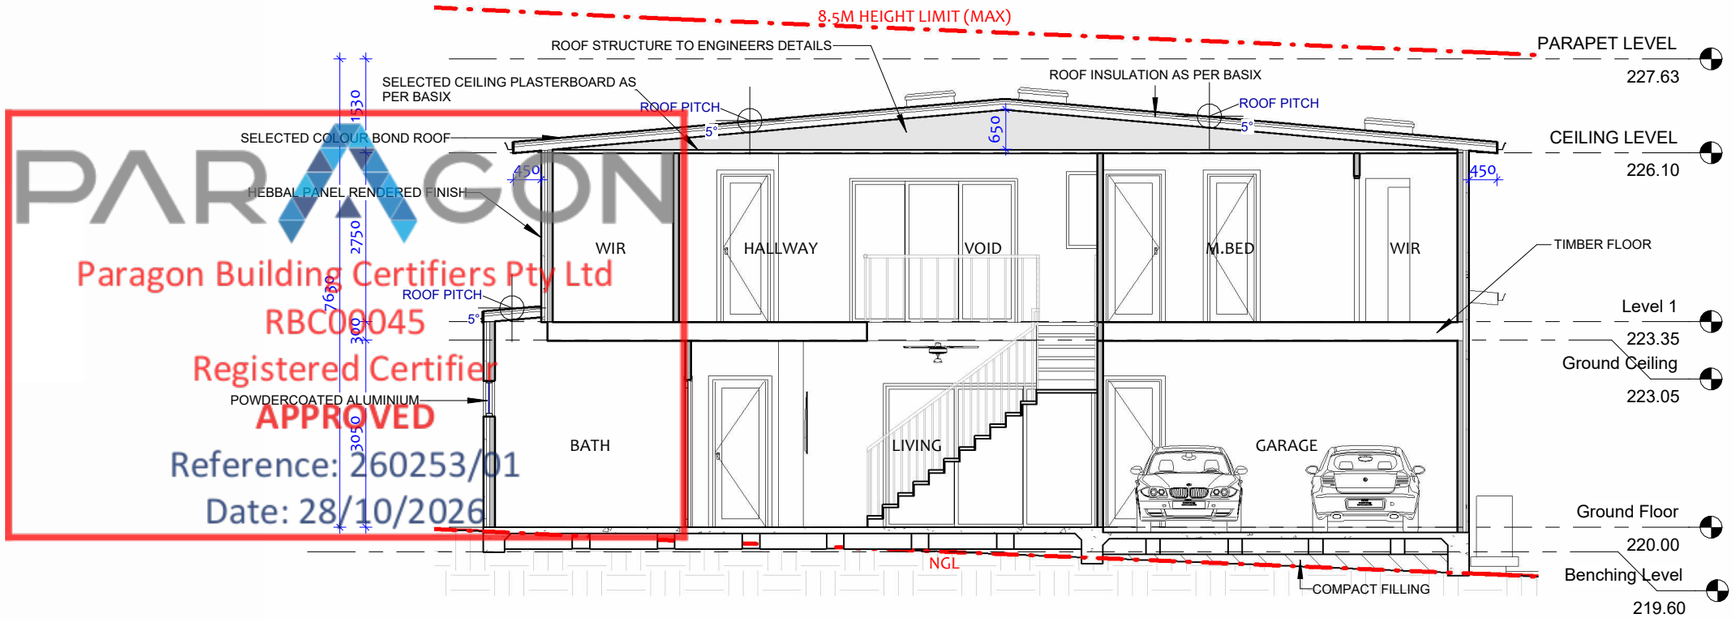

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

1 CROSS SECTION

1 : 100

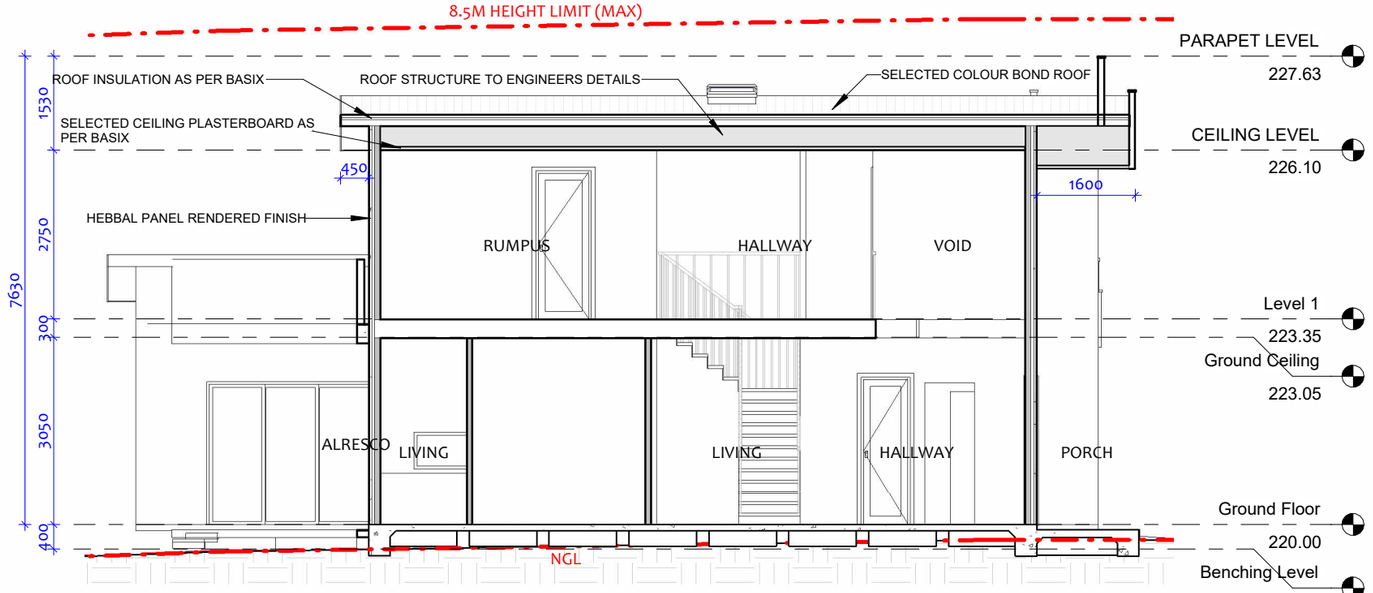

2 LONGITUDINAL SECTION

1 : 100

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
SECTIONS

NORTH:

CC ISSUE


LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.10	3

DRAWN BY:	CHECKED BY:	ISSUED BY:
AS	RH	

DRAFTED BY: SL

CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary

A3

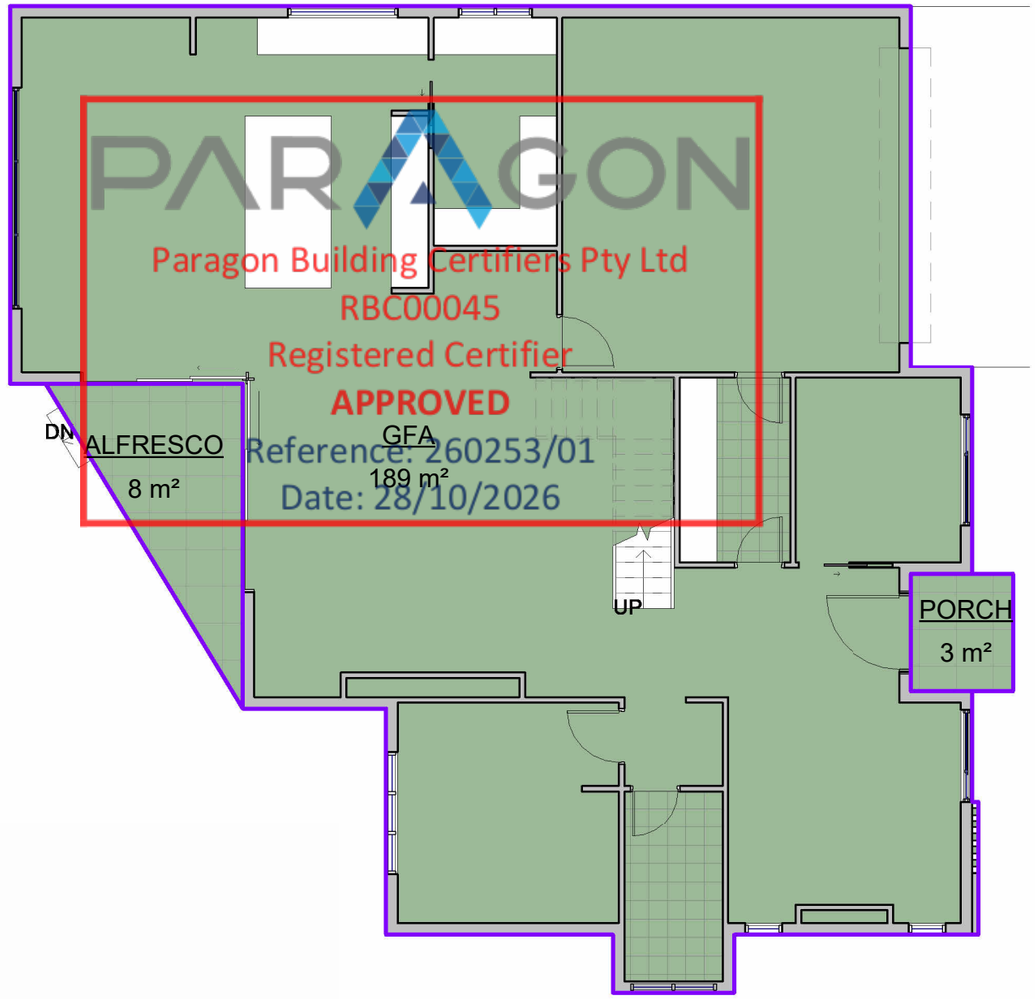


PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

1 Ground Floor

1 : 100

Area Schedule (Gross Building)	
Name	Area
Ground Floor	
GFA	189 m²
ALFRESCO	8 m²
PORCH	3 m²
Ground Floor: 3	201 m²

Area Schedule (Gross Building)	
Name	Area
Level 1	
FFA	155 m²
BALCONY	8 m²
BALCONY	7 m²
STAIR VOID	8 m²
Level 1: 4	179 m²
Grand total: 7	380 m²

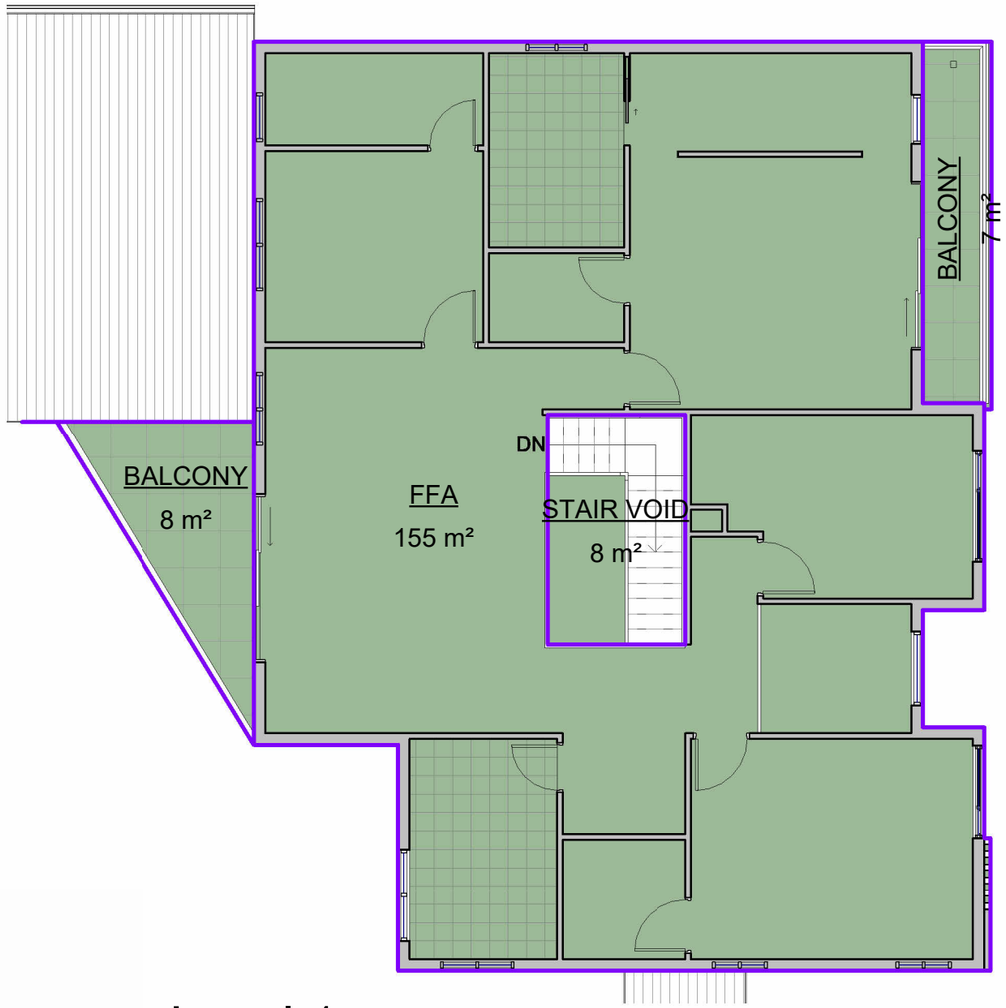

2 Level 1

1 : 100

CC ISSUE

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

RUBY HOMES

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.


PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
FLOOR AREA PLAN

NORTH:


LOT NO: 3	DATE: 15-10-2026	SCALE: 1 : 100	DRAWING No: CC.11
REV: 3	DRAWN BY: AS	CHECKED BY: RH	ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary		

A3

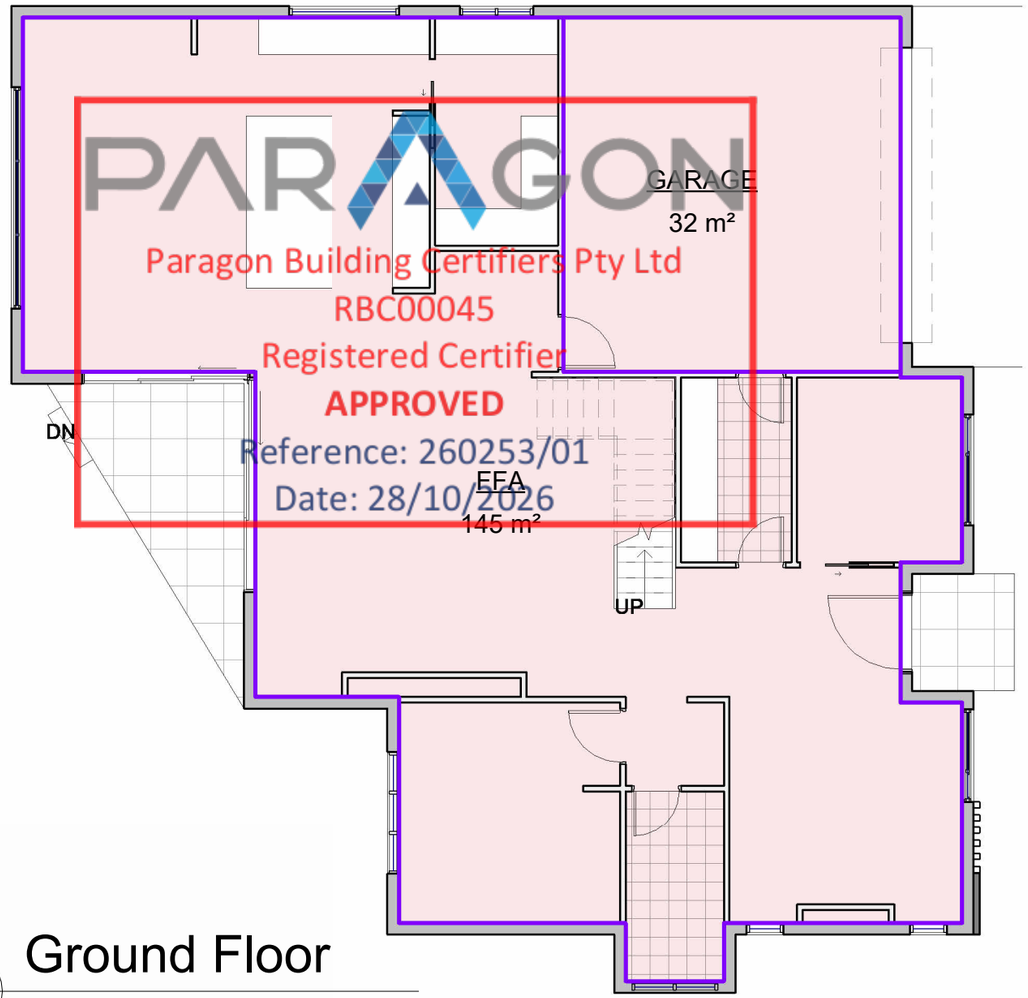

1 Ground Floor

1 : 100

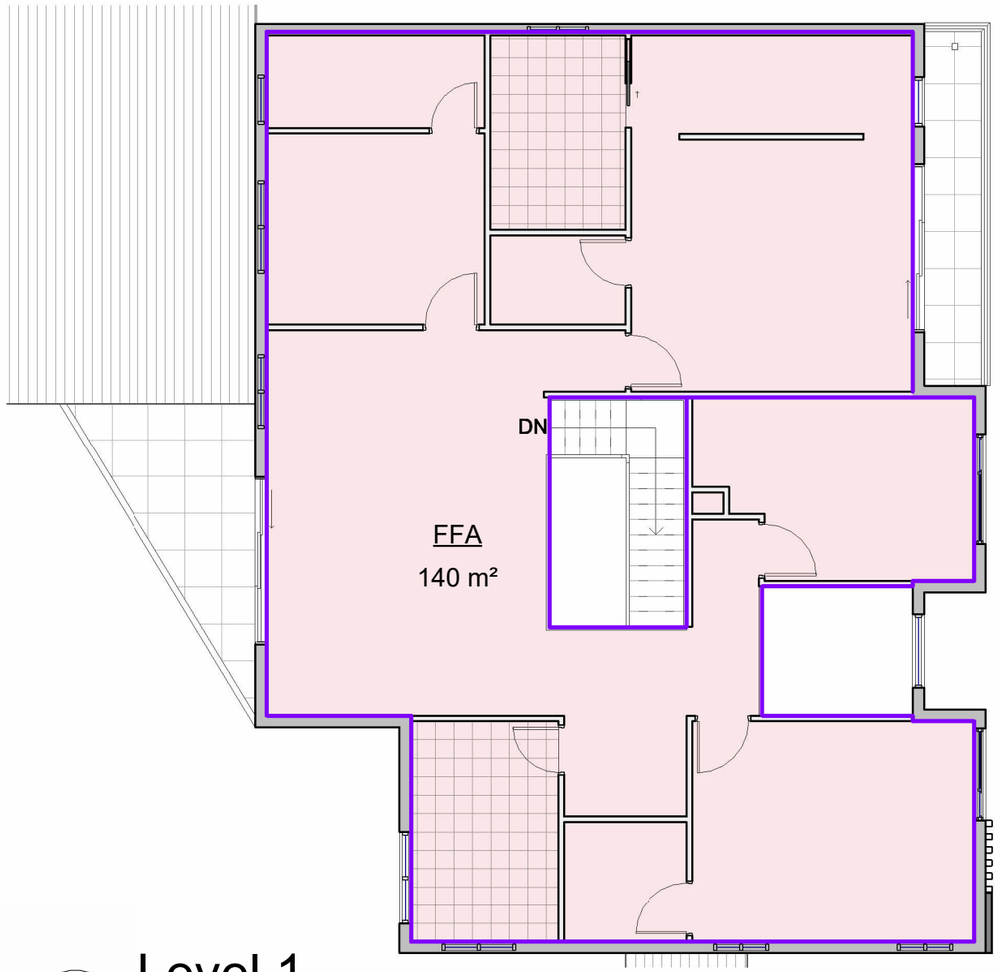

2 Level 1

1 : 100

Area Schedule (Rentable)	
Name	Area
Ground Floor	
FFA	145 m²
GARAGE	32 m²
Ground Floor: 2	177 m²
Level 1	
FFA	140 m²
Level 1: 1	140 m²
Grand total: 3	317 m²

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
RENTABLE AREA PLAN

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 100	CC.12	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026



	1. RF	2. HEBEL	3. CR1	4. AL	5. ED	6. GD	7. FAS	8. GUT
	ROOF	MAIN WALLS	ACCENT 1/RENDER	WINDOWS/ BALUSTRADE	MAIN DOOR	GARAGE DOOR	FASCIA	GUTTER
MATERIAL	COLORBOND	HEBEL	HEBEL	ALUMINIUM	TIMBER	COLORBOND	COLORBOND	COLORBOND
COLOUR								

NOTE : ALL COLOURS SPECIFIED ARE INDICATATIVE ONLY AND ARE SUBJECT TO VARIATION AND TO AVAILABILITY ANY DISCREPANCY PLEASE FOLLOW AS PER RENDERED IMAGE

CC ISSUE

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES


PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
COLOR SCHEDULE

NORTH:

LOT NO: 3	DATE: 15-10-2026	SCALE: 1 : 100	DRAWING No: CC.14 / REV: 3
DRAWN BY: AS	CHECKED BY: RH		ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary		

A3

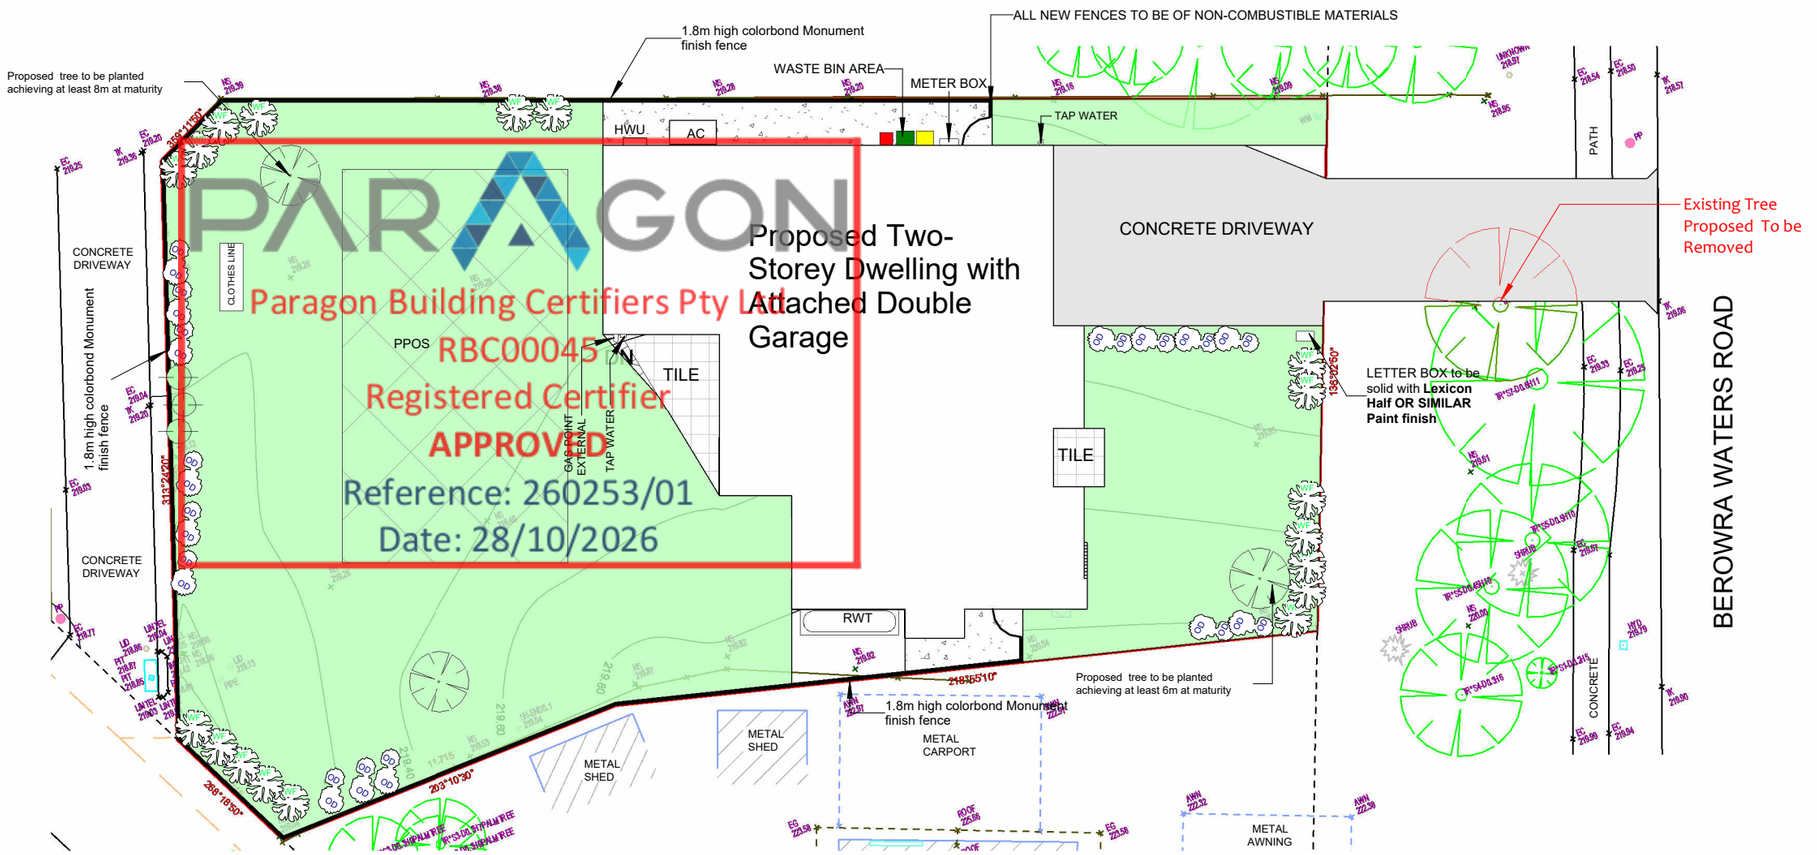


1 LANDSCAPE PLAN

1 : 200


REAR LANDSCAPE area = 473.0m²
FRONT LANDSCAPE AREA = 103m²
TOTAL LANDSCAPE AREA = 370m²

LEGENDS

- PROPOSED SCREENING PLANTING
- PROPOSED SHRUB PLANTING
- PROPOSED ACCENT PLANTING
- PROPOSED TREE
- PROPOSED EXISITING TREE REMOVAL
- EXISITING TREE
- PROPOSED TURF AREA TO BE SIR WALTER SOFT LEAF BUFFALO
- PROPOSED CONCRETE PATH



2. TREE & SHRUB PLANTING IN GARDEN BED



1. TURF & GARDEN EDGE DETAIL

GENERAL NOTES:

- LANDSCAPE CONTRACTOR TO CHECK DA CONDITIONS AND STAMPED LANDSCAPE PLAN BEFORE COMMENCING WORKS TO ENSURE NO ADDITIONS/AMENDMENTS TO PLAN.
- GARDEN BEDS IN OSD BASIN TO CONSIST OF NON FLOATABLE DECORATIVE GRAVEL.
- REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD DETAILS/FINAL LEVELS.
- MULCHED PLANTING BEDS TO BE A MINIMUM DEPTH OF 75mm AS SELECTED.
- CONTRACTOR'S RESPONSIBILITY TO CHECK AND ADJUST SOIL pH AS REQUIRED.
- PROVIDE TIMBER EDGE AS A MINIMUM BENEATH FENCING/GATES TO DEFINE TURF AND GARDEN BEDS/PATHWAYS,EDGING TO BE PROVIDED TO ALL AREAS WHERE DIFFERING MATERIALS MEET i.e TURF/GARDEN,TURF/GRAVEL PATH ETC.
- WEED MAT BENEATH GRAVEL GRAVEL PATHWAYS REQUIRED TO LIMIT MUD TRACKING.
- PREMIUM ORGANIC GARDEN MIX TO BE USED.
- ALL PLANTS TO BE HEALTHY AND VIGOROUS.
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION
- CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION.
- DO NOT SCALE ARCHITECTURAL SETOUT FROM LANDSCAPE DRAWING.
- EXISTING TREE SPREAD APPROXIMATE ONLY.REFER TO TREE REPORT WHEN APPLICABLE.
- SITE SURVEY PROVIDED BY OTHERS.
- BUFFALO TURF PREFERRED OVER KIKUYU.

LANDSCAPE BASIX NOTE:
THE APPLICANT MUST PLANT INDIGENEOUS OR LOW WATER USE SPECIES OF VEGETATION THROUGHOUT 15 SQM OF THE SITE.

NOTE :BUILDER RESERVES THE RIGHT NOT TO UNDERTAKE NOR SUPPLY CERTIFICATE FOR OCCUPATION CERTIFICATE.
NOTE : TO AID COMPLIANCE WITH BASIX LEGISLATION,PLANTS (WHERE APPLICABLE) HAVE BEEN SELECTED FROM THE LOCAL CITY COUNCIL/SHIRE PLANT LISTS.
NOTE: LOCATION OF SEWER MAINS/LINES,WATER PIPES,UNDERGROUND ELECTRICITY AND OTHER SERVICES MUST BE OBTAINED PRIOR TO COMMENCEMENT OF ANY WORK ON SITE.

CONTRACTORS NOTE : CALCULATED ARES DETERMINED BY CAD AND HAVE BEEN ROUNDED UP FOR USE AS A GUIDE ONLY ALLOW STANDARD PERCENTAGE FOR CUTTING AND WASTAGE .CONFIRM DIMENSIONS AND NUMBERS PRIOR TO QUOTING/ORDERING.



Bursaria spinosa var spinosa
Blackthorn, Boxthorn
Type: **Shrub**. *Description:* Thorny, wiry branches. Leaf size and shape vary's with age. Small, white fragrant flowers. *Height:* Medium. *Flowers:* Jan-April. *Propagation:* sow seed. *Prune:* after flowering, only to maintain shape.



Dodonaea viscosa ssp. Cuneata
Wedge-leaf Hop Bush
Type: **Shrub**. *Description:* Compact growth. Sticky leaves taper to sharp point. Green fruit turns red and purple. *Height:* 1m. *Flowers:* Spring. *Propagation:* sow from seed or take cutting in Spring and Summer. *Prune:* minimally.



Indigofera australis
Native Indigo
Type: **Shrub**. *Description:* Slender, erect. Pink to lilac pea flowers, numerous along stems. *Height:* 1m Alluvial Aug-Sept. *Flowers:* Spring. *Propagation:* from cutting, early to mid Summer. *Prune:* trim lightly after flowering.



Backhousia myrtifolia
Grey Myrtle
Type: **Tree**. *Description:* Dense feature tree with, green glossy foliage. Greenish yellow flowers in small terminal clusters. *Height:* 6-10m. *Flowers:* Nov-Dec. *Propagation:* sow seed in Spring. *Prune:* minimally.

PLANT SCHEDULE

Genus	Common Name	Qty	Pot size	Height	width
Trees					
Backhousia myrtifolia	Grey Myrtle	1	45L	6-10m	Dense feature tree with, green glossy foliage. Greenish yellow flowers in small terminal clusters.
Shrubs					
Bursaria Spinosa Var Sppinosa	Blackthorn ,Boxthorn	8	140mm	1.5m	Thorny, wiry branches. Leaf size and shape vary's with age. Small, white fragrant flowers.
Dodonea Visco ssp. Cuneata	Wedge-Leaft Hop Bush	6	140mm	1m	Compact growth. Sticky leaves taper to sharp point. Green fruit turns red and purple
Indigofera Australis	Native Indigo	5	140mm	1m	Slender, erect. Pink to lilac pea flowers, numerous along stems.
Hedgeing & screening Plants					
Acmena smithii 'Cherry Surprise'	Lilly Pilly Cherry Surprise PBR	10	140mm	3m	It has attractive small dense green foliage that provides a continuous flush of cherry-red new growth nearly all year round. Small white starry flowers bloom in summer.

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
LANDSCAPE PLAN

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 200	CC.15	3
DRAWN BY: AS	CHECKED BY: ROHIT			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

BASIX™ Certificate

Building Sustainability Index
www.planningportal.nsw.gov.au/development-and-assessment/basix

Single Dwelling

Certificate number: 1849142S

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.planningportal.nsw.gov.au/definitions

Secretary
Date of issue: Monday, 01 June 2026
To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.

Project summary	
Project name	75 Berowra Waters Road Berowra
Street address	75 BEROWRA WATERS ROAD BEROWRA 2081
Local Government Area	Hornsby Shire Council
Plan type and plan number	Deposited Plan
Lot no.	-
Section no.	-
Project type	dwelling house (detached)
No. of bedrooms	5

Project score		
Water	✔ 41	Target 40
Thermal Performance (Do-it-Yourself Method)	✔ Pass	Target Pass
Energy	✔ 74	Target 72
Materials	✔ -100	Target n/a

Certificate Prepared by
Name / Company Name: HOMESVALE PTY LTD.
ABN (if applicable): 76638783150

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

Description of project

Project address	
Project name	75 Berowra Waters Road Berowra
Street address	75 BEROWRA WATERS ROAD BEROWRA 2081
Local Government Area	Hornsby Shire Council
Plan type and plan number	Deposited Plan
Lot no.	-
Section no.	-
Project type	
Project type	dwelling house (detached)
No. of bedrooms	5
Site details	
Site area (m²)	746
Roof area (m²)	222
Conditioned floor area (m²)	251.31
Unconditioned floor area (m²)	24.63
Total area of garden and lawn (m²)	450
Roof area of the existing dwelling (m²)	0

Assessor details and thermal loads	
NatHERS assessor number	n/a
NatHERS certificate number	n/a
Climate zone	n/a
Area adjusted cooling load (MJ/m².year)	n/a
Area adjusted heating load (MJ/m².year)	n/a

Project score		
Water	✔ 41	Target 40
Thermal Performance (Do-it-Yourself Method)	✔ Pass	Target Pass
Energy	✔ 74	Target 72
Materials	✔ -100	Target n/a

Schedule of BASIX commitments

The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

Water Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Landscape			
The applicant must plant indigenous or low water use species of vegetation throughout 20 square metres of the site.	✔	✔	
Fixtures			
The applicant must install showerheads with a minimum rating of 5 star (> 4.5 but <= 6 L/min plus spray force and/or coverage tests) in all showers in the development.		✔	✔
The applicant must install a toilet flushing system with a minimum rating of 4 star in each toilet in the development.		✔	✔
The applicant must install taps with a minimum rating of 4 star in the kitchen in the development.		✔	
The applicant must install basin taps with a minimum rating of 4 star in each bathroom in the development.		✔	
Alternative water			
Rainwater tank			
The applicant must install a rainwater tank of at least 2000 litres on the site. This rainwater tank must meet, and be installed in accordance with, the requirements of all applicable regulatory authorities.	✔	✔	✔
The applicant must configure the rainwater tank to collect rain runoff from at least 222 square metres of the roof area of the development (excluding the area of the roof which drains to any stormwater tank or private dam).		✔	✔
The applicant must connect the rainwater tank to:			
• the cold water tap that supplies each clothes washer in the development		✔	✔
• at least one outdoor tap in the development (Note: NSW Health does not recommend that rainwater be used for human consumption in areas with potable water supply.)		✔	✔

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Do-it-yourself Method			
General features			
The dwelling must be a Class 1 dwelling according to the National Construction Code, and must not have more than 2 storeys.	✔	✔	✔
The conditioned floor area of the dwelling must not exceed 300 square metres.	✔	✔	✔
The dwelling must not contain open mezzanine area exceeding 25 square metres.	✔	✔	✔
The dwelling must not contain third level habitable attic room.	✔	✔	✔
Floor, walls and ceiling/roof			
The applicant must construct the floor(s), walls, and ceiling/roof of the dwelling in accordance with the specifications listed in the table below.	✔	✔	✔
The applicant must adopt one of the options listed in the tables below to address thermal bridging in metal framed floor(s), walls and ceiling/roof of the dwelling.	✔	✔	✔
The applicant must show through receipts that the materials purchased for construction are consistent with the specifications listed in the tables below.			✔

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
floor - concrete slab on ground, waffle pod slab.	188.8	nil;not specified	nil	
garage floor - concrete slab on ground, waffle pod slab.	32	none	nil	
external wall: AAC veneer; frame: timber - H2 treated softwood.	all external walls	2.73 (or 3.50 including construction);fibreglass batts or roll	nil	wall colour: Dark (solar absorptance 0.71-0.85)

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
internal wall shared with garage: plasterboard; frame: timber - H2 treated softwood.	37.4	nil;none	nil	
internal wall: plasterboard; frame: timber - H2 treated softwood.	250	none	nil	
ceiling and roof - flat ceiling / flat roof, framed - metal roof, timber - H2 treated softwood.	222	ceiling: 5.7 (up), roof: foil backed blanket ;ceiling: foil backed blanket; roof: foil backed blanket.	nil	roof colour: medium (solar absorptance 0.48-0.59); 0.5 to < 1.0% of ceiling area uninsulated

Note	• Insulation specified in this Certificate must be installed in accordance with the ABCB Housing Provisions (Part 13.2.2) of the National Construction Code.
Note	• If the additional ceiling insulation listed in the table above is greater than R3.0, refer to the ABCB Housing Provisions (Part 13.2.3 (6)) of the National Construction Code.
Note	• In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials.
Note	• Thermal breaks must be installed in metal framed walls and applicable roofs in accordance with the ABCB Housing Provisions of the National Construction Code.

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Ceiling fans			
The applicant must install at least one ceiling fan in at least one daytime habitable space, such as living room.	✔	✔	✔
• The minimum number and diameter of ceiling fans in a daytime habitable space must be installed in accordance with the ABCB Housing Provisions (Part 13.5.2) of the National Construction Code .	✔	✔	✔

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	
2	22-07-2026	TREE REMOVAL	
1	01-06-2026	DA ISSUE	

RUBY HOMES

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
BASIX

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026		CC.16	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Glazed windows, doors and skylights			
The applicant must install the windows, glazed doors and shading devices described in the table below, in accordance with the specifications listed in the table. Relevant overshadowing specifications must be satisfied for each glazed window and door.	✔	✔	✔
The dwelling may have 1 skylight (<0.7 square metres) which is not listed in the table.	✔	✔	✔
The following requirements must also be satisfied in relation to each window and glazed door:	✔	✔	✔
• The applicant must install windows and glazed doors in accordance with the height and width, frame and glazing types listed in the table.	✔	✔	✔
• Each window and glazed door must have a U-value no greater than that listed and a Solar Heat Gain Coefficient (SHGC) within the range listed. Total system U values and SHGC must be calculated in accordance with National Fenestration Rating Council (NFRC) conditions.		✔	✔
• Overshadowing buildings/vegetation must be of the height and distance from the centre and the base of the window and glazed door as specified in the 'overshadowing' column.	✔	✔	✔
The applicant must install the skylights described in the table below, in accordance with the specifications listed in the table. Total skylight area must not exceed 3 square metres (the 3 square metre limit does not include the optional additional skylight of less than 0.7 square metres that does not have to be listed in the table).	✔	✔	✔

Skylight no.	Maximum area (m²)	Skylight specification	Shading device
SL1	0.60	aluminium, single clear (U-value: <=7.3, SHGC: 0.75 - 0.83)	no shading
SL2	0.60	aluminium, single clear (U-value: <=7.3, SHGC: 0.75 - 0.83)	no shading
SL3	0.60	aluminium, single clear (U-value: <=7.3, SHGC: 0.75 - 0.83)	no shading

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
North-East facing					

DRAGON
Dragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
GW1	2350.00	1800.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	eave 500 mm, 3100 mm above head of window or glazed door	>4 m high, 5-8 m away
GW2	2350.00	1500.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	none	>4 m high, 5-8 m away
FW1	1800.00	800.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	none	>4 m high, 5-8 m away
FW2	2350.00	1800.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	eave 500 mm, 10 mm above head of window or glazed door	>4 m high, 5-8 m away
FW3	2350.00	1200.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	eave 1500 mm, 50 mm above head of window or glazed door	>4 m high, 5-8 m away
FW4	2350.00	1500.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	none	>4 m high, 5-8 m away
SD2	2300.00	2650.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	eave 1500 mm, 50 mm above head of window or glazed door	>4 m high, 5-8 m away
South-East facing					
GW3	1850.00	600.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	eave 450 mm, 3632 mm above head of window or glazed door	>4 m high, 2-5 m away
GW4	1850.00	600.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	eave 450 mm, 3632 mm above head of window or glazed door	>4 m high, 2-5 m away
SD1	2300.00	2650.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	verandah 2000 mm, 3050 mm above base of window or glazed door	>4 m high, 8-12 m away
FW5A	800.00	900.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 230 mm above head of window or glazed door	>4 m high, 2-5 m away

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
FW5B	800.00	900.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 230 mm above head of window or glazed door	>4 m high, 2-5 m away
GW5	600.00	1400.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	>4 m high, 2-5 m away
FW6	800.00	1200.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 450 mm, 230 mm above head of window or glazed door	>4 m high, 2-5 m away
South-West facing					
GW6	1800.00	2000.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 3860 mm above head of window or glazed door	>4 m high, 5-8 m away
GW8	2700.00	3600.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	eave 450 mm, 935 mm above head of window or glazed door	>4 m high, 5-8 m away
FW7	1450.00	1500.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 630 mm above head of window or glazed door	2-4 m high, 5-8 m away
FW9	1250.00	1200.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 630 mm above head of window or glazed door	2-4 m high, 5-8 m away
FW10	1250.00	1500.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 630 mm above head of window or glazed door	2-4 m high, 5-8 m away
FW11	1250.00	800.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.60 - 0.74)	eave 450 mm, 630 mm above head of window or glazed door	2-4 m high, 5-8 m away
SD3	2300.00	2650.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	eave 450 mm, 630 mm above head of window or glazed door	2-4 m high, 5-8 m away
SD1A	2300.00	3400.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	verandah 3787 mm, 3000 mm above base of window or glazed door	>4 m high, 5-8 m away

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
North-West facing					
GW9	600.00	1800.00	aluminium, double glazed (U-value: <=2.0, SHGC: 0.40 - 0.49)	eave 450 mm, 4530 mm above head of window or glazed door	>4 m high, 2-5 m away
GW10	900.00	1200.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 4230 mm above head of window or glazed door	>4 m high, 2-5 m away
FW12	800.00	1000.00	aluminium, single glazed (U-value: <=5.0, SHGC: 0.49 - 0.60)	eave 450 mm, 230 mm above head of window or glazed door	2-4 m high, 2-5 m away

Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Hot water			
The applicant must install the following hot water system in the development, or a system with a higher energy rating: gas instantaneous with a performance of 6 stars.	✔	✔	✔
Cooling system			
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER 3.5 - 4.0		✔	✔
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER 3.5 - 4.0		✔	✔
Heating system			
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER 3.5 - 4.0		✔	✔
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER 3.5 - 4.0		✔	✔
Ventilation			
The applicant must install the following exhaust systems in the development:			
At least 1 Bathroom: no mechanical ventilation (ie. natural); Operation control: n/a		✔	✔
Kitchen: individual fan, ducted to façade; Operation control: manual switch on/off		✔	✔
Laundry: individual fan, ducted to façade; Operation control: interlocked to light		✔	✔
Artificial lighting			
The applicant must ensure that a minimum of 80% of light fixtures are fitted with fluorescent, compact fluorescent, or light-emitting-diode (LED) lamps.		✔	✔
Natural lighting			
The applicant must install a window and/or skylight in 3 bathroom(s)/toilet(s) in the development for natural lighting.	✔	✔	✔

Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Other			
The applicant must install a gas cooktop & electric oven in the kitchen of the dwelling.		✔	
The applicant must install a fixed outdoor clothes drying line as part of the development.		✔	

CC ISSUE

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
BASIX 02

NORTH:

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026		CC.16a	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3

ABCB HOUSING PROVISIONS : PART 10.2 WET AREA WATERPROOFING


10.2.1 Wet Areas

1. Building elements in wet areas within a building must be protected with a waterproofing system.
2. The waterproofing system in (1) must be either waterproof or water resistant in accordance with 10.2.2 to 10.2.6.


10.2.2 Shower Area (enclosed and unenclosed)

1. For a shower area with a hob, step-down or level threshold, the following applies:
   a. The floor of the *shower area* must be *waterproof*, including any hob or step-down (see Figure 10.2.2); and
   b. The walls of the *shower area* must be *waterproof* not less than 1800 mm above the floor substrate (see Figure 10.2.2).
   c. Wall junctions and joints within the *shower area* must be *waterproof* not less than 40 mm either side of the junction (see Figure 10.2.2).
   d. Wall/floor junctions within the shower area must be *waterproof* (see Figure 10.2.2).
   e. Penetrations within the *shower area* must be *waterproof*.
2. A shower with a *preformed shower base* must also comply with the requirements of (1), except for (a) which is not applicable.

Figure 10.2.2: Extent of treatment for shower areas - concrete compressed fibre-cement and fibre-cement sheet floors.

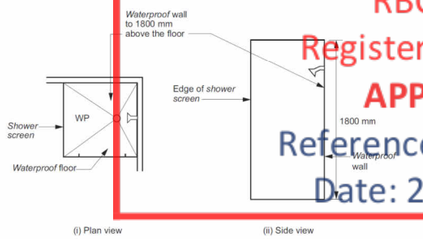

(a) Enclosed shower

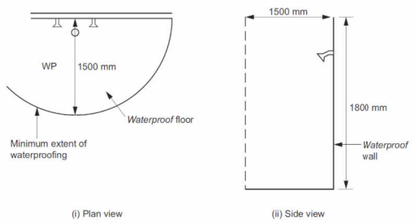

(b) Unenclosed shower

Figure Notes
Wall/floor junction heights are to be as per 10.2.2 to 10.2.6 (as applicable).

Notes
Where a shower is above a bath or spa, use requirements for shower.

10.2.3 Area outside shower area

1. For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.
2. For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.
3. Wall/floor junctions must be -
   a. waterproof, and
   b. where a flashing is used, the horizontal leg must be not less than 40 mm.

10.2.4 Areas adjacent to baths and spas without showers

1. For areas adjacent to all baths and spas, the following applies:
   a. For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be water resistant.
   b. For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be waterproof.
   c. Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.
2. For areas adjacent to non-freestanding baths and spas, the following applies:
   a. Walls must be water resistant (see Figure 10.2.4a and Figure 10.2.4b)-
      • to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is within 75mm of a wall; and
      • for all exposed surfaces below vessel lip.
   b. Wall junctions and joints must be water resistant within 150mm above a vessel for the extent of the vessel.
   c. Wall/floor junctions must be waterproof for the extent of the vessel (see Figure 10.2.4a and Figure 10.2.4b).
3. For inserted baths and spas, the following applies.
   a. For floors and horizontal surfaces:
      • Any shelf area adjoining the bath or spa must be waterproof and include a waterstop under the vessel lip.
      • There are no requirements for the floor under a bath or spa.
   b. For walls:
      • Waterproof to not less than 150mm above the lip of a bath or spa.
      • There are no requirements for the floor under a bath or spa.
   c. For wall junctions and joints, the following applies:
      • Waterproof junctions within 150mm of a bath or spa.
      • There are no requirements for junctions and joints in walls beneath the lip of a bath or spa.
   d. Tap and spout penetrations must be waterproof where they occur in horizontal surfaces.

Figure 10.2.4a: Areas adjacent to baths and spas without showers for concrete, compressed fibre-cement and fibre-cement sheet flooring


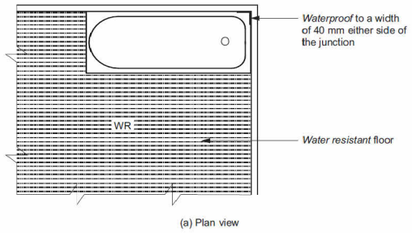



Figure 10.2.4b: Areas adjacent to baths and spas without showers for timber floors including particle-board, plywood and other floor materials

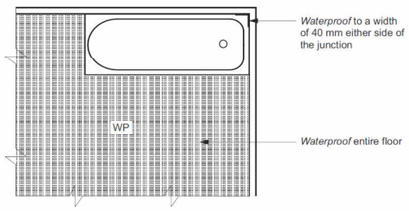

10.2.5 Other areas

1. For walls adjoining other types of vessels (e.g. sink, basin or laundry tub), the following applies:
   a. Walls must be water resistant to a height of not less than 150mm above the vessel, for the extent of the vessel, where the vessel is withing 75 mm of a wall (see Figure 10.2.5.)
   b. Waterproof wall junctions where a vessel is fixed to a wall.
   c. Waterproof tap and spout penetrations where they occur in surfaces required to be waterproof or water resistant.
2. For laundries and WCs, the following applies:
   a. The floor of the room must be water resistant.
   b. Wall/floor junctions must be water resistant, and where a flashing is used, the horizontal leg must not be less than 40 mm.
3. For WCs with handheld bidet spray installations, the following applies:
   a. The floor of the room must be waterproof.
   b. Walls must be -
      • waterproof in WC area within a 900 mm radius from the wall connection of the handheld bidet spray device to a height of not less than 150mm above the floor substrate; and
      • water resistant in WC area within a 900 mm radius from the wall connection of the handheld bidet device to not less than 1200 mm above the finished floor level of the WC.
   c. Wall junctions within the WC area within 900 mm radius from the wall connection of the handheld bidet spray device must be waterproof.
   d. Wall/floor junctions within the WC area within 1000 mm radius from the wall connection of the handheld bidet spray device must be waterproof.
   e. Penetrations in the WC area must be waterproof.

Figure 10.2.5: Bath and vessel abutting wall - areas to be protected

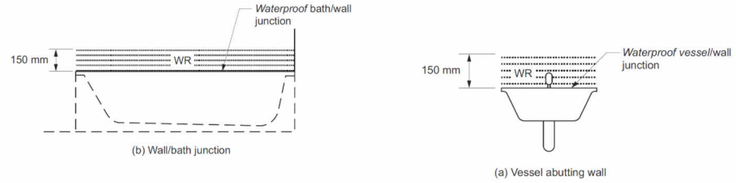

10.2.6 Waterproofing systems

1. For the purposes of this Part, a waterproofing system is deemed -
   a. waterproof, if it complies with (2); or
   b. water resistant, if it complies with (3).
2. For a waterproofing system required to be waterproof in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.8 must be used.
3. For a waterproofing system required to be water resistant in accordance with 10.2.2 to 10.2.5, the materials nominated in 10.2.9 must be used in conjunction with the materials in 10.2.10.

10.2.12 Construction of wet area floors - falls

Where a floor waste is installed -
   a. the minimum continuous fall of a floor plane to the waste must be 1:80; and
   b. the maximum continuous fall of a floor plane to the waste must be 1:50.

PARAGON
Paragon Building Certifiers Pty Ltd
RBC00045
Registered Certifier
APPROVED
Reference: 260253/01
Date: 28/10/2026

REV	DATE	DESCRIPTION	BY
3	1-10-2026	CC ISSUE	

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE DEVELOPER & THE REPRODUCTION OF ANY PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE DEVELOPER IS A VIOLATION OF APPLICABLE LAWS. IN NO EVENT SHALL THE DEVELOPER BE HELD LIABLE FOR SPECIAL COLLATERAL, INCIDENTAL OR CONSEQUENTIAL LIABILITY IN CONNECTION WITH THE USE OF THIS DIGITAL DATA ONCE RELEASED FROM THE DEVELOPER'S OFFICE. THIS DRAWING IS TO BE READ & UNDERSTOOD IN CONJUNCTION WITH THE STRUCTURAL, MECHANICAL, ELECTRICAL & / OR ANY OTHER CONSULTANT'S DOCUMENTATION AS MAY BE APPLICABLE TO THE PROJECT PRIOR TO THE START OF ANY WORKS AND FOR ITS DURATION.

RUBY HOMES

PROJECT:
LOT 3 75 BEROWRA WATERS ROAD
75 BEROWRA WATERS ROAD
BEROWRA

DRAWING TITLE:
WATERPROOFING DETAILS

NORTH:

CC ISSUE

LOT NO:	DATE:	SCALE:	DRAWING No:	REV:
3	15-10-2026	1 : 50	CC.18	3
DRAWN BY: AS	CHECKED BY: RH			ISSUED BY:
DRAFTED BY: SL	CLIENT NAME: Vikas Kumar Rangi & Poonam Chaudhary			

A3