

DESIGNED BY:



HECARD Consult Pty. Ltd.

Suit 301 / 6-8 Dumaresq Street,
Campbelltown, NSW, 2560

Mob. +61431574826

Email: info@hecardconsult.com.au

Web: www.hecardconsult.com.au


FOR: **SANDSTONE CONSTRUCTIONS**

JOB NO: ST 196-2608

DATE: 01/09/2026

ISSUE: A

STRUCTURAL DESIGN **FOR PROPOSED DWELLING AT** **28, Guruwin Street, Austral, NSW**

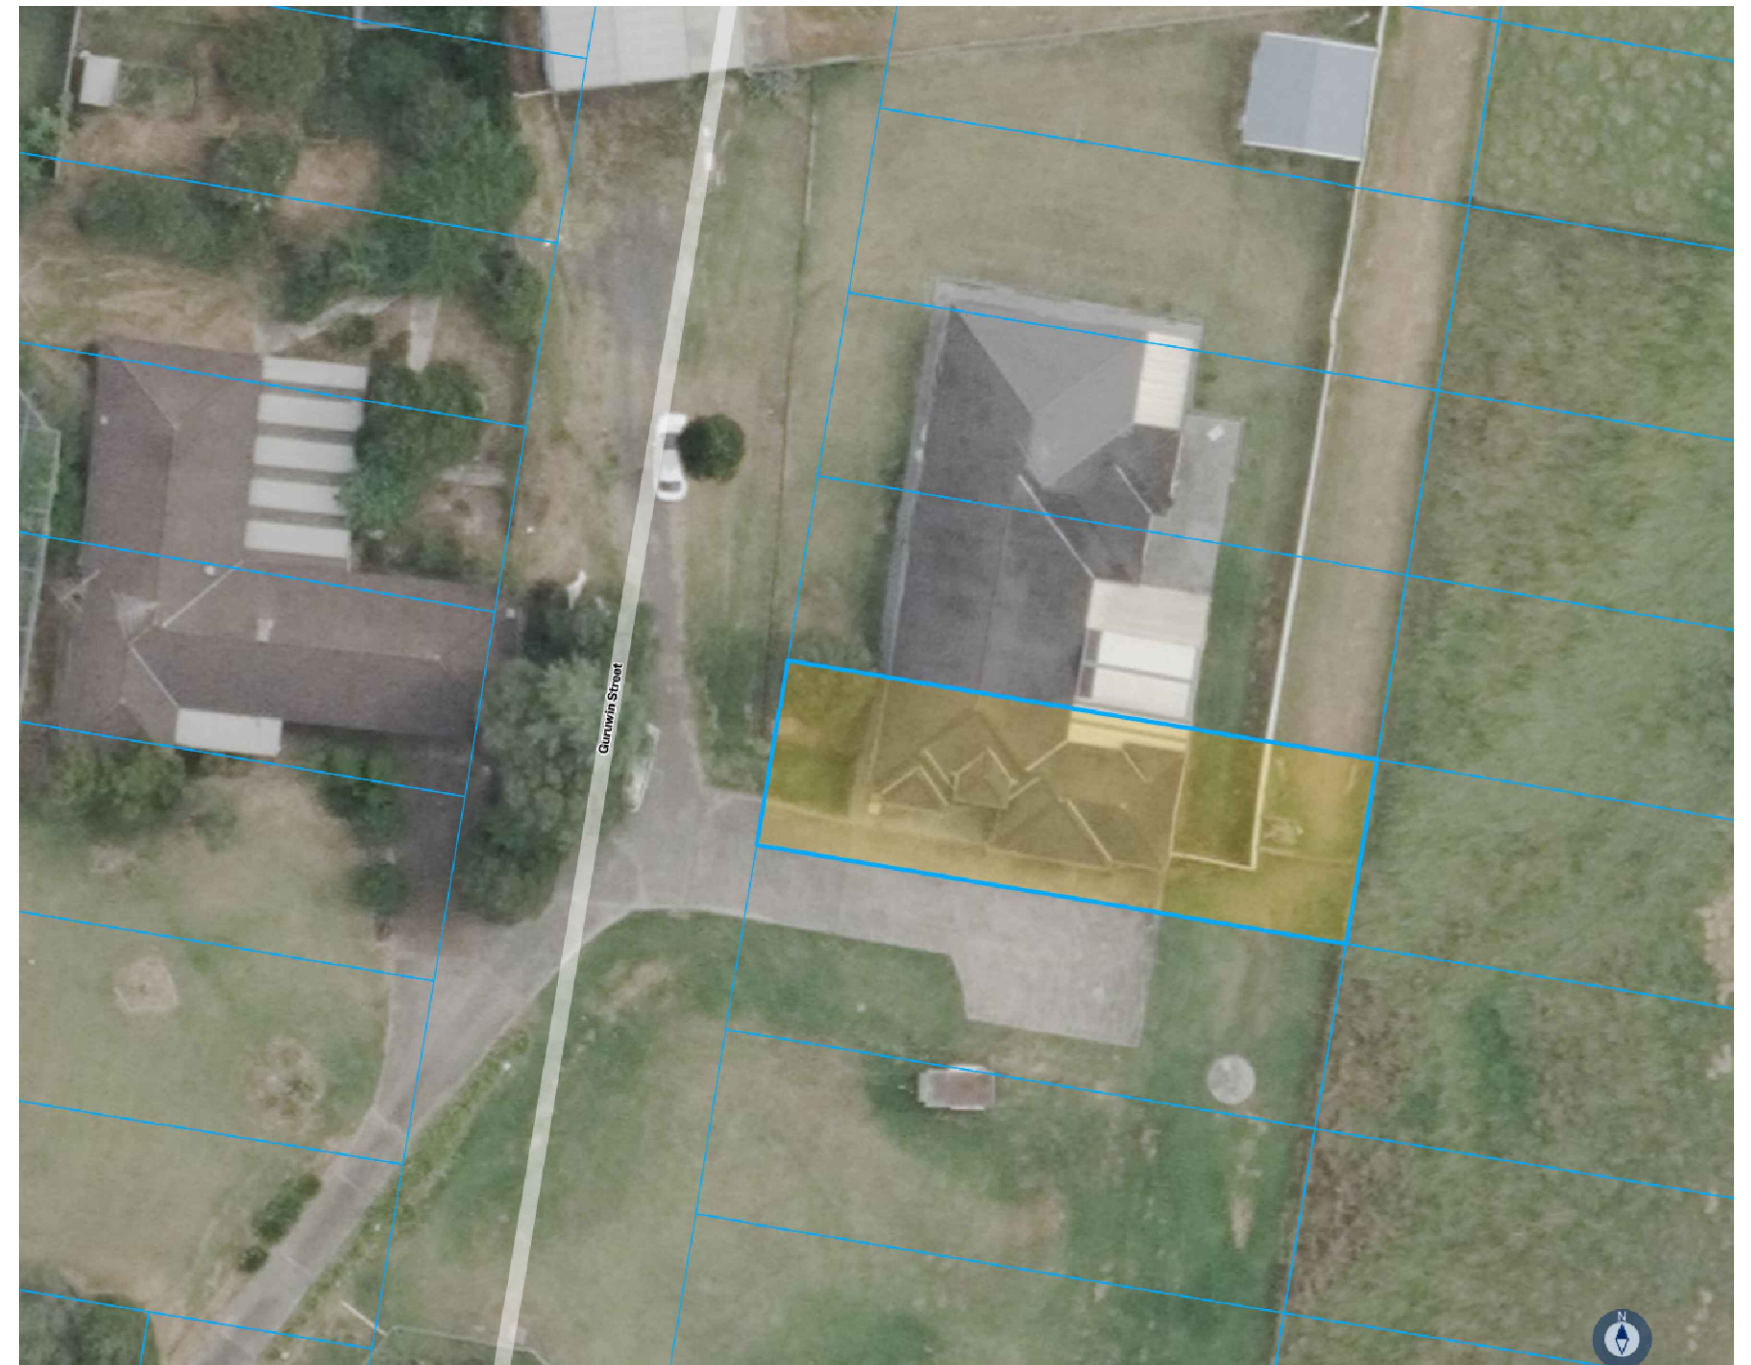

ISSUED FOR: CDC

GENERAL

G1. THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ALL DISCREPANCIES SHALL BE REFERRED TO THE ARCHITECT AND BE RESOLVED BEFORE WORK PROCEEDS.

G2. ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT S.A.I GLOBAL CODES. THE BCA/NCC, AND WITH THE BY-LAWS AND ORDINANCES OF THE RELEVANT BUILDING STRUCTURE, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.

G3. ALL WORK SHALL BE CARRIED OUT IN COMPLIANCE WITH THE REQUIREMENTS OF WORK COVER AND THE OH&S ACT.

G4. ALL DIMENSIONS SHOWN AND/OR RELEVANT TO SETTING OUT AND OFF-SITE WORK SHALL BE VERIFIED BY THE BUILDER BEFORE CONSTRUCTION AND FABRICATION IS COMMENCED. ENGINEER'S DRAWINGS SHALL NOT BE SCALED FOR DIMENSIONS.

G5. DURING CONSTRUCTION THE BUILDER SHALL MAINTAIN SAFE AND STABLE THE STRUCTURE AND NEIGHBORING STRUCTURES. NO PART SHALL BE OVERSTRESSED. TEMPORARY BRACING SHALL BE PROVIDED BY THE BUILDER TO KEEP THE WORKS AND EXCAVATIONS STABLE AT ALL TIMES.

G6. UNLESS NOTED OTHERWISE, ALL LEVELS ARE EXPRESSED IN METERS AND ALL DIMENSIONS ARE IN MILLIMETERS.

G7. THE APPROVAL OF A SUBSTITUTION SHALL BE SOUGHT FROM THE ENGINEER. SUCH SUBSTITUTION SHALL NOT BE AN AUTHORIZATION FOR VARIATION TO THE CONTRACT. ANY VARIATIONS INVOLVED MUST BE TAKEN UP WITH THE ARCHITECT BEFORE THE WORK COMMENCES.

G8. ABBREVIATIONS USED:

ALT	ALTERNATIVE
BTM	BOTTOM
CTS	CENTERS
C/S	BRICK/ BLOCK COURSE
DIA	DIAMETER
FGL	FINISHED GROUND LINE
GALV	HOT DIP GALVANISED
MAX	MAXIMUM
MIN	MINIMUM
NSOP	NOT SHOWN ON PLAN
U.N.O	UNLESS NOTED OTHERWISE
U/S	UNDERSIDE

INSPECTIONS:

I1. THE PURPOSE OF THE STRUCTURAL INSPECTIONS IS TO VERIFY THAT THE BUILDER HAS COMPILED WITH THE STRUCTURAL REQUIREMENTS OF THE CONTRACT DOCUMENTATION. NOT TO BE THE FIRST CHECK OF A SUBCONTRACTOR'S INTERPRETATION OF THESE REQUIREMENTS. SHOULD THE WORK CLEARLY BE UNSATISFACTORY AT THE TIME THE INSPECTION IS ARRANGED, THE VISIT AND SUBSEQUENT 'ABORTIVE' INSPECTION VISITS (INCLUDING ASSOCIATED TRAVEL AND OFFICE TIME) WILL BE CHARGED TO THE BUILDER.

SITE PREPARATION AND EXCAVATOR NOTES

D1. STRIP TOPSOIL AND VEGETATION 100MM MINIMUM DEPTH AND STOCKPILE.

D2. THE SITE IS TO BE BENCHED BY CUT AND FILL TO DESIRE LEVEL. ALL EXCAVATION AND BACKFILL SHALL BE CARRIED OUT NEATLY TO THE LINES, LEVELS AND GRADES SPECIFIED BY THE ARCHITECT.

D3. FILL IS TO BE PLACED IN 150MM MAXIMUM LAYERS AND THOROUGHLY COMPACTED USING EXCAVATOR. UNLESS THIS FILL IS COMPACTED IN ACCORDANCE WITH CLAUSE 6.4.2 OF AS2870, IT IS NOT ADEQUATE TO PROVIDE LONG TERM STRUCTURAL SUPPORT TO THE SLAB/FOTTING SYSTEM AND THEREFORE, PIERS MUST BE INSTALLED. ALTERNATIVELY, THE FILL CAN BE PLACED, TESTED AND CERTIFIED BY A QUALIFIED GEOTECHNICAL ENGINEER AS "CONTROLLED FILL" AS DEFINED IN AS3798. THIS IS THEN DEEMED TO BE ADEQUATE TO SUPPORT THE SLAB/FOTTING SYSTEM.

D4. THE FILL IS TO EXTEND PAST THE EDGE OF THE HOUSE BY AT LEAST ONE METER AND SHALL BE BATTERED OFF AT NOT STEEPER THAN TWO HORIZONTALLY TO ONE VERTICALLY OR RETAINED BY A SUITABLE STRUCTURE PROVIDED BY THE OWNER OR BUILDER AS SOON AS POSSIBLE.

D5. THE FINISHED LEVELS SHALL ALLOW FOR THE MAIN SLAB LEVEL TO BE AT LEAST 300MM ABOVE THE ADJACENT GROUND. SURFACE DRAINAGE SHALL BE PROVIDED AS REQUIRED TO AVOID THE POSSIBILITY OF WATER PONDING NEAR THE SLAB. A FALL OF 50MM OVER A DISTANCE OF ONE METER AWAY FROM THE SLAB IS CONSIDERED ADEQUATE. SUBSOIL DRAINS (AGRICULTURAL DRAINS) ARE CONSIDERED DESIRABLE BUT SHOULD NOT BE LOCATED DIRECTLY ADJACENT TO THE FOOTINGS.

D6. IT IS THE RESPONSIBILITY OF THE OWNER TO ENSURE THE SITE IS PROPERLY MAINTAINED. APPENDIX B OF AS2870 PROVIDES INFORMATION AND GUIDANCE ON THE MAINTENANCE OF FOUNDATION SITE CONDITIONS. SUBJECT TO ADOPTION OF THESE RECOMMENDATIONS THE BUILDING MAY EXPERIENCE MINOR DAMAGE BUT OF A SEVERITY NOT EXCEEDING THE LEVELS DEFINED IN APPENDIX C OF AS2870.

D7. TRENCH EXCAVATIONS FOR SERVICES OR AGRICULTURAL DRAINS PARALLEL TO THE EDGE OF THE BORED PIER NOTES.

D8. FOR ALL FILLED AREAS IN BUILDING PLATFORM, INTERNAL BEAMS ARE TO BE PIERED AT MAX. 2100 CST. AT RIB INTERSECTIONS.

FOOTING AND SLAB NOTES

F1. BORED PIERS/FOOTINGS/BEAMS...ETC ARE TO BE FOUNDED ONTO NATURAL BEARING MATERIAL HAVING A MINIMUM SAFE BEARING CAPACITY OF 250 KPA U.N.O. BEFORE ANY CONCRETE IS PLACED, THE SAFE BEARING CAPACITY SHALL BE VERIFIED BY A QUALIFIED GEOTECHNICAL ENGINEER.

F2. THE FOOTING SYSTEM SPECIFIED ON THESE DRAWINGS WILL MEET THE PERFORMANCE REQUIREMENTS SET OUT IN CLAUSE 1.3 OF AS2870 (RESIDENTIAL SLABS AND FOOTINGS CODE). THE FOOTING SYSTEM INTENDED TO ACHIEVE ACCEPTABLE PROBABILITIES OF SERVICEABILITY AND SAFETY OF THE BUILDING DURING ITS DESIGN LIFE.

F3. THE FOOTING DETAILS SHOWN ARE FOR THE SITE CLASSIFICATION STIPULATED ABOVE. WHILST EVERY CARE HAS BEEN TAKEN TO VERIFY THAT THE INFORMATION SHOWN IS CORRECT, HECARD CONSULT TAKES NO RESPONSIBILITY FOR VARIATIONS WHICH MAY OCCUR DUE TO VARIATIONS IN SITE CONDITIONS.

F4. A DAMP PROOFING MEMBRANE MUST BE PLACED BENEATH THE SLAB SO THAT THE BOTTOM OF THE SLAB IS ENTIRELY UNDERLAID. THE DAMP PROOFING MEMBRANE SHALL BE TURNED UP TO FINISHED GROUND LEVEL. THE DAMP PROOFING MEMBRANE MUST BE 0.2MM NOMINAL THICKNESS POLYTHENE FILM AND OF HIGH IMPACT RESISTANCE. LAPS SHALL BE 200MM MINIMUM AT JOINTS AND ALL PLUMBING PENETRATIONS SHALL BE IN ACCORDANCE WITH THE BCA/NCC.

F5. SLAB REQUIREMENTS AT PIPE PENETRATIONS IN THE EDGE AND SPINE BEAMS ARE TO BE CARRIED OUT IN ACCORDANCE WITH THE DETAILS ON THESE DRAWINGS.

F6. SUBTERRANEAN TERMITE PROTECTION IS TO BE PROVIDED IN ACCORDANCE WITH THE REQUIREMENTS OF AS3660.1

BORDER PIER NOTES

P1. IF PIER LOCATIONS ARE NOT SHOWN ON THE PLAN, THEN ALL EDGE BEAMS, INTERNAL BEAMS AND OTHER LOAD BEARING AREAS THAT DO NOT BEAR ON FIRM NATURAL GROUND AS NOTED IN "FOOTING AND SLAB NOTES" NOTE F1 ARE TO BE PIERED IN ACCORDANCE WITH THE FOLLOWING PIERING SCHEDULE:

SINGLE STORY PLERING REQUIREMENTS SCHEDULE				
BEARING STRATA	MIN. DESIGN BEARING CAPACITY	PIER DIAMETER (mm)	MAXIMUM PIER SPACING C/C (mm)	
			BORED PIER	BUCKET PIER (800X300)
SAND	100 kPa	600	1800	1800
CONTROLLED CLAY FILL	150 kPa	400	1600	1800
STIFF NATURAL CLAY	250 kPa	400	2100	N/S
SHALE/ROCK	600 kPa	300 *	3000	N/S


* Denotes: 400 dia pier if pier depth ? 2.5m
N/S Denotes: Not Suitable

P2. IT SHOULD BE NOTED THAT IF ANY OF THE FOOTING BEAMS OF PIERS ENCOUNTER ROCK OR SHALE, THEN ALL FOOTING BEAMS AND LOAD BEARING SPINE BEAMS SHALL BE PIERED TO ROCK OR SHALL.

P3. PIERING TO STRATA OTHER THAN ROCK OR SHALE MAY BE DELETED FROM THE CUT AREA OF THE BUILDING PLATFORM OF AUTHORIZED BY THE ENGINEER.

P4. ALL PIERS ARE TO BE CLEAN AND DE-WATERED PRIOR TO PLACEMENT OF CONCRETE.

P5. WHERE A SERVICE TRENCH OR AGRICULTURAL DRAIN IS PARALLEL TO THE EDGE OF A SLAB, WHETHER THE SLAB BE IN EXCAVATED OR FILLED AREA, THEN PIERING TO SUPPORT THE SLAB BESIDE THE SERVICE TRENCH IS ONLY REQUIRED IF THE SERVICE LINE IS BELOW A LINE OF INFLUENCE DRAWN AS INDICATED BELOW IN Z.O.I DIAGRAM:

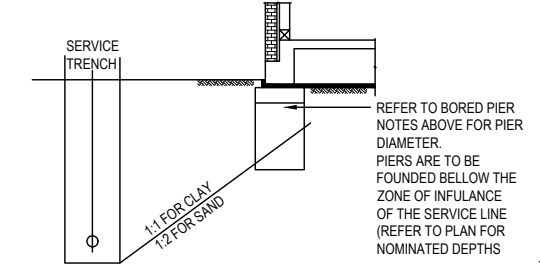

FOR CONSTRUCTION NEXT TO OR OVER EXISTING/ PROPOSED SERVICES EASEMENT- FINAL EXTENT AND ZONE OF INFLUENCE TO BE DETERMINED BY ENGINEER PRIOR TO CONSTRUCTION OF FLOOR SLAB. DETAILS TO BE SUPPLIED FOLLOWING RECEIPT OF SEWER PEG OUT DETAILS.

Z.O.I. DIAGRAM

P6. THESE NOTES ARE INTENDED AS A GUIDE. THERE IS ALWAYS A POSSIBILITY OF SITE CONDITIONS REQUIRING VARIATIONS TO THESE PROCEDURES. IN SUCH CASES, THE ENGINEER MUST BE CONSULTED.

PLASTIC SHRINKAGE CRACKING CONTROL AND SLAB MAINTENANCE

M1. CONCRETE PLACING, VIBRATING AND CURING MUST BE CARRIED OUT IN ACCORDANCE WITH AS3600.

M2. WATER IS NOT TO BE ADDED TO THE CONCRETE ON SITE AS TO INCREASE THE SLUMP ABOVE THAT SPECIFIED.

M3. IT IS RECOMMENDED THAT AN APPROVED CURING COMPOUND BE APPLIED TO THE SLAB IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS.

M4. CAUTION SHOULD BE EXERCISED WHEN APPLYING BRITTLE FINISHES, SUCH AS CERAMIC TILES TO THE FLOOR SLAB. AN ISOLATING MORTAR BED OR AN APPROVED FLEXIBLE ADHESIVE SYSTEM IS RECOMMENDED.
M5. THE OWNER'S ATTENTION SHALL BE DRAWN TO APPENDIX 'A' - "PERFORMANCE REQUIREMENTS AND FOUNDATION MAINTENANCE" OF AS2870 AND CSIRO PUBLICATION "GUIDE TO HOME OWNERS ON FOUNDATION MAINTENANCE AND FOOTING PERFORMANCE".

CONCRETE NOTES

C1. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS3600, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.

C2. UNLESS NOTED OTHERWISE:
- MAXIMUM AGGREGATE SIZE SHALL BE 20MM.
- SLUM DURING PLACING SHALL BE 100MM.
- NO ADMIXTURES SHALL BE USED IN CONCRETE UNLESS PROVED IN WRITING.

C3. CEMENT TYPE TO BE GP/GB AND 250KG MIN. CEMENT CONTENT PER M3.

C4. ALL CONCRETE CONSTRUCTION TO BE COMPACTED WITH A MECHANICAL VIBRATOR.

REINFORCEMENT FIXING NOTES

R1. ALL REINFORCING BAR AND FABRIC SHALL BE DESIGNATED AS SHOWN IN THE FOLLOWING TABLE AND SHALL COMPLY WITH THE APPROPRIATE CODES AS NOTED BELOW:

R	STRUCTURAL GRADE ROUND BARS TO AS4671 (250MPa)
S	STRUCTURAL GRADE DEFORMED BARS TO AS4671 (250MPa)
N	TEMPCORE DEFORMED BAR TO AS4671 (500MPa)
RL /SL	FEBRIC TO AS4671 (500MPa)
TM	TRENCH MESH TO AS4671 (500MPa)
NOTE: THE NUMBER FOLLOWING THE SYMBOL IS THE BAR DIAMETER (MM)	

R2. IF SLAB FABRIC IS USED IT IS TO BE LAPPED, THE TWO OUTERMOST TRANSVERSE WIRES OF ONE SHEET MUST OVERLAP THE TWO OUTERMOST TRANSVERSE WIRES OF THE OTHERS .

R3. FOOTING BEAMS AND RIBS REINFORCEMENT TO HAVE 40MM CLEAR COVER ALL - ROUND.

R4. BAR REINFORCEMENT IS TO BE TIED BENEATH THE FABRIC IF USED OR OTHERWISE PLACED ON CHAIRS AND LAPPED AS FOLLOWS:

BAR SIZE	N12	N16	N20
Splice length	500	700	900

TIMBER FRAME NOTES

T1. ALL MEMBERS SHALL BE ADEQUATELY TIGHT TO THE STRUCTURE FOR THE DESIGNED WIND LOAD SPECIFIED.

T2. ONLY THE MAIN STRUCTURAL ELEMENTS, VIZ, TRUSSES, RAFTERS, AND TRIMMING BEAMS ARE SHOWN. ALL OTHER TIMBER FRAMING SHALL BE CARRIED OUT TO CONFIRM TO AS1684 " RESIDENTIAL TIMBER FRAMED CODE".

T3. BEARERS AND JOISTS HAVE BEEN DESIGNED TO AND SHALL BE MANUFACTURED IN ACCORDANCE WITH AS1720 ' TIMBER STRUCTURES'.

T4. TIMBER STRESSED GRADE SHALL BE AS SHOWN.

T5. TIMBER STRENGTH GROUP AND TIMBER JOINT GROUP SHALL BE AS INDICATED.

T6. COAT ENDS OF MEMBERS AND GROOVES FOR INSERTING SPLIT RINGS AND SHEAR PLATES TO PREVENT SPLITTING OF TIMBER

T7. ALL BRACING, BOTH TEMPORARY AND PERMANENT, NECESSARY TO ENSURE SAFETY DURING ERECTION AND STRUCTURAL ADEQUACY OF THE COMPLETED STRUCTURE SHALL BE PROVIDED BY THE BUILDER.

T8. ALL TIMER SIZING AND ALL DETAILS SHALL BE CARRIED OUT IN ACCORDANCE WITH AS1720 'TIMBER STRUCTURES' AND AS 1684 'RESIDENTIAL TIMBER FRAMED CONSTRUCTION'.

T9. TIMBER DURABILITY SHALL BE IN ACCORDANCE WITH AS1684.

T10. BRACING TYPE AND NUMBER SHALL BE ACCORDANCE WITH AS1684.2 'RESIDENTIAL TIMBER-FREAMED CONSTRUCTION'

T11. ALL BRACING SHALL BE INSTALLED WITH THE MINIMUM REQUIREMENTS SET OUT IN AS1684.2-2010

T12. ALL TIE DOWNS REQUIREMENTS TO BE AS SPECIFIED IN AS 1684.2-2010

				©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing. 	HECARD Consult Pty. Ltd. Suit 301 / 6-8 Dumaresq Street, Campbelltown, NSW, 2560 Mob. +61431574826 Email: info@hecardconsult.com.au Web: www.hecardconsult.com.au	Client: SANDSTONE COUNSTRUCTIONS	Title: 2 GENERAL NOTES	
							Designed By: R.S	Date: 01/09/2026
							Issue: A	
						Project: Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW	Reviewed By: C.S	Job No: ST 196–2608
A	ISSUED FOR CDC	CS	01/09/2026				Scale: as shown (A3)	Sheet No: 2 OF 12
Rev	Description	By	Date					


CONCRETE QUALITY AND COVER REQUIREMENTS				
ELEMENT	CONCRETE STRENGTH	MINIMUM COVER(mm)		
		TOP	BOTTOM	SIDE
SLAB ON GRADE	N32	40	60	60
SUSPENDED SLAB	N32	20	40	40
FOOTINGS	N32	40	60	60

SITE CLASSIFICATION: SITE CLASSIFICATION P WIND RATING N2	
---	--


SLAB DESIGN SUMMARY (U.N.O)		
POD SIZE (mm)		1100X1100
SLAB THICKNESS (mm)		100 Min
EDGE BEAM WIDTH (mm)		300
RIB WIDTH (mm)		110
SLAB REINF'T (TOP MESH)		SL82
EDGE BEAM REINF'T (300)		3-N12 or 3-L11TM
RIB REINF'T (110)		1-N12 BTM
REINF'T FOR BEAMS WIDER THAN 300mm		
WIDTH (mm)	TOP	BOTTOM
301-370	1-N12	3-N12
371-480	2-N12	4-N12
481-600	3-N12	5-N12

PIERS	MIN DEPTH, mm
P1	2482
P2	1282
P3	2457
P4	1257
P5	2429
P6	1229




	300 mm WAFFLE POD		400 DIA. MASS CONCRETE PIERS (250 KPA MIN BEARING CAPACITY) TO UNIFORM BEARING ON NATURAL STRATA THROUGH OUT.
	225 mm WAFFLE POD		3 X N12 OR EQUIVALENT CRACK CONTROL BARS 2000 mm LONG TIED TO UNDERSIDE OF SLAB TOP FABRIC
	WAFFLE POD START POINT		N12, 1500 mm LONG BOTH WAY TO PROVIDE AT ALL INTERNAL PIERS UNDERSIDE OF TOP SLAB FABRIC

[illegible]

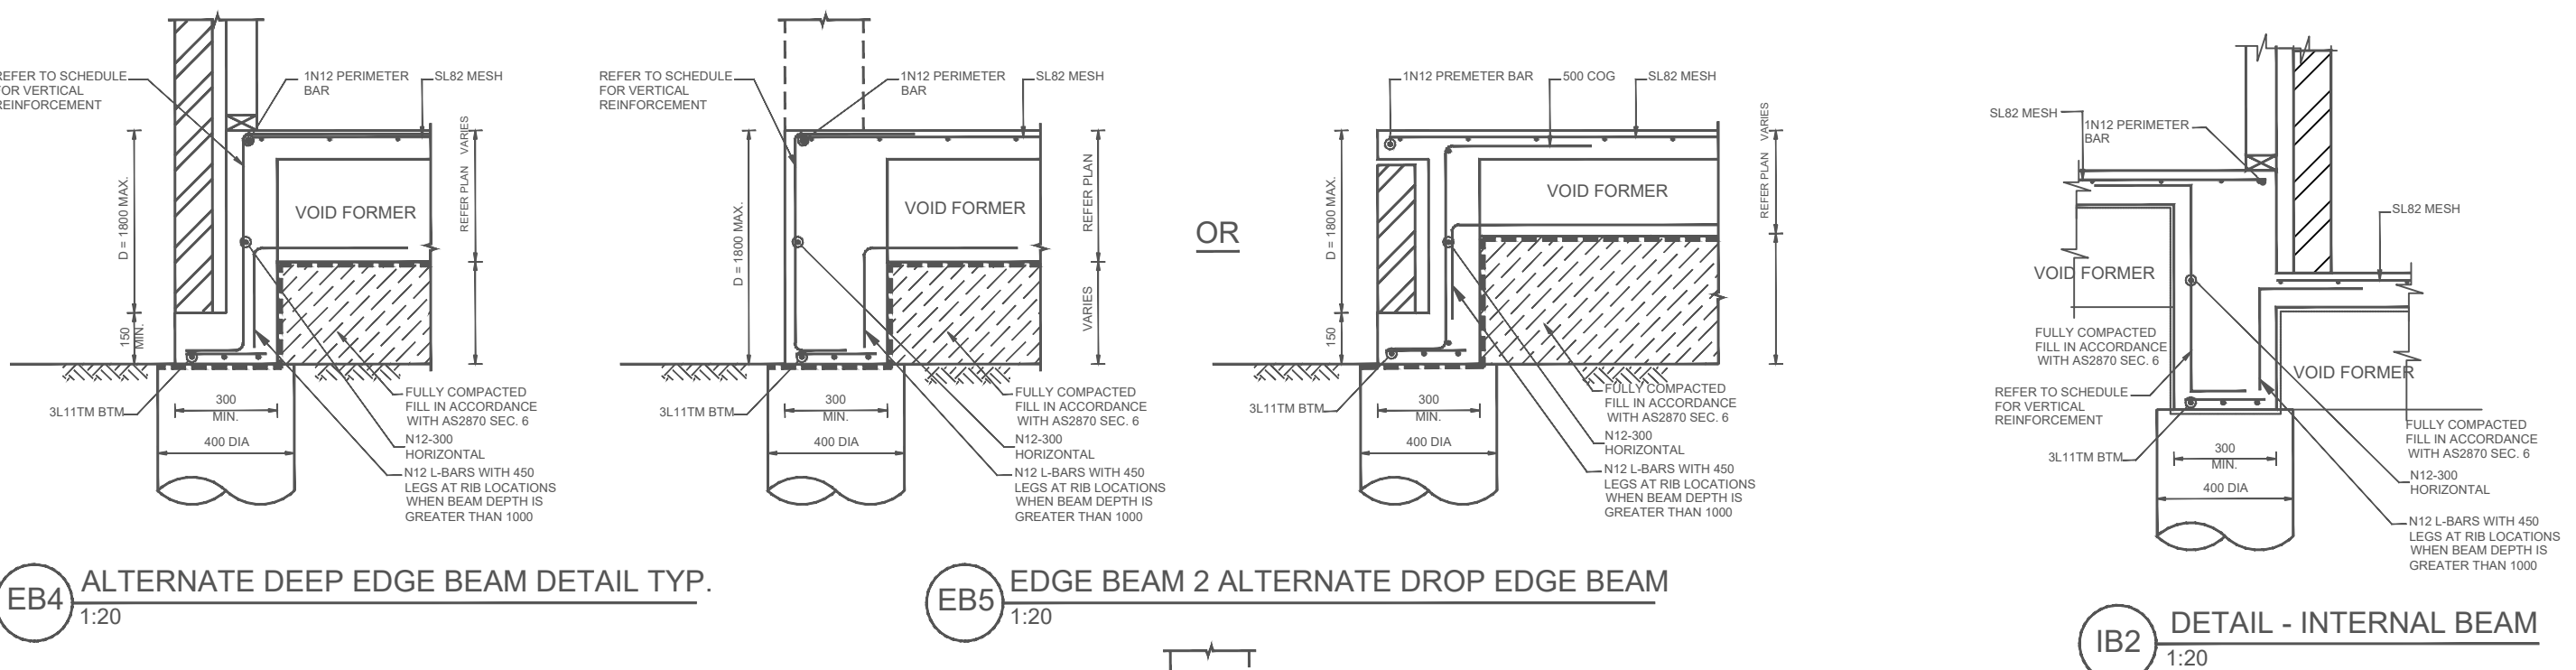

REINFORCEMENT FOR RIBS & BEAMS		
WIDTH	TOP STEEL	BOTTOM STEEL
100 TO 150	NONE	1 N12
150 TO 270	NONE	2 N12
270 TO 330	1 N12	3 N12 OR 3-L12TM
331 TO 440	2 N12	4 N12 OR 4-L12TM
441 TO 440	3 N12	5 N12

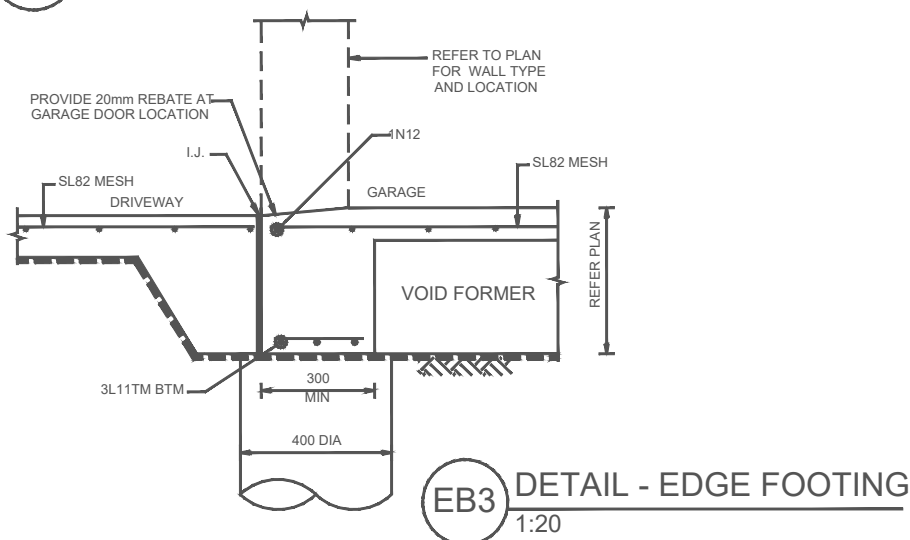

A	ISSUED FOR CDC	CS	01/09/2026
Rev	Description	By	Date


©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.




HECARD Consult Pty. Ltd.
Suit 301 / 6-8 Dumaesq Street,
Campbelltown, NSW, 2560
Mob. +61431574826
Email: info@hecardconsult.com.au
Web: www.hecardconsult.com.au

Client:	SANDSTONE COUNSTRUCTIONS
Project:	Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW


Title:		4 STRUCTURAL DETAIL	
Designed By:	R.S	Date:	01/09/2026
		Issue:	A
Reviewed By:	C.S	Job No:	ST 196-2608
Scale:	as shown (A3)	Sheet No:	4 OF 12

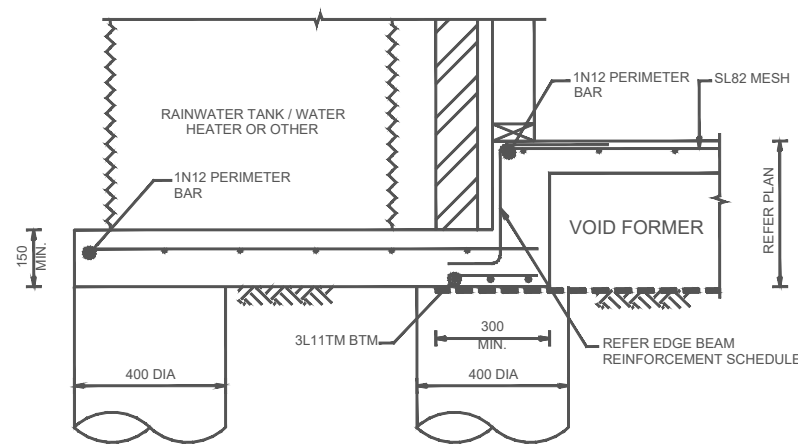



SOG EXTERNAL SLAB ON GRADE DETAIL
1:20

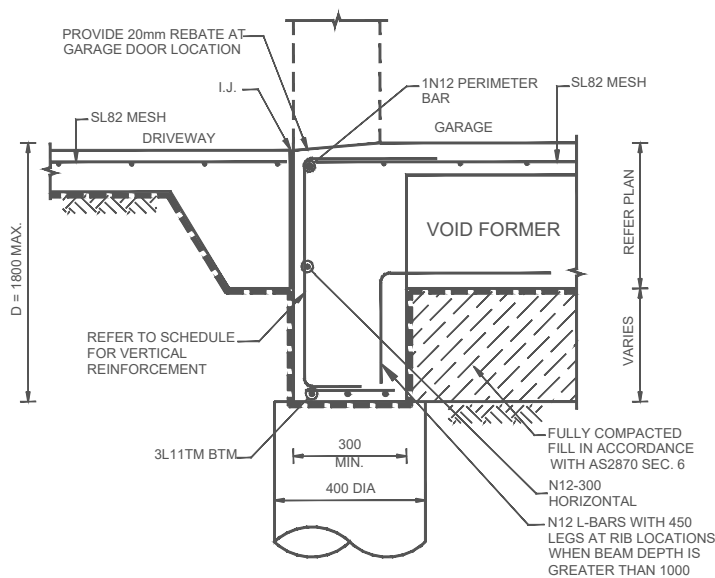


EB3 EDGE BEAM 3 ALTERNATE DROP EDGE BEAM
1:20

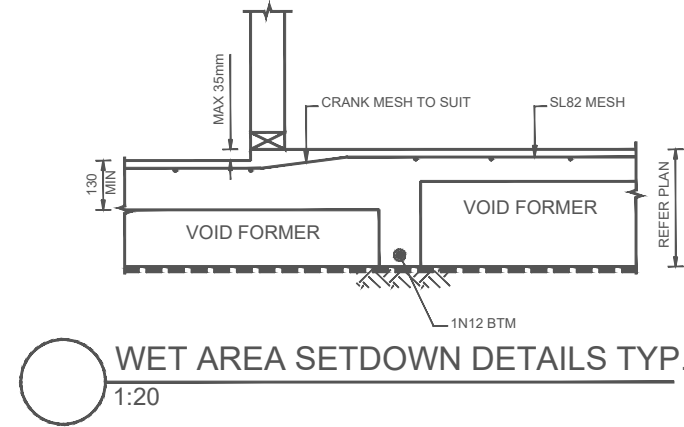


MINIMUM PIPE LAGGING	
CLASS	LAGGING THICKNESS (T)
S, M	20
H1, H2, E	40

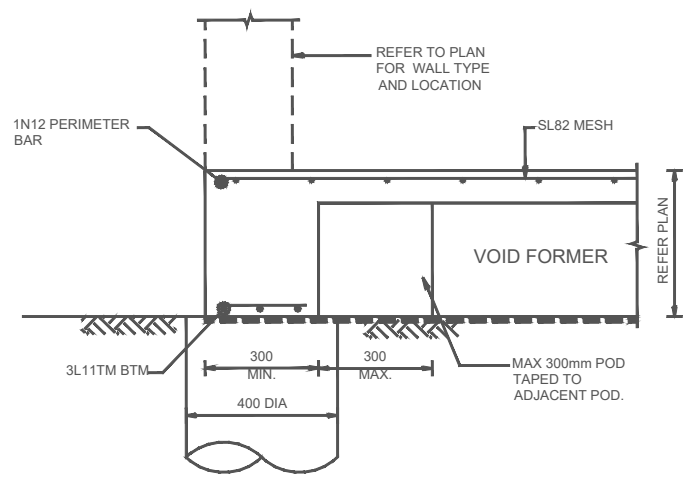


TYPICAL POD TAPING DETAIL
1:20

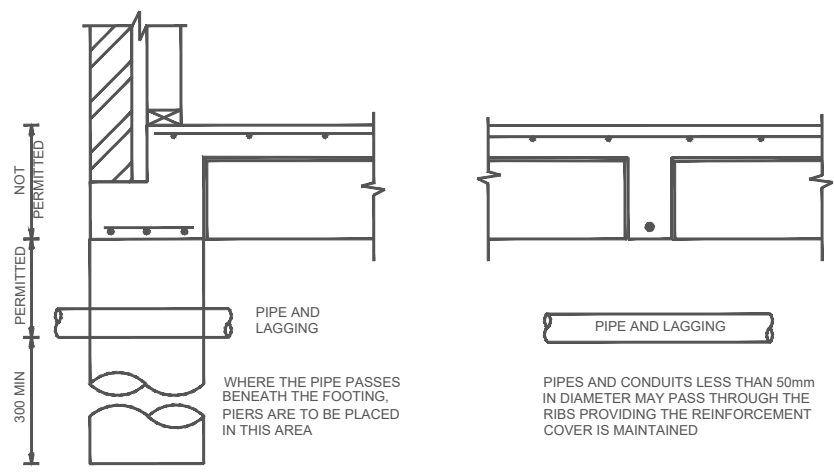


TYPICAL PIPE LAYING UNDER SLAB DETAIL
NTS

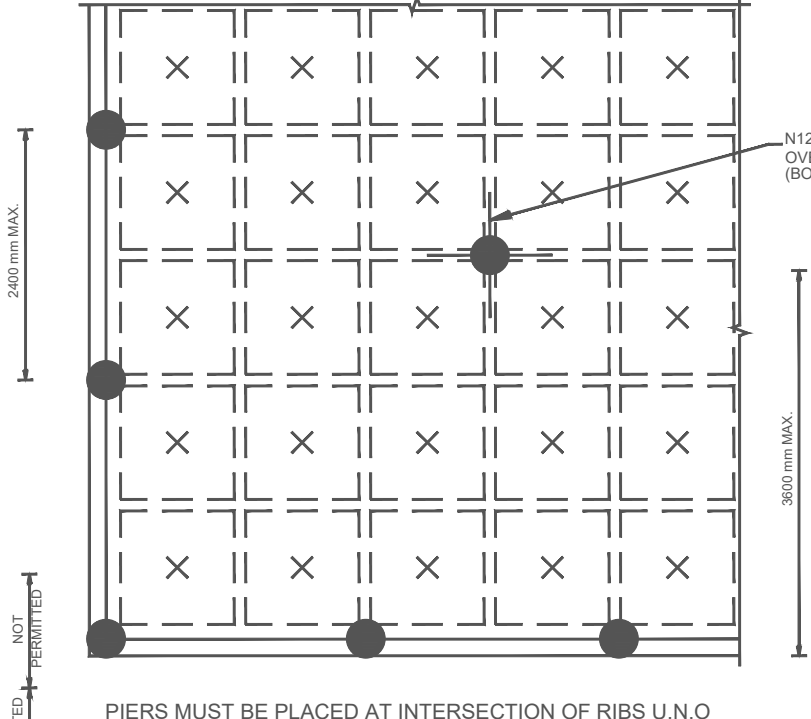

SLAB PIER PLAN VIEW TYP.
N.T.S

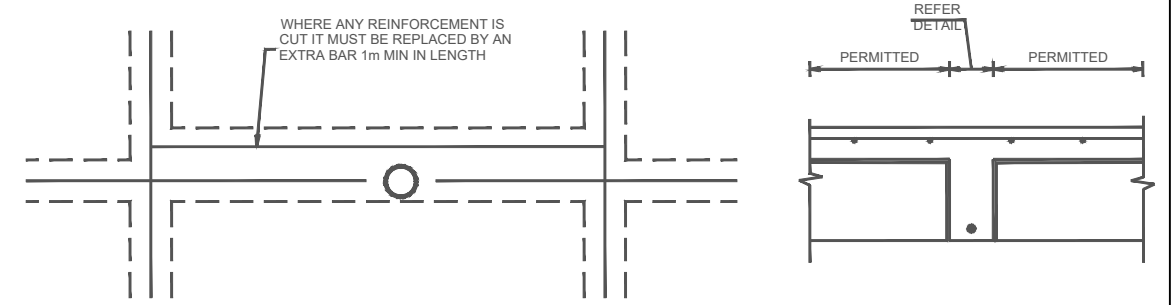

TYPICAL INTERNAL RIB VERTICAL PIPE PENETRATION DETAIL
NTS

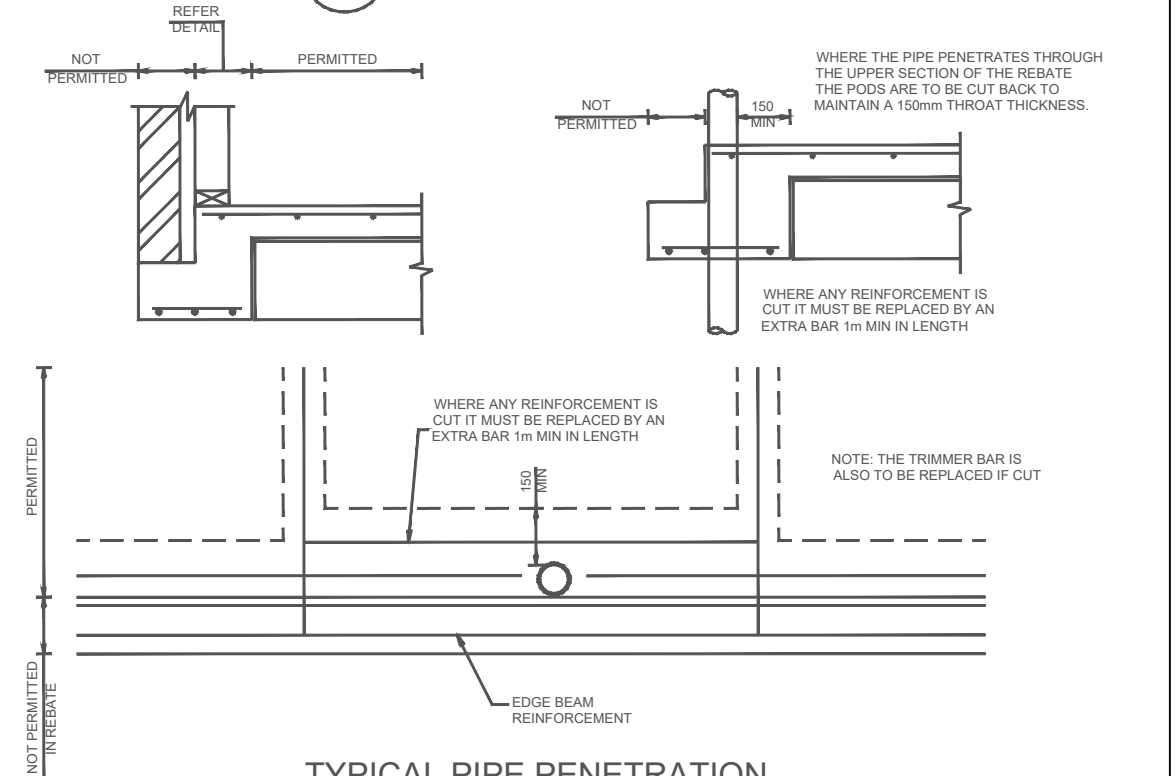

TYPICAL PIPE PENETRATION THROUGH EDGE BEAM DETAIL
NTS

Rev	Description	By	Date
A	ISSUED FOR CDC	CS	01/09/2026


©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.



HECARD Consult Pty. Ltd.
Suit 301 / 6-8 Dumaresq Street,
Campbelltown, NSW, 2560
Mob. +61431574826
Email: info@hecardconsult.com.au
Web: www.hecardconsult.com.au

Client: SANDSTONE COUNSTRUCTIONS
Project: Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW

Title: 5 STRUCTURAL DETAIL	
Designed By: R.S	Date: 01/09/2026
Reviewed By: C.S	Issue: A
Scale: as shown (A3)	Job No: ST 196-2608
	Sheet No: 5 OF 12

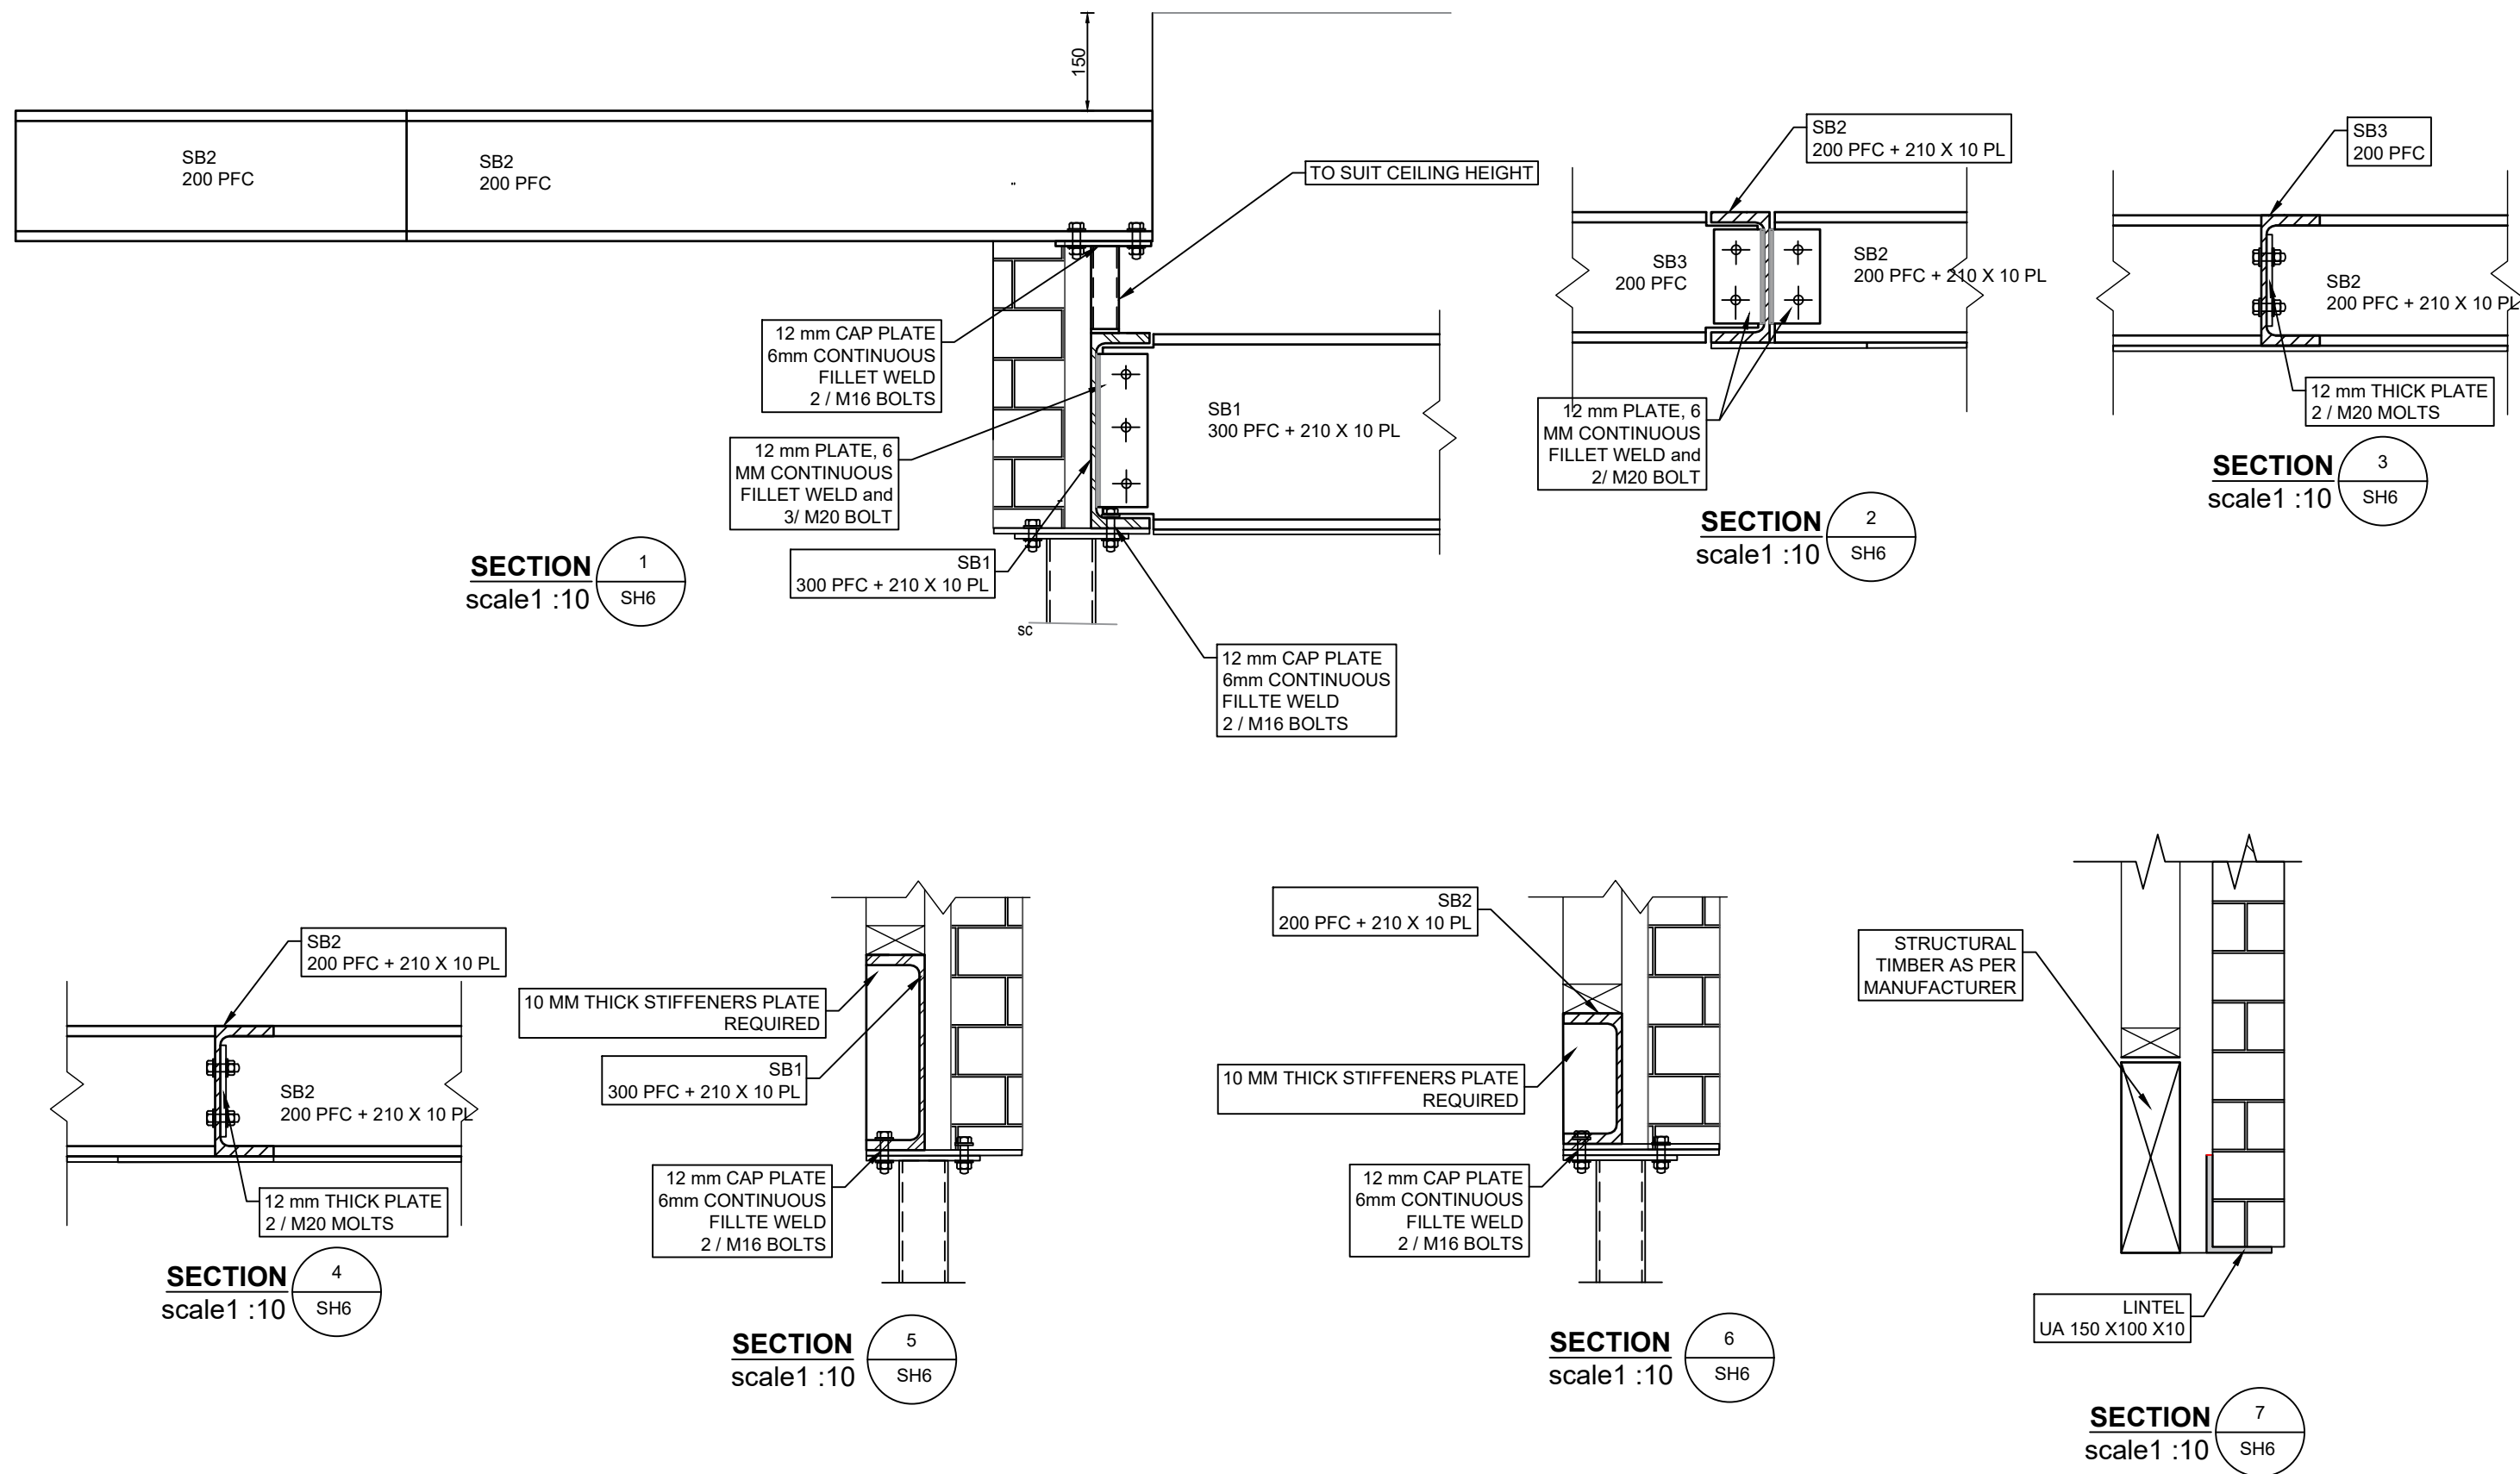

A	ISSUED FOR CDC	CS	01/09/2026
Rev	Description	By	Date


©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.




HECARD Consult Pty. Ltd.
 Suit 301 / 6-8 Dumaresq Street,
 Campbelltown, NSW, 2560
 Mob. +61431574826
 Email: info@hecardconsult.com.au
 Web: www.hecardconsult.com.au

Client:	SANDSTONE COUNSTRUCTIONS
Project:	Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW


Title:	7 STRUCTURAL DETAIL
Designed By:	R.S
Date:	01/09/2026
Issue:	A
Reviewed By:	C.S
Job No:	ST 196-2608
Scale:	as shown (A3)
Sheet No:	7 OF 12

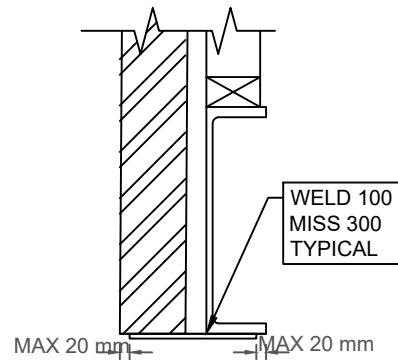


TYPICAL PLATE CONNECTION DETAIL
scale1 :10

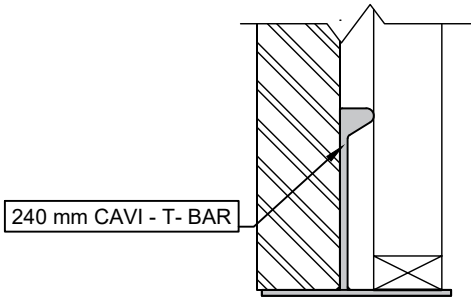


TYPICAL CAVI-T-BAR CONFIGURATION
scale1 :10

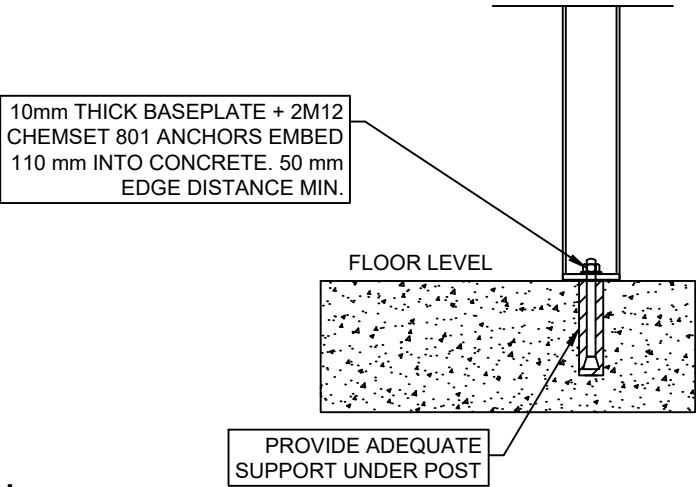


TYPICAL BASE PLATE CONNECTION DETAIL
scale1 :10

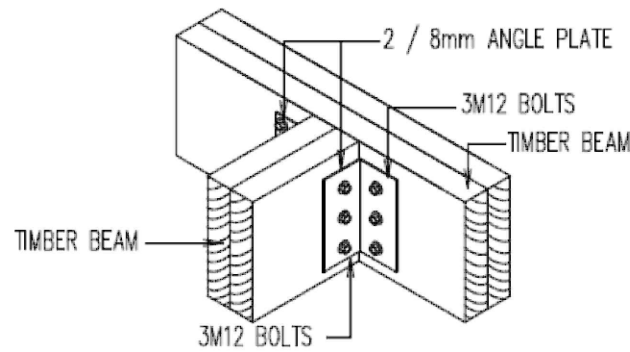


TIMBER BEAM - TIMBER BEAM CONNECTION
not to scale

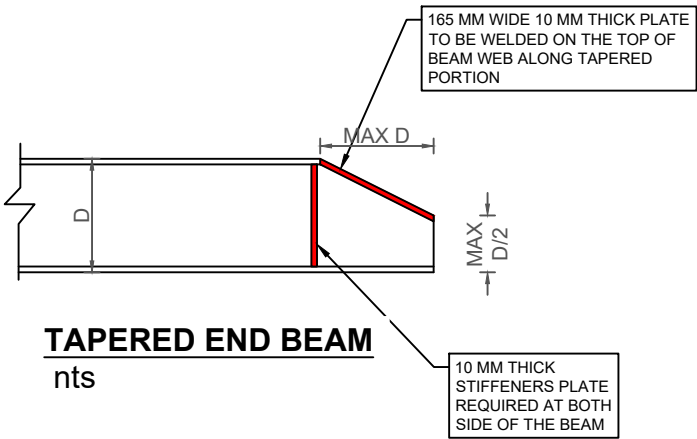


TAPERED END BEAM
nts

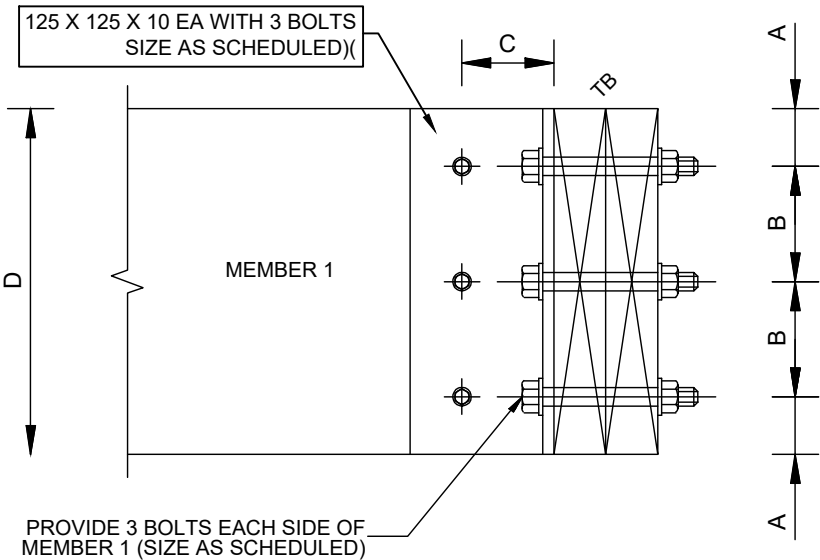

TYPICAL TIMBER BEAM TO TIMBER BEAM CONNECTION DETAIL

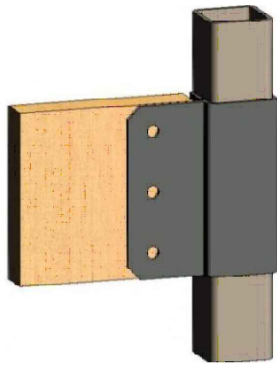

CLEAT FOR SHS-TIMBER BEAM CONNECTION
not to scale

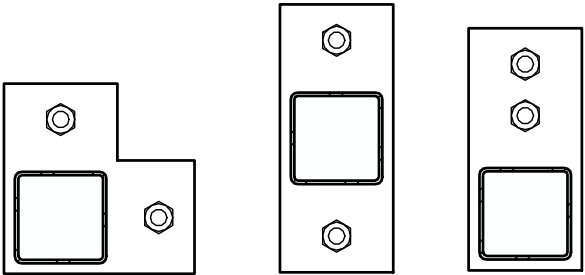

TYPICAL BASE PLATE DETAIL
nts

TIMBER BOLTING SCHEDULE ALL DIMENSIONS IN (mm) AND GRADE 4.6/S BOLTS				
'D'	BOLT	A	B	C
190	M10	40	50	50
240	M12	48	60	60
290	M16	64	80	80
360	M20	80	100	100

Rev	Description	By	Date
A	ISSUED FOR CDC	CS	01/09/2026


©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.



HECARD Consult Pty. Ltd.
Suit 301 / 6-8 Dumaresq Street,
Campbelltown, NSW, 2560
Mob. +61431574826
Email: info@hecardconsult.com.au
Web: www.hecardconsult.com.au


Client: SANDSTONE COUNSTRUCTIONS
Project: Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW

Title: 8 STRUCTURAL DETAIL
Designed By: R.S. Date: 01/09/2026
Issue: A
Reviewed By: C.S. Job No: ST 196-2608
Scale: as shown (A3) Sheet No: 8 OF 12

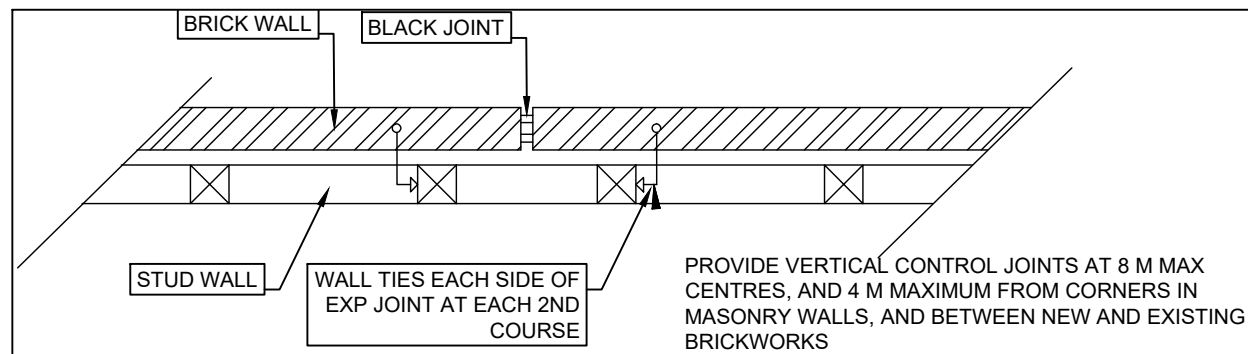


TYPICAL EXPANSION JOINT DETAIL
scale 1 : 10


Smart Joist shall be designed to support load bearing wall above when not stacked over wall below.

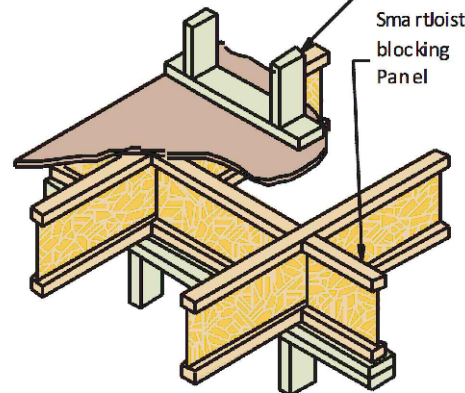


TYPICAL JOIST BLOCKING DETAIL
nts

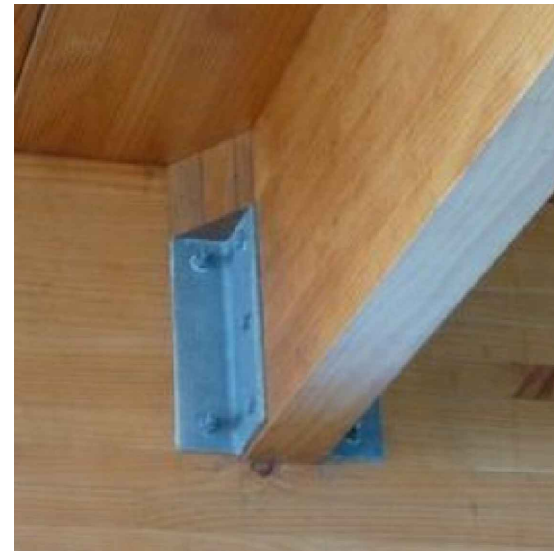


TYPICAL DETAIL OF TIMBER BEAM CONNECTION
nts

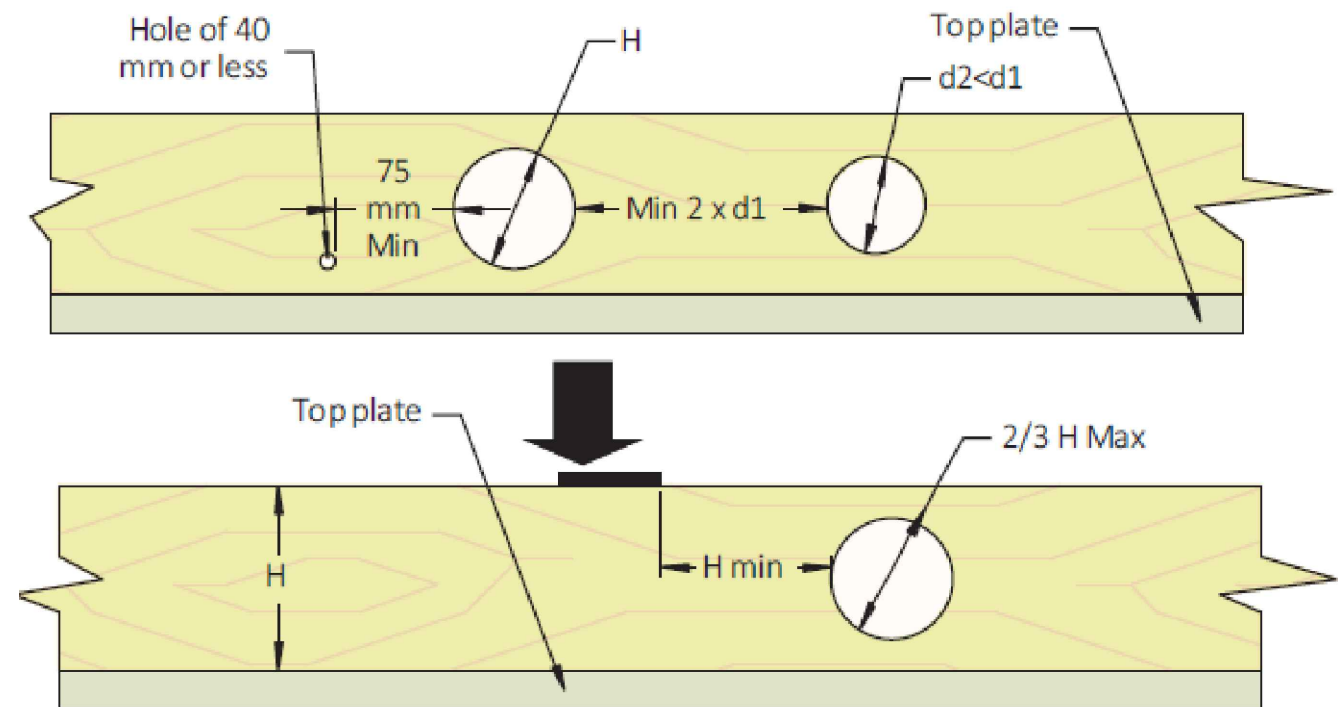

TYPICAL DETAIL OF HOLES IN JOIST
nts

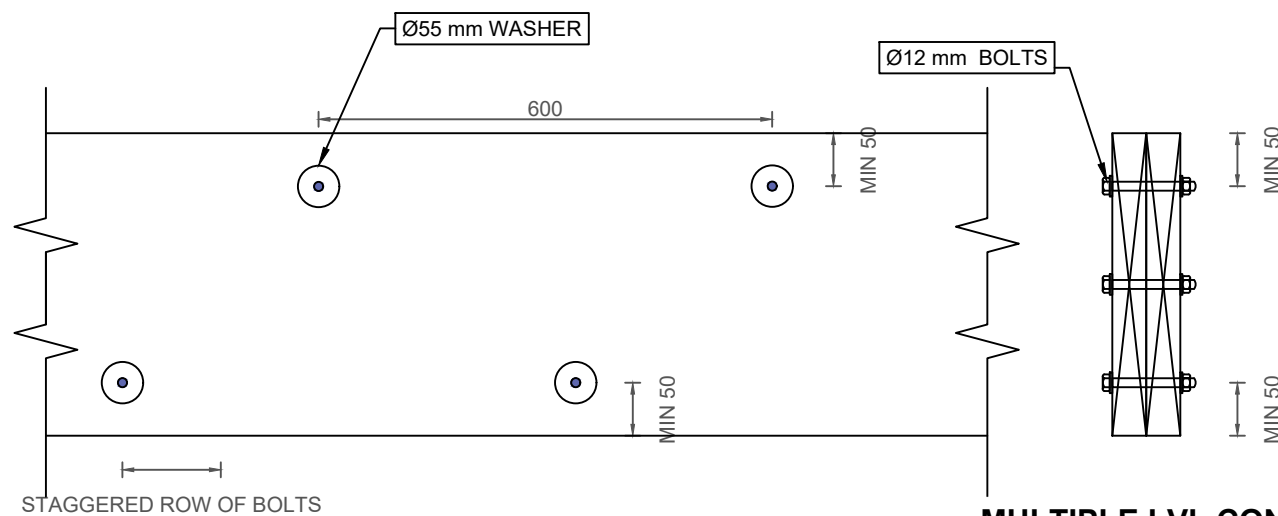

OR

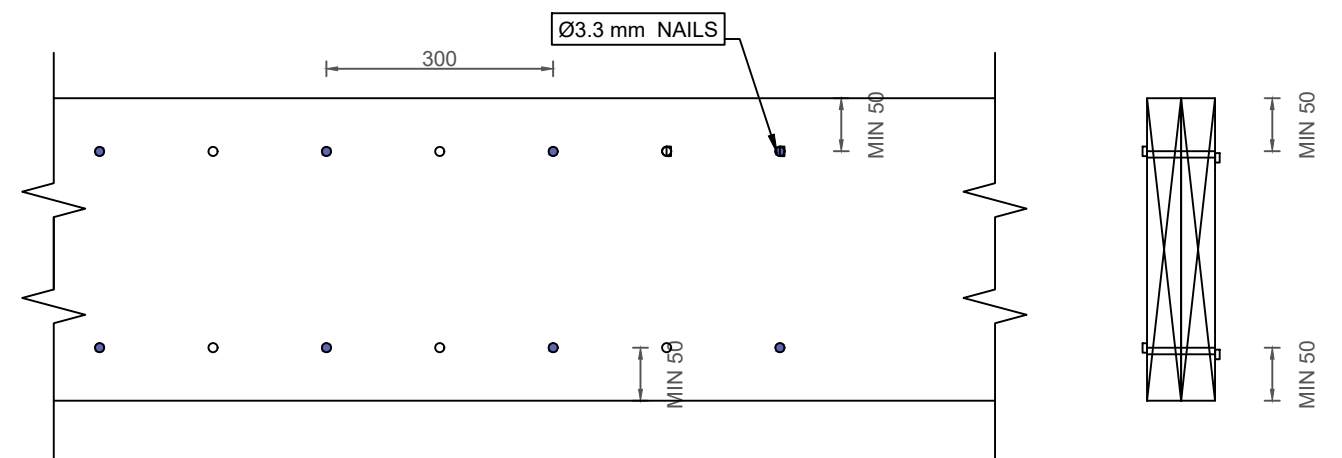

MULTIPLE LVL CONNECTION DETAIL
scale 1 : 10

Ø3.3 mm X 90 mm NAILS TO DRIVE ON ALTERNATE SIDES

Rev	Description	By	Date
A	ISSUED FOR CDC	CS	01/09/2026


©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.



HECARD Consult Pty. Ltd.
Suit 301 / 6-8 Dumaresq Street,
Campbelltown, NSW, 2560
Mob. +61431574826
Email: info@hecardconsult.com.au
Web: www.hecardconsult.com.au

Client:	SANDSTONE COUNSTRUCTIONS
Project:	Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW

Title:	9 STRUCTURAL DETAIL		
Designed By:	R.S	Date:	01/09/2026
		Issue:	A
Reviewed By:	C.S	Job No:	ST 196-2608
Scale:	as shown (A3)	Sheet No:	9 OF 12

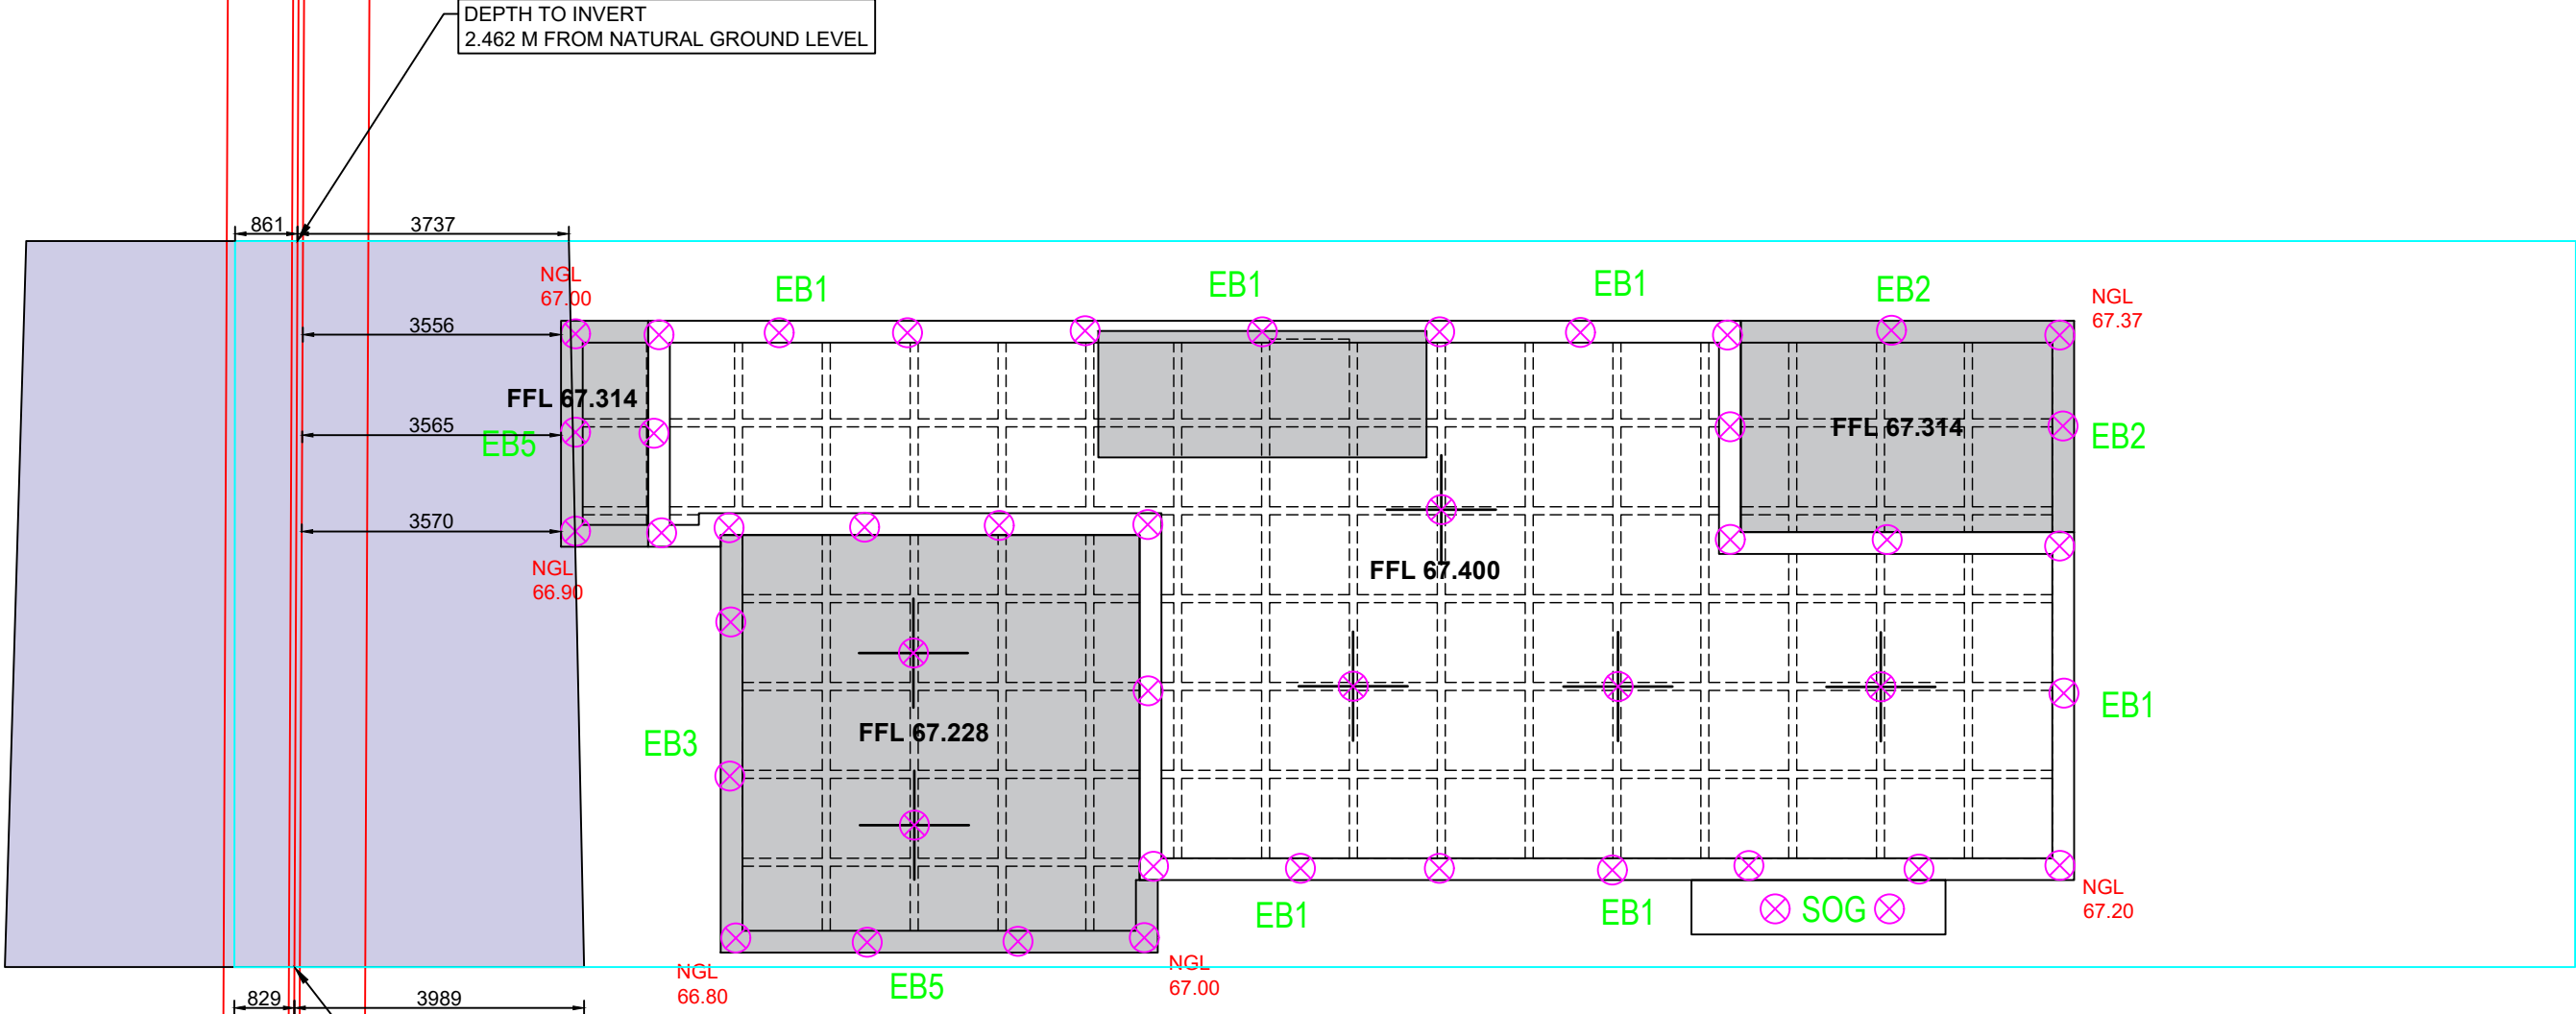

SEWER ZONE OF INFLUENCE PLAN
scale 1:100



A PORTION OF THE PROPOSED BUILDING ENCROACHES INTO THE ZONE OF INFLUENCE (ZOI) OF SYDNEY WATER ASSETS AND IS LOCATED ADJACENT TO THE EXISTING SEWER. THIS STATEMENT CERTIFIES THAT THE DESIGNS AND DETAILS PROVIDED IN THIS SECTION COMPLY WITH THE REQUIREMENTS OUTLINED IN SYDNEY WATER'S TECHNICAL GUIDELINES FOR BUILDING OVER OR ADJACENT TO PIPE ASSETS, VERSION 6.1.

- THE BUILDING STRUCTURE HAS BEEN DESIGNED TO BE FULLY SELF-SUPPORTING, ENSURING THAT FUTURE EXCAVATION OR MAINTENANCE OF THE SEWER CAN BE UNDERTAKEN WITHOUT IMPOSING LOAD OR RELIANCE ON THE SEWER ASSET.
- ALL BEARING AND FRICTION EFFECTS ASSOCIATED WITH POTENTIAL FUTURE SEWER EXCAVATION HAVE BEEN EXCLUDED FROM THE FOUNDATION DESIGN.

				©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing.		HECARD Consult Pty. Ltd. Suit 301 / 6-8 Dumaresq Street, Campbelltown, NSW, 2560 Mob. +61431574826 Email: info@hecardconsult.com.au Web: www.hecardconsult.com.au	Client: SANDSTONE COUNSTRUCTIONS Project: Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW	Title: 10 SEWER ZONE OF INFLUENCE PLAN		
								Designed By: R.S	Date: 01/09/2026	
								Issue: A		
								Reviewed By: C.S	Job No: ST 196–2608	
								Scale: as shown (A3)	Sheet No: 10 OF 12	
A	ISSUED FOR CDC		CS					01/09/2026		
Rev	Description		By					Date		

SEWER ZOI DETAIL

scale 1:50

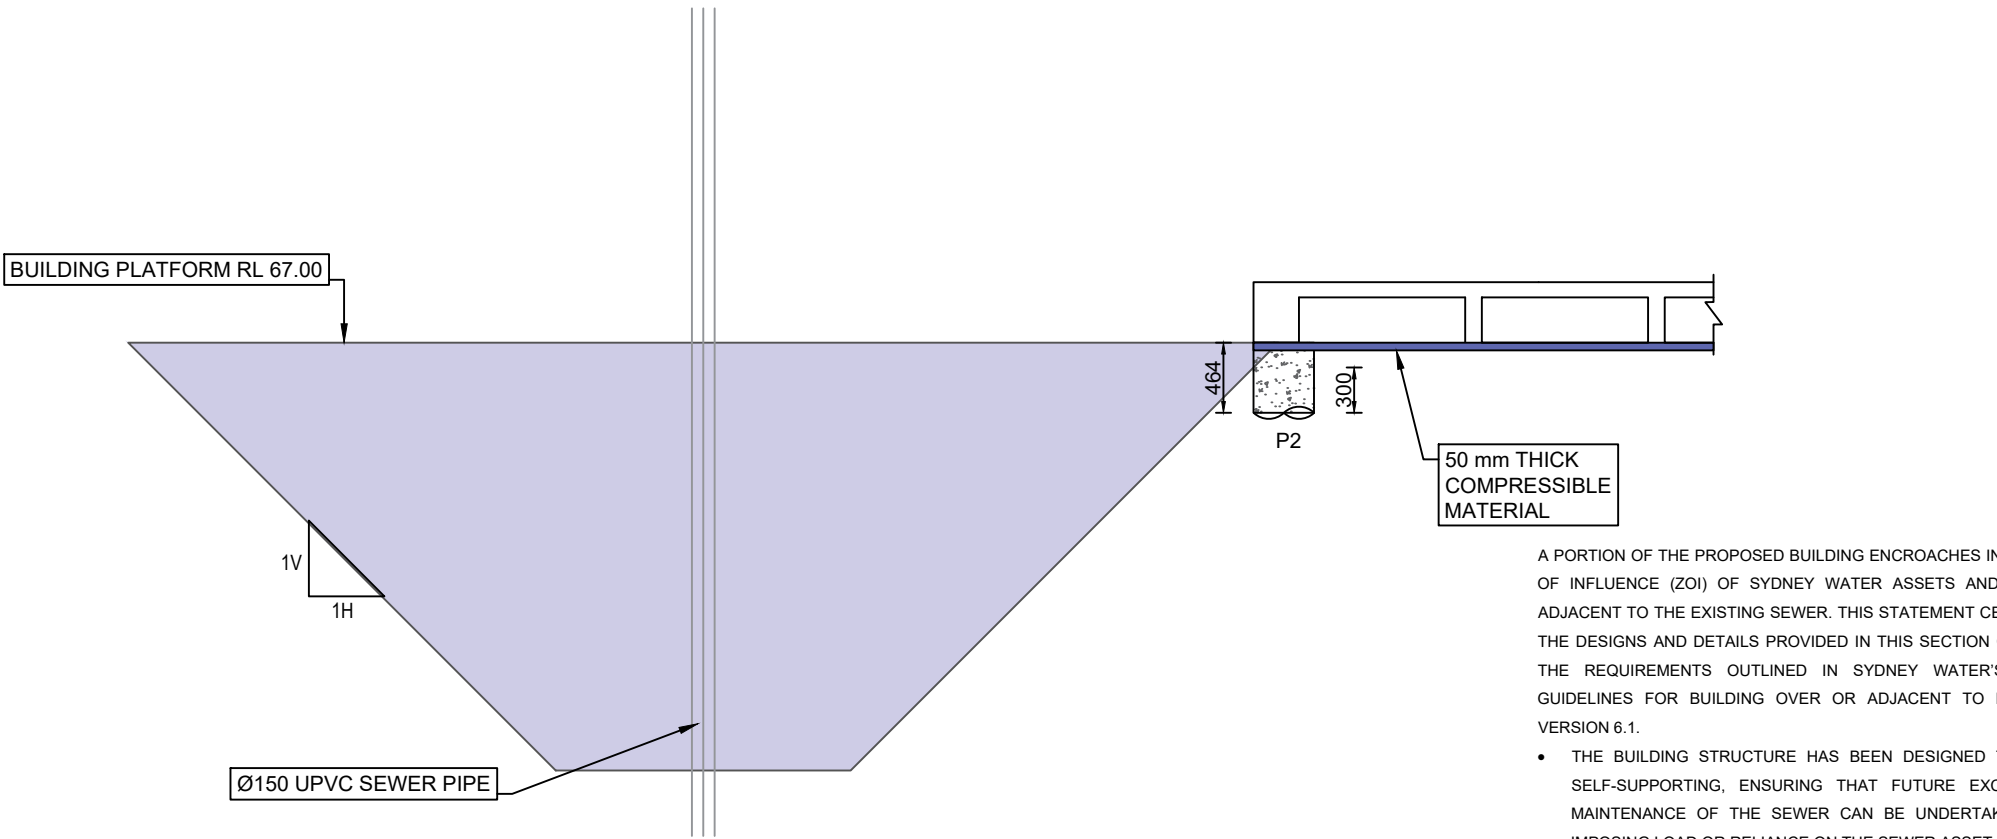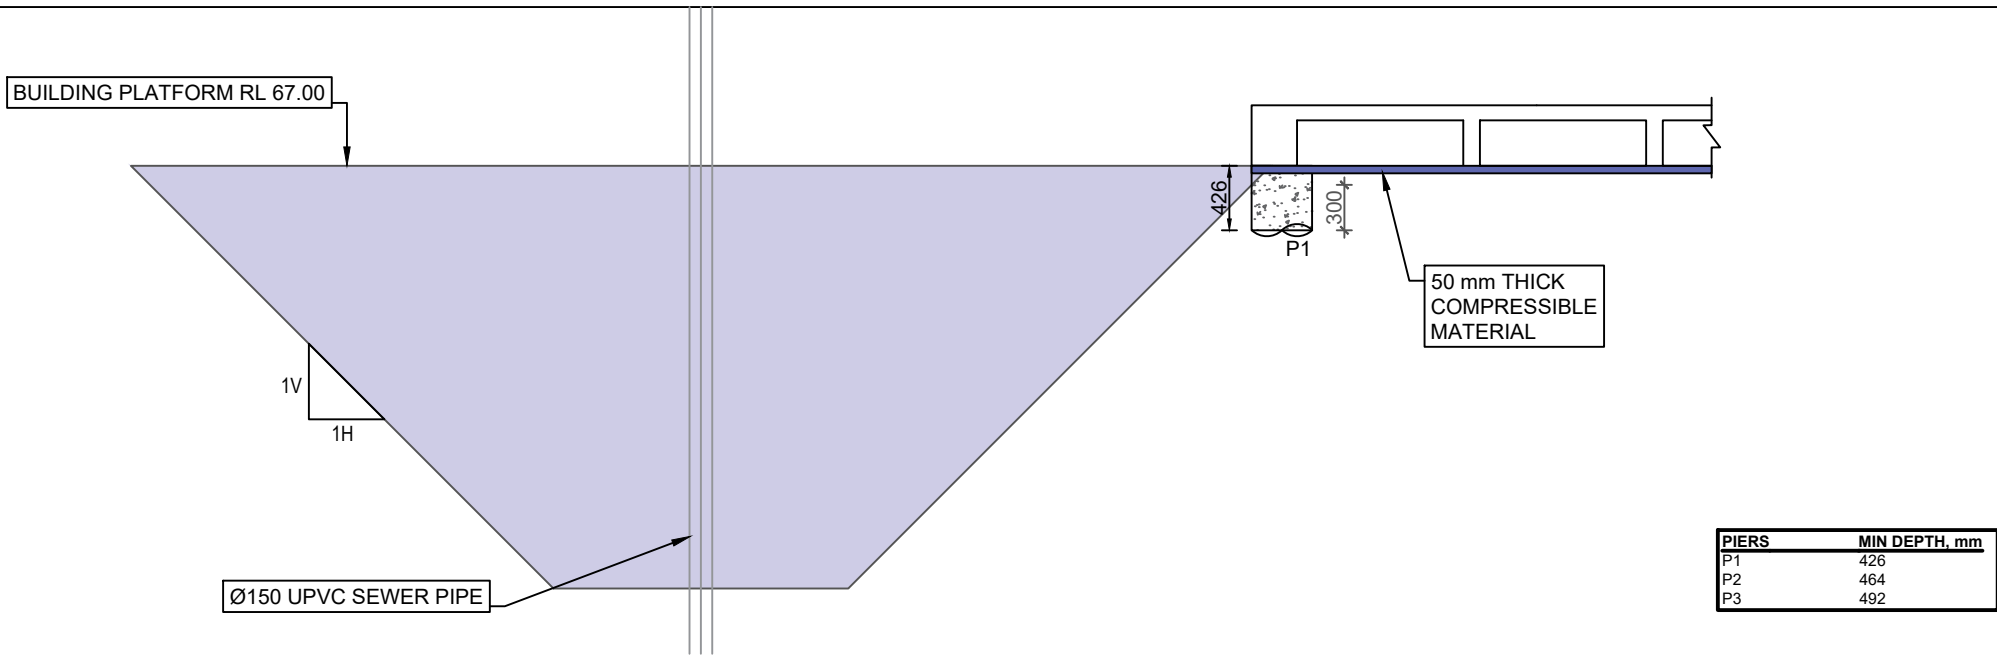

A PORTION OF THE PROPOSED BUILDING ENCROACHES INTO THE ZONE OF INFLUENCE (ZOI) OF SYDNEY WATER ASSETS AND IS LOCATED ADJACENT TO THE EXISTING SEWER. THIS STATEMENT CERTIFIES THAT THE DESIGNS AND DETAILS PROVIDED IN THIS SECTION COMPLY WITH THE REQUIREMENTS OUTLINED IN SYDNEY WATER'S TECHNICAL GUIDELINES FOR BUILDING OVER OR ADJACENT TO PIPE ASSETS, VERSION 6.1.

- THE BUILDING STRUCTURE HAS BEEN DESIGNED TO BE FULLY SELF-SUPPORTING, ENSURING THAT FUTURE EXCAVATION OR MAINTENANCE OF THE SEWER CAN BE UNDERTAKEN WITHOUT IMPOSING LOAD OR RELIANCE ON THE SEWER ASSET.
- ALL BEARING AND FRICTION EFFECTS ASSOCIATED WITH POTENTIAL FUTURE SEWER EXCAVATION HAVE BEEN EXCLUDED FROM THE FOUNDATION DESIGN.


SEWER ZOI DETAIL

scale 1:50

PIERS	MIN DEPTH, mm
P1	426
P2	464
P3	492

A PORTION OF THE PROPOSED BUILDING ENCROACHES INTO THE ZONE OF INFLUENCE (ZOI) OF SYDNEY WATER ASSETS AND IS LOCATED ADJACENT TO THE EXISTING SEWER. THIS STATEMENT CERTIFIES THAT THE DESIGNS AND DETAILS PROVIDED IN THIS SECTION COMPLY WITH THE REQUIREMENTS OUTLINED IN SYDNEY WATER'S TECHNICAL GUIDELINES FOR BUILDING OVER OR ADJACENT TO PIPE ASSETS, VERSION 6.1.

- THE BUILDING STRUCTURE HAS BEEN DESIGNED TO BE FULLY SELF-SUPPORTING, ENSURING THAT FUTURE EXCAVATION OR MAINTENANCE OF THE SEWER CAN BE UNDERTAKEN WITHOUT IMPOSING LOAD OR RELIANCE ON THE SEWER ASSET.
- ALL BEARING AND FRICTION EFFECTS ASSOCIATED WITH POTENTIAL FUTURE SEWER EXCAVATION HAVE BEEN EXCLUDED FROM THE FOUNDATION DESIGN.

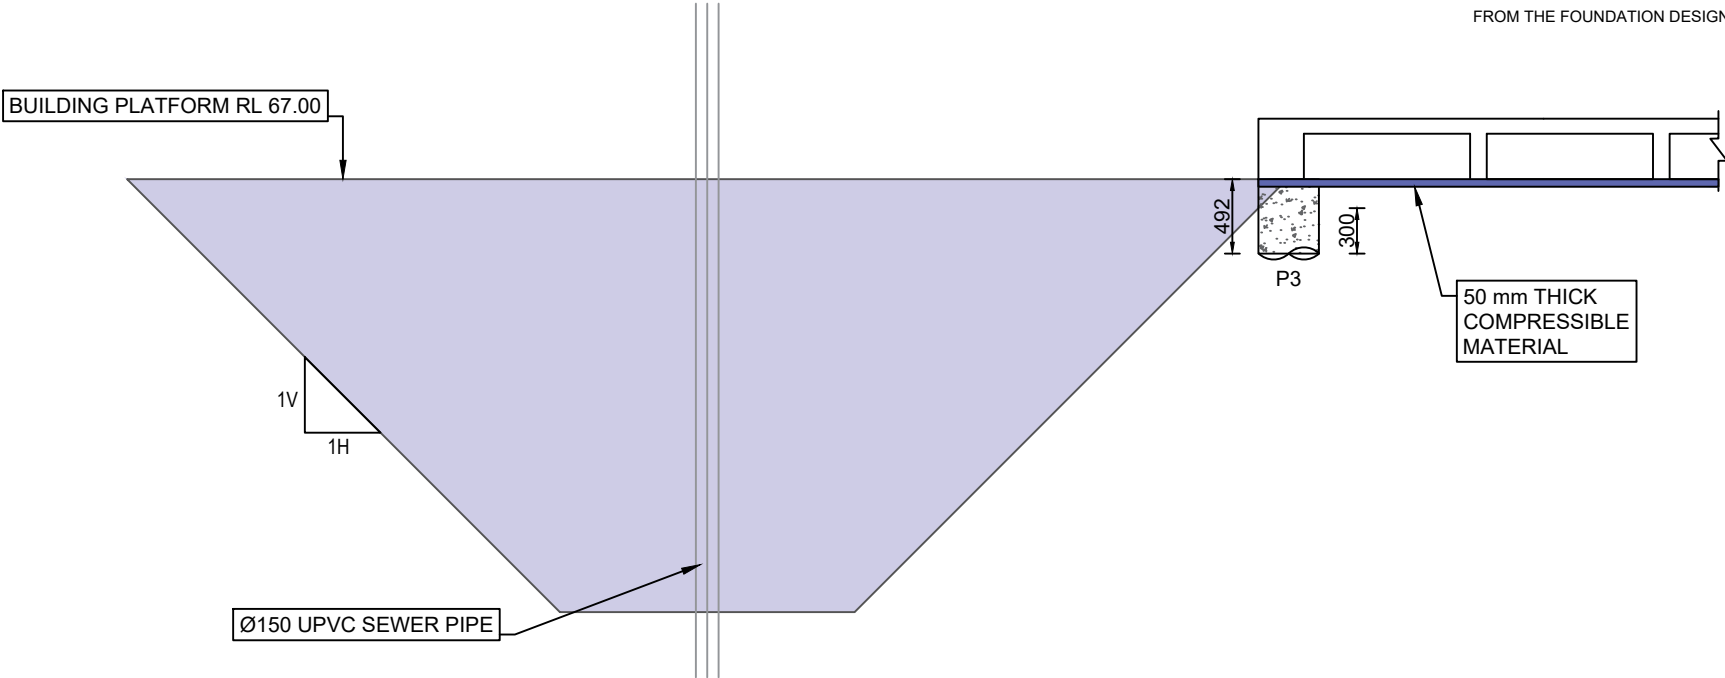

				©HECARD Consult. Copyright in the whole and every part of this drawing belongs to HECARD Consult and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person other than by agreement with HECARD Consult. This drawing is produced by HECARD Consult solely for the benefit of and use by the client in accordance with the terms of the engagement. HECARD Consult does not and shall not assume any responsibility or liability whatsoever to any third party arising out of any use or reliance by any third party on the content of this drawing. 		HECARD Consult Pty. Ltd. Suit 301 / 6-8 Dumaresq Street, Campbelltown, NSW, 2560 Mob. +61431574826 Email: info@hecardconsult.com.au Web: www.hecardconsult.com.au		Client:		Title: 12 SEWER ZONE OF INFLUENCE DETAIL	
		SANDSTONE COUNSTRUCTIONS						Designed By: R.S	Date: 01/09/2026		
									Issue: A		
		Project:						Reviewed By: C.S	Job No: ST 196–2608		
		Proposed Development at Lot-224, 28 Guruwin Street, Austral, NSW						Scale: as shown (A3)	Sheet No: 12 OF 12		
A	ISSUED FOR CDC			CS	01/09/2026						
Rev	Description			By	Date						