

**EXEMPT AND COMPLYING DEVELOPMENT
STATE ENVIRONMENTAL PLANNING POLICY (SEPP 2008)**

SITE ANALYSIS PROPOSED DEVELOPMENT AREA

TOTAL	
CONSTRUCTION AREAS	354.42 M/2

TOTAL IMPERVIOUS AREA	255.24 M/2
-----------------------	------------

**PROPOSED
LANDSCAPE RATIO** **0.55 : 1 %**





ANTHONY LEWIS
MOB : 0411 411 141
ajlewis@74ad.com.au

THE CONTRACTOR SHALL IMPLEMENT SITE SILT AND SEDIMENT CONTROL IN ACCORDANCE WITH THE REQUIREMENTS OF BLACKTOWN CITY COUNCIL.

ALL SILT BARRIERS SHALL BE REGULARLY INSPECTED AND CLEANED OF SILT TO ENSURE CONTINUED OPERATION. ANY SILT BARRIERS THAT ALLOW SILT TO PASS ARE TO BE REPLACED.

TREE PROTECTION

Diagram illustrating the installation of a sediment trap. The trap consists of a rectangular pad of geotextile fabric, 3m wide, with a 200mm high berm on one side. The berm is constructed from 50-75mm gravel. The runoff from the pad is directed to the sediment trap.

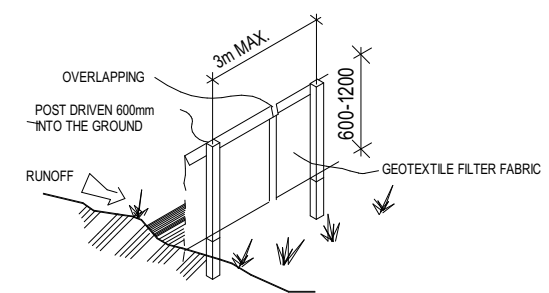


THE CONTRACTOR SHALL PROVIDE ALL NECESSARY BARRIERS, WARNING AND / OR DIRECTIONAL SIGNS, LIGHTING, ETC TO PROTECT PEDESTRIANS FROM ARJEZ PLACE. THESE SIGNS SHALL ALSO PROTECT THE PUBLIC FROM TRUCKS AND VEHICLES ENTERING OR LEAVING THE CONSTRUCTION SITE.

Diagram illustrating a stockpile stabilization method:

- WATERPROOF COVERING
- EARTH BANK TO PREVENT SCOUR OF STOCKPILE
- SEDIMENT FENCE

Diagram illustrating the installation of a straw bale and geotextile sediment filter. The diagram shows a cross-section of the filter structure. Key components and labels include:

- GEOTEXTILE FILTER FABRIC FASTEN ON TOP EDGE**: Text at the top left.
- STAKES DRIVEN 0.6m INTO THE GROUND WITH FIRST STAKE ANGLED TOWARDS PREVIOUSLY LAG BALE**: Text at the top center.
- DISTURBED AREA**: Label on the left side of the filter structure.
- RUNOFF**: Label with an arrow pointing to the left, indicating the direction of water flow.
- 0.6m**: Dimension line indicating the height of the filter structure.
- UNDISTURBED AREA**: Label on the right side of the filter structure.
- STRAW BALE AND GEOTEXTILE SEDIMENT FILTER**: Label on the right side, pointing to the filter structure.

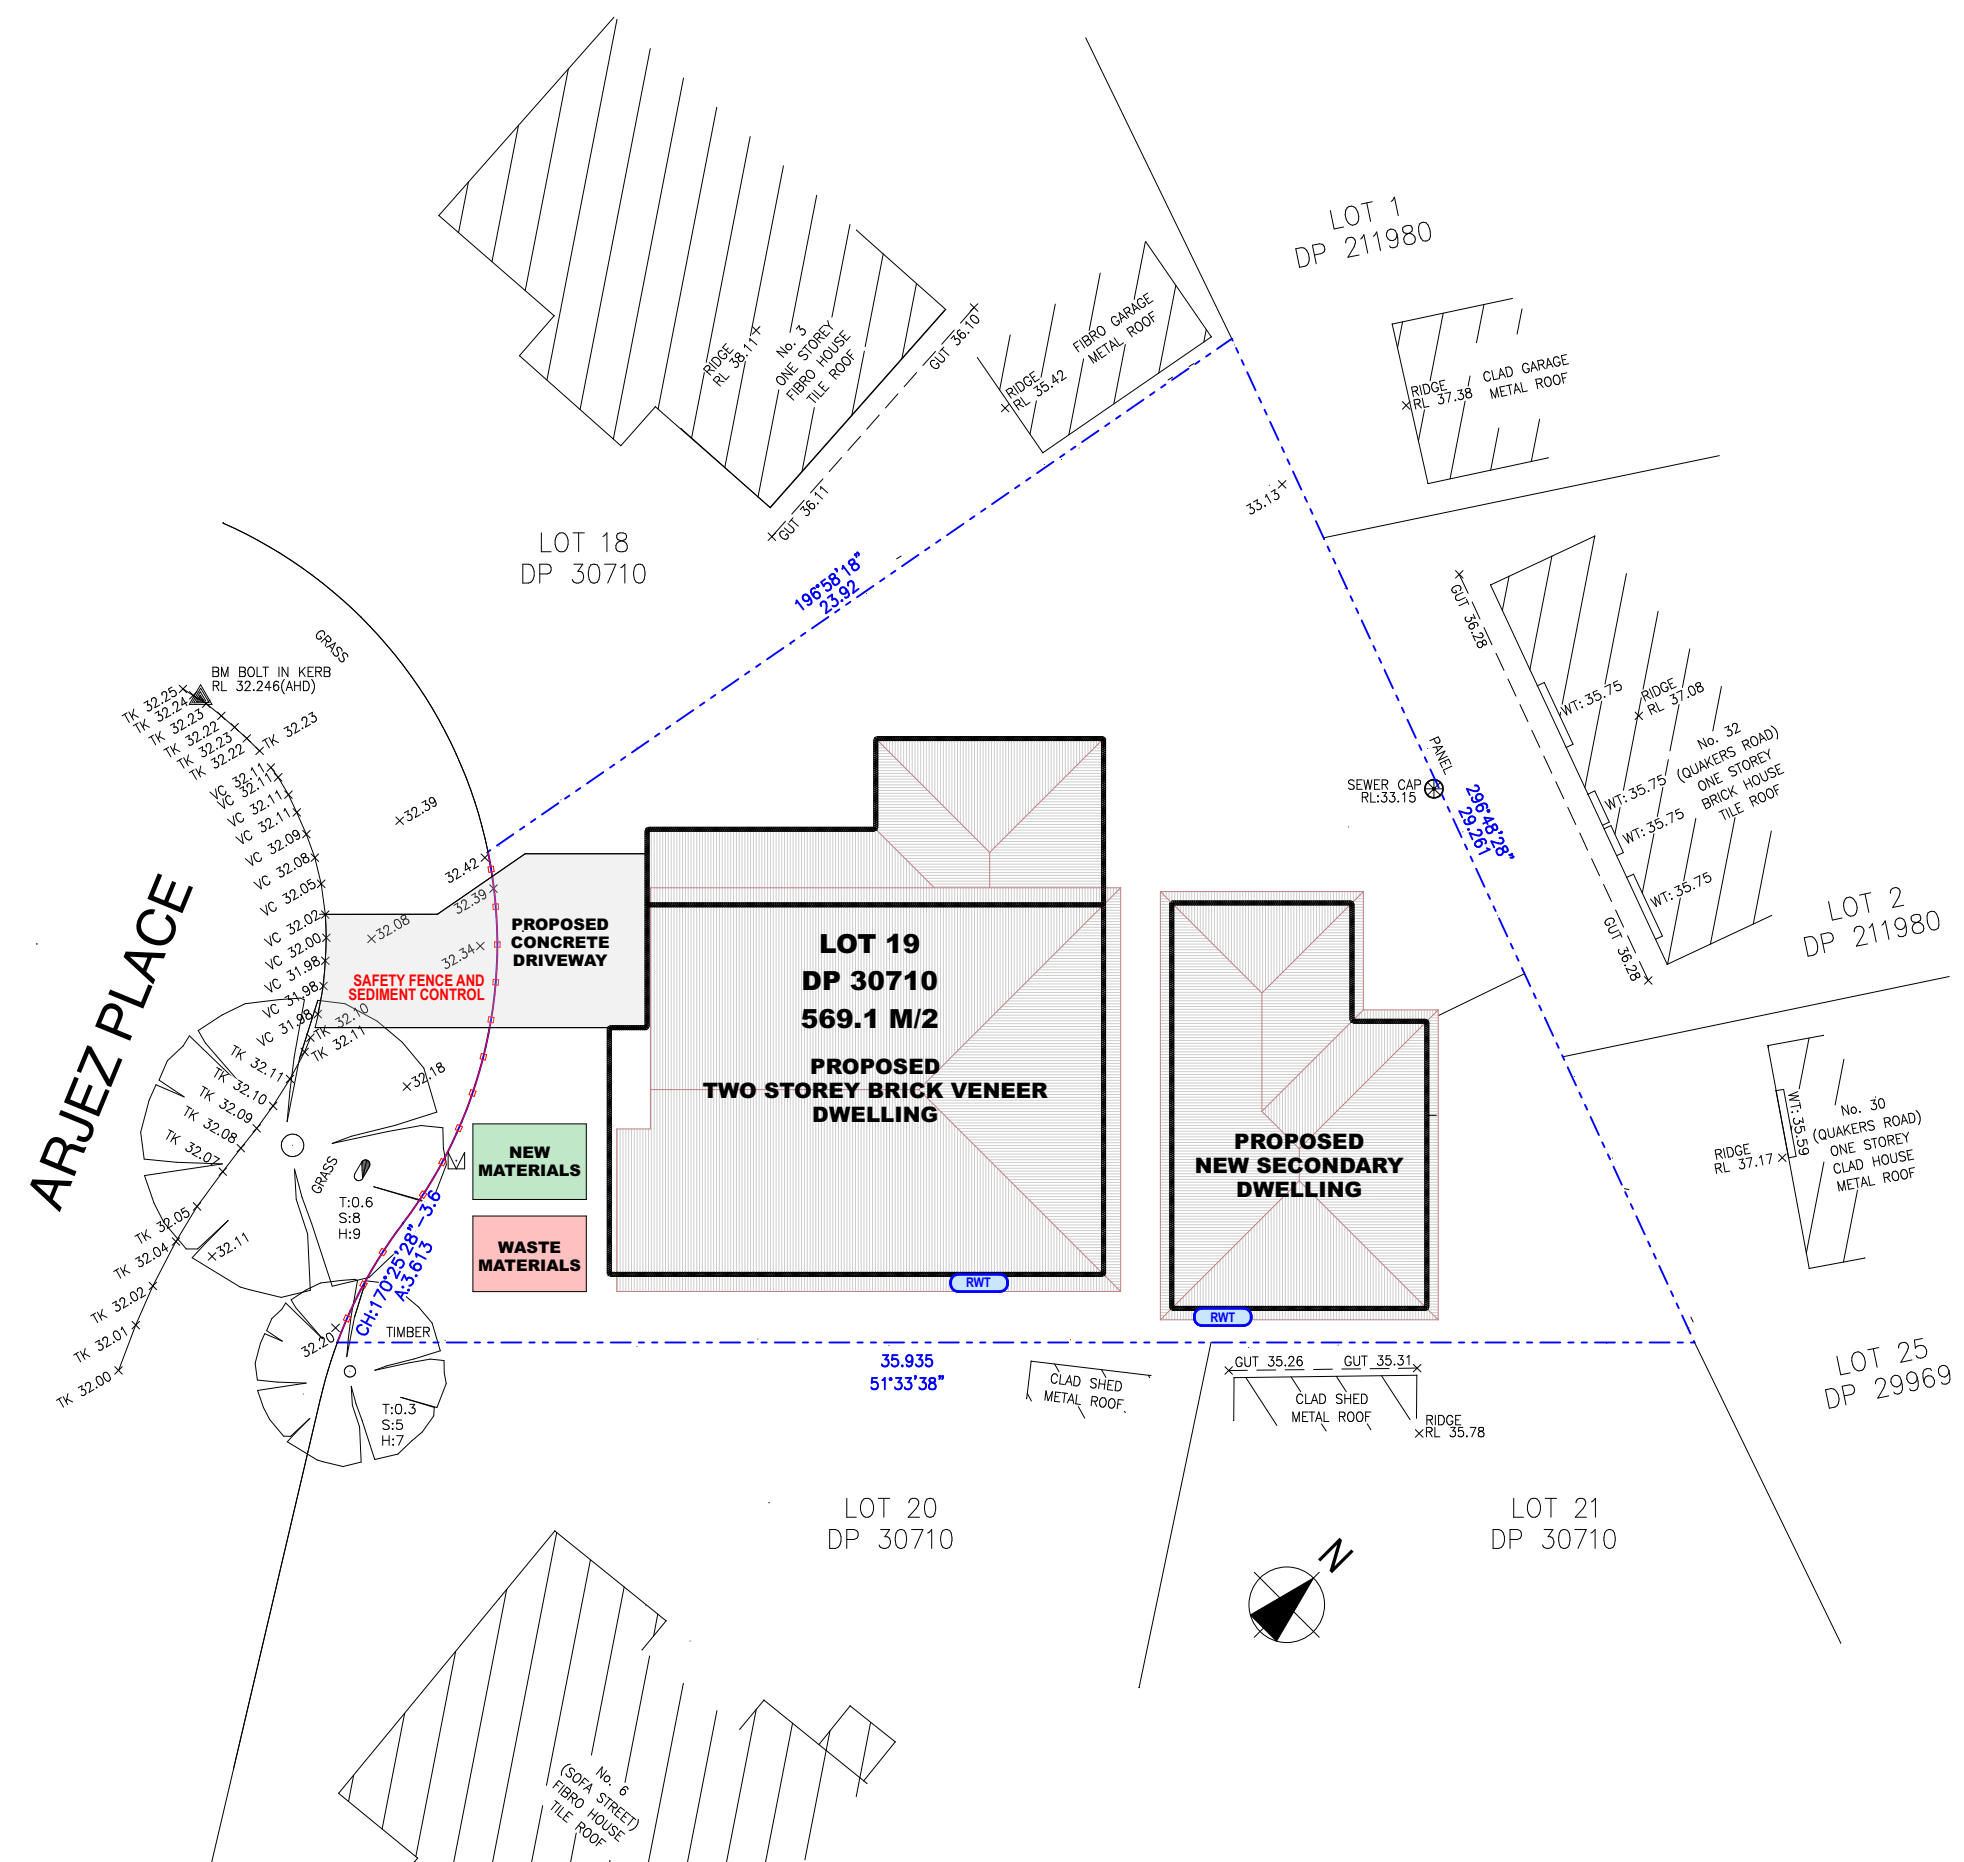


Site Management Plan

1:200

Development Type	PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
		VERITAS	A	Design Development	26/10/2025	19	30710	AS NOTED	A 2	
		Site Address				Drawn by	Date	Layout ID	Status	
		1 ARJEZ PLACE				A J LEWIS	13 FEB 2025	A.01.2	C.D.C	
		MARAYONG NSW 2148								

SITE ANALYSIS PROPOSED LANDSCAPED AREA	
SITE AREA	569.10 M/2
DWELLING GARAGE FLOOR AREA	032.78 M/2
DWELLING GROUND FLOOR AREA	113.57 M/2
DWELLING PORTICO AREA	002.48 M/2
DWELLING ALFRESCO AREA	014.47 M/2
G. FLAT FLOOR AREA	060.00 M/2
G. FLAT PORTICO AREA	008.10 M/2
G. FLAT ALFRESCO AREA	005.62 M/2
PROPOSED CONCRETE DRIVEWAY	018.25 M/2
TOTAL PROPOSED IMPERVIOUS AREA	255.24 M/2
TOTAL PROPOSED LANDSCAPED AREA	313.86 M/2
TOTAL PROPOSED LANDSCAPED RATIO	0.55 : 1 %
AREA FORWARD OF PROPOSED BUILDING LINE	066.80 M/2
PROPOSED LANDSCAPED AREA FORWARD OF BUILDING LINE	041.27 M/2
PROPOSED LANDSCAPE RATIO FORWARD OF THE BUILDING LINE	0.62 : 1 %
TOTAL LANDSCAPED AREA REQUIRED	234.55 M/2
TOTAL REQUIRED MINIMUM LANDSCAPE AREA BEHIND	0.50 : 1 %
TOTAL REQUIRED AREA BEHIND THE BUILDING LINE	117.28 M/2
TOTAL LANDSCAPED AREA PROVIDED BEHIND BUILDING LINE	246.14 M/2

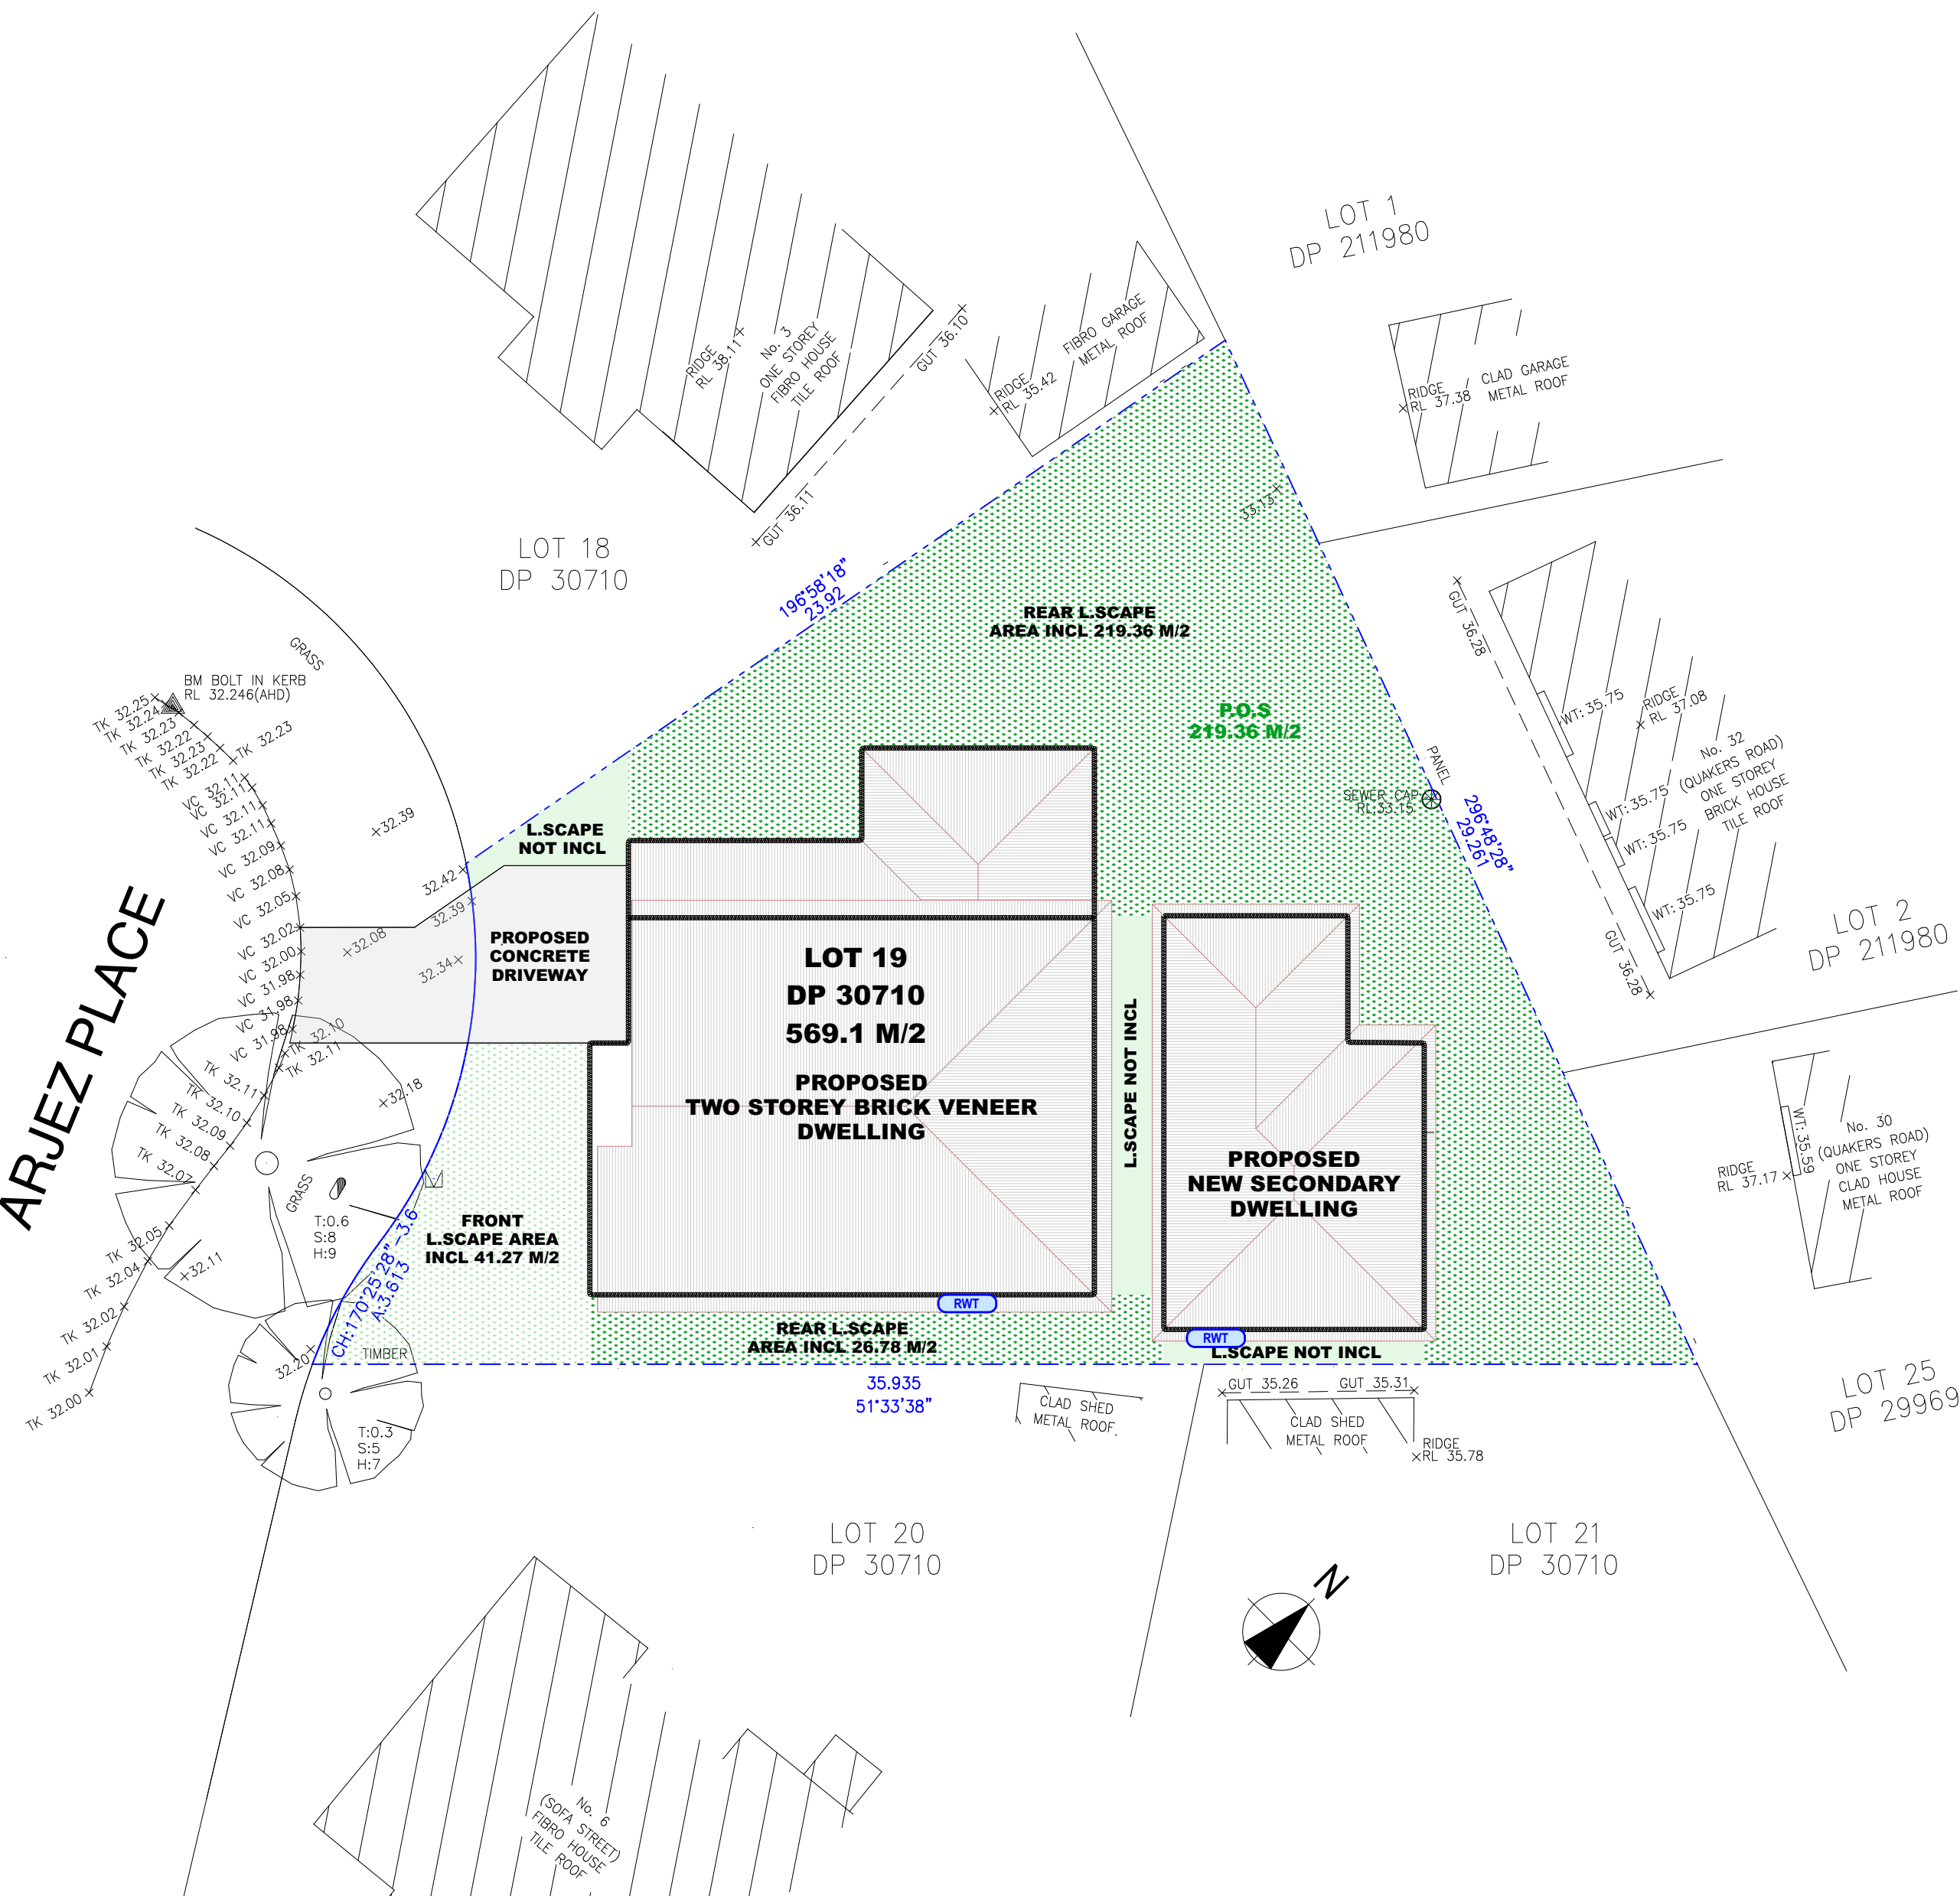

Proposed **Landscape Concept Plan** **1:150**

Development Type	Client / Applicant VERITAS QUALITY CONSULTING Site Address 1 ARJEZ PLACE MARAYONG NSW 2148	Issue A	Comments Design Development	Date 26/10/2025	Lot 19 Drawn by A J LEWIS	DP 30710 Date 13 FEB 2025	Scale AS NOTED	Sheet Size A 2	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
							Layout ID A.01.3	Status C.D.C	

THE CONTRACTOR SHALL IMPLEMENT SITE SILT AND SEDIMENT CONTROL IN ACCORDANCE WITH THE REQUIREMENTS OF BLACKTOWN CITY COUNCIL.

ALL SILT BARRIERS SHALL BE REGULARLY INSPECTED AND CLEANED OF SILT TO ENSURE CONTINUED OPERATION. ANY SILT BARRIERS THAT ALLOW SILT TO PASS ARE TO BE REPLACED.

TREE PROTECTION






PUBLIC PROTECTION

THE CONTRACTOR SHALL PROVIDE ALL NECESSARY BARRIERS, WARNING AND / OR DIRECTIONAL SIGNS, LIGHTING, ETC TO PROTECT PEDESTRIANS FROM ARJEEZ PLACE. THESE SIGNS SHALL ALSO PROTECT THE PUBLIC FROM TRUCKS AND VEHICLES ENTERING OR LEAVING THE CONSTRUCTION SITE.

THE CONTRACTOR SHALL ALSO PROVIDE SUITABLE FENCING AND LOCKABLE GATES AS REQUIRED TO PROTECT THE PUBLIC FROM ENTERING THE CONSTRUCTION SITE.

ALL BARRIERS, FENCING, AND GATES SHALL BE TO THE SATISFACTION OF WORK COVER AND SAFETY REQUIREMENTS, BLACKTOWN CITY COUNCIL, AND ANY OTHER SUCH AUTHORITY.


ALL BARRIERS, FENCING, AND GATES SHALL BE PROPERLY MAINTAINED UNTIL ALL WORKS ARE COMPLETE.

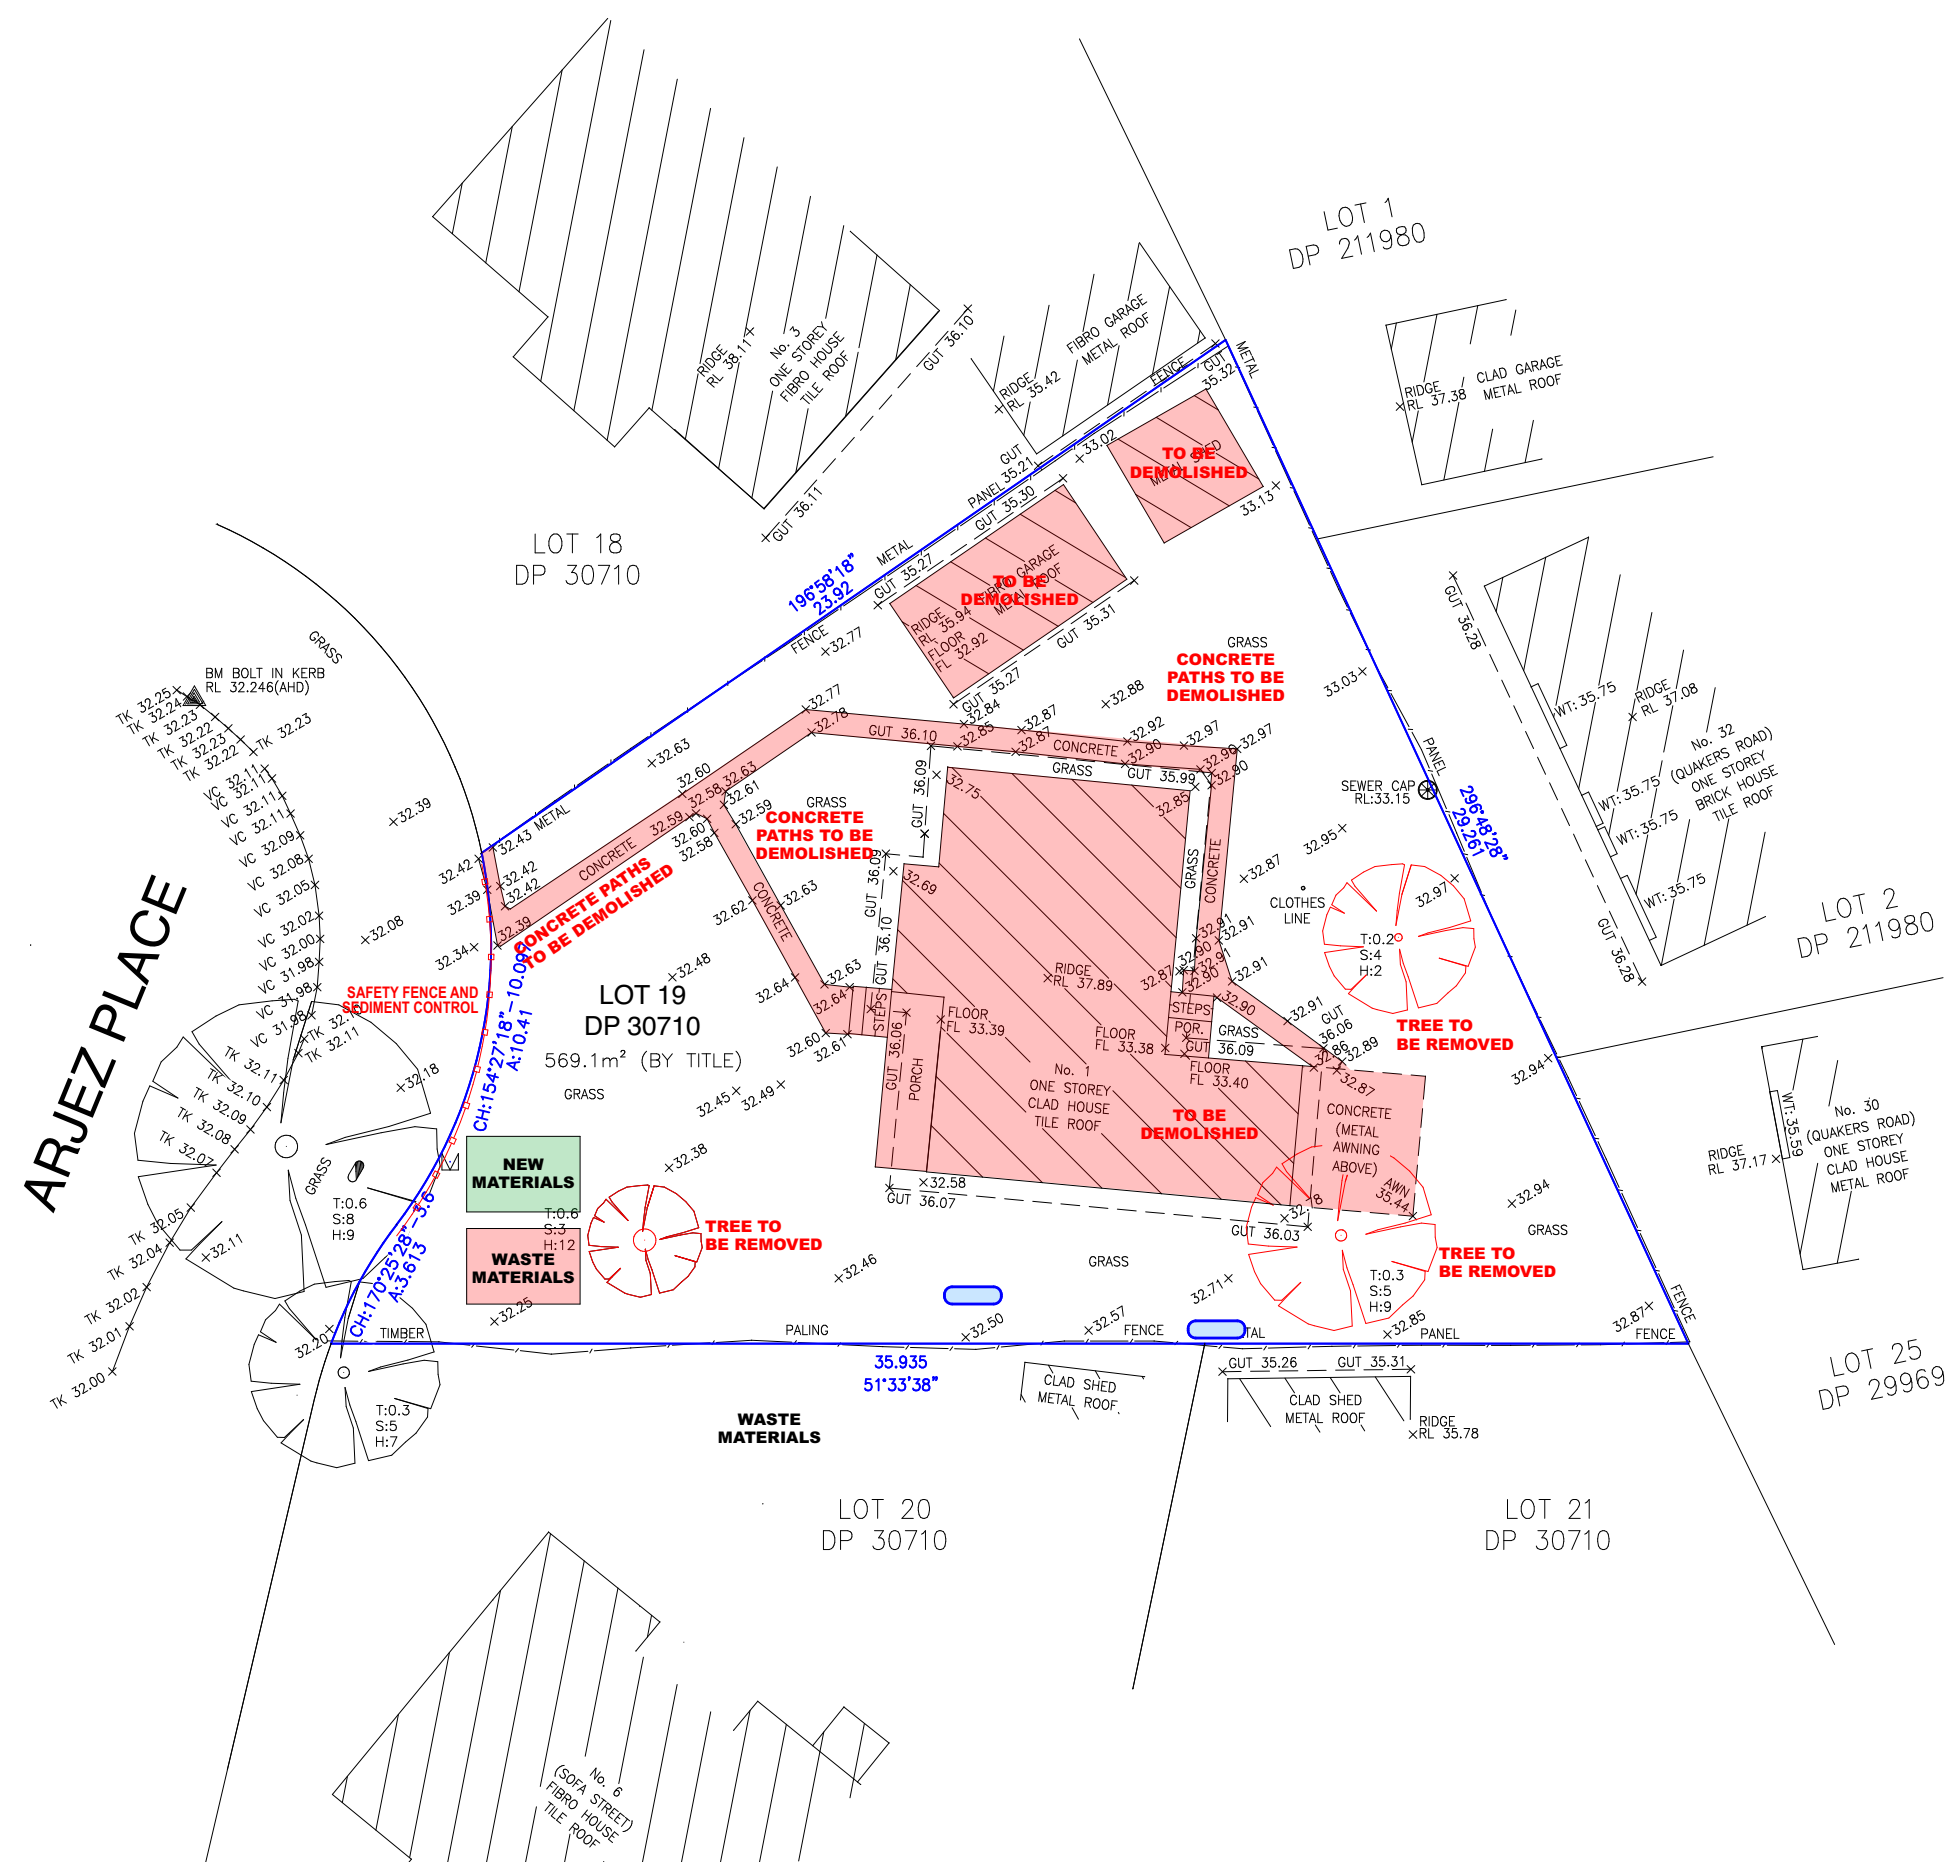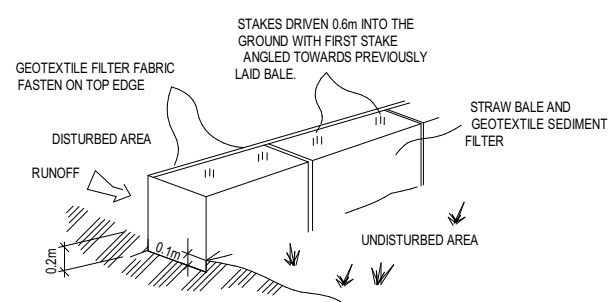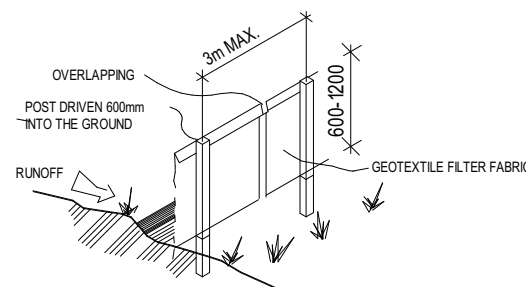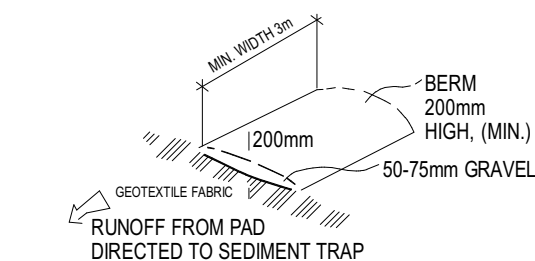

1:200

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
	VERITAS	A	Design Development	26/10/2025	19	30710	AS NOTED	A 2	
	QUALITY CONSULTING								
	Site Address								
	1 ARJEZ PLACE MARAYONG NSW 2148				Drawn by A J LEWIS	Date 13 FEB 2025	Layout ID A.01.4	Status C.D.C	

1:100



Energy Efficiency requirement to be installed in accordance with part 13 and NSW Part 13 of the BCA 2022'.


All Glazing to be in accordance with H1 D8 of BCA 2022.

**Mechanical ventilation to be provided as per
BCA Part 10.6.3, 10.8.2 & 10.8.3.**

Termite risk Management - Termite management system to be provided in accordance with Part 3.4 of ABCB and AS 3660.1 and/or AS 3660.3.

Condensation Management to be provided to NCC H4D9. Sarking and Roof Ventilation to be provided to Roof Construction. Sarking to be provided to all wall framed construction. Exhaust fans in the form of Mechanical Ventilation to be provided where indicated on Floor Plans.


H4D2
Bathrooms Wet Areas and Laundry areas to
comply with AS 3740 or Part 10.2 of the ABCB
Housing Provisions

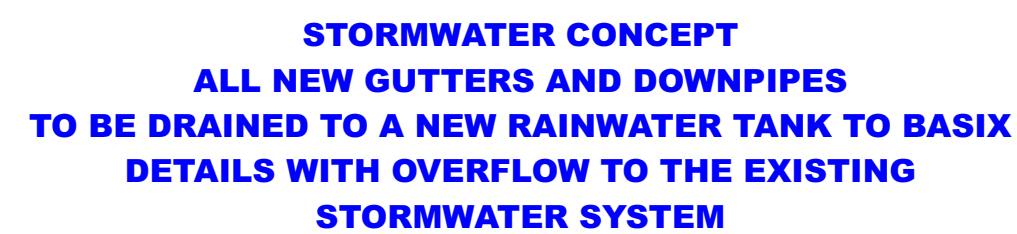

1:100

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue A	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajllewis@74ad.com.au
	VERITAS QUALITY CONSULTING		Design Development	26/10/2025	19	30710	AS NOTED	A 2	
	Site Address				Drawn by	Date	Layout ID	Status	
	1 ARJEZ PLACE MARAYONG NSW 2148				A J LEWIS	13 FEB 2025	A.02.3	C.D.C	

ANTHONY LEWIS
MOB : 0411 411 141
ajlewis@74ad.com.au

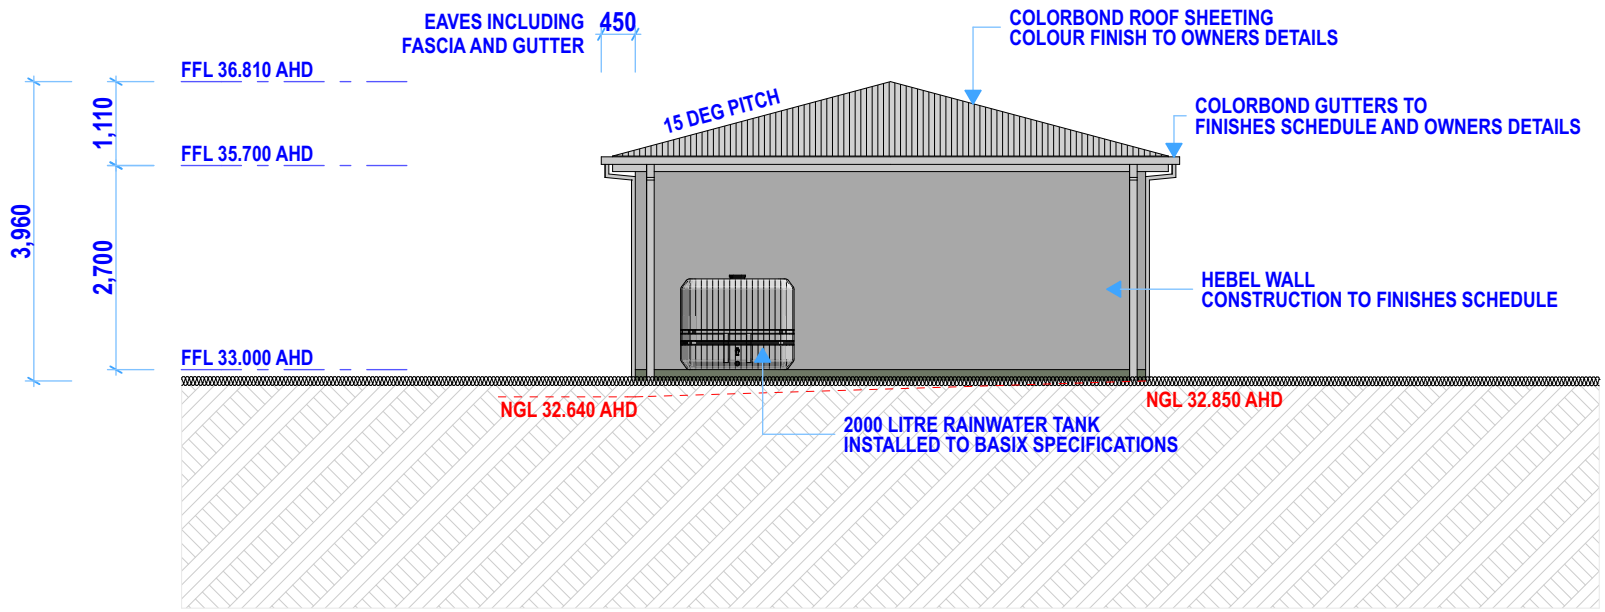

ALL CONSTRUCTION IS TO BE CARRIED OUT IN ACCORDANCE WITH THE NATIONAL CONSTRUCTION CODE - NCC 2022 VOLUME 2 ABCB - HOUSING PROVISIONS

Hard Wired Smoke Alarm to be installed in accordance with Part NSW 9.5.1 of NCC 2022 Housing provision standard"

Energy Efficiency requirement to be installed in accordance with part 13 and NSW Part 13 of the BCA 2022'.

All Glazing to be in accordance with H1 D8 of BCA 2022.


Mechanical ventilation to be provided as per BCA Part 10.6.3, 10.8.2 & 10.8.3.

Termite risk Management - Termite management system to be provided in accordance with Part 3.4 of ABCB and AS 3660.1 and/or AS 3660.3.

Condensation Management to be provided to NCC H4D9. Sarking and Roof Ventilation to be provided to Roof Construction. Sarking to be provided to all wall framed construction. Exhaust fans in the form of Mechanical Ventilation to be provided where indicated on Floor Plans.

H4D2 Bathrooms Wet Areas and Laundry areas to comply with AS 3740 or Part 10.2 of the ABCB Housing Provisions

Granny Flat South East Elevation 1:100

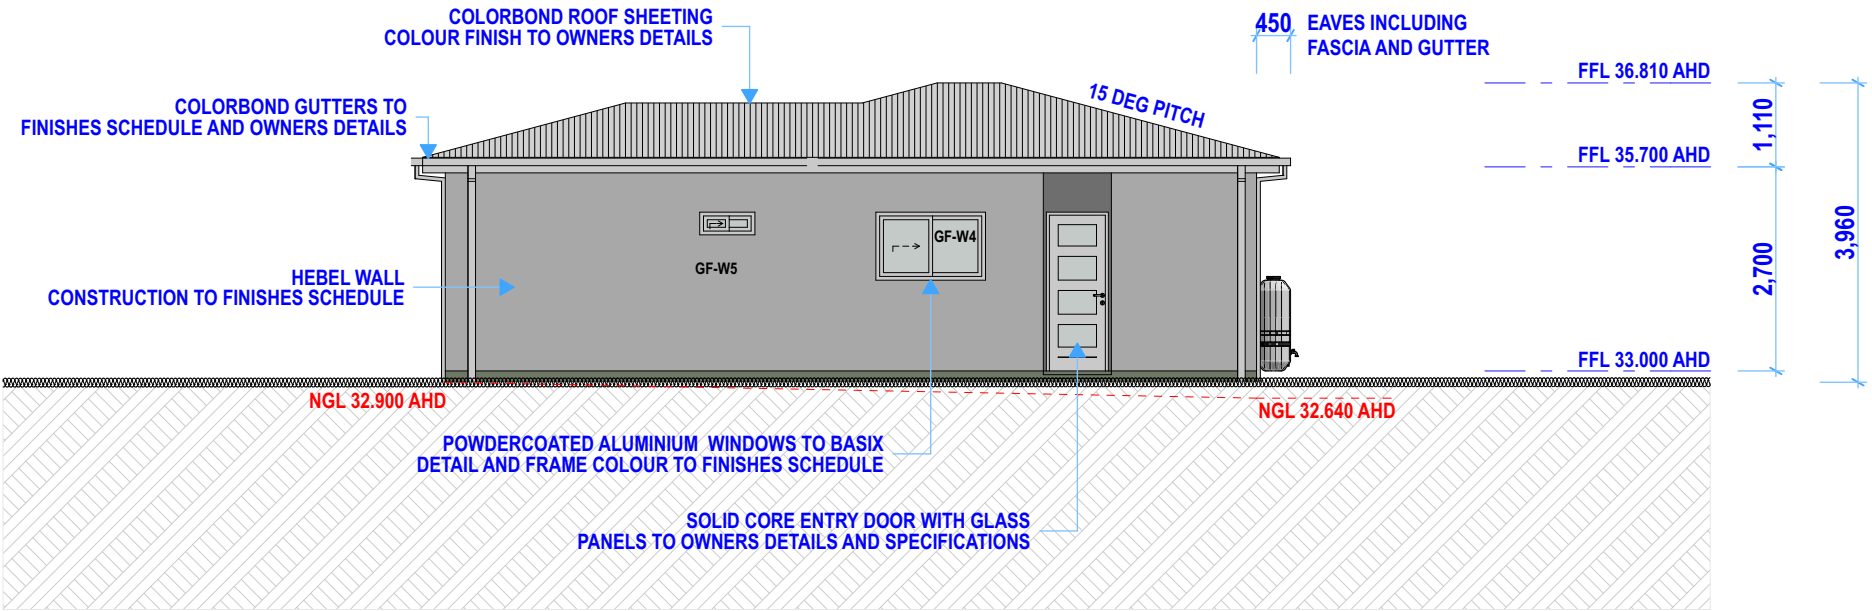

ALL CONSTRUCTION IS TO BE CARRIED OUT IN ACCORDANCE WITH THE NATIONAL CONSTRUCTION CODE - NCC 2022 VOLUME 2 ABCB - HOUSING PROVISIONS

Hard Wired Smoke Alarm to be installed in accordance with Part NSW 9.5.1 of NCC 2022 Housing provision standard"

Energy Efficiency requirement to be installed in accordance with part 13 and NSW Part 13 of the BCA 2022'.

All Glazing to be in accordance with H1 D8 of BCA 2022.

Mechanical ventilation to be provided as per BCA Part 10.6.3, 10.8.2 & 10.8.3.

Termite risk Management - Termite management system to be provided in accordance with Part 3.4 of ABCB and AS 3660.1 and/or AS 3660.3.

Condensation Management to be provided to NCC H4D9. Sarking and Roof Ventilation to be provided to Roof Construction. Sarking to be provided to all wall framed construction. Exhaust fans in the form of Mechanical Ventilation to be provided where indicated on Floor Plans.

H4D2 Bathrooms Wet Areas and Laundry areas to comply with AS 3740 or Part 10.2 of the ABCB Housing Provisions

Granny Flat South West Elevation 1:100


Development Type	Client / Applicant VERITAS QUALITY CONSULTING Site Address 1 ARJEZ PLACE MARAYONG NSW 2148	Issue A	Comments Design Development	Date 26/10/2025	Lot 19	DP 30710	Scale AS NOTED	Sheet Size A 2	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
					Drawn by A J LEWIS	Date 13 FEB 2025	Layout ID A.03.4	Status C.D.C	

Building Sustainability Index
www.planningportal.nsw.gov.au/development-and-assessment/basix

Certificate number: 1840128S

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.planningportal.nsw.gov.au/definitions

Secretary
Date of issue: Tuesday, 31 March 2026
To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.

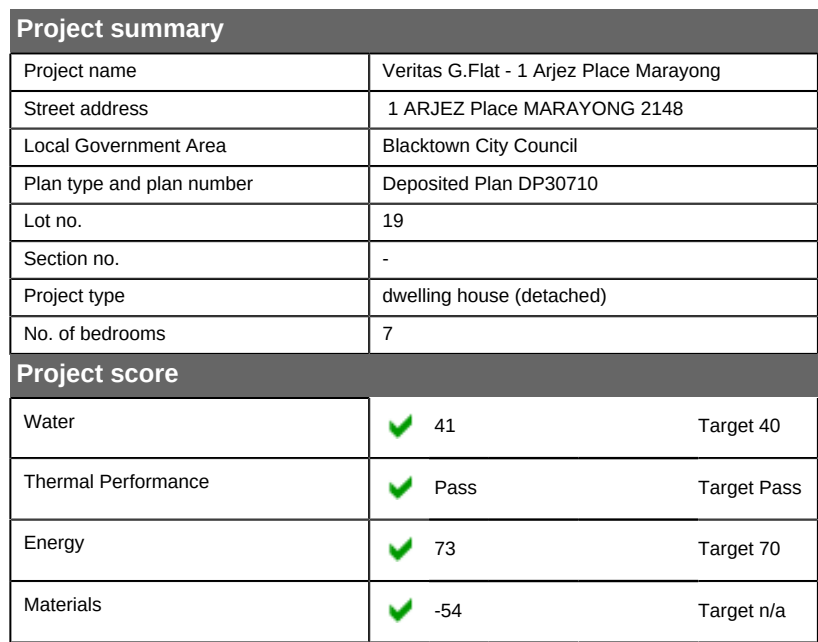

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 1/12

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 2/12

The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 3/12

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant VERITAS QUALITY CONSULTING	Issue A	Comments Design Development	Date 26/10/2025	Lot 19	DP 30710	Scale AS NOTED	Sheet Size A 2	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
	Site Address 1 ARJEZ PLACE MARAYONG NSW 2148				Drawn by A J LEWIS	Date 13 FEB 2025	Layout ID A.05.1	Status C.D.C	

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Do-it-yourself Method			
General features			
The dwelling must be a Class 1 dwelling according to the National Construction Code, and must not have more than 2 storeys.	✔	✔	✔
The conditioned floor area of the dwelling must not exceed 300 square metres.	✔	✔	✔
The dwelling must not contain open mezzanine area exceeding 25 square metres.	✔	✔	✔
The dwelling must not contain third level habitable attic room.	✔	✔	✔
Floor, walls and ceiling/roof			
The applicant must construct the floor(s), walls, and ceiling/roof of the dwelling in accordance with the specifications listed in the table below.	✔	✔	✔
The applicant must adopt one of the options listed in the tables below to address thermal bridging in metal framed floor(s), walls and ceiling/roof of the dwelling.	✔	✔	✔
The applicant must show through receipts that the materials purchased for construction are consistent with the specifications listed in the tables below.			✔

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
floor - concrete slab on ground, conventional slab.	113.57	nil;not specified	nil	
floor - above habitable rooms or mezzanine, treated softwood; frame: timber - H2 treated softwood..	84.95	nil;fibreglass batts or roll	nil	
floor - suspended floor above garage, treated softwood; frame: timber - H2 treated softwood.	32.78	nil;fibreglass batts or roll	nil	

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 4/12

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
garage floor - concrete slab on ground.	32.78	none	nil	
external wall: AAC veneer; frame: timber - H2 treated softwood.	141.49	2.54 (or 3.50 including construction);fibreglass batts or roll + reflective foil in the cavity	nil	wall colour: Light (solar absorptance < 0.48)
external wall: framed (fibre cement sheet or boards); frame: timber - H2 treated softwood.	38.43	3.00 (or 3.50 including construction);fibreglass batts or roll + reflective foil in the cavity	nil	wall colour: Light (solar absorptance < 0.48)
external garage wall: AAC veneer; frame: timber - H2 treated softwood.	21.16	fibreglass batts or roll + reflective foil in the cavity	nil	
internal wall shared with garage: plasterboard, frame: timber - H2 treated softwood.	27.47	nil;fibreglass batts or roll	nil	
internal wall: plasterboard; frame: timber - H2 treated softwood.	189.59	fibreglass batts or roll	nil	
ceiling and roof - flat ceiling / pitched roof, framed - metal roof, timber - H2 treated softwood.	191.14	ceiling: 4.5 (up), roof: foil/ sarking ;ceiling: fibreglass batts or roll; roof: foil/sarking.	nil	roof space ventilation: wind-driven ventilator(s) + eave vents, roof colour: light (solar absorptance < 0.38); ceiling area fully insulated

Note	• Insulation specified in this Certificate must be installed in accordance with the ABCB Housing Provisions (Part 13.2.2) of the National Construction Code.
Note	• If the additional ceiling insulation listed in the table above is greater than R3.0, refer to the ABCB Housing Provisions (Part 13.2.3 (6)) of the National Construction Code.
Note	• In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials.
Note	• Thermal breaks must be installed in metal framed walls and applicable roofs in accordance with the ABCB Housing Provisions of the National Construction Code.

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Ceiling fans			
The applicant must install at least one ceiling fan in at least one daytime habitable space, such as living room.	✔	✔	✔
• The minimum number and diameter of ceiling fans in a daytime habitable space must be installed in accordance with the ABCB Housing Provisions (Part 13.5.2) of the National Construction Code .	✔	✔	✔

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
South-East facing					
W04	1200.00	1810.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W05	1200.00	1810.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W06	600.00	970.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W07	600.00	970.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W08	600.00	2410.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W09	1200.00	1810.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
W10	1200.00	1810.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
W11	600.00	970.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
W12	600.00	970.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
W13	600.00	2410.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
South-West facing					

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 8/12

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
W14	1400.00	2110.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	none	not overshadowed
W15	2400.00	920.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 1600 mm, 230 mm above head of window or glazed door	not overshadowed
W16	1400.00	2110.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
W17	1400.00	2110.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 1600 mm, 230 mm above head of window or glazed door	not overshadowed
W18	1400.00	2110.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	not overshadowed
North-West facing					
W19	1000.00	2410.00	aluminium, single glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	2-4 m high, 8-12 m away
W20	1000.00	2410.00	aluminium, single glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	eave 600 mm, 230 mm above head of window or glazed door	2-4 m high, 8-12 m away
D-SSD1	2400.00	3600.00	aluminium, single glazed (U-value: <=3.0, SHGC: 0.60 - 0.74)	eave 3000 mm, 230 mm above head of window or glazed door	2-4 m high, 8-12 m away

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840128S Tuesday, 31 March 2026 page 9/12


Development Type	PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant VERITAS QUALITY CONSULTING Site Address 1 ARJEZ PLACE MARAYONG NSW 2148	Issue A	Comments Design Development	Date 26/10/2025	Lot 19	DP 30710	Scale AS NOTED	Sheet Size A 2	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
						Drawn by A J LEWIS	Date 13 FEB 2025	Layout ID A.05.2	Status C.D.C	

Building Sustainability Index
www.planningportal.nsw.gov.au/development-and-assessment/basix

Certificate number: 1840130S

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.planningportal.nsw.gov.au/definitions

Secretary
Date of issue: Tuesday, 31 March 2026
To be valid, this certificate must be submitted with a development application or lodged with a complying development certificate application within 3 months of the date of issue.

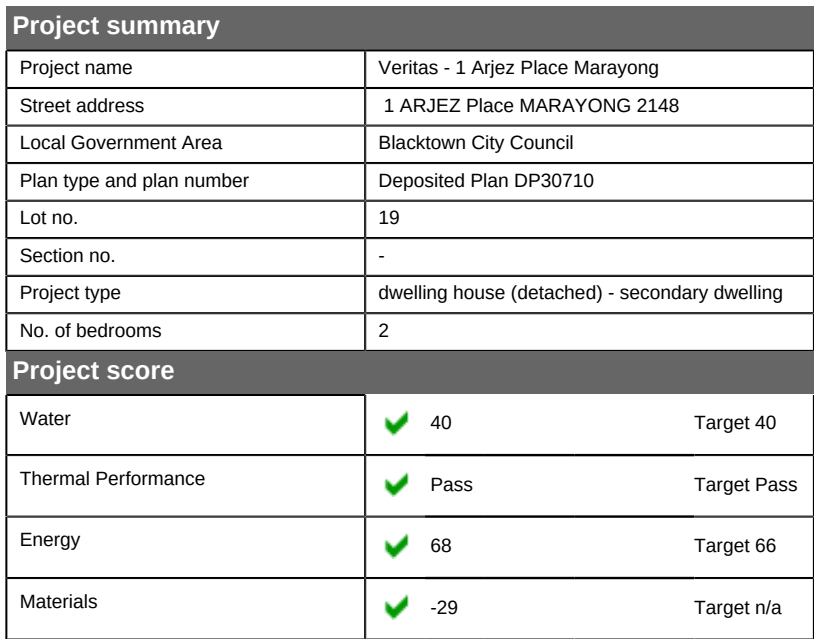

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840130S Tuesday, 31 March 2026 page 1/11

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840130S Tuesday, 31 March 2026 page 2/11

The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

BASIX Department of Planning, Housing and Infrastructure www.basix.nsw.gov.au Version: 4.03 / EUCALYPTUS_03_01_0 Certificate No.: 1840130S Tuesday, 31 March 2026 page 3/11

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
	VERITAS QUALITY CONSULTING	A	Design Development	26/10/2025	19	30710	AS NOTED	A 2	
	Site Address				Drawn by	Date	Layout ID	Status	
	1 ARJEZ PLACE MARAYONG NSW 2148				A J LEWIS	13 FEB 2025	A.05.4	C.D.C	

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Do-it-yourself Method			
General features			
The dwelling must be a Class 1 dwelling according to the National Construction Code, and must not have more than 2 storeys.	✔	✔	✔
The conditioned floor area of the dwelling must not exceed 300 square metres.	✔	✔	✔
The dwelling must not contain open mezzanine area exceeding 25 square metres.	✔	✔	✔
The dwelling must not contain third level habitable attic room.	✔	✔	✔
Floor, walls and ceiling/roof			
The applicant must construct the floor(s), walls, and ceiling/roof of the dwelling in accordance with the specifications listed in the table below.	✔	✔	✔
The applicant must adopt one of the options listed in the tables below to address thermal bridging in metal framed floor(s), walls and ceiling/roof of the dwelling.	✔	✔	✔
The applicant must show through receipts that the materials purchased for construction are consistent with the specifications listed in the tables below.			✔

Construction	Area - m ²	Additional insulation required	Options to address thermal bridging	Other specifications
floor - concrete slab on ground, conventional slab.	59.8	nil;not specified	nil	
external wall: AAC veneer; frame: timber - H2 treated softwood.	78.13	2.04 (or 3.00 including construction);fibreglass batts or roll + reflective foil in the cavity	nil	wall colour: Medium (solar absorptance 0.48-0.7)
external wall: framed (fibre cement sheet or boards); frame: timber - H2 treated softwood.	5.81	2.50 (or 3.00 including construction);fibreglass batts or roll + reflective foil in the cavity	nil	wall colour: Medium (solar absorptance 0.48-0.7)

Construction	Area - m ²	Additional insulation required	Options to address thermal bridging	Other specifications
internal wall: plasterboard; frame: timber - H2 treated softwood.	40.77	none	nil	
ceiling and roof - flat ceiling / pitched roof, framed - metal roof, timber - H2 treated softwood.	76.75	ceiling: 3.5 (up), roof: foil/sarking ;ceiling: fibreglass batts or roll; roof: foil/sarking.	nil	roof space ventilation: unventilated; roof colour: light (solar absorbance 0.38-0.47); ceiling area fully insulated

Note	• Insulation specified in this Certificate must be installed in accordance with the ABCB Housing Provisions (Part 13.2.2) of the National Construction Code.
Note	• If the additional ceiling insulation listed in the table above is greater than R3.0, refer to the ABCB Housing Provisions (Part 13.2.3 (6)) of the National Construction Code.
Note	• In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials.
Note	• Thermal breaks must be installed in metal framed walls and applicable roofs in accordance with the ABCB Housing Provisions of the National Construction Code.

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Ceiling fans			
The applicant must install at least one ceiling fan in at least one daytime habitable space, such as living room.	✓	✓	✓
• The minimum number and diameter of ceiling fans in a daytime habitable space must be installed in accordance with the ABCB Housing Provisions (Part 13.5.2) of the National Construction Code .	✓	✓	✓

Thermal Performance and Materials commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Glazed windows, doors and skylights			
The applicant must install the windows, glazed doors and shading devices described in the table below, in accordance with the specifications listed in the table. Relevant overshadowing specifications must be satisfied for each glazed window and door.	✓	✓	✓
The dwelling may have 1 skylight (<0.7 square metres) which is not listed in the table.	✓	✓	✓
The following requirements must also be satisfied in relation to each window and glazed door:	✓	✓	✓
• The applicant must install windows and glazed doors in accordance with the height and width, frame and glazing types listed in the table.	✓	✓	✓
• Each window and glazed door must have a U- value no greater than that listed and a Solar Heat Gain Coefficient (SHGC) within the range listed. Total system U values and SHGC must be calculated in accordance with National Fenestration Rating Council (NFRC) conditions.		✓	✓
• Overshadowing buildings/vegetation must be of the height and distance from the centre and the base of the window and glazed door, as specified in the 'overshadowing' column.	✓	✓	✓
The applicant must install the skylights described in the table below, in accordance with the specifications listed in the table. Total skylight area must not exceed 3 square metres (the 3 square metre limit does not include the optional additional skylight of less than 0.7 square metres that does not have to be listed in the table).	✓	✓	✓

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
North-East facing					
W01	600.00	730.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 520 mm above head of window or glazed door	not overshadowed
W02	900.00	1450.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 520 mm above head of window or glazed door	not overshadowed
W03	900.00	1450.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 450 mm, 520 mm above head of window or glazed door	not overshadowed

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
GF-SD1	2100.00	1810.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.49 - 0.60)	eave 70 mm, 520 mm above head of window or glazed door	not overshadowed
South-West facing					
W04	900.00	1450.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.40 - 0.49)	eave 450 mm, 520 mm above head of window or glazed door	1-2 m high, <1.5 m away
W05	300.00	730.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.40 - 0.49)	eave 450 mm, 520 mm above head of window or glazed door	1-2 m high, <1.5 m away
North-West facing					
W06	900.00	1450.00	aluminium, single glazed (U-value: <=4.5, SHGC: 0.40 - 0.49)	eave 450 mm, 520 mm above head of window or glazed door	not overshadowed

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
	VERITAS QUALITY CONSULTING	A	Design Development	26/10/2025	19	30710	AS NOTED	A 2	
	Site Address				Drawn by	Date	Layout ID	Status	
	1 ARJEZ PLACE MARAYONG NSW 2148				A J LEWIS	13 FEB 2025	A.05.5	C.D.C	

Address: 1 Arjez Place Lalor Park NSW 2148
Description: Proposed New Two Storey Dwelling and Granny Flat

Termite risk Management - Termite management system to be provided in accordance with HP Part 3.5 and AS 3660.1 and/or AS 3660.3.

Drainage - Drainage to site to comply with HP Part 3.3 OR AS/NZS 3500.3 in accordance with NCC 2022 H2D2.

Vertical articulation joints - Masonry articulation joints to be provided as specified in HP 5.6.8 or AS 4773.2 or AS 3700.

Frame - Timber Frames & Trusses – Designed and constructed to AS/NZS 1170.1 – 2002, AS/NZS 1170.2 – 2021, AS 1684.2 – 2021, AS 1720.1 – 2010, AS 1720.5 – 2015 and AS 4440 -2004 -Installation of nailplated timber roof trusses.
Frame – Steel Frames – Designed and constructed to NASH Part 1 & 2, AS 4100 & AS/NZS 4600.
Subfloor ventilation - Sub-floor ventilation and clearance compliance with NCC Housing Provisions Part 6.2.

Gutters & downpipes - Downpipes & Gutters to comply with NCC Housing Provisions Part 7.4 OR AS/NZS 3500.3.
Timber and composite wall cladding - Cladding material to be in accordance with HP Part 7.5 OR for AAC-AS 5146.1 OR for metal wall cladding AS 1562.1.
Roof and wall cladding – All Roof and wall cladding to be designed and installed in accordance with NCC 2022 H1D7.

Glazing – All glazing to be in accordance with H1D8 & H2D7 of the NCC Volume Two, Section 8 of the Housing Provisions & Australian Standards AS 1288, 2047, 4055. (Basix requirements to be addressed also)

Wet area waterproofing - Wet area in accordance with H4D1, H4D2 & H4D3 of the NCC Volume Two and Part 10.2 of the Housing Provisions OR Clauses 10.2.1 to 10.2.6 & 10.2.12 and AS 3740.

Floor Waste - Wet Area – All provided floor waste to have floor falls to them between 1:50 – 1:80 as per NCC Housing Provisions Clause 10.2.12.

External waterproofing - External waterproofing for roofing systems on flat roofs, roof terraces, balconies and terraces and other similar horizontal surfaces located above internal spaces of a building compliant with NCC Volume 2 H2D8 & AS 4654.1 & 2.

External wall construction – Where pliable building membrane is installed in an external wall it is comply with HP 10.8.1 and AS 4200.1 & 2.

Exhaust systems - The bathroom &/or sanity compartment/s with an exhaust system and NOT provided with complaint natural ventilation must be interlocked to rooms light switch and have off timer set for 10 minutes after the light is switched off.

Exhaust systems -The room/s with an exhaust system and not provided with compliant natural ventilation must be provided with make-up air from adjacent room of 14,000mm² which is approx. a 20mm undercut of a 700mm door or 18mm from an 820mm door.

Exhaust systems - The exhaust system installed in a kitchen, bathroom, sanitary compartment or laundry must have a minimum flow rate of— (a) 25 L/s for a bathroom or sanitary compartment; and (b) 40 L/s for a kitchen or laundry.

Ventilation of roof spaces – In climate zones 6, 7 & 8 a roof space must be ventilated in accordance with HP Part 10.8.3.

Stairway and ramp construction – Stairways and ramps to be constructed to HP Part 11.2.
Barrier and handrails - Barrier and handrails to be constructed to HP Part 11.3.
Barrier and handrails - Handrail to stairs having a change in elevation exceeding 1m required to be provided at a height not less than 865mm to NCC Housing Provisions Clause 11.3.5.
Barrier and handrails - Bedroom windows where the FFL is 2m or more above the surface beneath are to have window restrictors OR screens (crim-safe style mesh) installed as per NCC Housing Provisions Clause 11.3.7.
Barrier and handrails - Windows other than bedroom with FFL 4m or more above adjacent surface to have sill or barrier minimum 865mm above FFL as per NCC Housing Provisions Clause 11.3.8.

HP= ABCB Housing Provisions Disclaimer: Please refer the appropriate NCC, Housing Provisions, Australian Standards for full details.

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant VERITAS QUALITY CONSULTING Site Address 1 ARJEZ PLACE MARAYONG NSW 2148	Issue A	Comments Design Development	Date 26/10/2025	Lot 19	DP 30710	Scale AS NOTED	Sheet Size A 2	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
					Drawn by A J LEWIS	Date 13 FEB 2025	Layout ID A.06.1	Status C.D.C	

Door List								
Full Element ID	D-D12	D-D13	D-D14	D-D15	D-SD1	D-SD2	D-SSD1	GD1
Height	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
Width	820	820	820	820	2,020	2,020	3,600	4,200
3D Back View								

Dwelling Door Schedule

Door List											
Full Element ID	D-D1	D-D2	D-D3	D-D4	D-D5	D-D6	D-D7	D-D8	D-D9	D-D10	D-D11
Height	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
Width	920	820	820	820	820	820	820	820	820	820	820
3D Back View											

Dwelling Door Schedule


Window List										
Full Element ID	D-W1	D-W2	D-W3	D-W4	D-W5	D-W6	D-W7	D-W8	D-W9	D-W10
Height	1,200	600	600	1,200	1,200	600	600	600	1,200	1,200
Width	1,810	2,410	610	1,810	1,810	970	970	2,410	1,810	1,810
Window sill height	1,200	1,800	1,800	1,200	1,200	1,800	1,800	1,800	1,200	1,200
Window head height	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
3D Back View										

Dwelling Window Schedule

Window List										
Full Element ID	D-W11	D-W12	D-W13	D-W14	D-W15	D-W16	D-W17	D-W18	D-W19	D-W20
Height	600	600	600	1,400	2,400	1,400	1,400	1,400	1,400	1,400
Width	970	970	2,410	2,110	920	2,110	1,810	2,110	2,410	2,410
Window sill height	1,800	1,800	1,800	1,000	0	1,000	1,000	1,000	1,000	1,000
Window head height	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
3D Back View										

Dwelling Window Schedule

Development Type PROPOSED NEW TWO STOREY DWELLING AND GRANNY FLAT	Client / Applicant	Issue	Comments	Date	Lot	DP	Scale	Sheet Size	ANTHONY LEWIS MOB : 0411 411 141 ajlewis@74ad.com.au
	VERITAS	A	Design Development	26/10/2025	19	30710	AS NOTED	A 2	
	Site Address				Drawn by	Date	Layout ID	Status	
	1 ARJEZ PLACE MARAYONG NSW 2148				A J LEWIS	13 FEB 2025	A.07.1	C.D.C	

Door List						
Full Element ID	GF-D1	GF-D2	GF-D3	GF-D4	GF-D5	GF-SD1
Height	2,100	2,100	2,100	2,100	2,100	2,100
Width	820	820	820	820	820	1,810
3D Back View						

G.Flat Door Schedule

Window List						
Full Element ID	GF-W1	GF-W2	GF-W3	GF-W4	GF-W5	GF-W6
Height	600	900	900	900	300	900
Width	730	1,450	1,450	1,450	730	1,450
Window sill height	1,500	1,200	1,200	1,200	1,800	1,200
Window head height	2,100	2,100	2,100	2,100	2,100	2,100
3D Back View						

G.Flat Window Schedule